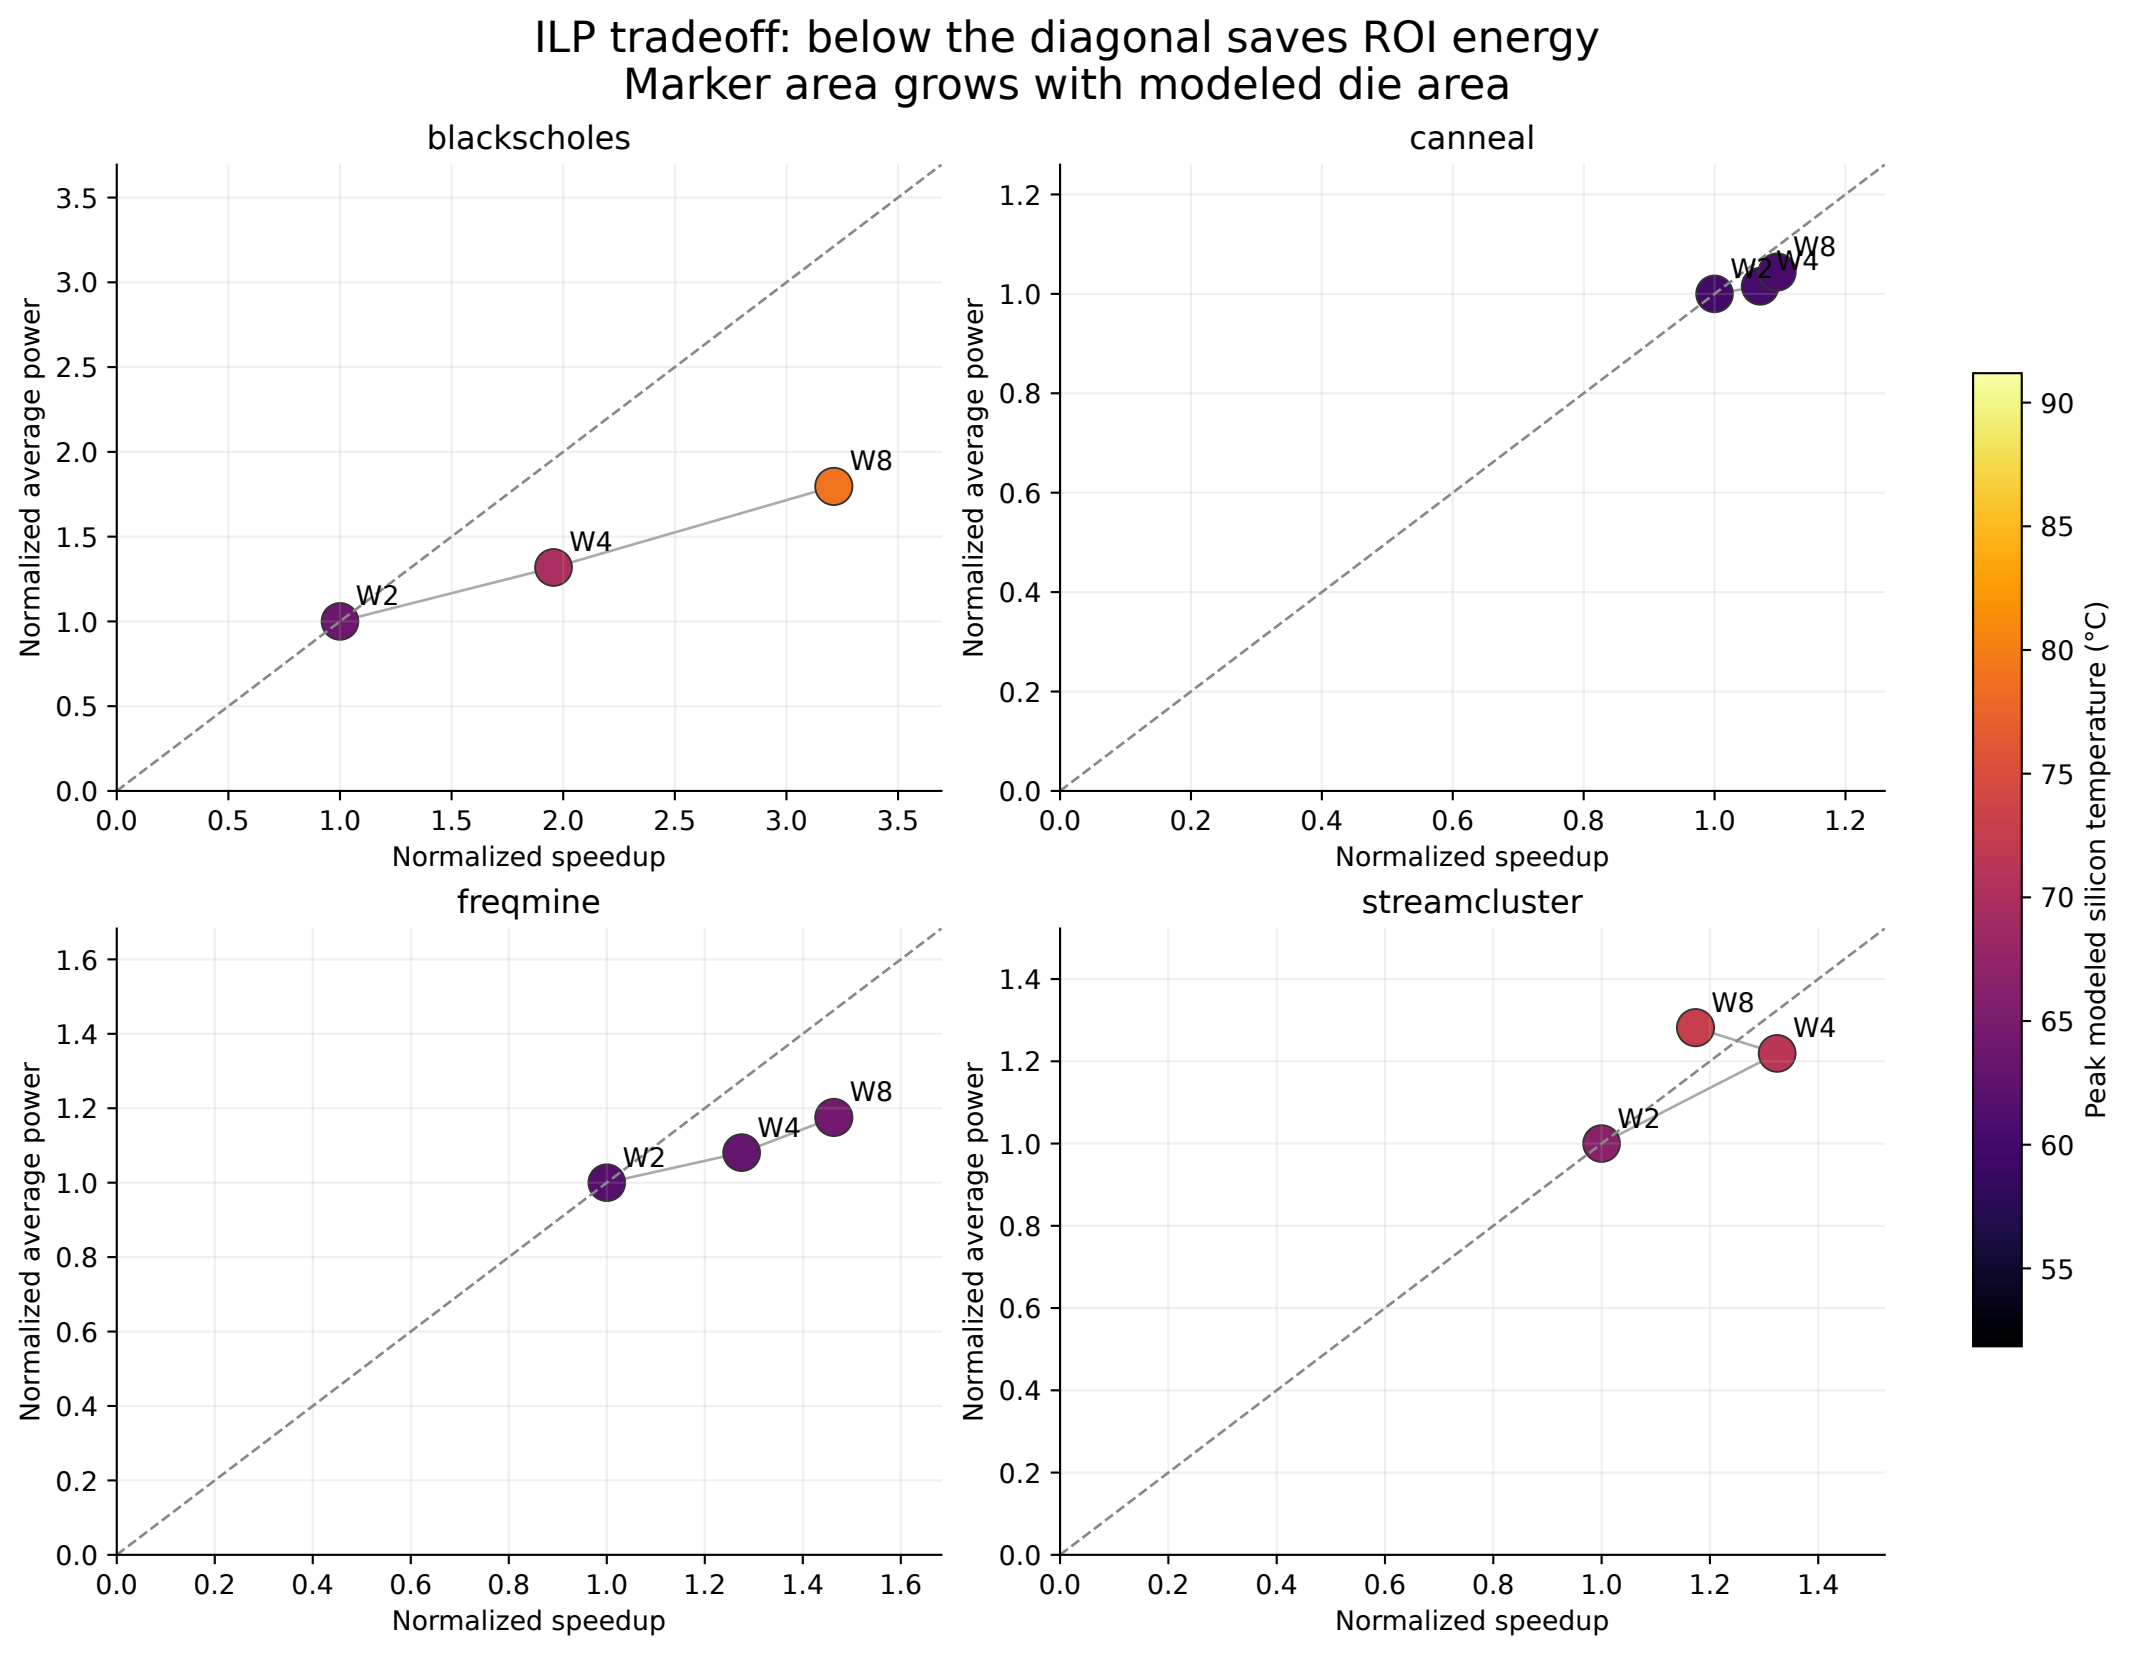
ILP tradeoff: below the diagonal saves ROI energy
Marker area grows with modeled die area
blackscholes
canneal
freqmine
streamcluster
Normalized average power
Normalized speedup
W2
W4
W8
Peak modeled silicon temperature (°C)