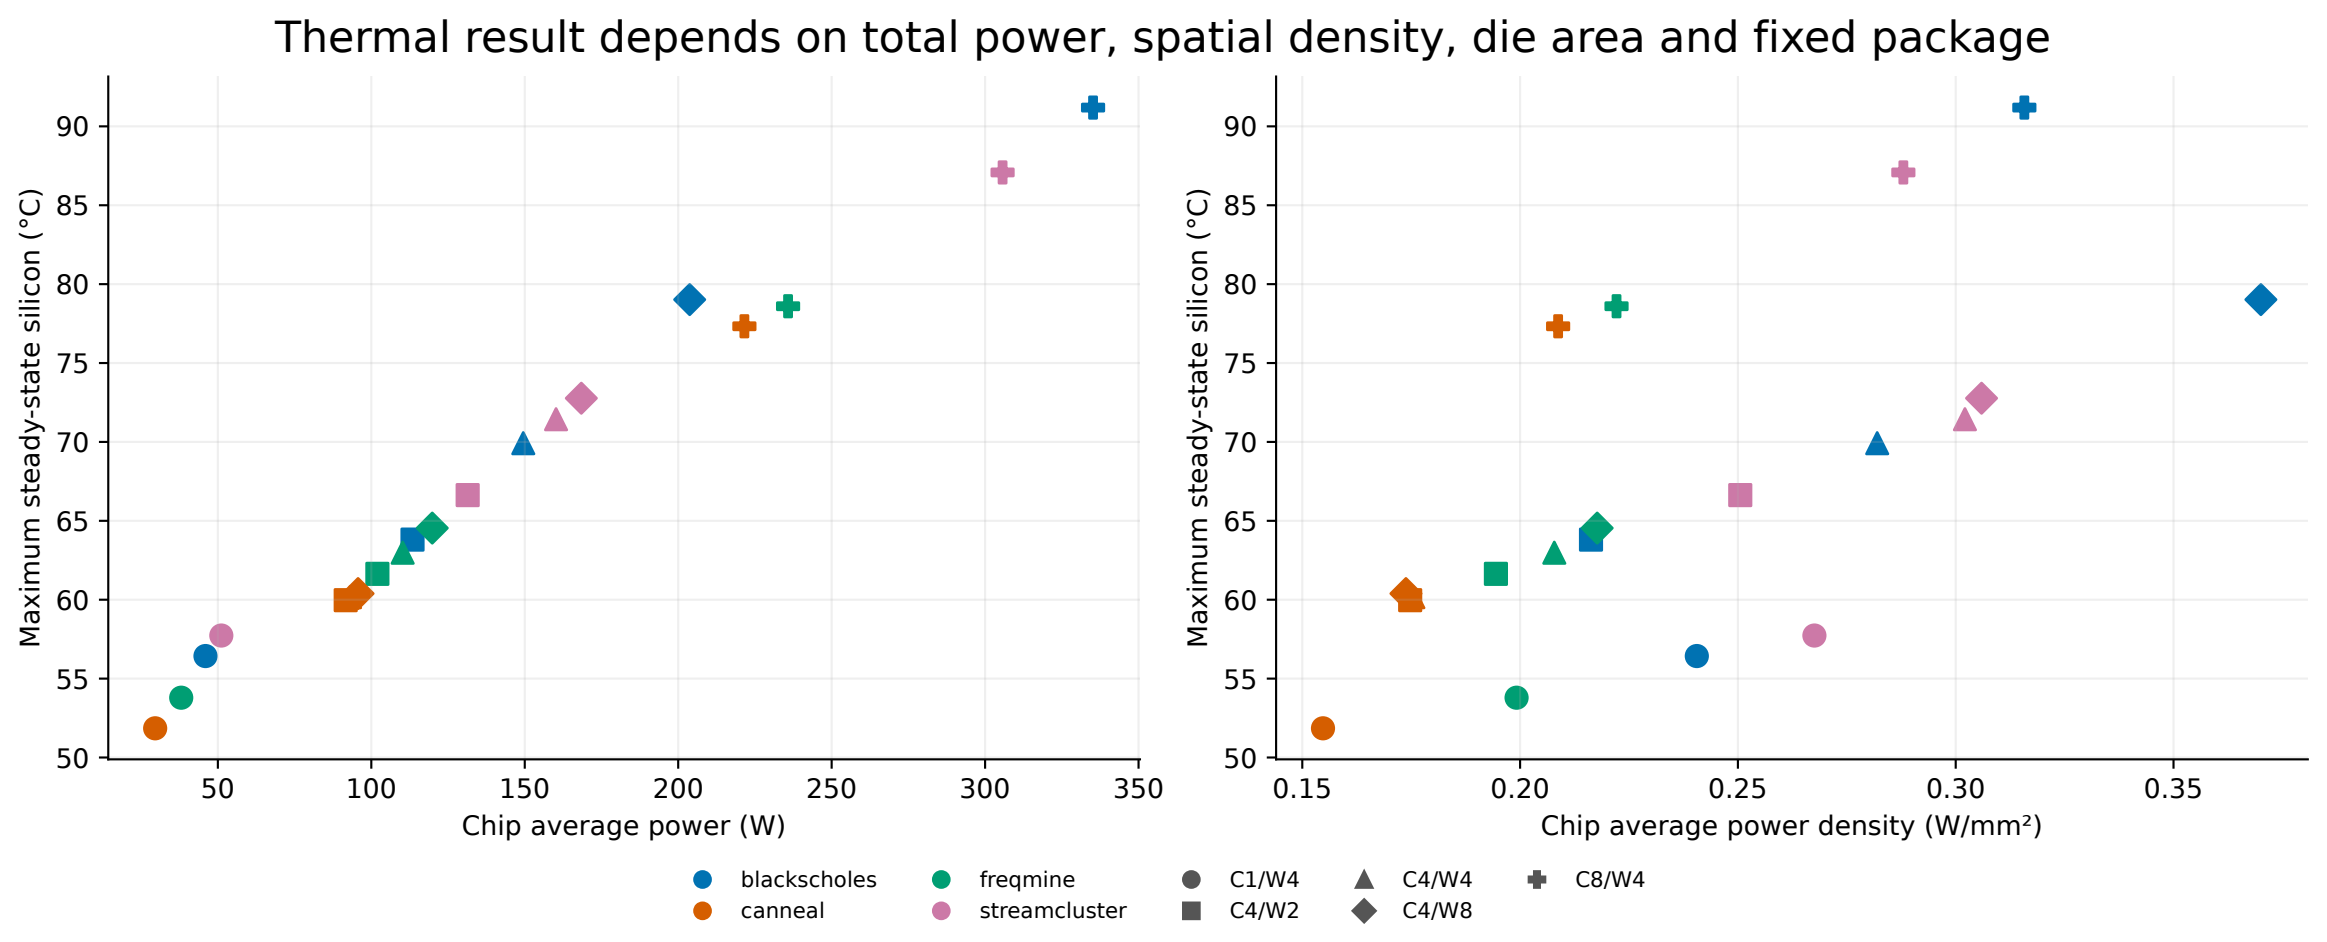
Thermal result depends on total power, spatial density, die area and fixed package
Maximum steady-state silicon (°C)
Chip average power (W)
Chip average power density (W/mm²)
blackscholes
canneal
freqmine
streamcluster
C1/W4
C4/W2
C4/W4
C4/W8
C8/W4