CABLE AUTOMATOR

Translate electrical requirements into a wiring diagram, a BOM, packaging recommendation, and wire-detail summary with a streamlined engineering workflow.

CABLE DESIGN INPUTS

Enter conductor data on the left, then generate the harness to see the wiring diagram view, wire table, BOM, and packaging recommendations.

NO. OF CONDUCTORS	LENGTH (FT)
3	12.00

SIGNAL NAME	CURRENT (A)	COLOR
SIGNAL 1	20.00	Red
SIGNAL 2	20.00	White
SIGNAL 3	20.00	Green

Generate Cable Design

CABLE DESIGN OUTPUTS

CONDUCTORS	CABLE LENGTH	BUNDLE DIAMETER	RECOMMENDED SLEEVE
3	**12.0 ft**	**0.157 in**	**M23053/13-001-0**
Total wires in harness	Entered design length	Estimated harness bundle size	Selected from fit-range reference data

HARNESS ROUTING VIEW

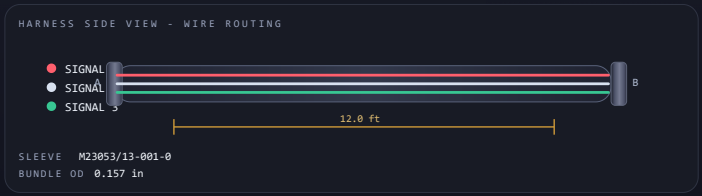

WIRE DETAILS

FN	Color	Wire Label	Gauge	OD	Current / Ampacity	Resistance	Voltage Drop
1	Red	SIGNAL 1	16 AWG	0.075 in	20.0 A / 13.0 A	0.0482 O	0.964V / 8.03%
2	White	SIGNAL 2	16 AWG	0.075 in	20.0 A / 13.0 A	0.0482 O	0.964V / 8.03%
3	Green	SIGNAL 3	16 AWG	0.075 in	20.0 A / 13.0 A	0.0482 O	0.964V / 8.03%

BILL OF MATERIALS

FN	Description	P/N	QTY
1	Hook-up wire	WIRE-16-GRN-001	
2	Hook-up wire	WIRE-16-RED-001	
3	Hook-up wire	WIRE-16-WHT-001	
4	Shrink sleeve	M23053/13-001-0	

PACKAGING NOTES

Bundle Diameter: 0.157 in
Recommended Sleeve: M23053/13-001-0
Sleeve Fit Range: 0.093 in to 0.187 in
Sleeve Wall Thickness: 0.035 in

CONNECTION SUMMARY

SIGNAL 1 -> 16 AWG wire -> 12.0 ft
SIGNAL 2 -> 16 AWG wire -> 12.0 ft
SIGNAL 3 -> 16 AWG wire -> 12.0 ft

CONNECTION DIAGRAM

[SOURCE] --- (SIGNAL 1, 16 AWG) --- [DESTINATION]
[SOURCE] --- (SIGNAL 2, 16 AWG) --- [DESTINATION]
[SOURCE] --- (SIGNAL 3, 16 AWG) --- [DESTINATION]

Voltage drop check recommended