


CPU1

- Assemble telemetry frame
- Decode and process control frame

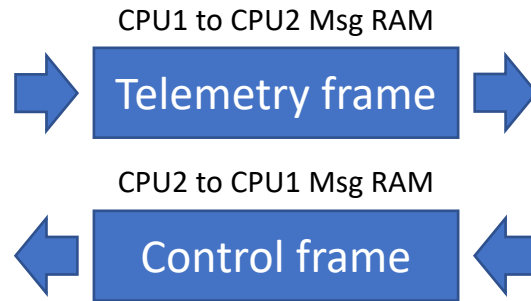

CPU2

- Configure Ethernet controller
- Open port
- Transfer packets to/from Ethernet controller

IPC flags used to signal
events between
processors