AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.21, AD-2.23, AD-2.25

RPVA AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPVA - DANIEL Z. ROMUALDEZ PRINCIPAL AIRPORT (Class 1)

RPVA AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	**ARP coordinates and site at AD**	111339N 1250140E.
2	**Direction and distance from (city)**	SE of city center, 3.5 KM.
3	**Elevation/Reference temperature**	13 FT.
4	**Geoid undulation at AD ELEV PSN**	Nil.
5	**MAG VAR/Annual Change**	2ºW (2021) / 7.0’ increasing.
6	**AD Operator, address, telephone, telefax, telex, AFS**	Civil Aviation Authority of the Philippines Daniel Z. Romualdez Airport San Jose, Tacloban City 6500 Leyte del Norte Phone: (053) 832-1632
7	**Types of traffic permitted (IFR/VFR)**	IFR-VFR.
8	**Remarks**	Nil.

RPVA AD 2.3 OPERATIONAL HOURS

1	**AD Operator**	MON - FRI: 0000 - 0900.
2	**Customs and immigration**	2100 - 1300.
3	**Health and sanitation**	2100 - 1300.
4	**AIS Briefing Office**	Nil.
5	**ATS Reporting Office (ARO)**	2030 - 1230.
6	**MET Briefing Office**	H24.
7	**ATS**	MON - FRI: 0000 - 0900.
8	**Fuelling**	2100 - 1300.
9	**Handling**	Nil.
10	**Security**	H24.
11	**De-icing**	Nil.
12	**Remarks**	Airport Operations: 2030 - 1230.

RPVA AD 2.4 HANDLING SERVICES AND FACILITIES

1	**Cargo-handling facilities**	Airlines only.
2	**Fuel/oil types**	Jet A-1.
3	**Fuelling facilities/capacity**	Cebu Pacific Air and Phoenix into Plane.
4	**De-icing facilities**	Nil.
5	**Hangar space for visiting aircraft**	Nil.
6	**Repair facilities for visiting aircraft**	Nil.
7	**Remarks**	Nil.

RPVA AD 2.5 PASSENGER FACILITIES

1	**Hotels**	Unlimited in the city.
2	**Restaurants**	Limited at the AD / Unlimited in the city.
3	**Transportation**	Car for hire, taxi.
4	**Medical facilities**	Hospitals in the city.
5	**Bank and Post Office**	Unlimited in the city.
6	**Tourist Office**	Sub-office of City Tourism at the terminal building, main office at the city.
7	**Remarks**	Nil.

RPVA AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	**AD category for fire fighting**	CAT VI.
2	**Rescue equipment**	Two (2) fire trucks [MORITA (6000 liters each)].
3	**Capability for removal of disabled aircraft**	Removal of disabled aircraft is to be done by aircraft owner or operator.
4	**Remarks**	Equipment provided by airline operators. Airport emergency plan to be submitted.

RPVA AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	**Types of clearing equipment**	Grass cutter/midrib brooms.
2	**Clearance priorities**	Manual clearing RWY and other aircraft movement areas; RWY shoulders and strip by grass cutter.
3	**Remarks**	Nil.

RPVA AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	**Apron surface and strength**	Surface: CONC. Strength: PCN 39.
2	**Taxiway width, surface and strength**	North Width: 66 M. Surface: CONC. Strength: PCN 39 R/B/W/U. South Width: 57 M. Surface: CONC. Strength: PCN 39 R/B/W/U.
3	**Altimeter checkpoint location and elevation**	Location: 111348.33N 1252935.04E. Elevation: 5.90 FT.
4	**VOR checkpoints**	111358.19N 1250140.75E.
5	**INS checkpoints**	Nil.
6	**Remarks**	Nil.

RPVA AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	**Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands**	CL, distance to go markers, guide line and aircraft parking signs.
2	**RWY and TWY markings and LGT**	RWY: RWY designation and lights. Distance to go marker - both sides of RWY, LGTD, 300 M interval THR to THR. TWY: TWY markings and lights.
3	**Stop bars and RWY guard lights**	SWY markings.
4	**Other RWY protection measures**	Nil.
5	**Remarks**	Nil.

RPVA AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	**Obstacle type Elevation Markings/LGT**	**Coordinates**	**Obstacle type Elevation Markings/LGT**	**Coordinates**	
a	**b**	**c**	**a**	**b**	
18	SWY lights	Nil	Presence of high tension power cables 900 M long across San Juanico Strait	Nil	Nil
36/APCH zone	Terrain 4413 FT	110047.4N 1244846.6E	Nil	Nil	Nil
	Terrain 1756 FT	110136.9N 1245053.0E	Nil	Nil	Nil
	Terrain 1071 FT	110121.6N 1250056.1E	Nil	Nil	Nil
	Terrain 171 FT	111214.6N 1250049.3E	Nil	Nil	Nil
	Antenna 147 FT	111216.9N 1250115.4E	Nil	Nil	Nil
	Terrain 91 FT	111242.8N 1250048.2E	Nil	Nil	Nil
36	Tall trees on SWY lights	Nil	Mountain/Trees	Nil	Nil

RPVA AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	**Associated MET Office**	PAGASA.
2	**Hours of service** **MET Office outside hours**	H24. -
3	**Office responsible for TAF preparation** **Periods of validity**	- -
4	**Trend forecast** **Interval of issuance**	- -
5	**Briefing/consultation provided**	Personal consultation.

6	**Flight documentation** **Language(s) used**	- English.
7	**Charts and other information available for briefing or consultation**	-
8	**Supplementary equipment available for providing information**	Nil.
9	**ATS units provided with information**	Tacloban TWR; Tacloban APP.
10	**Additional information (limitation of service, etc.)**	Nil.

RPVA AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY (M)	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY	Slope of RWY-SWY
1	2	3	4	5	6	7
18	183.38º	2142 X 45	PCN 46 R/B/W/U CONC+ASPH	111414.13N 1250142.23E 210 FT	THR 7 FT TDZ 6 FT	Nil
36	003.38º	2142 X 45	PCN 46 R/B/W/U CONC+ASPH	111304.57N 1250137.58E 210 FT	THR 13 FT TDZ 10 FT	Nil

SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	RESA dimensions (M)	Location/ description of arresting system	OFZ	Remarks
8	9	10	11	12	13	14
Nil	120 X 150	2142 X 150	Nil	Nil	Nil	Nil
Nil	75 X 150	2142 X 150	Nil	Nil	Nil	Nil

RPVA AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
18	2142	2262	2142	2142	Nil
36	2142	2217	2142	2142	Nil

RPVA AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
18	Nil	THR LGT Green RTIL	PAPI Left 3.0° (48.84 FT)	Nil
36	Nil	THR LGT Green RTIL	PAPI Left 3.0° (46.12 FT)	Nil

RWY Centre Line LGT LEN, spacing, colour, INTST	RWY Edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	2022 M, 60 M, Amber, LIH	Red	Nil	RWY THR Identification Light (RTIL) Visibility range: 4 NM. Distance from THR light: 10 M. Color: White. Interval: 60-120 flashes per minute. Intensity: LIH. PAPI Path width: 0.5º. Visibility range: 6 NM. Vertical obstruction clearance: <1º. Horizontal obstruction clearance: 10º from RWY center line. Distance from THR: 275 M.
Nil	2022 M, 60 M, Amber, LIH	Red	Nil	RTIL Distance from THR light: 10 M. Color: White. Interval: 60-120 flashes per minute. Intensity: LIH. PAPI Path width: 0.5º. Visibility range: 6 NM. Vertical obstruction clearance: <1º. Horizontal obstruction clearance: 10º from RWY center line.

RPVA AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	**ABN/IBN location, characteristics and hours of operation**	Location: 111339.78N 1250133.89E. Characteristics: Alternating white green - 25 flashes per minute. HR of OPS: Nil.
2	**LDI location and LGT** **Anemometer location and LGT**	Anemometer RWY 18: 111315.23N 1250133.78E. Weather Pole - 294 M from THR (Lighted). RWY 36: 111358.74N 1250137.80E. Weather Pole - 284 M from THR (Lighted).
3	**TWY edge and centre line lighting**	Edge: TWY. Center line: Nil.
4	**Secondary power supply/switch-over time**	Secondary power supply to all lighting at aerodrome. Switch-over time 15 seconds.
5	**Remarks**	Nil.

RPVA AD 2.16 HELICOPTER LANDING AREA

1	**Coordinates TLOF or THR of FATO** **Geoid undulation**	Nil.
2	**TLOF and/or FATO elevation M/FT**	Nil.
3	**TLOF and FATO area dimensions, surface, strength, marking**	Nil.
4	**True BRG of FATO**	Nil.
5	**Declared distance available**	Nil.
6	**APP and FATO lighting**	Nil.
7	**Remarks**	Old apron is designated training/landing pad with clearance from Tacloban TWR (Civilian Operators). Military has their own helipad at CASAF 8.

RPVA AD 2.17 ATS AIRSPACE

1	**Designation and lateral limits**	TACLOBAN AERODROME TRAFFIC ZONE (ATZ): A circle radius 5 NM centered on 111339N 1250140E (ARP). TACLOBAN CONTROL ZONE (CTR): A circle radius 10 NM centered on 111355.2N 1250133.6E (TAC DVOR/DME). TACLOBAN TERMINAL CONTROL AREA (TMA): 110626N 1241526E - 122220N 1241526E - 122150N 1255528E - 105636N 1255528E - 105618N 1254639E - 104918N 1250634E - 104537N 1244214E thence along an arc 50 NM radius centered on 101848.8N 1235917.9E (MCT DVOR/DME) counterclockwise to 110626N 1241526E.
2	**Vertical limits**	ATZ: SFC up to but excluding 2000 FT. CTR: SFC up to 1500 FT. TMA: 1500 FT to FL200 (excluding ATZ and ATS routes at FL160 and above).
3	**Airspace classification**	ATZ - B; CTR - D; TMA - D; ATS routes inside TMA below FL160 - D; ATS routes inside TMA above FL160 - A.
4	**ATS unit call sign** **Language(s)**	ATZ - Tacloban Tower. CTR/TMA - Tacloban Approach. English.
5	**Transition altitude**	11000 FT.
6	**Hours of applicability**	Nil.
7	**Remarks**	Nil.

RPVA AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	SATVOICE number	Logon address	Hours of operation	Remarks
1	2	3	4	5	6	7
TWR	Tacloban Tower	124.3 MHZ 5205 KHZ 3872.5 KHZ	Nil	Nil	2030 - 1230	PRI FREQ. P/P PRI FREQ (Mactan Network). P/P SRY FREQ.
APP	Tacloban Approach	120.8 MHZ				PRI FREQ. For extension of SER, one (1) day prior notice is required.

RPVA AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
DVOR/DME	TAC	115.5 MHZ / CH102X	H24	111355.2N 1250133.6E	100 FT	Coverage: VOR - 60 NM. DME - 40 NM.

RPVA AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport regulations

1.1 General

1.1.1 Avoid tight wheel turn at the runway. Utilize turn around pad at the end of either runway.

2. Parking Bays

Bay Number	Coordinates	Aircraft Type	Restrictions/Remarks
1	111333.21N 1250134.92E	ATR, Q400, A320 and A321.	Nil.
2	111334.98N 1250135.03E	ATR, Q400 and A320.	Nil.
3	111336.69N 1250135.08E	ATR, Q400 and A320.	Nil.
4	111338.85N 1250135.24E	ATR, Q400, A320 and A321.	Nil.

RPVA AD 2.22 FLIGHT PROCEDURES

1. Helicopter Operation

1.1 General

1.1.1 The procedures for the control of VFR and IFR traffic shall apply to all helicopters flying within the established helicopter traffic pattern when departing and arriving at the Daniel Z. Romualdez Heliport.

1.1.2 Except when a clearance is obtained from an air traffic control unit, VFR helicopter flights shall not take-off or land at the Daniel Z. Romualdez Principal Airport within its control zone, or enter its aerodrome traffic zone:

a. when the ceiling is less than 90 M (300 FT);

b. when the ground visibility is less than 1.5 KM (1 mile).

1.1.3 Helicopter operating VFR may be allowed outside controlled airspace with flight visibility below 1.5 KM (1 mile) provided that:

a. the helicopter is clear of clouds and the ground or water is in sight at all times.

b. the helicopter shall be maneuvered at a speed that give adequate opportunity to observe other traffic or any obstruction to avoid collision.

1.1.4 It shall be the responsibility of pilots concerned for the proper interpretation of the meaning of light gun signals directed from the Tower.

1.2 Taxiing/holding maneuvers

1.2.1 Except when clearance is obtained from Tacloban TWR/APP, taxiing/holding maneuver within airport maneuvering area shall not commence.

1.3 VFR Arrival Procedures

1.3.1 Landing at North or South of ramp: contact Tacloban tower when entering control zone. Join the circuit within one (1) mile west of Tower not above 300 FT.

1.3.2 Helicopter without two-way radio communications: when landing south, hover at Hotel Sierra at desired altitude. Observe light signal from the Tower, then proceed to designated landing area at ramp.

1.4 VFR Departure Procedures

1.4.1 Departure (Civil): lift-off to desired altitude but not above 300 FT towards Hotel Sierra, thence towards destination.

1.4.2 Departure (Military): lift-off to desired altitude but not above 300 FT towards Hotel Sierra, thence towards destination.

1.4.3 Pre-flight briefing at the Tower is a pre-requisite for the helicopter without two-way communication.

1.5 IFR Arrival and Departure Procedures

1.5.1 Helicopter desiring to fly IFR shall adhere to the procedures provided for, provided that:

a. the helicopter is IFR rated;

b. the pilot is IFR rated; and

c. the helicopter and pilot meet all other IFR requirements.

1.6 Deviations

1.6.1 Any deviation from these departure/arrival procedures shall have prior approval from Tacloban TWR/APP.

RPVA AD 2.23 ADDITIONAL INFORMATION

1. Bird concentration in the vicinity of the airport

1.1 Exercise extreme caution during landing and take-off RWY 18/36 due concentration of birds at the aerodrome.

RPVA AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Area Chart (Departure, Arrival and Track Routes)	see Enroute Chart
Standard Departure Chart - Instrument - ICAO	RPVA AD CHART 2 - 1
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 18 - ARREX4R, LARYO4R, MALAG4N)	RPVA AD CHART 2 - 3
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 18 - BANWA4R, MALAG4R, TAGPI4R)	RPVA AD CHART 2 - 7
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 36 - ARREX5R, BANWA5R, MALAG5R, TAGPI5R)	RPVA AD CHART 2 - 11
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 36 - BANWA5N, LARYO5R)	RPVA AD CHART 2 - 15
Standard Arrival Chart - Instrument - ICAO	RPVA AD CHART 2 - 17
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 18)	RPVA AD CHART 2 - 19
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 36)	RPVA AD CHART 2 - 23
Instrument Approach Chart - ICAO (VOR Y RWY 36)	RPVA AD CHART 2 - 27
Instrument Approach Chart - ICAO (VOR Z RWY 36)	RPVA AD CHART 2 - 28
Instrument Approach Chart - ICAO (RNP RWY 18)	RPVA AD CHART 2 - 29
Instrument Approach Chart - ICAO (RNP RWY 36)	RPVA AD CHART 2 - 31
Traffic Circuit Chart (RWY 18)	RPVA AD CHART 2 - 33
Traffic Circuit Chart (RWY 36)	RPVA AD CHART 2 - 34

STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 11000 FT

TWR - 124.3
APP - 120.8
ACC - 132.5 / 125.7 (SOUTHEAST)
- 8942 (SEA-2 HF)
- 8903 (CWP HF)

TACLOBAN/Daniel Z. Romualdez (RPVA) RWY 18/36

ALICO1A/1B ARREX1A/1B/1C/1D
BANWA1A/1B MALAG1A/1B/1C/1D
POXOS1A/1B/1C/1D SADOK1A/1B
TAGPI1A/1B

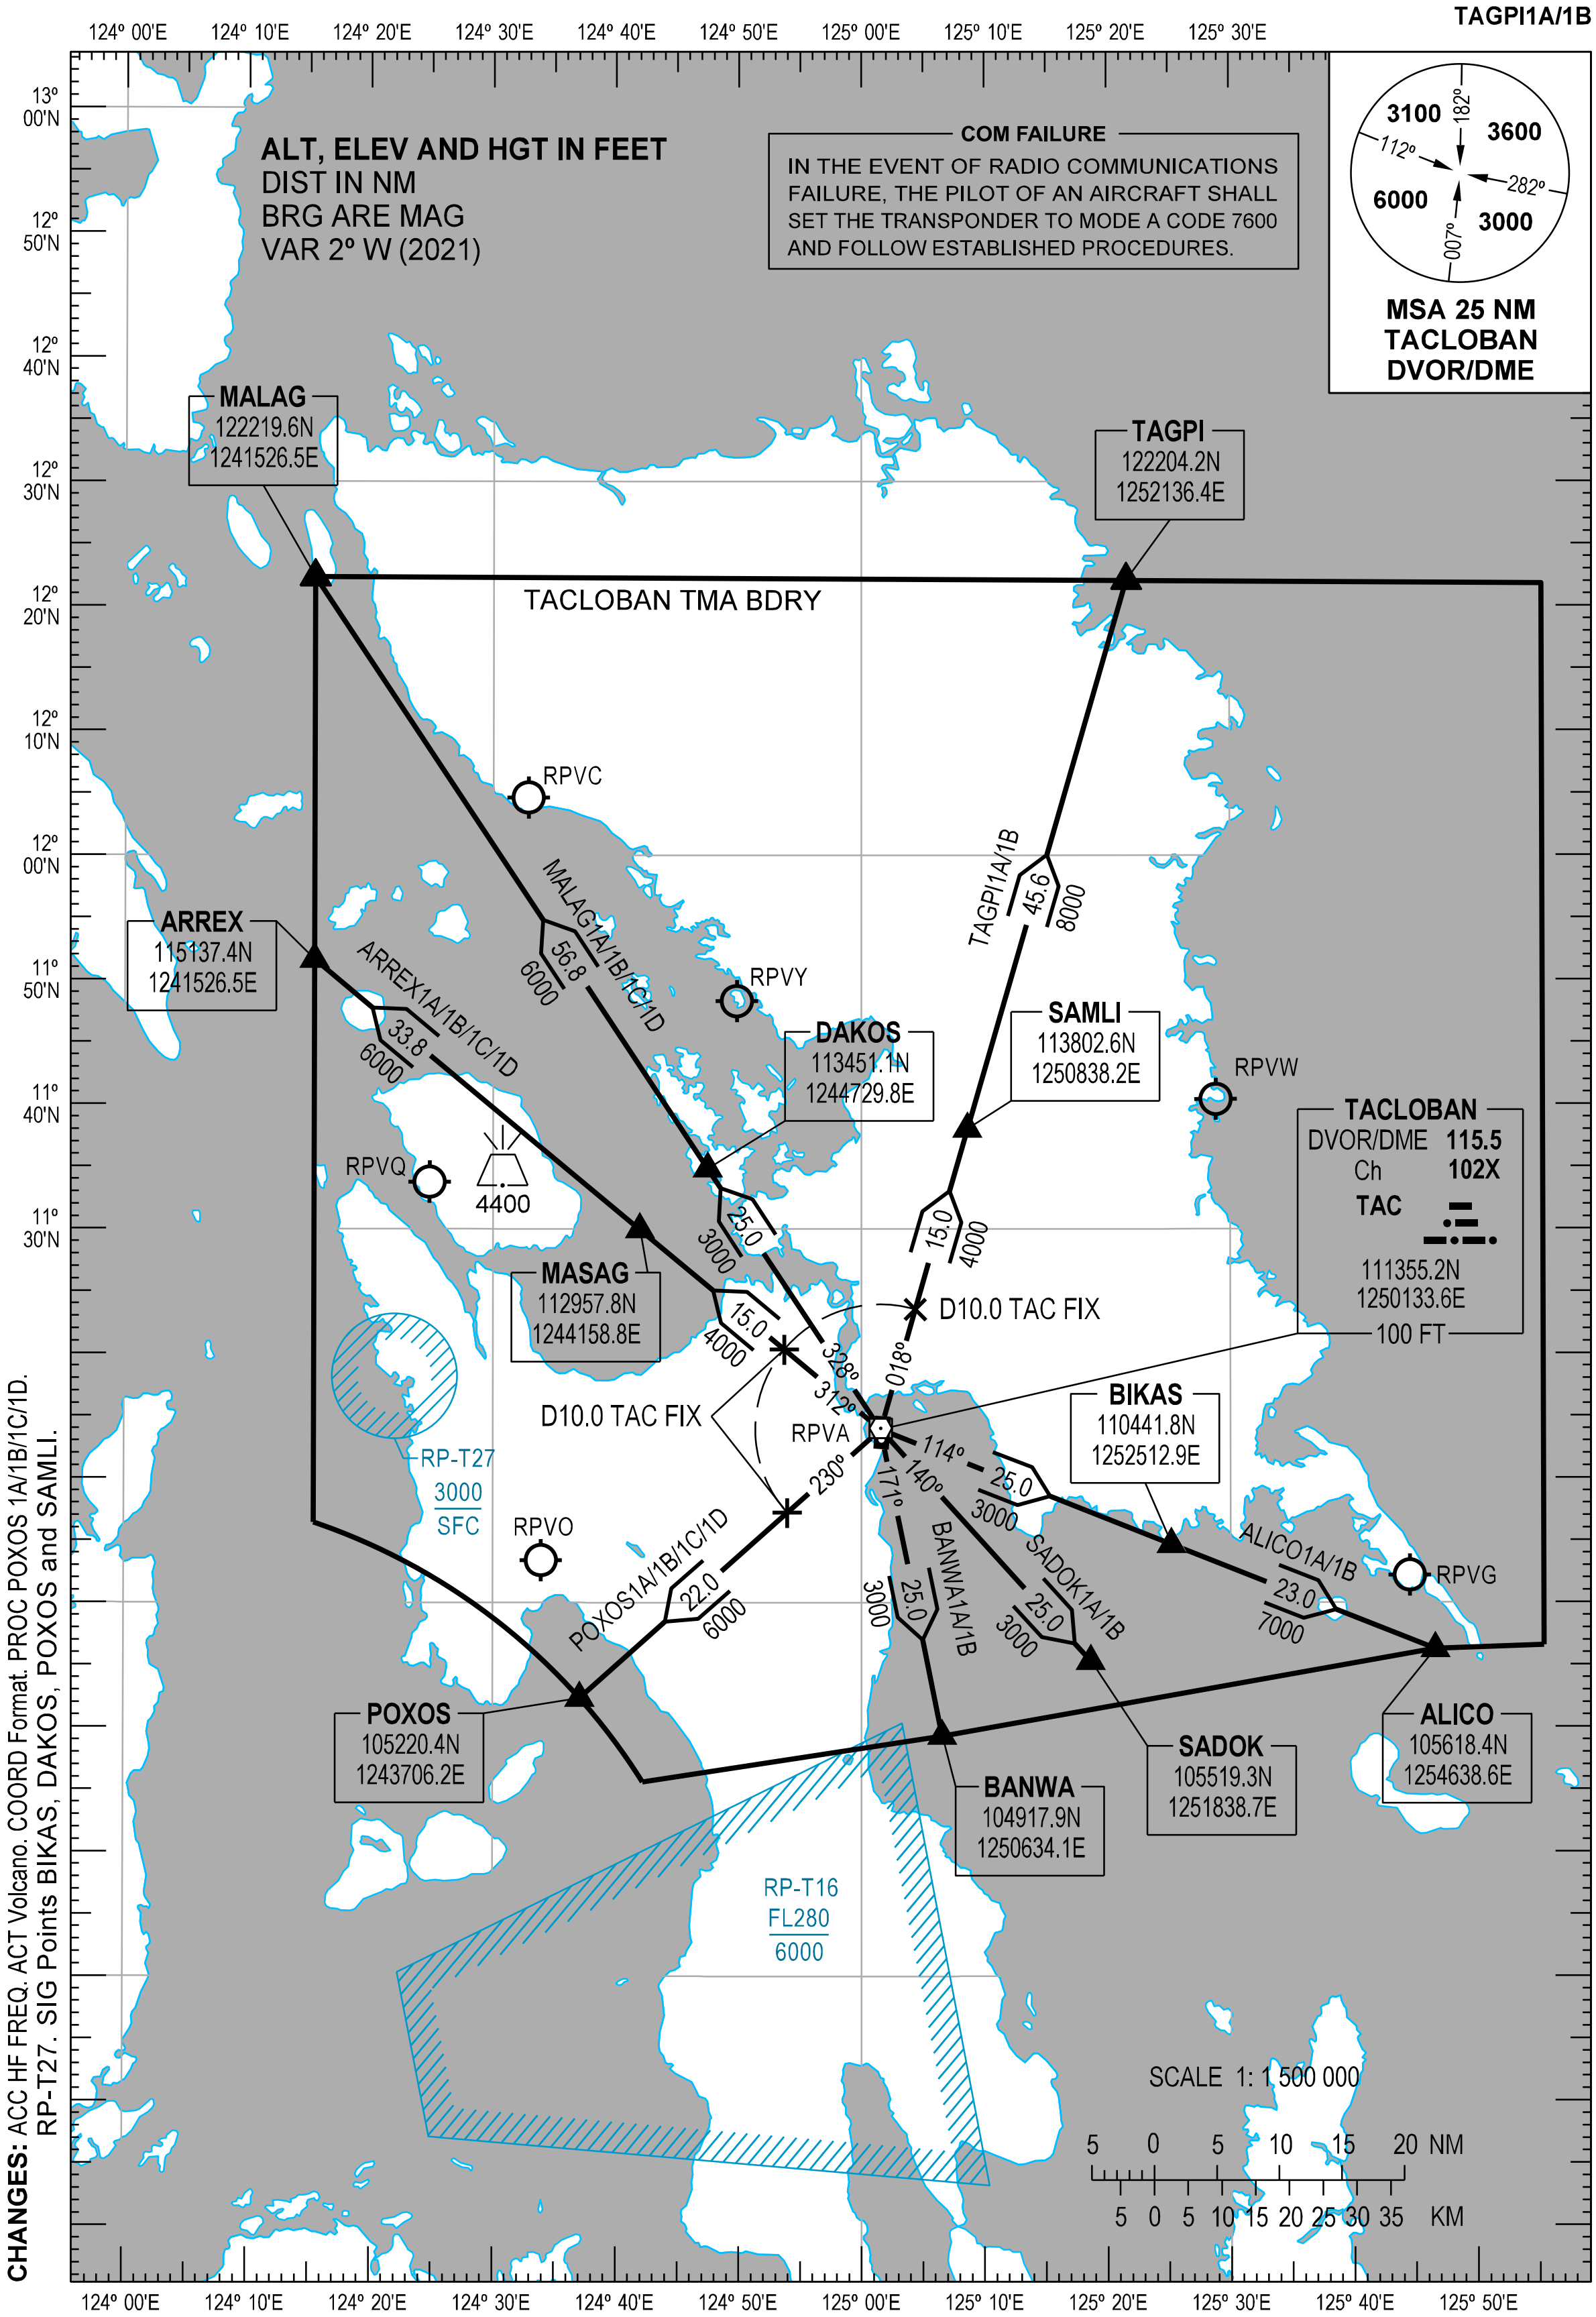

CHANGES: ACC HF FREQ. ACT Volcano. COORD Format. PROC POXOS 1A/1B/1C/1D. RP-T27. SIG Points BIKAS, DAKOS, POXOS and SAMLI.

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
ALICO1A **ALICO1B**	RWY 36 - Right turn within 5.0 NM RWY 18 - Left turn within 5.0 NM	Intercept and track-out on TAC DVOR/DME Radial 114 to cross BIKAS at or above 7000 FT. Continue to ALICO.	
ARREX1A **ARREX1B**	RWY 36 - Right turn within 5.0 NM RWY 18 - Straight-out departure to 2000 FT, then right climbing turn	Climb to cross TAC DVOR/DME at or above 4000 FT. Track-out on TAC DVOR/DME Radial 312 to cross MASAG at or above 6000 FT. Continue to ARREX. Intercept and track-out on TAC DVOR/DME Radial 312 to cross D10.0 TAC FIX at or above 4000 FT. Continue climb to cross MASAG at or above 6000 FT. Continue to ARREX.	
ARREX1C For high performance aircraft **ARREX1D For high performance aircraft**	RWY 36 - Straight-out departure to 3000 FT, then left climbing turn RWY 18 - Straight-out departure to 3000 FT, then right climbing turn	Intercept and track-out on TAC DVOR/DME Radial 312 to cross D10.0 TAC FIX at or above 4000 FT. Continue climb to cross MASAG at or above 6000 FT. Continue to ARREX.	
BANWA1A **BANWA1B**	RWY 36 - Right turn within 5.0 NM RWY 18 - Left turn	Intercept and track-out on TAC DVOR/DME Radial 171 to cross BANWA at or above 8000 FT.	
MALAG1A **MALAG1B**	RWY 36 - Right turn within 5.0 NM RWY 18 - Straight-out departure to 2000 FT, then right climbing turn	Climb to cross TAC DVOR/DME at or above 3000 FT. Track-out on TAC DVOR/DME Radial 328 to cross DAKOS at or above 6000 FT. Continue to MALAG to cross MALAG at or above 10000 FT. Intercept and track-out on TAC DVOR/DME Radial 328 to cross DAKOS at or above 6000 FT. Continue to MALAG to cross MALAG at or above 10000 FT.	
MALAG1C For high performance aircraft **MALAG1D For high performance aircraft**	RWY 36 - Straight-out departure to 3000 FT, then left climbing turn RWY 18 - Straight-out departure to 3000 FT, then right climbing turn	Intercept and track-out on TAC DVOR/DME Radial 328 to cross DAKOS at or above 6000 FT. Continue to MALAG to cross MALAG at or above 10000 FT.	
POXOS1A **POXOS1B**	RWY 36 - Right turn within 5.0 NM RWY 18 - Left turn within 5.0 NM	Climb to cross TAC DVOR/DME at or above 6000 FT. Track-out on TAC DVOR/DME Radial 230 to POXOS.	When weather is VMC, climb on course during daytime may be authorized by ATC depending on traffic condition.
POXOS1C For high performance aircraft **POXOS1D For high performance aircraft**	RWY 36 - Right turn within 5.0 NM RWY 18 - Straight-out departure to 3000 FT, then right climbing turn	Intercept and track-out on TAC DVOR/DME Radial 230 to cross D10.0 TAC FIX at or above 6000 FT. Continue climb to POXOS.	When weather is VMC, climb on course during daytime may be authorized by ATC depending on traffic condition.
SADOK1A **SADOK1B**	RWY 36 - Right turn within 5.0 NM RWY 18 - Left turn within 5.0 NM	Intercept and track-out on TAC DVOR/DME Radial 140 to cross SADOK at or above FL150.	
TAGPI1A **TAGPI1B**	RWY 36 - Right turn RWY 18 - Left turn within 5.0 NM	Intercept and track-out on TAC DVOR/DME Radial 018 to cross D10.0 TAC FIX at or above 4000 FT. Continue climb to cross SAMLI at or above 8000 FT. Continue to TAGPI.	

CHANGES: PROC POXOS1A/1B/1C/1D. SIG Points BIKAS, DAKOS, POXOS and SAMLI.

STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 11000 FT

TWR - 124.3
APP - 120.8
ACC - 132.5 / 125.7 (SOUTHEAST)
- 8942 (SEA-2 HF)
- 8903 (CWP HF)

TACLOBAN/Daniel Z. Romualdez (RPVA)
RNP SID RWY 18
ARREX4R LARYO4R MALAG4N

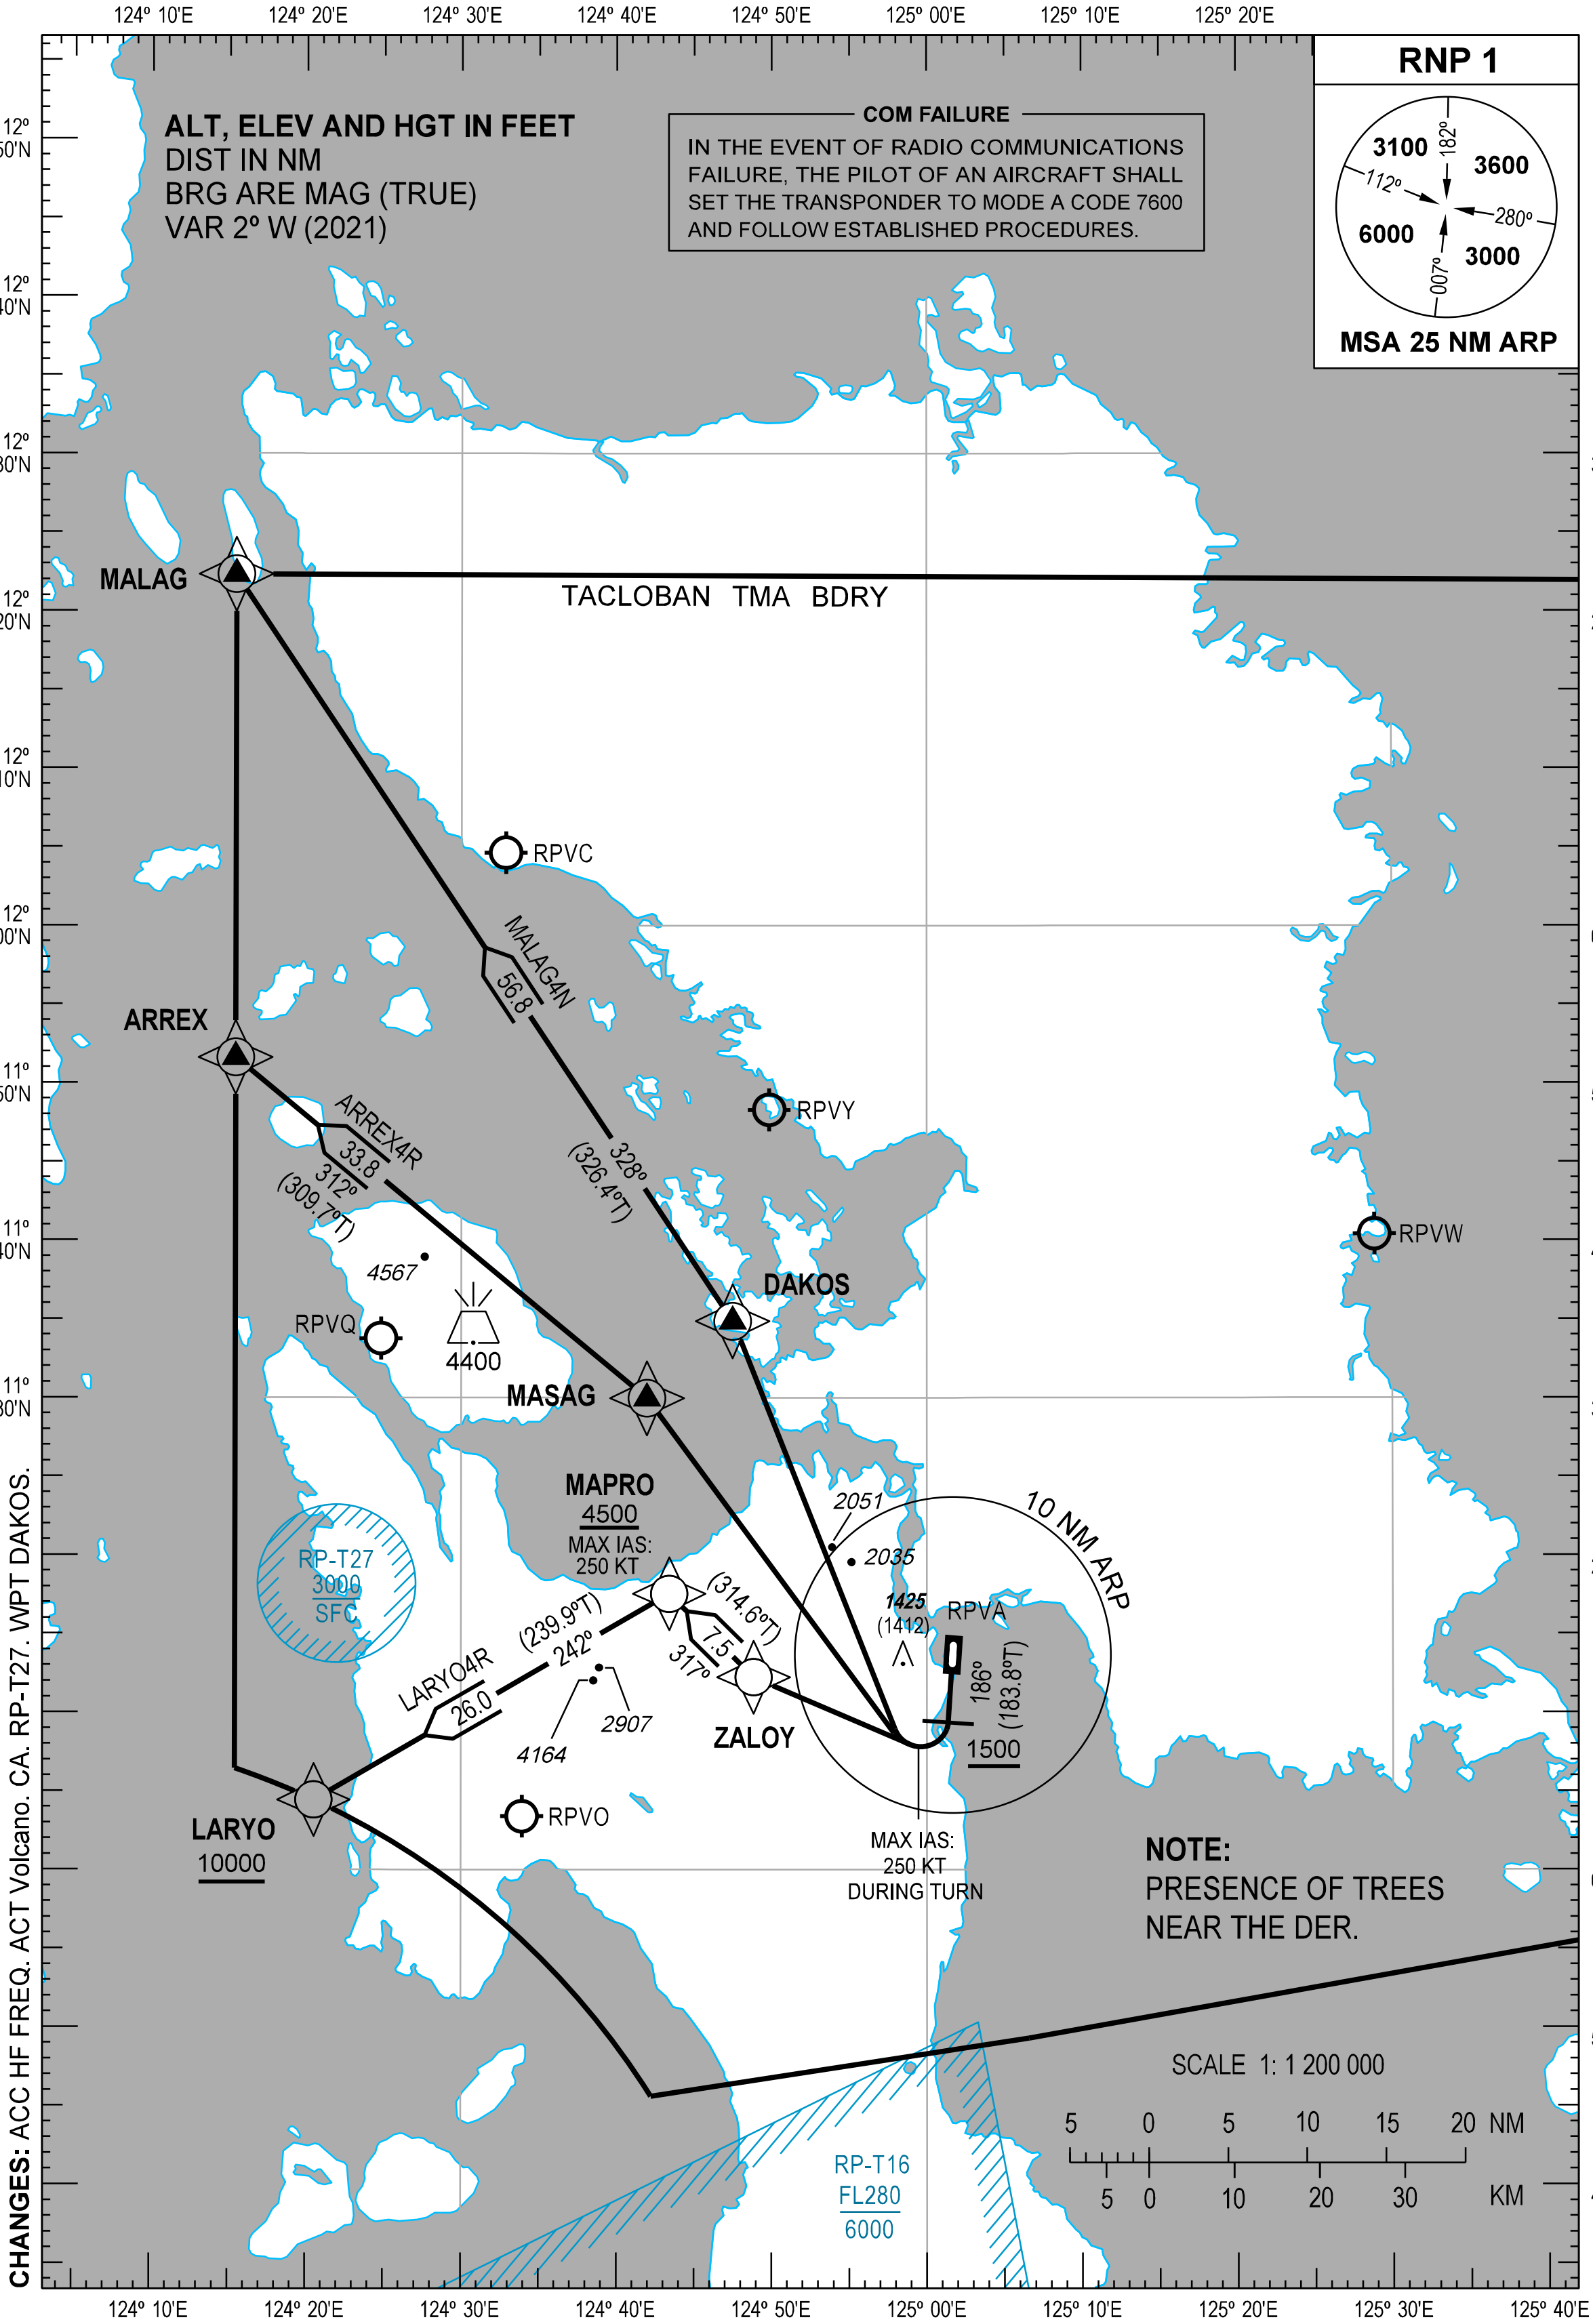

CHANGES: ACC HF FREQ. ACT Volcano. CA. RP-T27. WPT DAKOS.

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
ARREX4R	RWY 18	Climb on course 186ºM. At 1500 FT, turn right direct to MASAG, to ARREX. (Note: Use of procedure is only allowed when airway W9 is closed).	Do not exceed 250 KT during turn to MASAG.
LARYO4R		Climb on course 186ºM. At 1500 FT, turn right direct to ZALOY, to MAPRO at or above 4500 FT, to LARYO at or above 10000 FT.	Do not exceed 250 KT until MAPRO.
MALAG4N		Climb on course 186ºM. At 1500 FT, turn right direct to DAKOS, to MALAG.	Do not exceed 250 KT during turn to DAKOS.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ARREX	115137.4N	1241526.5E	Fly-by
DAKOS	113451.1N	1244729.8E	Fly-by
LARYO	110426.5N	1242031.8E	Fly-by
MALAG	122219.6N	1241526.5E	Fly-by
MAPRO	111732.1N	1244324.8E	Fly-by
MASAG	112957.8N	1244158.8E	Fly-by
ZALOY	111214.3N	1244850.9E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 18

Table 1: ARREX4R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	186 (183.8)	+2	-	-	+1500	-250	-	RNP1	RW18
20	DF	MASAG	-	-	-	-	R	-	-	-	RNP1	RW18
30	TF	ARREX	-	312 (309.7)	+2	33.8	-	-	-	-	RNP1	RW18

Table 2: LARYO4R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	186 (183.8)	+2	-	-	+1500	-	-	RNP1	RW18
20	DF	ZALOY	-	-	-	-	R	-	-	-	RNP1	RW18
30	TF	MAPRO	-	317 (314.6)	+2	7.5	-	+4500	-250	-	RNP1	RW18
40	TF	LARYO	-	242 (239.9)	+2	26.0	-	+10000	-	-	RNP1	RW18

CHANGES: ALT. COORD Format. WPT DAKOS.

Table 3: MALAG4N

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	186 (183.8)	+2	-	-	+1500	-250	-	RNP1	RW18
20	DF	DAKOS	-	-	-	-	R	-	-	-	RNP1	RW18
30	TF	MALAG	-	328 (326.4)	+2	56.8	-	-	-	-	RNP1	RW18

CHANGES: ALT. WPT DAKOS.

INTENTIONALLY
LEFT
BLANK

STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE 11000 FT

TWR - 124.3
APP - 120.8
ACC - 132.5 / 125.7 (SOUTHEAST)
- 8942 (SEA-2 HF)
- 8903 (CWP HF)

TACLOBAN/Daniel Z. Romualdez (RPVA)
RNP SID RWY 18
BANWA4R MALAG4R TAGPI4R

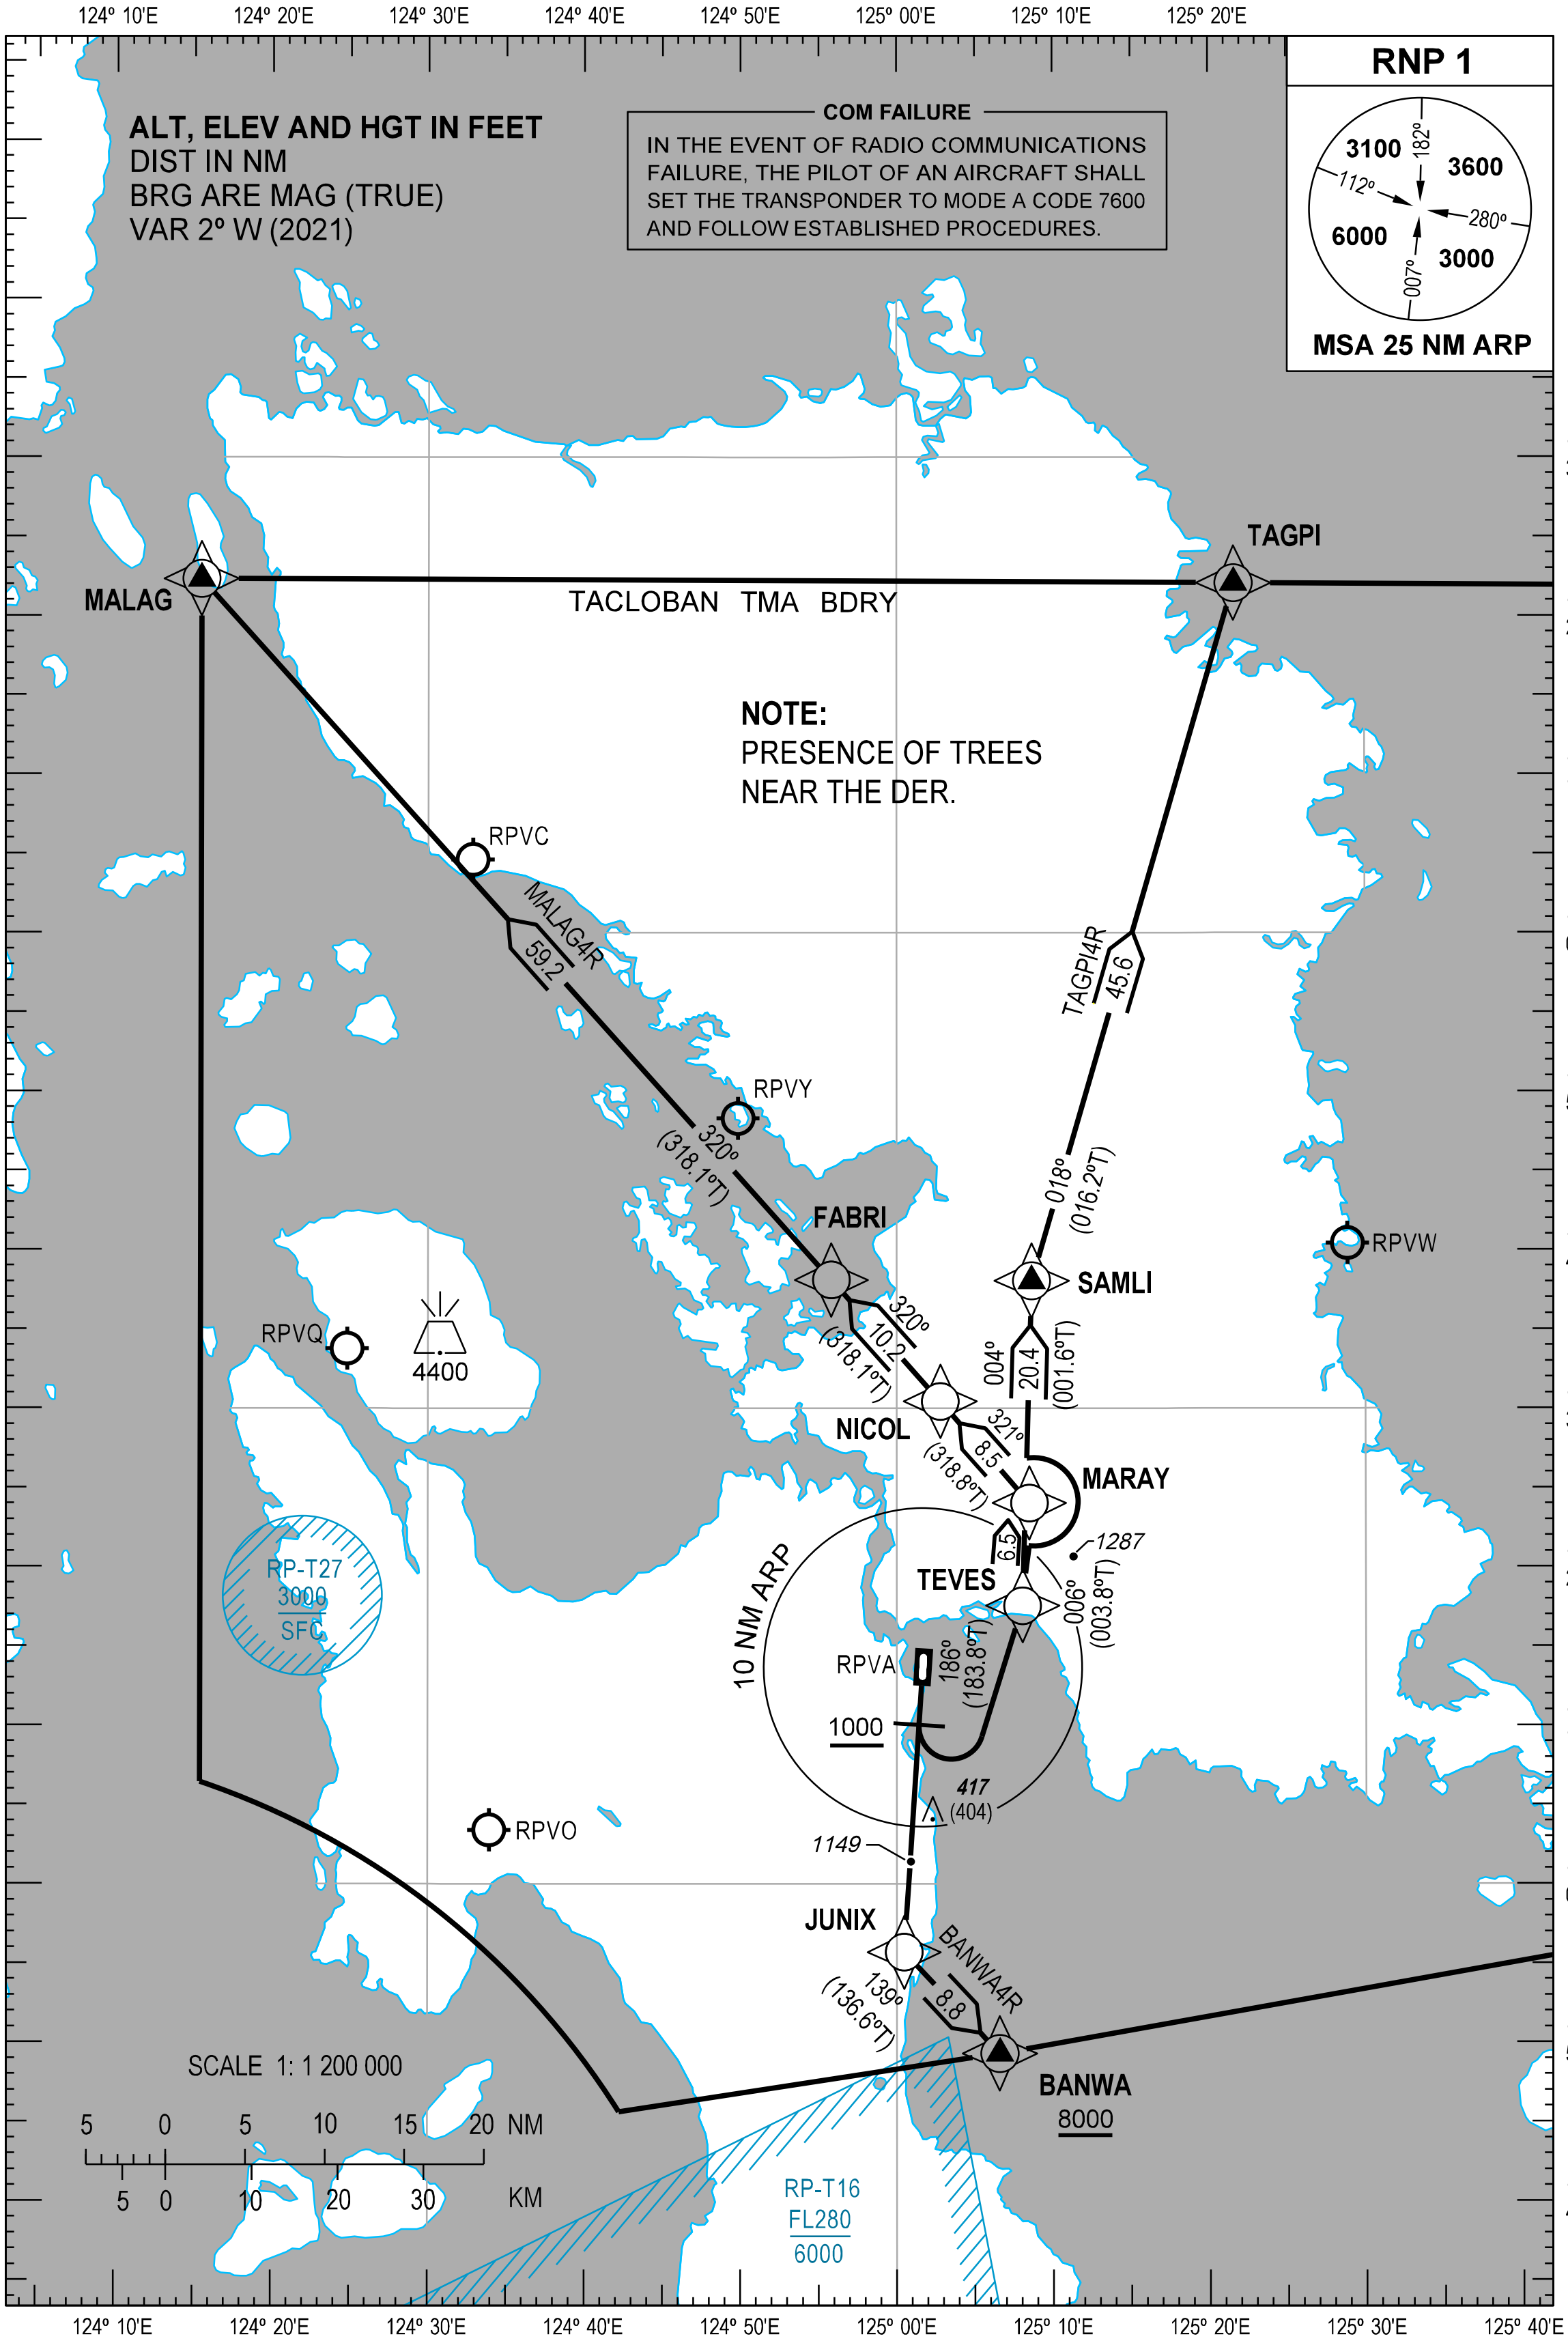

CHANGES: ACC HF FREQ. ACT Volcano. CA. RP-T27. WPT SAMLI.

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
BANWA4R	RWY 18	Climb on course 186ºM. At 1000 FT, fly direct to JUNIX, to BANWA at or above 8000 FT.	ATS gradient 5.1% to cross BANWA at or above 8000 FT.
MALAG4R		Climb on course 186ºM. At 1000 FT, turn left direct to TEVES, to MARAY, to NICOL, to FABRI, to MALAG.	
TAGPI4R		Climb on course 186ºM. At 1000 FT, turn left direct to TEVES, to SAMLI, to TAGPI.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BANWA	104917.9N	1250634.1E	Fly-by
FABRI	113805.9N	1245549.3E	Fly-by
JUNIX	105541.5N	1250027.9E	Fly-by
MALAG	122219.6N	1241526.5E	Fly-by
MARAY	112401.4N	1250828.9E	Fly-by
NICOL	113026.2N	1250247.2E	Fly-by
SAMLI	113802.6N	1250838.2E	Fly-by
TAGPI	122204.2N	1252136.4E	Fly-by
TEVES	111732.4N	1250802.6E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 18

Table 1: BANWA4R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	186 (183.8)	+2	-	-	+1000	-	-	RNP1	RW18
20	DF	JUNIX	-	-	-	-	-	-	-	-	RNP1	RW18
30	TF	BANWA	-	139 (136.6)	+2	8.8	-	+8000	-	-	RNP1	RW18

Table 2: MALAG4R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	186 (183.8)	+2	-	-	+1000	-	-	RNP1	RW18
20	DF	TEVES	-	-	-	-	L	-	-	-	RNP1	RW18
30	TF	MARAY	-	006 (003.8)	+2	6.5	-	-	-	-	RNP1	RW18
40	TF	NICOL	-	321 (318.8)	+2	8.5	-	-	-	-	RNP1	RW18
50	TF	FABRI	-	320 (318.1)	+2	10.2	-	-	-	-	RNP1	RW18
60	TF	MALAG	-	320 (318.1)	+2	59.2	-	-	-	-	RNP1	RW18

CHANGES: ALT. COORD Format. WPT SAMLI.

Table 3: TAGPI4R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	186 (183.8)	+2	-	-	+1000	-	-	RNP1	RW18
20	DF	TEVES	-	-	-	-	L	-	-	-	RNP1	RW18
30	TF	SAMLI	-	004 (001.6)	+2	20.4	-	-	-	-	RNP1	RW18
40	TF	TAGPI	-	018 (016.2)	+2	45.6	-	-	-	-	RNP1	RW18

CHANGES: ALT. WPT SAMLI.

INTENTIONALLY
LEFT
BLANK

STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE
11000 FT

TWR - 124.3
APP - 120.8
ACC - 132.5 / 125.7 (SOUTHEAST)
- 8942 (SEA-2 HF)
- 8903 (CWP HF)

TACLOBAN/Daniel Z. Romualdez (RPVA)
RNP SID RWY 36
ARREX5R BANWA5R
MALAG5R TAGPI5R

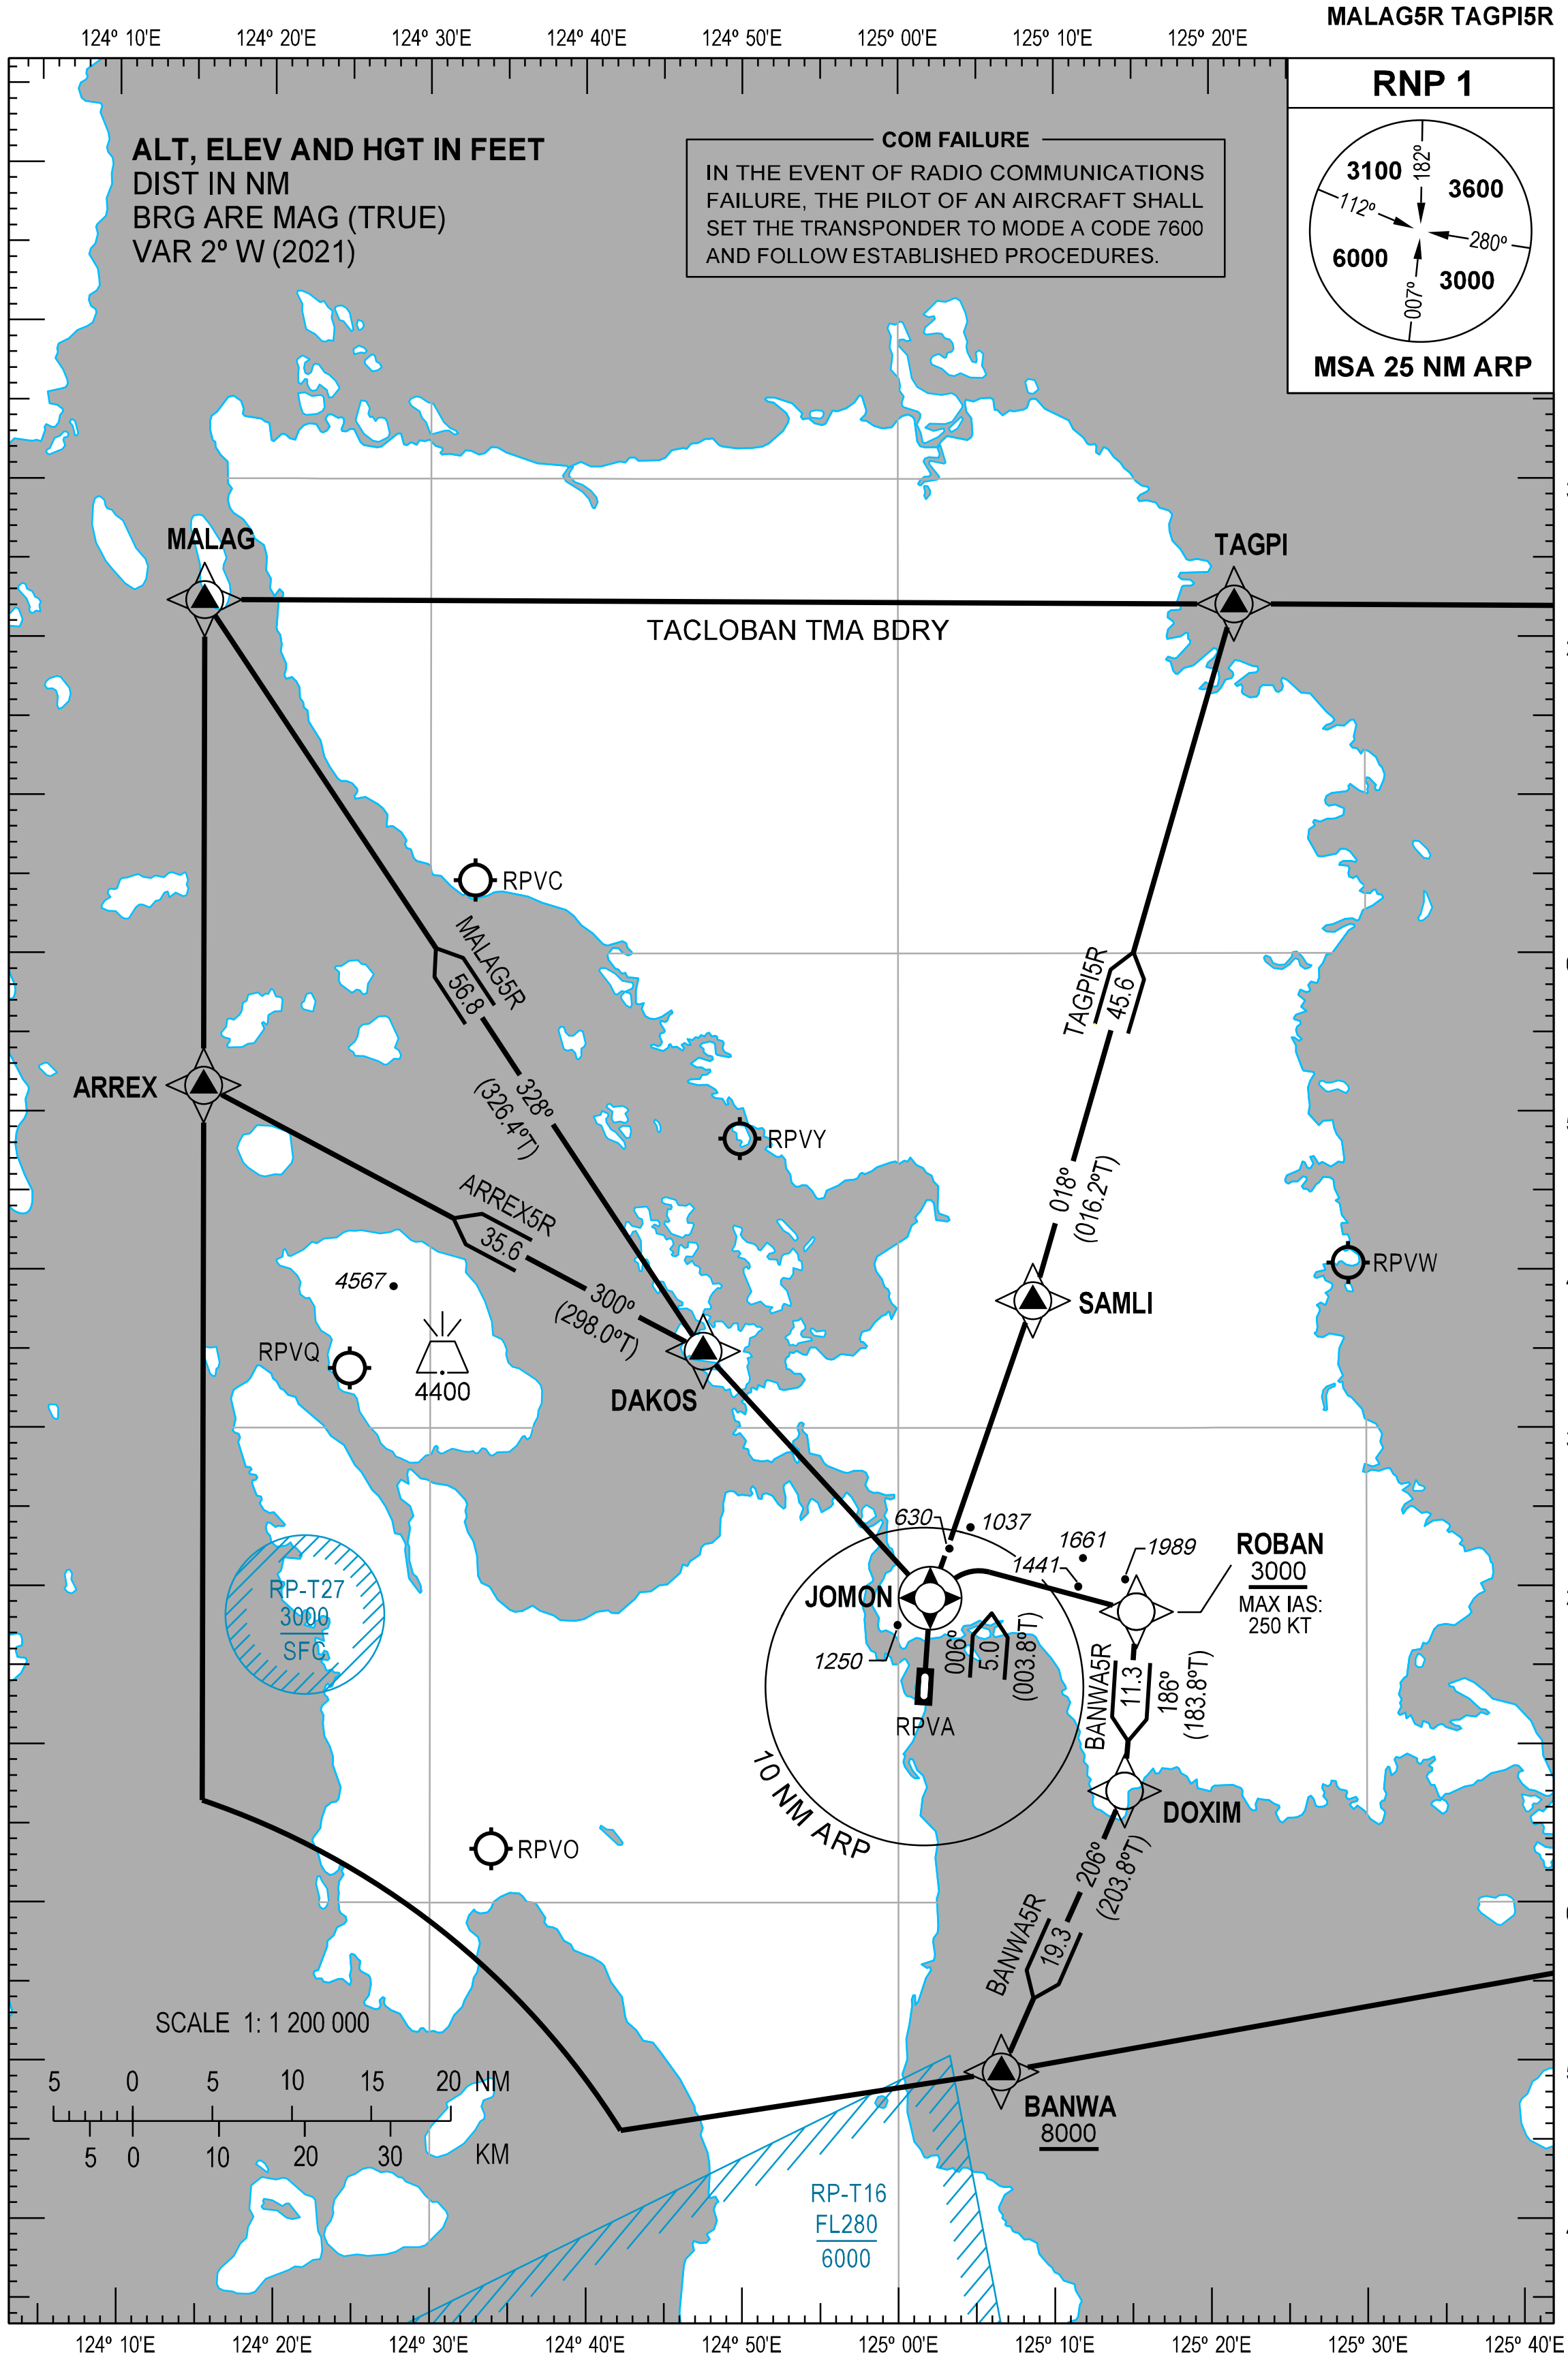

CHANGES: ACC HF FREQ. ACT Volcano. RP-T27. WPT DAKOS and SAMLI.

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
ARREX5R	RWY 36	Climb on course 006ºM. At JOMON, turn left direct to DAKOS, to ARREX. (Note: Use of procedure is only allowed when airway W9 is closed).	
BANWA5R		Climb on course 006ºM. At JOMON, turn right direct to ROBAN at or above 3000 FT, to DOXIM, to BANWA at or above 8000 FT.	Do not exceed 250 KT until ROBAN.
MALAG5R		Climb on course 006ºM. At JOMON, turn left direct to DAKOS, to MALAG.	
TAGPI5R		Climb on course 006ºM. At JOMON, turn right direct to SAMLI, to TAGPI.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ARREX	115137.4N	1241526.5E	Fly-by
BANWA	104917.9N	1250634.1E	Fly-by
DAKOS	113451.1N	1244729.8E	Fly-by
DOXIM	110703.2N	1251428.4E	Fly-by
JOMON	111914.8N	1250202.3E	Flyover
MALAG	122219.6N	1241526.5E	Fly-by
ROBAN	111823.0N	1251514.3E	Fly-by
SAMLI	113802.6N	1250838.2E	Fly-by
TAGPI	122204.2N	1252136.4E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 36

Table 1: ARREX5R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CF	JOMON	Y	006 (003.8)	+2	5.0	-	-	-	-	RNP1	RW36
20	DF	DAKOS	-	-	-	-	L	-	-	-	RNP1	RW36
30	TF	ARREX	-	300 (298.0)	+2	35.6	-	-	-	-	RNP1	RW36

Table 2: BANWA5R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CF	JOMON	Y	006 (003.8)	+2	5.0	-	-	-	-	RNP1	RW36
20	DF	ROBAN	-	-	-	-	R	+3000	-250	-	RNP1	RW36
30	TF	DOXIM	-	186 (183.8)	+2	11.3	-	-	-	-	RNP1	RW36
40	TF	BANWA	-	206 (203.8)	+2	19.3	-	+8000	-	-	RNP1	RW36

CHANGES: COORD Format. WPT DAKOS and SAMLI.

Table 3: MALAG5R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CF	JOMON	Y	006 (003.8)	+2	5.0	-	-	-	-	RNP1	RW36
20	DF	DAKOS	-	-	-	-	L	-	-	-	RNP1	RW36
30	TF	MALAG	-	328 (326.4)	+2	56.8	-	-	-	-	RNP1	RW36

Table 4: TAGPI5R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CF	JOMON	Y	006 (003.8)	+2	5.0	-	-	-	-	RNP1	RW36
20	DF	SAMLI	-	-	-	-	R	-	-	-	RNP1	RW36
30	TF	TAGPI	-	018 (016.2)	+2	45.6	-	-	-	-	RNP1	RW36

CHANGES: WPT DAKOS and SAMLI.

INTENTIONALLY
LEFT
BLANK

STANDARD DEPARTURE CHART - INSTRUMENT (SID) - ICAO

TRANSITION ALTITUDE
11000 FT

TWR - 124.3
APP - 120.8
ACC - 132.5 / 125.7 (SOUTHEAST)
- 8942 (SEA-2 HF)
- 8903 (CWP HF)

TACLOBAN/Daniel Z. Romualdez (RPVA)
RNP SID RWY 36
BANWA5N LARYO5R

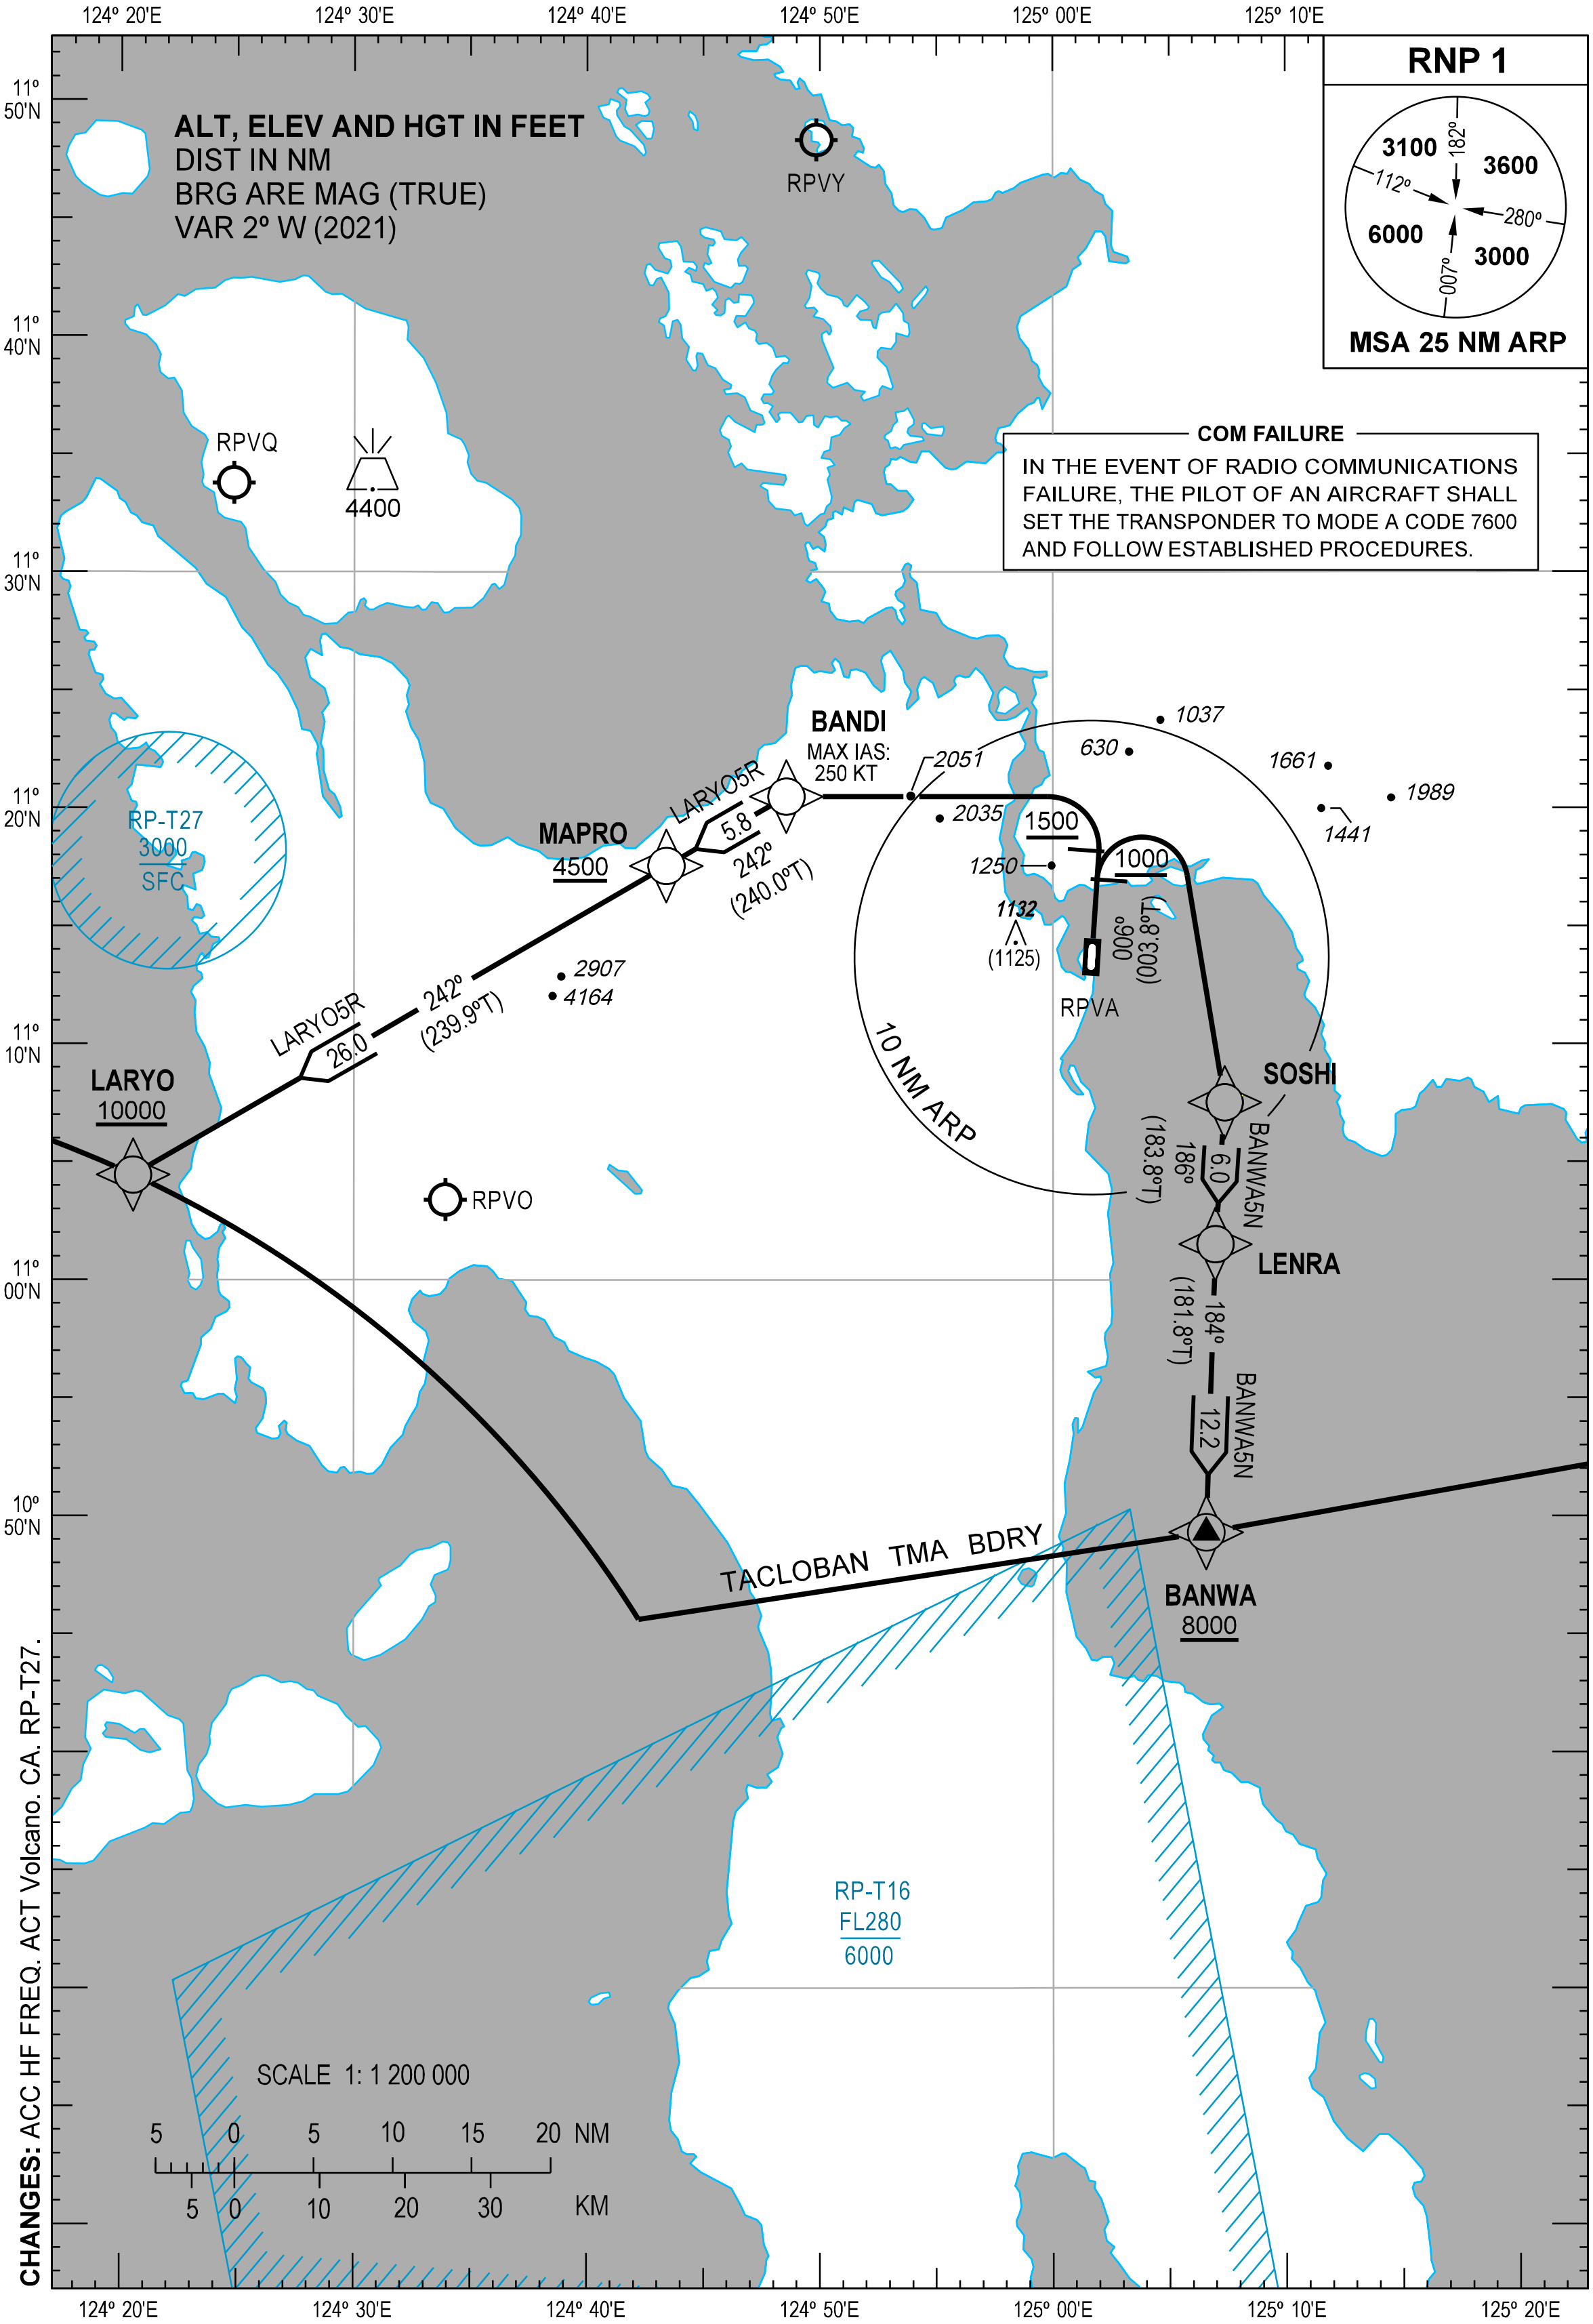

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
BANWA5N	RWY 36	Climb on course 006ºM. At 1000 FT, turn right direct to SOSHI, to LENRA, to BANWA at or above 8000 FT.	ATS gradient 3.8% to cross BANWA at or above 8000 FT.
LARYO5R		Climb on course 006ºM. At 1500 FT, turn left direct to BANDI, to MAPRO at or above 4500 FT, to LARYO at or above 10000 FT.	(1) PDG 3.7% until 2600 FT then 3.3%. (2) Do not exceed 250 KT until BANDI.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BANDI	112028.4N	1244833.8E	Fly-by
BANWA	104917.9N	1250634.1E	Fly-by
LARYO	110426.5N	1242031.8E	Fly-by
LENRA	110130.4N	1250658.1E	Fly-by
MAPRO	111732.1N	1244324.8E	Fly-by
SOSHI	110731.1N	1250722.3E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 36

Table 1: BANWA5N

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	006 (003.8)	+2	-	-	+1000	-	-	RNP1	RW36
20	DF	SOSHI	-	-	-	-	R	-	-	-	RNP1	RW36
30	TF	LENRA	-	186 (183.8)	+2	6.0	-	-	-	-	RNP1	RW36
40	TF	BANWA	-	184 (181.8)	+2	12.2	-	+8000	-	-	RNP1	RW36

Table 2: LARYO5R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	006 (003.8)	+2	-	-	+1500	-	-	RNP1	RW36
20	DF	BANDI	-	-	-	-	L	-	-250	-	RNP1	RW36
30	TF	MAPRO	-	242 (240.0)	+2	5.8	-	+4500	-	-	RNP1	RW36
40	TF	LARYO	-	242 (239.9)	+2	26.0	-	+10000	-	-	RNP1	RW36

CHANGES: ALT. COORD Format.

STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE
11000 FT

ACC - 132.5 / 125.7 (SOUTHEAST)
- 8942 (SEA-2 HF)
- 8903 (CWP HF)
APP - 120.8
TWR - 124.3

TACLOBAN/Daniel Z. Romualdez (RPVA)
RWY 18/36
ALICO1 ARREX1 BANWA1 MALAG1 POXOS3 SADOK1 TAGPI1

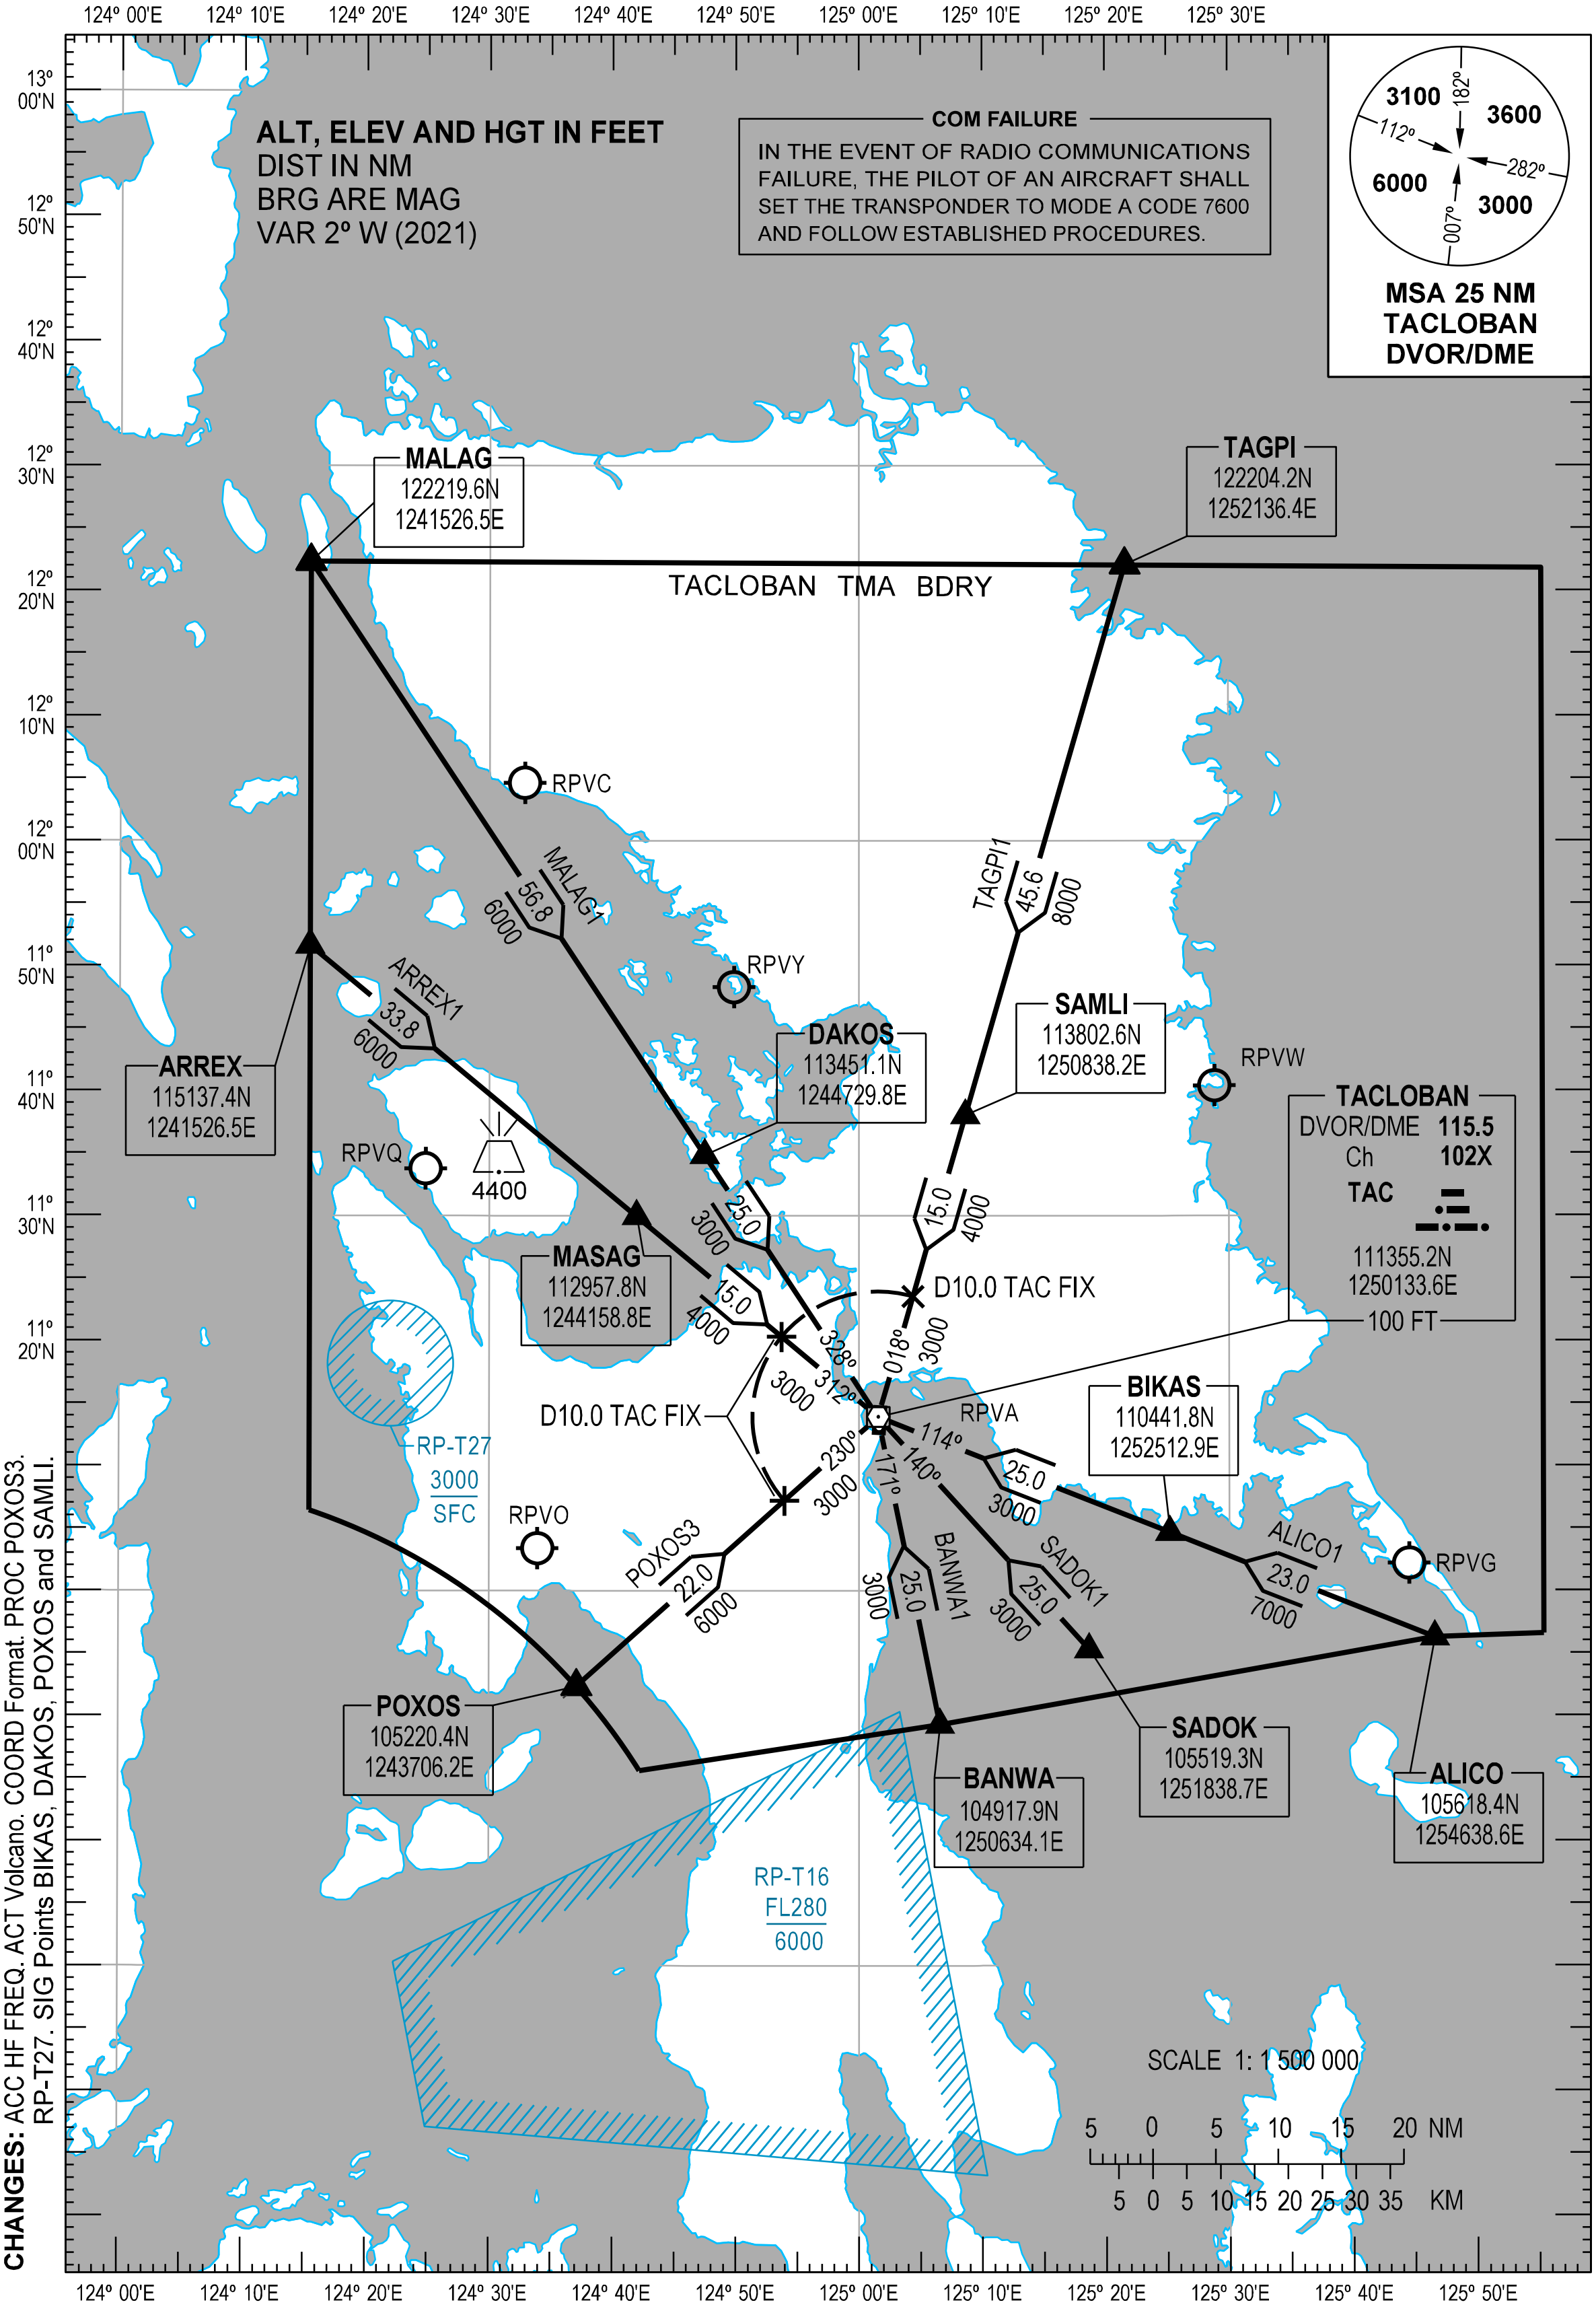

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
ALICO1	ALICO - BIKAS - TAC	From ALICO on TAC DVOR/DME Radial 114 to BIKAS at or above 7000 FT, to TAC at or above 3000 FT.	
ARREX1	ARREX - MASAG - TAC	From ARREX on TAC DVOR/DME Radial 312 to MASAG at or above 6000 FT, to D10.0 TAC FIX at or above 4000 FT, to TAC at or above 3000 FT.	
BANWA1	BANWA - TAC	From BANWA on TAC DVOR/DME Radial 171 to TAC at or above 3000 FT.	
MALAG1	MALAG - DAKOS - TAC	From MALAG on TAC DVOR/DME Radial 328 to DAKOS at or above 6000 FT, to TAC at or above 3000 FT.	
POXOS3	POXOS - TAC	From POXOS on TAC DVOR/DME Radial 230 to D10.0 TAC FIX at or above 6000 FT to TAC at or above 3000 FT.	
SADOK1	SADOK - TAC	From SADOK on TAC DVOR/DME Radial 140 to TAC at or above 3000 FT.	
TAGPI1	TAGPI - SAMLI - TAC	From TAGPI on TAC DVOR/DME Radial 018 to SAMLI at or above 8000 FT, to D10.0 TAC FIX at or above 4000 FT, to TAC at or above 3000 FT.	

CHANGES: PROC POXOS3. SIG Points BIKAS, DAKOS, POXOS and SAMLI.

STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE
11000 FT

ACC - 132.5 / 125.7 (SOUTHEAST)
- 8942 (SEA-2 HF)
- 8903 (CWP HF)
APP - 120.8
TWR - 124.3

TACLOBAN/Daniel Z. Romualdez (RPVA)
RNP STAR RWY 18
ARREX3R BANWA3R POXOS3R TAGPI3R

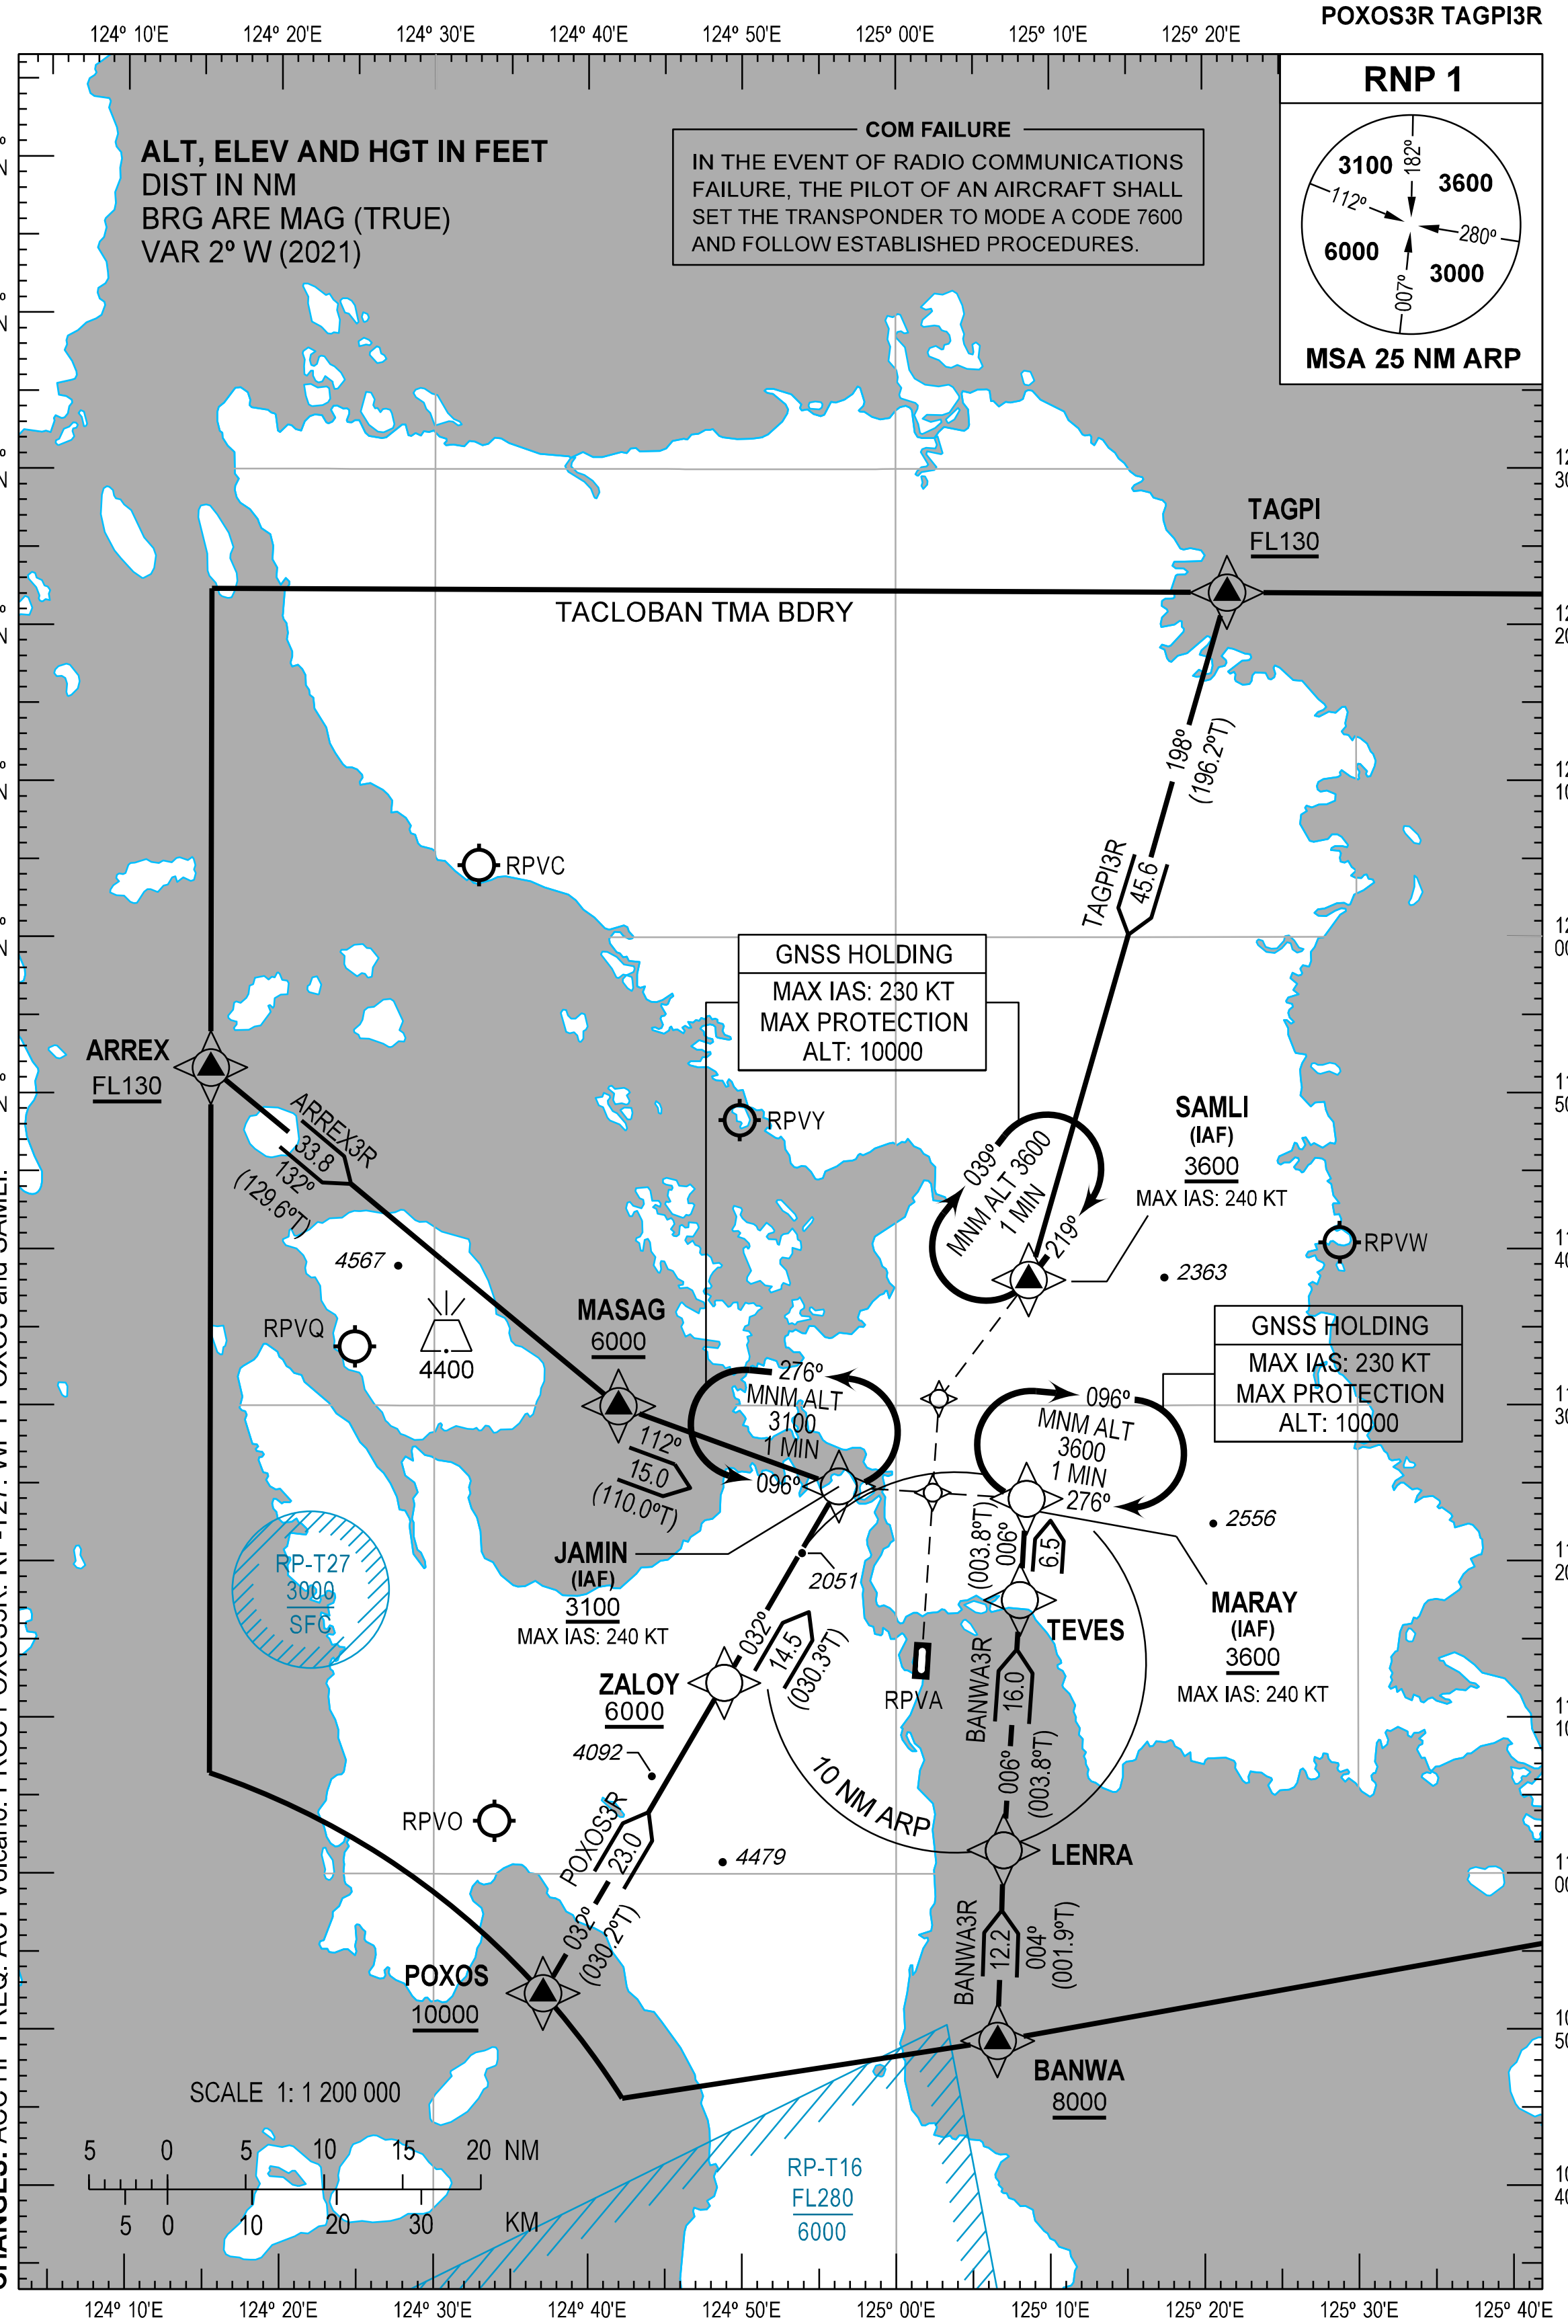

CHANGES: ACC HF FREQ. ACT Volcano. PROC POXOS3R. RP-T27. WPT POXOS and SAMLI.

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
ARREX3R	ARREX - MASAG - JAMIN	From ARREX at or above FL130, to MASAG at or above 6000 FT, to JAMIN at or above 3100 FT.	
BANWA3R	BANWA - LENRA - TEVES - MARAY	From BANWA at or above 8000 FT, to LENRA, to TEVES, to MARAY at or above 3600 FT.	
POXOS3R	POXOS - ZALOY - JAMIN	From POXOS at or above 10000 FT, to ZALOY at or above 6000 FT, to JAMIN at or above 3100 FT.	
TAGPI3R	TAGPI - SAMLI	From TAGPI at or above FL130, to SAMLI at or above 3600 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ARREX	115137.4N	1241526.5E	Fly-by
BANWA	104917.9N	1250634.1E	Fly-by
JAMIN	112449.0N	1245617.4E	Fly-by
LENRA	110130.4N	1250658.1E	Fly-by
MARAY	112401.4N	1250828.9E	Fly-by
MASAG	112957.8N	1244158.8E	Fly-by
POXOS	105220.4N	1243706.2E	Fly-by
SAMLI	113802.6N	1250838.2E	Fly-by
TAGPI	122204.2N	1252136.4E	Fly-by
TEVES	111732.4N	1250802.6E	Fly-by
ZALOY	111214.3N	1244850.9E	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 18

Table 1: ARREX3R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	ARREX	-	-	-	-	-	+FL130	-	-	RNP1	RW18
20	TF	MASAG	-	132 (129.6)	+2	33.8	-	+6000	-	-	RNP1	RW18
30	TF	JAMIN	-	112 (110.0)	+2	15.0	-	+3100	-240	-	RNP1	RW18

CHANGES: COORD Format. PROC POXOS3R. WPT POXOS and SAMLI.

Table 2: BANWA3R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	BANWA	-	-	-	-	-	+8000	-	-	RNP1	RW18
20	TF	LENRA	-	004 (001.9)	+2	12.2	-	-	-	-	RNP1	RW18
30	TF	TEVES	-	006 (003.8)	+2	16.0	-	-	-	-	RNP1	RW18
40	TF	MARAY	-	006 (003.8)	+2	6.5	-	+3600	-240	-	RNP1	RW18

Table 3: POXOS3R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	POXOS	-	-	-	-	-	+10000	-	-	RNP1	RW18
20	TF	ZALOY	-	032 (030.2)	+2	23.0	-	+6000	-	-	RNP1	RW18
30	TF	JAMIN	-	032 (030.3)	+2	14.5	-	+3100	-240	-	RNP1	RW18

Table 4: TAGPI3R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	TAGPI	-	-	-	-	-	+FL130	-	-	RNP1	RW18
20	TF	SAMLI	-	198 (196.2)	+2	45.6	-	+3600	-240	-	RNP1	RW18

CHANGES: PROC POXOS3R. WPT POXOS and SAMLI.

INTENTIONALLY
LEFT
BLANK

STANDARD ARRIVAL CHART - INSTRUMENT (STAR) - ICAO

TRANSITION ALTITUDE 11000 FT

ACC - 132.5 / 125.7 (SOUTHEAST)
- 8942 (SEA-2 HF)
- 8903 (CWP HF)
APP - 120.8
TWR - 124.3

TACLOBAN/Daniel Z. Romualdez (RPVA) RNP STAR RWY 36

ARREX2R BANWA2R
POXOS2R TAGPI2R

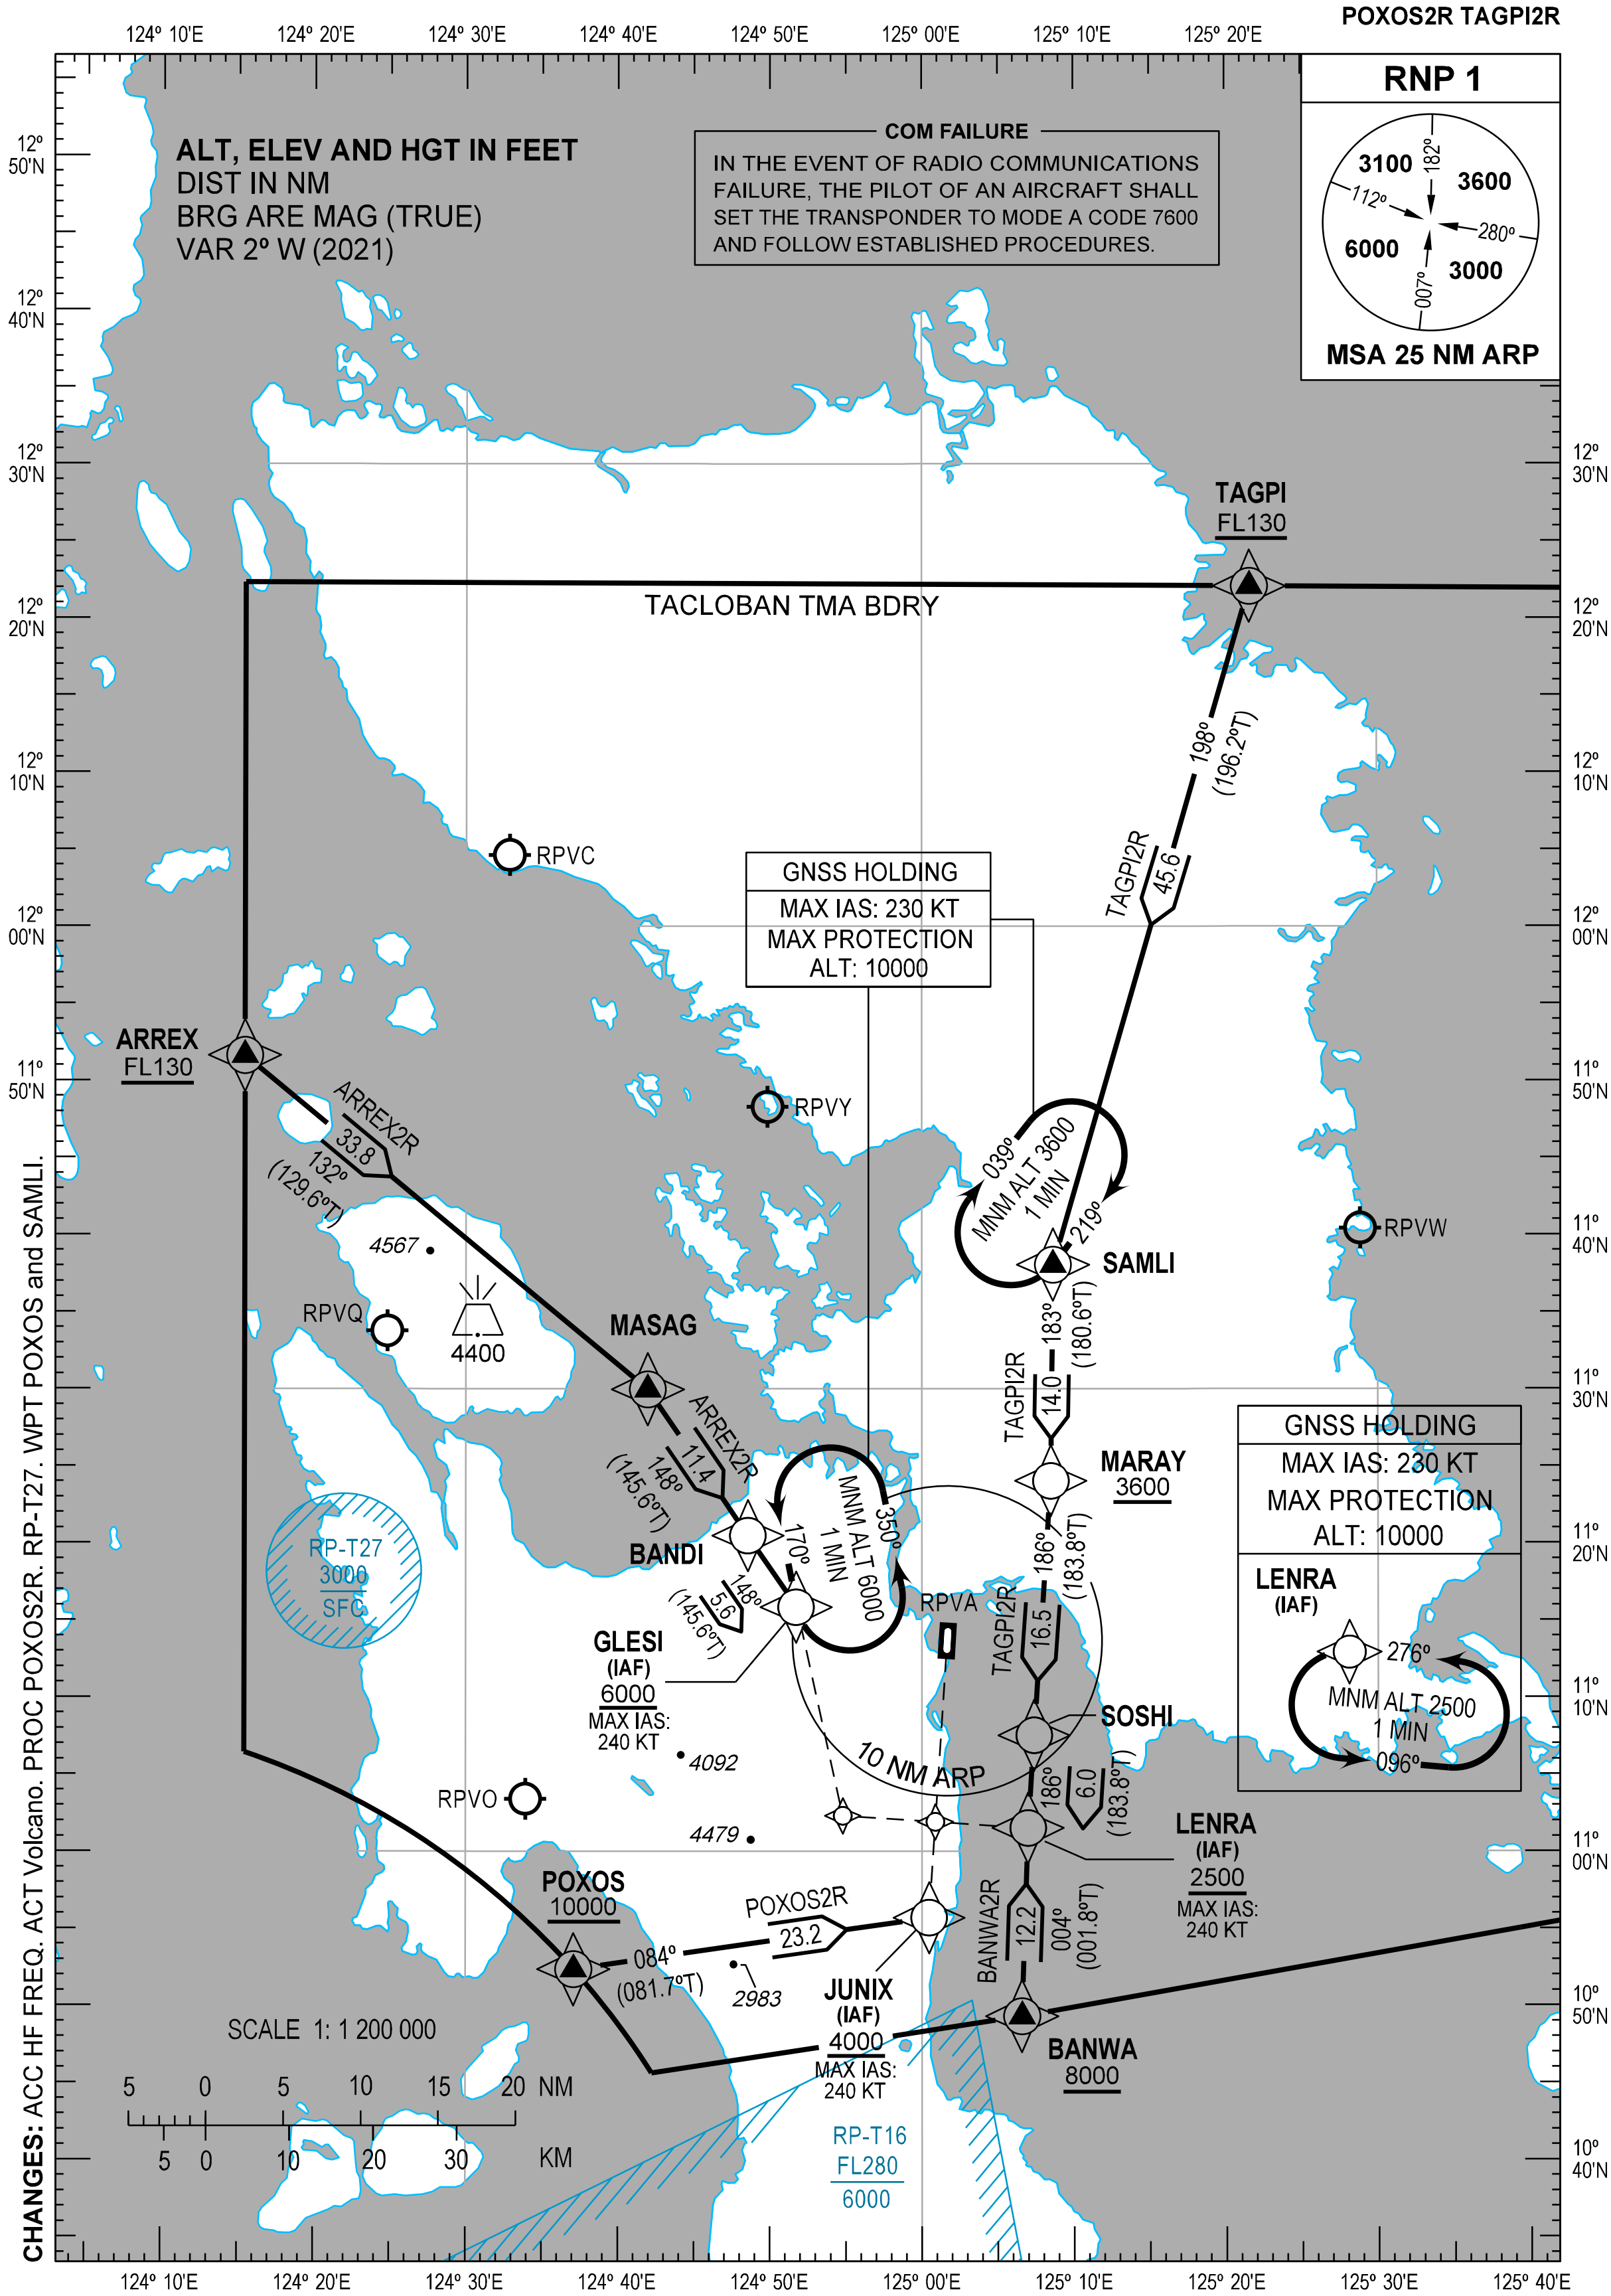

CHANGES: ACC HF FREQ. ACT Volcano. PROC POXOS2R. RP-T27. WPT POXOS and SAMLI.

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
ARREX2R	ARREX - MASAG - BANDI - GLESI	From ARREX at or above FL130, to MASAG, to BANDI, to GLESI at or above 6000 FT.	
BANWA2R	BANWA - LENRA	From BANWA at or above 8000 FT, to LENRA at or above 2500 FT.	
POXOS2R	POXOS - JUNIX	From POXOS at or above 10000 FT, to JUNIX at or above 4000 FT.	
TAGPI2R	TAGPI - SAMLI - MARAY - SOSHI - LENRA	From TAGPI at or above FL130, to SAMLI, to MARAY at or above 3600 FT, to SOSHI, to LENRA at or above 2500 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ARREX	115137.4N	1241526.5E	Fly-by
BANDI	112028.4N	1244833.8E	Fly-by
BANWA	104917.9N	1250634.1E	Fly-by
GLESI	111549.9N	1245146.8E	Fly-by
JUNIX	105541.5N	1250027.9E	Fly-by
LENRA	110130.4N	1250658.1E	Fly-by
MARAY	112401.4N	1250828.9E	Fly-by
MASAG	112957.8N	1244158.8E	Fly-by
POXOS	105220.4N	1243706.2E	Fly-by
SAMLI	113802.6N	1250838.2E	Fly-by
SOSHI	110731.1N	1250722.3E	Fly-by
TAGPI	122204.2N	1252136.4E	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 36

Table 1: ARREX2R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	ARREX	-	-	-	-	-	+FL130	-	-	RNP1	RW36
20	TF	MASAG	-	132 (129.6)	+2	33.8	-	-	-	-	RNP1	RW36
30	TF	BANDI	-	148 (145.6)	+2	11.4	-	-	-	-	RNP1	RW36
40	TF	GLESI	-	148 (145.6)	+2	5.6	-	+6000	-240	-	RNP1	RW36

Table 2: BANWA2R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	BANWA	-	-	-	-	-	+8000	-	-	RNP1	RW36
20	TF	LENRA	-	004 (001.8)	+2	12.2	-	+2500	-240	-	RNP1	RW36

CHANGES: COORD Format. PROC POXOS2R. WPT POXOS and SAMLI.

Table 3: POXOS2R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	POXOS	-	-	-	-	-	+10000	-	-	RNP1	RW36
20	TF	JUNIX	-	084 (081.7)	+2	23.2	-	+4000	-240	-	RNP1	RW36

Table 4: TAGPI2R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	TAGPI	-	-	-	-	-	+FL130	-	-	RNP1	RW36
20	TF	SAMLI	-	198 (196.2)	+2	45.6	-	-	-	-	RNP1	RW36
30	TF	MARAY	-	183 (180.6)	+2	14.0	-	+3600	-	-	RNP1	RW36
40	TF	SOSHI	-	186 (183.8)	+2	16.5	-	-	-	-	RNP1	RW36
50	TF	LENRA	-	186 (183.8)	+2	6.0	-	+2500	-240	-	RNP1	RW36

CHANGES: PROC POXOS2R. WPT SAMLI.

INTENTIONALLY
LEFT
BLANK

INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV 13 FT
HEIGHTS RELATED TO
THR RWY 36 - ELEV **13 FT**

APP - 120.8
TWR - 124.3

TACLOBAN/Daniel Z. Romualdez (RPVA)
VOR Y RWY 36

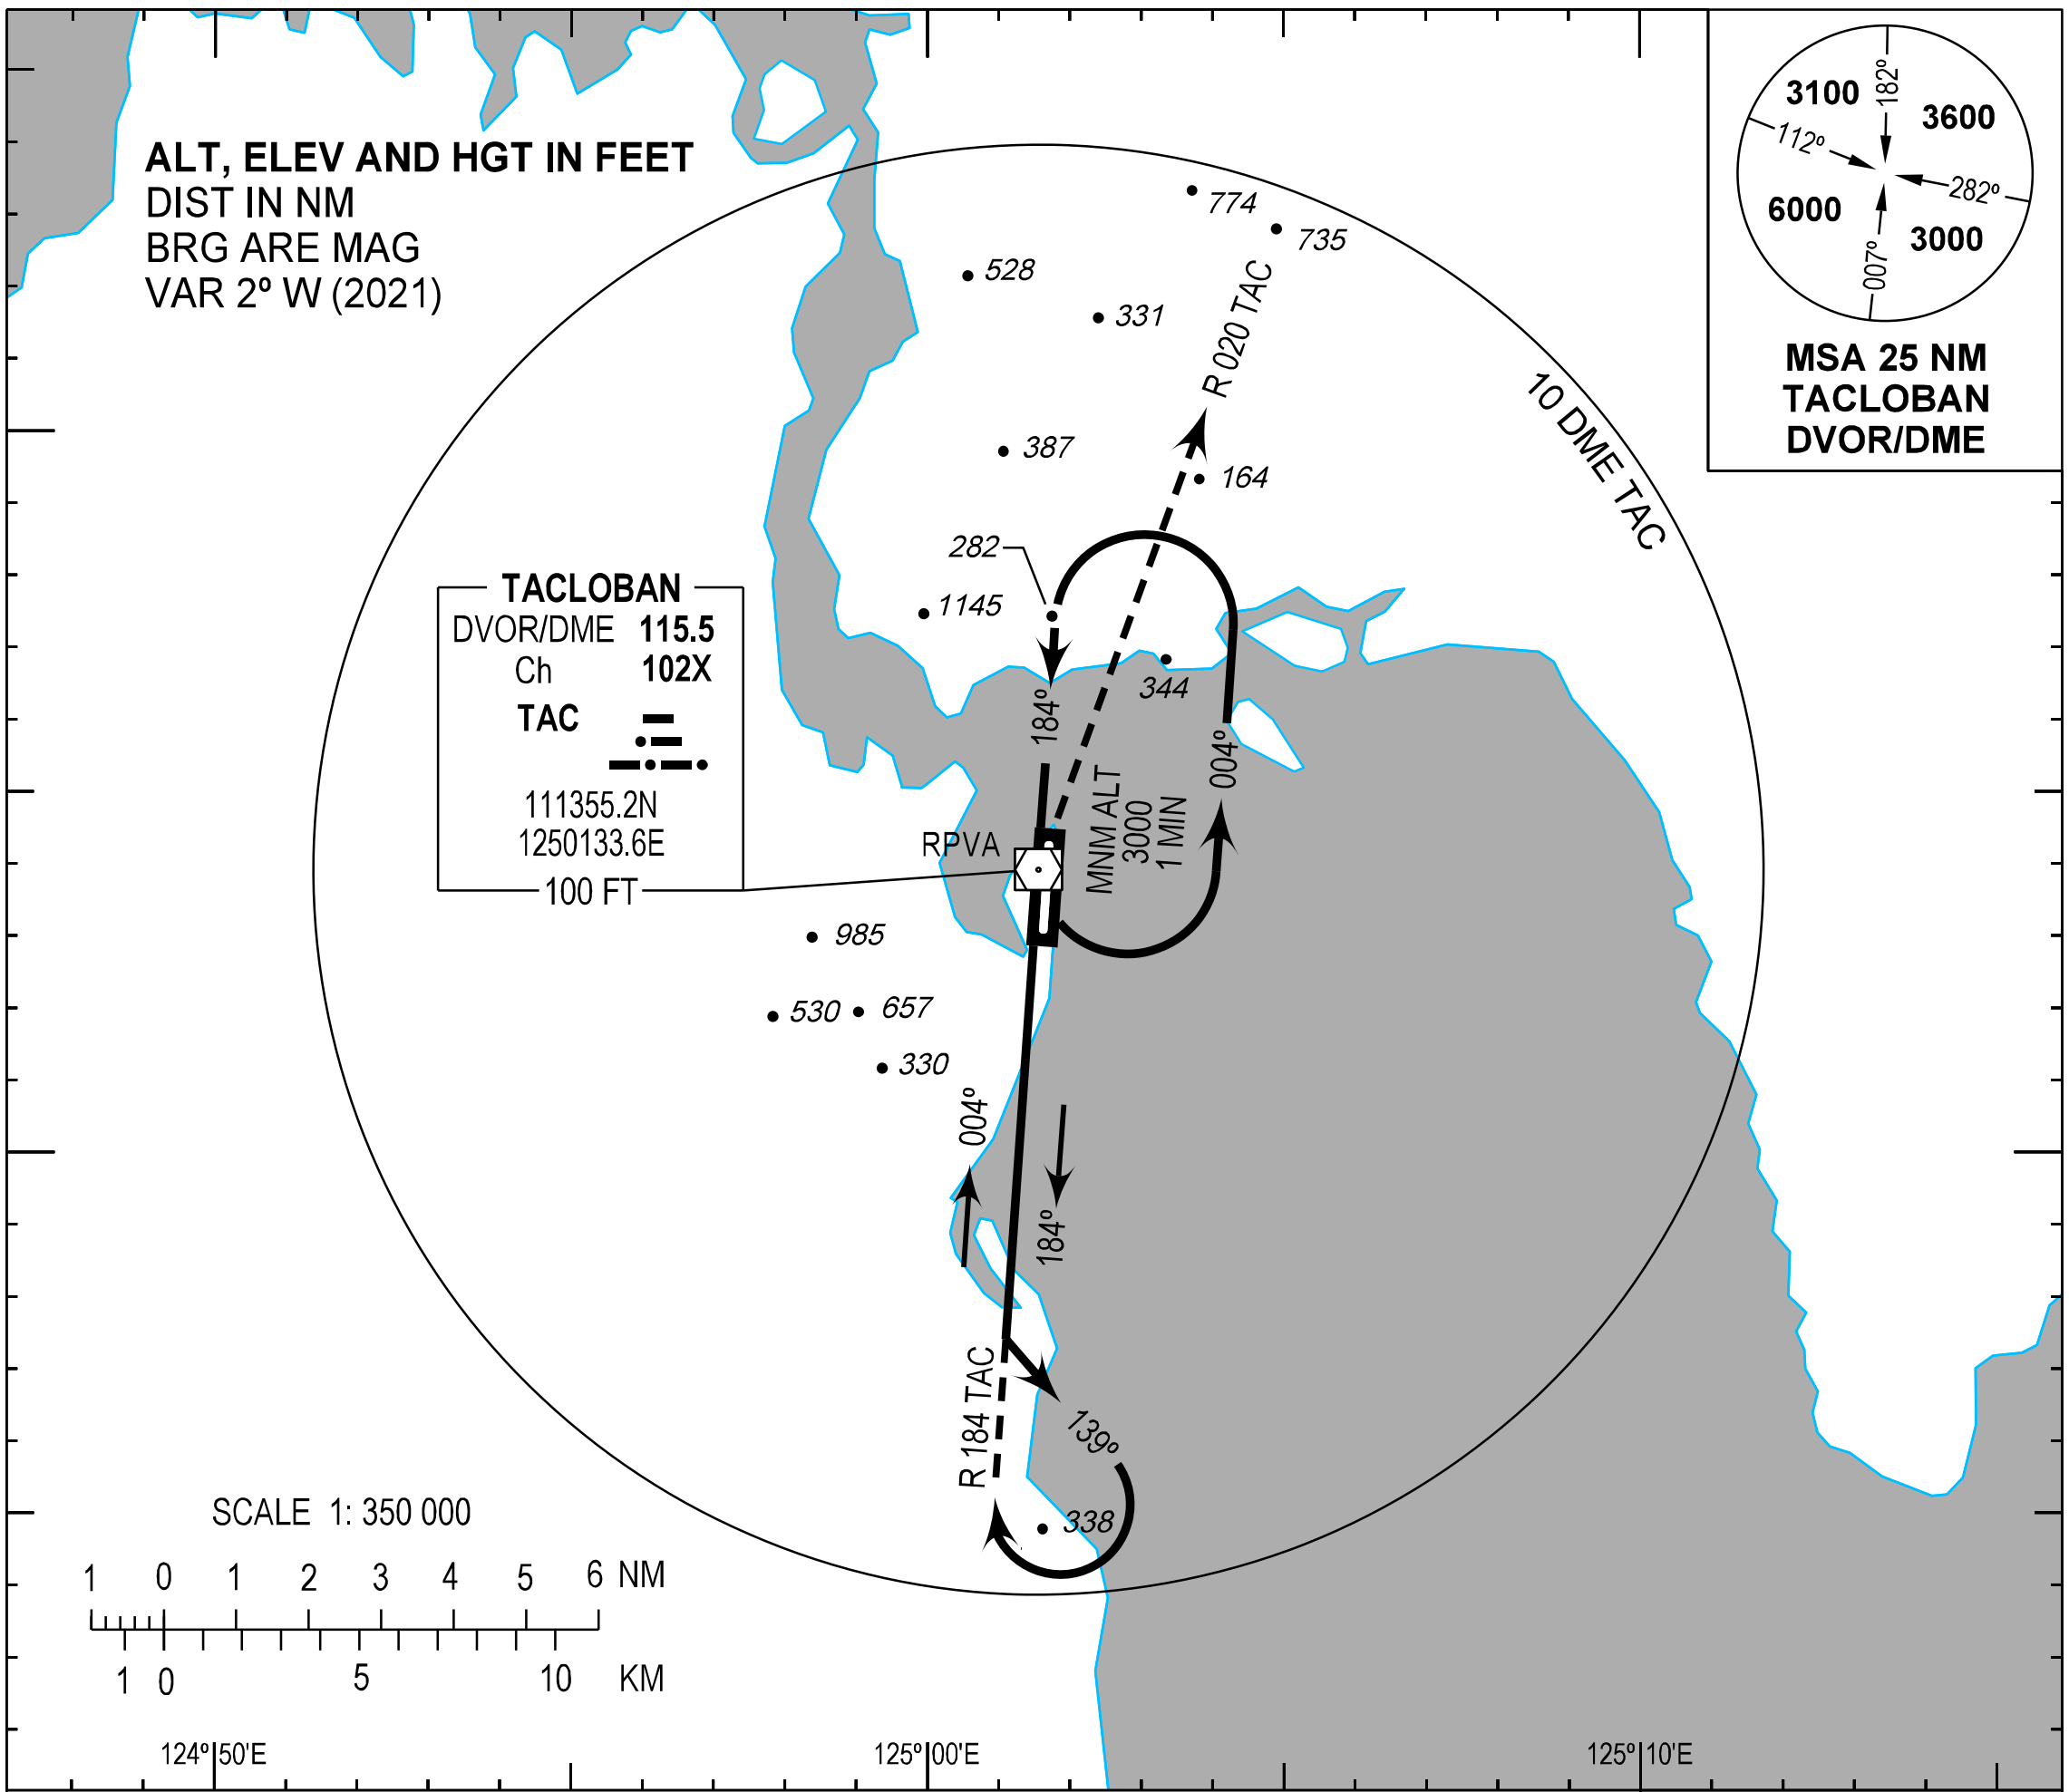

MISSED APPROACH

At the **TAC DVOR/DME**, climb on **Radial 020** to **3000 FT** within **10 NM**. Return to **TAC DVOR/DME** or as instructed by ATC.

TRANSITION ALT : 11000
TRANSITION LVL : FL130

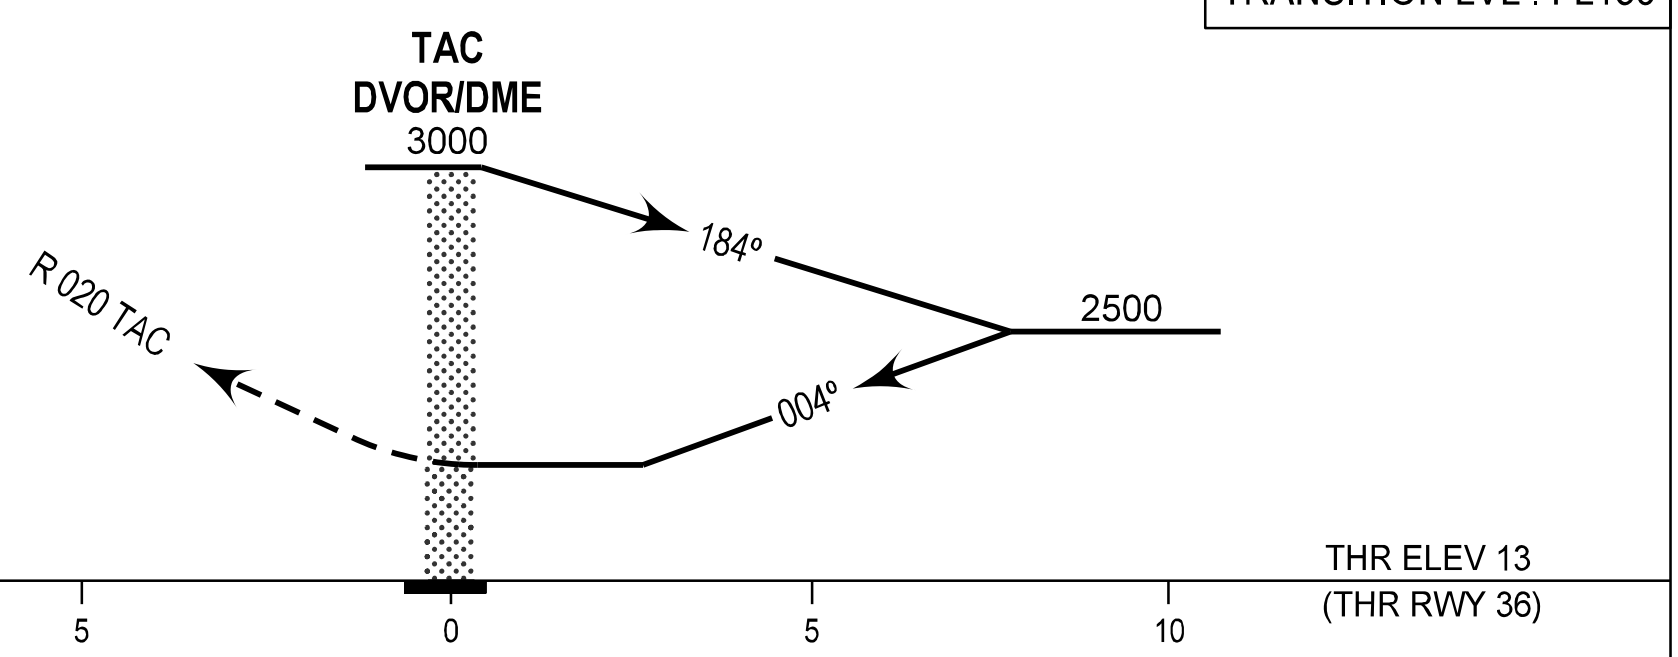

OCA (H)	A	B	C
STRAIGHT-IN	745 (732)		
CIRCLING	745 (732)	1300 (1287)	1900 (1887)

CHANGES: AD OPR Minima Table. COORD Format. QDR. Radial. Profile View Terrain and HGT Deleted.

INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV 13 FT
HEIGHTS RELATED TO
THR RWY 36 - ELEV 13 FT

APP - 120.8
TWR - 124.3

TACLOBAN/Daniel Z. Romualdez (RPVA)
VOR Z RWY 36

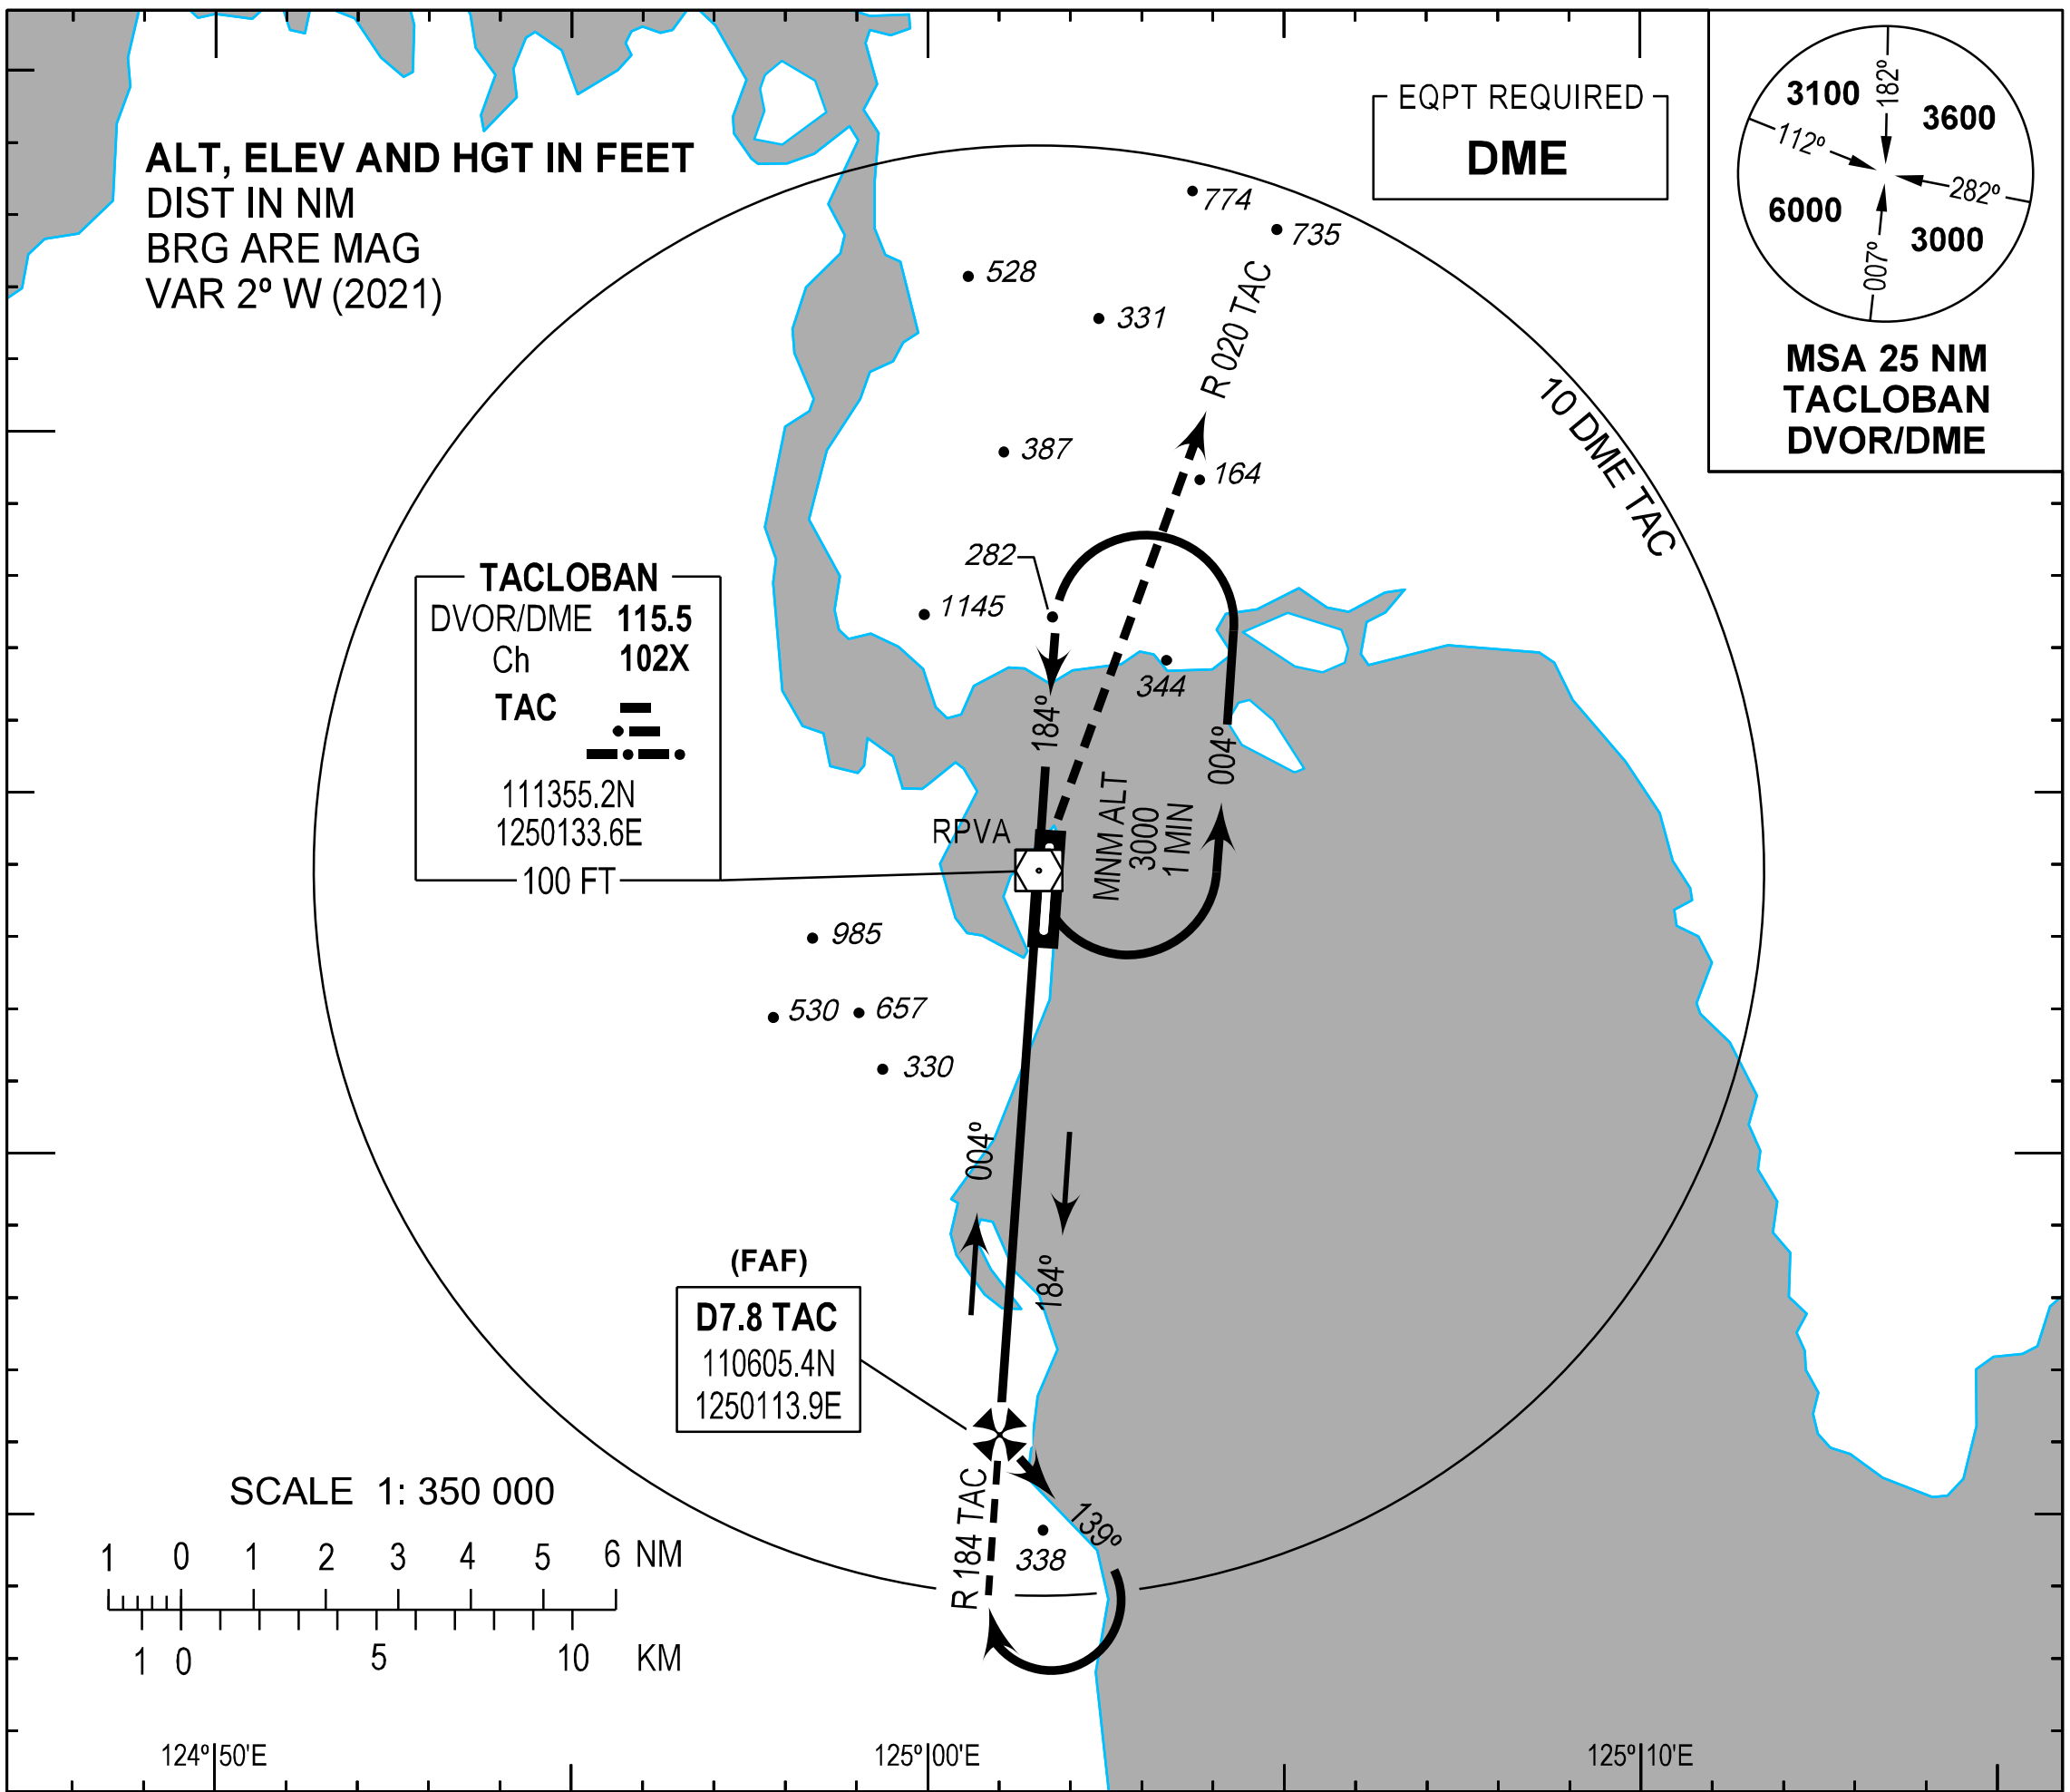

TRANSITION ALT : 11000
TRANSITION LVL : FL130

MISSED APPROACH

At the **TAC DVOR/DME**, climb on **Radial 020** to **3000 FT** within **10 NM**. Return to **TAC DVOR/DME** or as instructed by ATC.

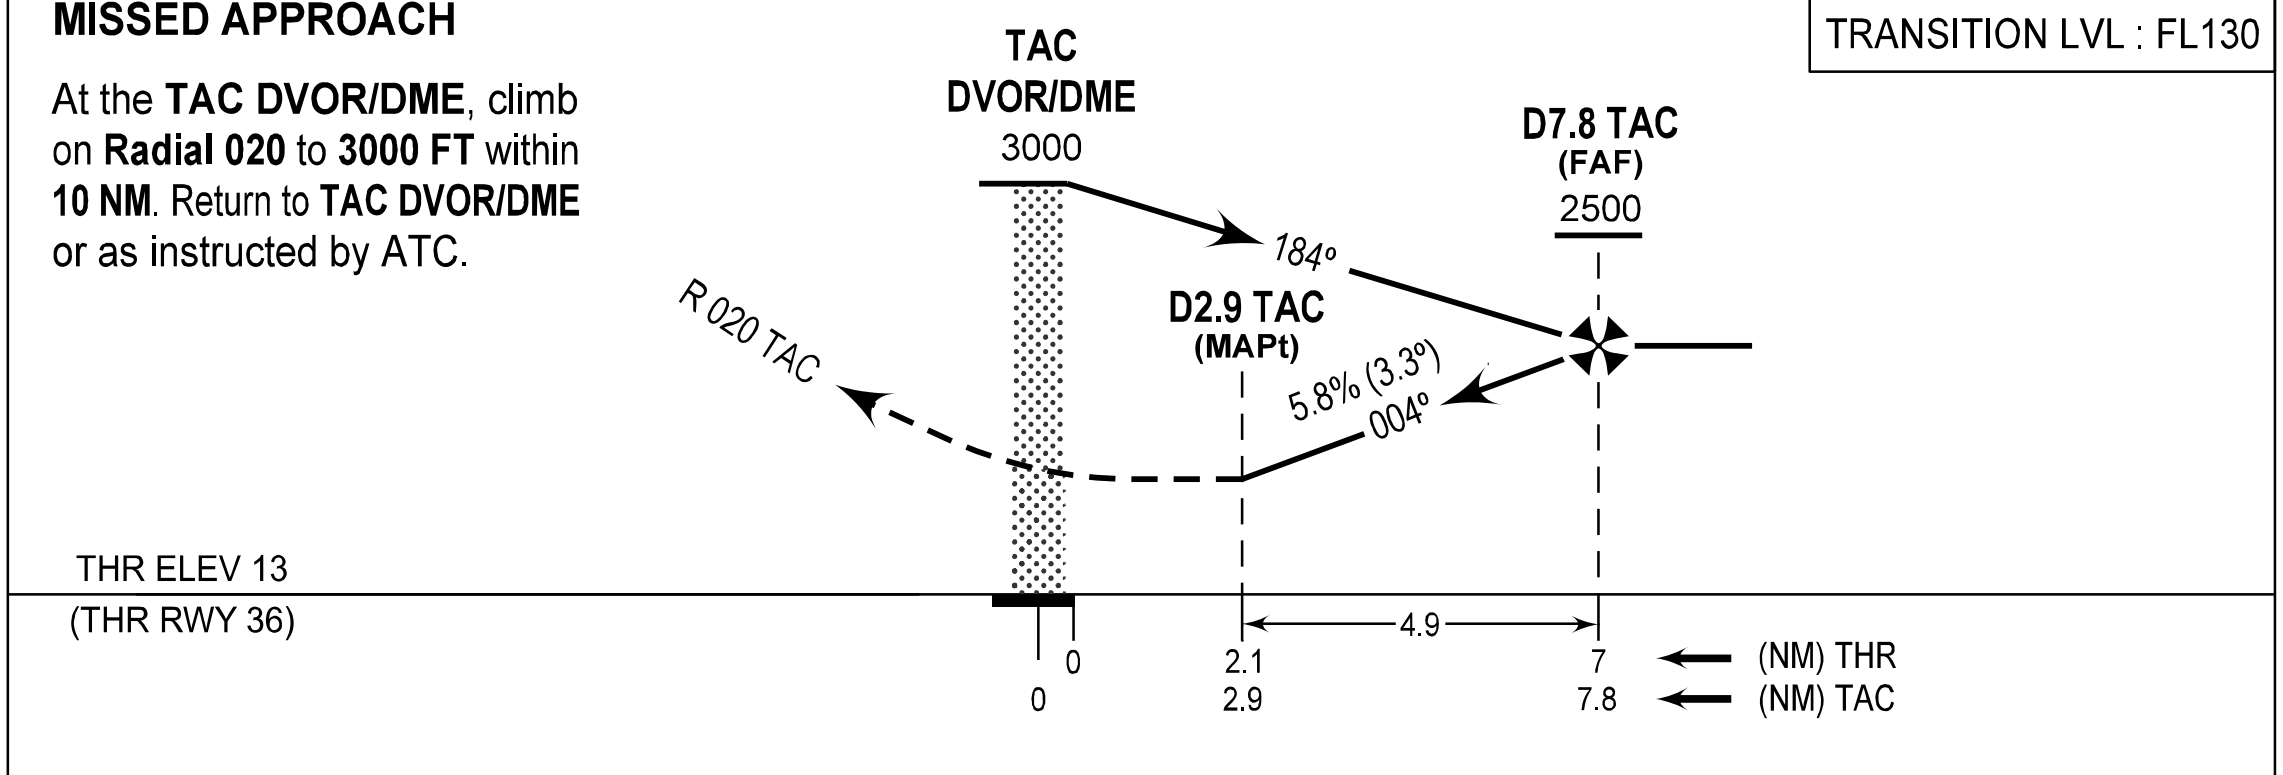

OCA (H)	A	B	C
STRAIGHT-IN	745 (732)		
CIRCLING	745 (732)	1300 (1287)	1900 (1887)

DIST	7.8	7	6	5	4	3	2.9
ALT (HGT)	2500 (2487)	2270 (2257)	1920 (1907)	1560 (1547)	1200 (1187)	840 (827)	745 (732)

CHANGES: AD OPR Minima Table. COORD Format. FAF. QDR. Radial. Profile View Terrain and HGT Deleted.

INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV 13 FT
HEIGHTS RELATED TO
THR RWY 36 - ELEV **7 FT**

APP - 120.8
TWR - 124.3

TACLOBAN/Daniel Z. Romualdez (RPVA)
RNP RWY 18

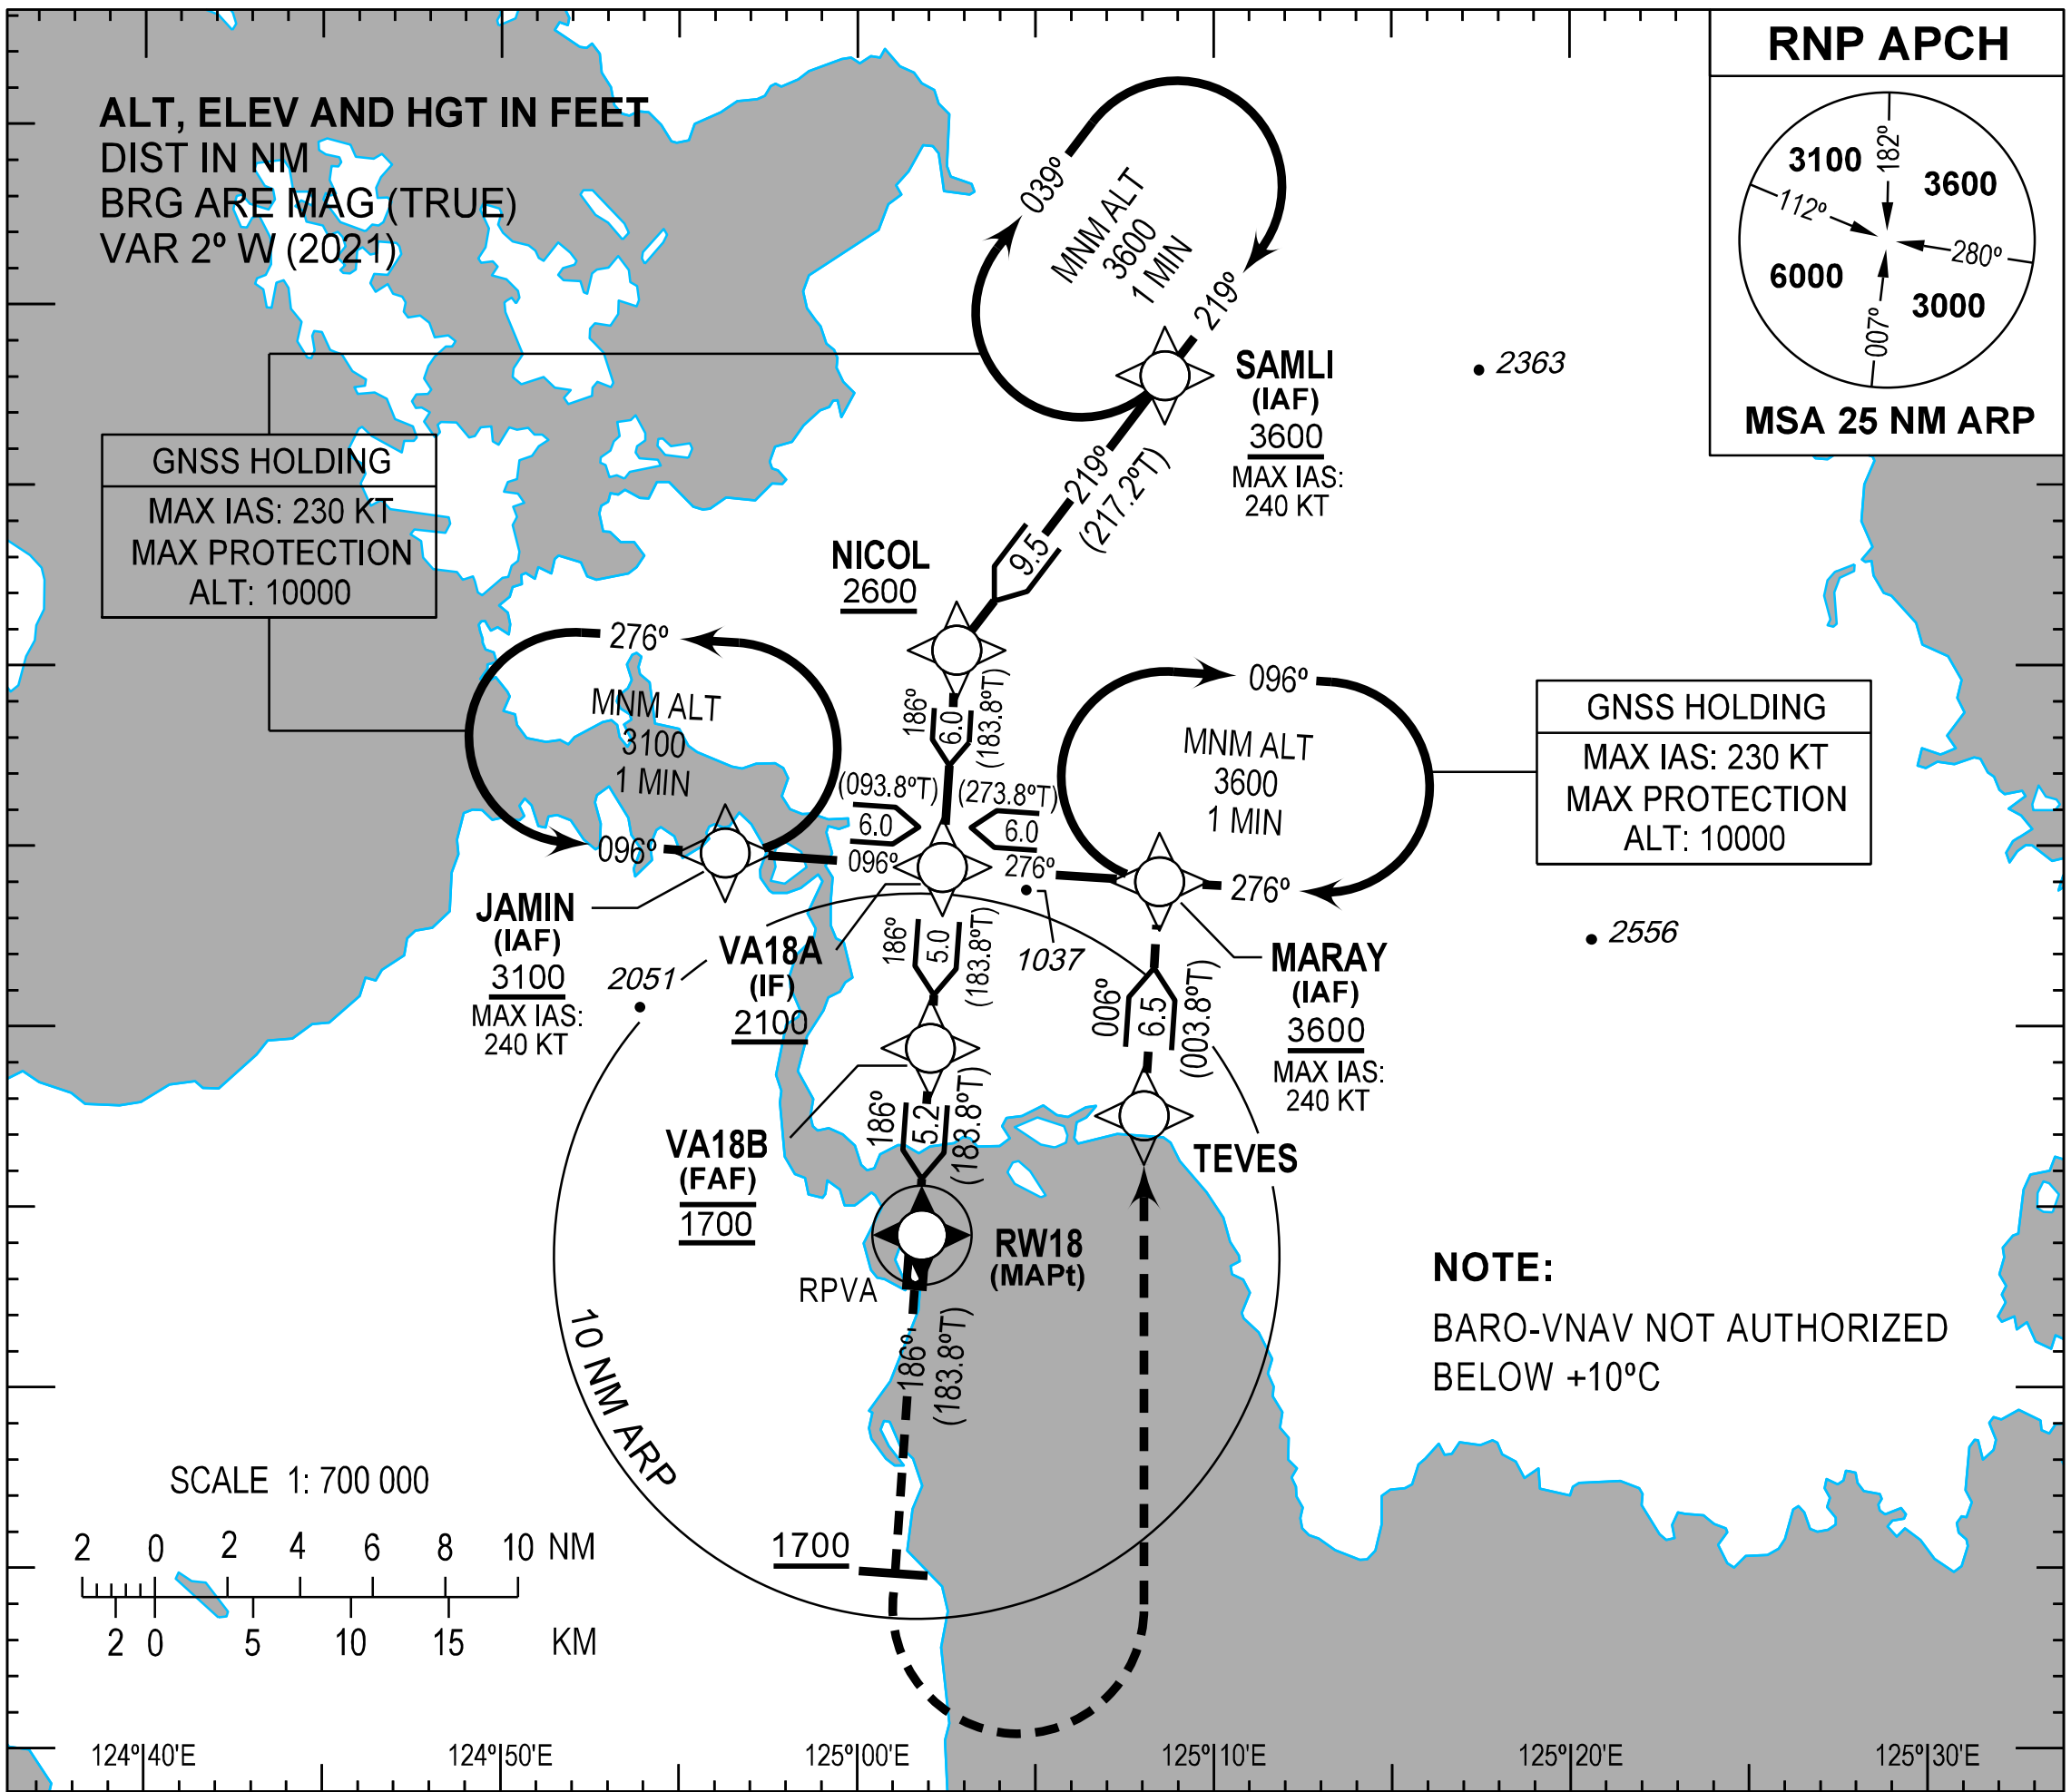

TRANSITION ALT : 11000
TRANSITION LVL : FL130

MISSED APPROACH

Climb on course **186°M** to **3600 FT**.
After passing **1700 FT**, turn left direct to **TEVES**, to **MARAY** and hold or as instructed by ATC.
Do not turn before **MAPt**.

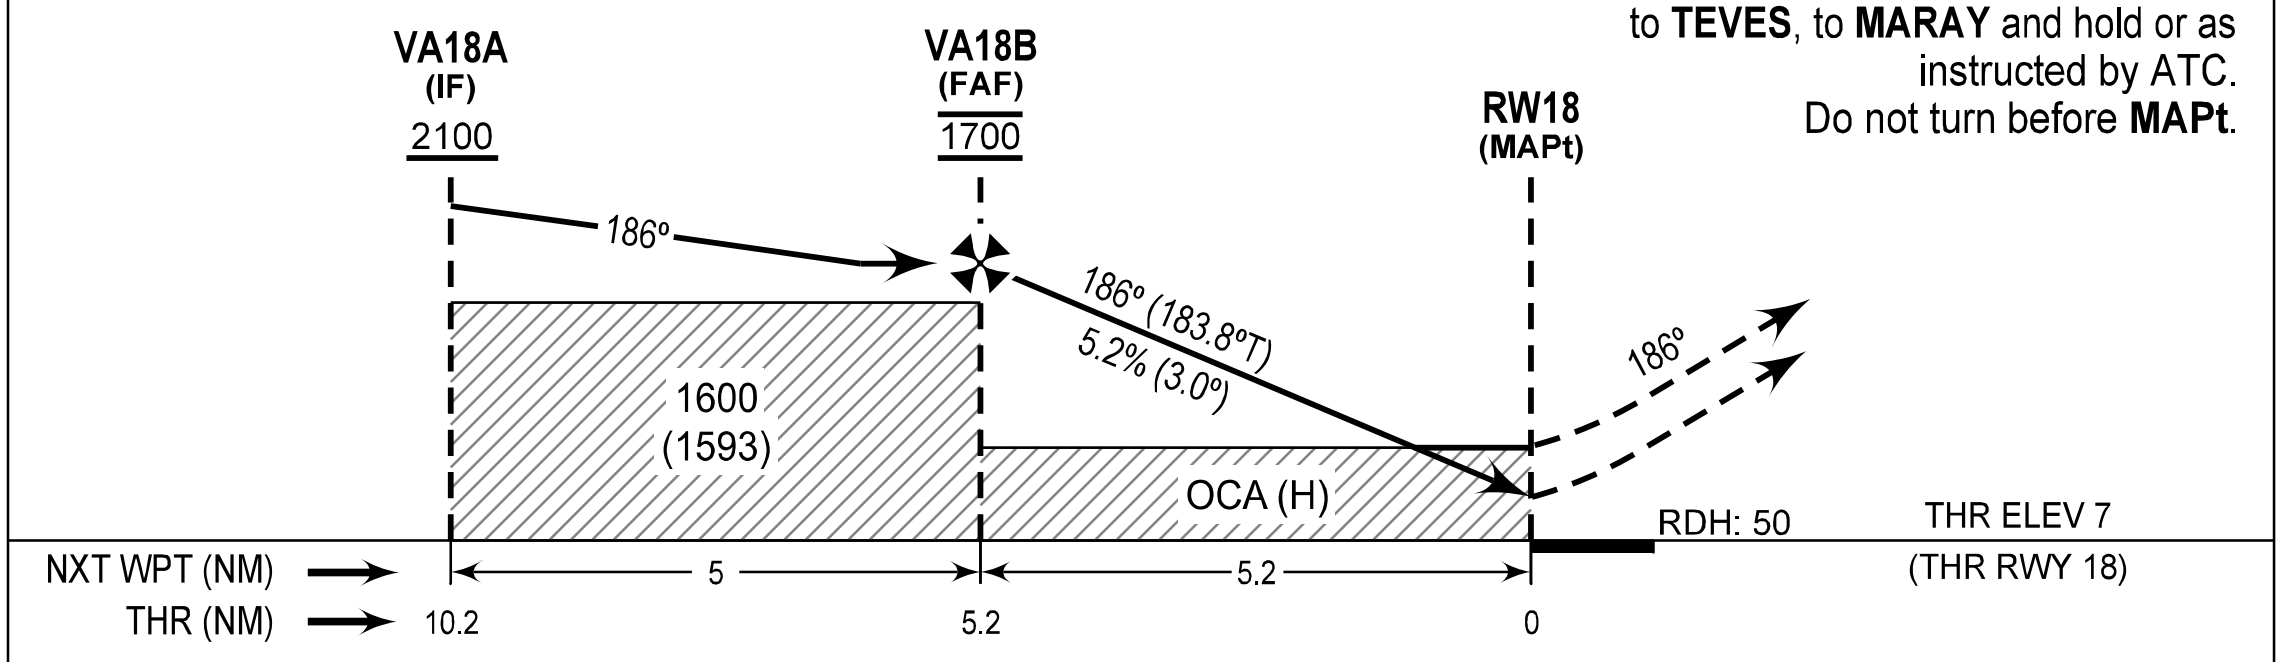

OCA (H)	A	B	C
LNAV/VNAV	300 (293)	310 (303)	320 (313)
LNAV	570 (563)		

CIRCLING NOT AUTHORIZED

NM TO THR	5.2	4	3	2	1.6
ALT (HGT)	1700 (1693)	1340 (1333)	1020 (1013)	700 (693)	570 (563)

CHANGES: CA. Note. WPT SAMLI.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
JAMIN	112449.0N	1245617.4E	Fly-by
MARAY	112401.4N	1250828.9E	Fly-by
NICOL	113026.2N	1250247.2E	Fly-by
RW18	111414.13N	1250142.23E	Flyover
SAMLI	113802.6N	1250838.2E	Fly-by
TEVES	111732.4N	1250802.6E	Fly-by
VA18A	112425.3N	1250223.1E	Fly-by
VA18B	111924.6N	1250203.0E	Fly-by

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 18

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	JAMIN	-	-	-	-	-	+3100	-240	-	RNP APCH	JAMIN
20	TF	VA18A	-	096 (093.8)	+2	6.0	-	+2100	-	-	RNP APCH	JAMIN
10	IF	SAMLI	-	-	-	-	-	+3600	-240	-	RNP APCH	SAMLI
20	TF	NICOL	-	219 (217.2)	+2	9.5	-	+2600	-	-	RNP APCH	SAMLI
30	TF	VA18A	-	186 (183.8)	+2	6.0	-	+2100	-	-	RNP APCH	SAMLI
10	IF	MARAY	-	-	-	-	-	+3600	-240	-	RNP APCH	MARAY
20	TF	VA18A	-	276 (273.8)	+2	6.0	-	+2100	-	-	RNP APCH	MARAY
10	IF	VA18A	-	-	-	-	-	+2100	-	-	RNP APCH	-
20	TF	VA18B	-	186 (183.8)	+2	5.0	-	@1700	-	-	RNP APCH	-
30	TF	RW18	Y	186 (183.8)	+2	5.2	-	@57	-	-3.0/-	RNP APCH	-
10	CA	-	-	186 (183.8)	+2	-	-	+1700	-	-	RNP APCH	-
20	DF	TEVES	-	-	-	-	L	-	-	-	RNP APCH	-
30	TF	MARAY	-	006 (003.8)	+2	6.5	-	+3600	-240	-	RNP APCH	-

CHANGES: ALT. COORD Format. WPT SAMLI.

INSTRUMENT APPROACH CHART - ICAO

AERODROME ELEV 13 FT
HEIGHTS RELATED TO
THR RWY 36 - ELEV **13 FT**

APP - 120.8
TWR - 124.3

TACLOBAN/Daniel Z. Romualdez (RPVA) RNP RWY 36

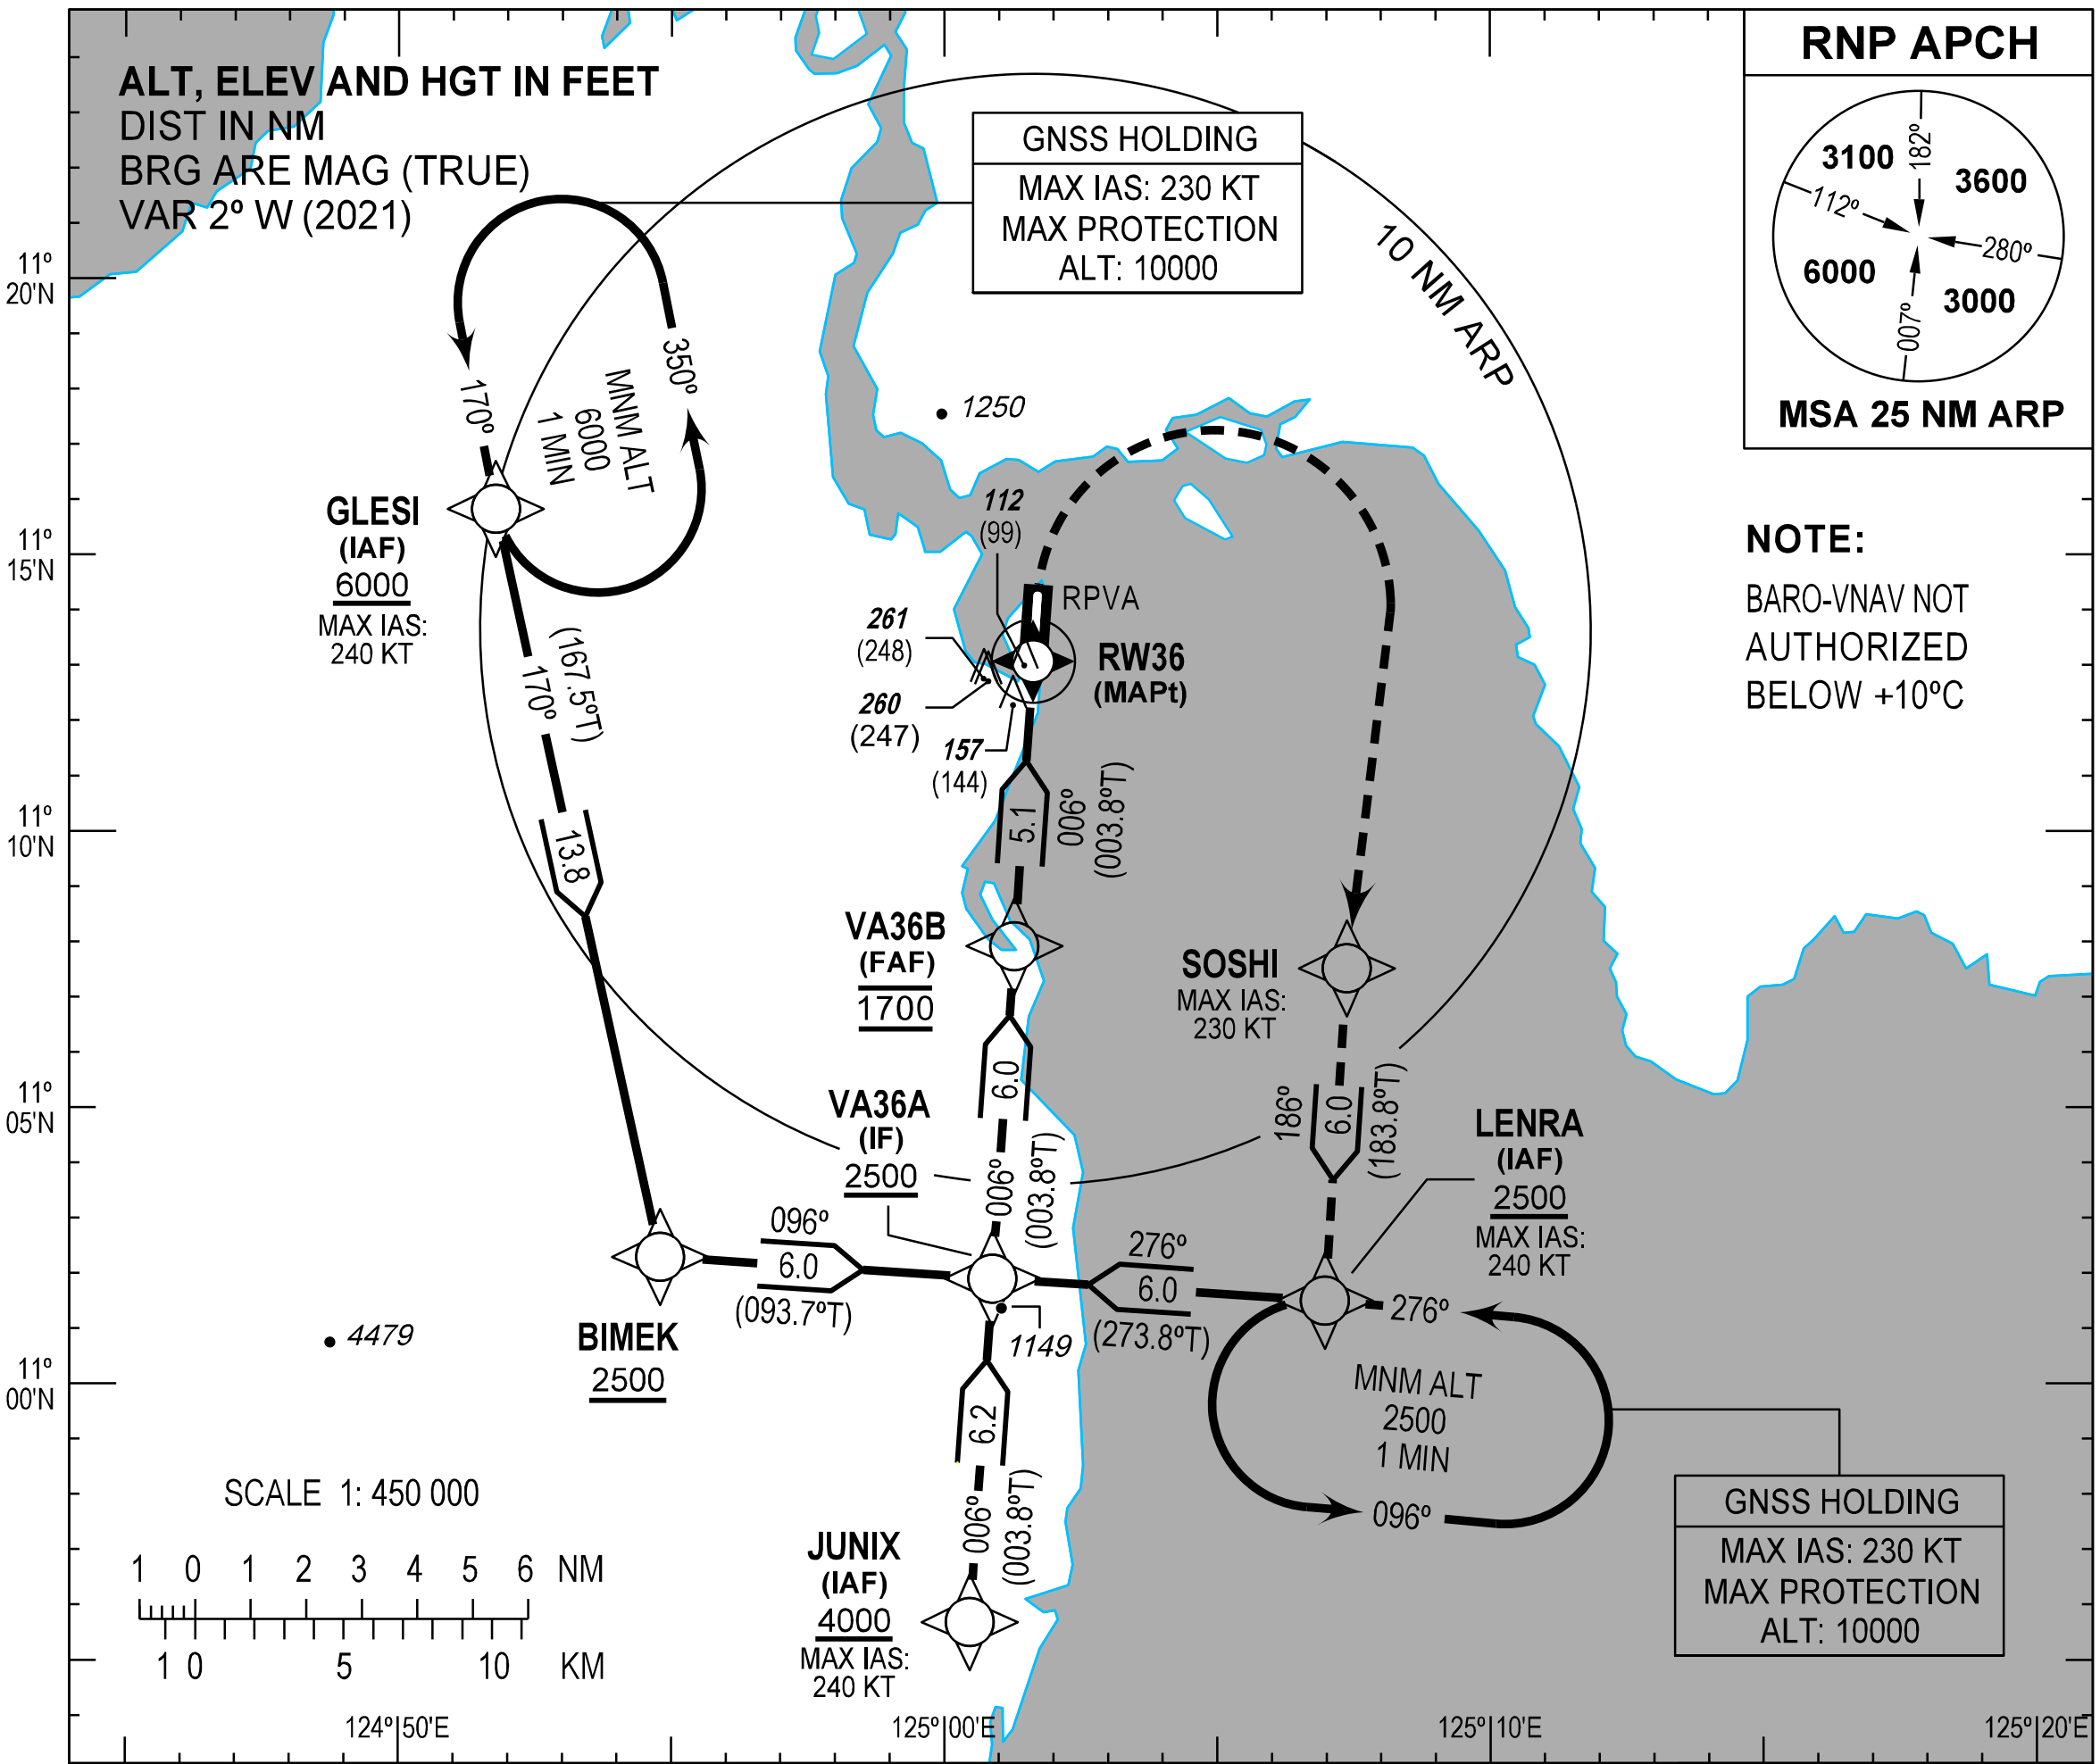

MISSED APPROACH

At **MAPt**, turn right direct to **SOSHI** climbing to **2500 FT** then to **LENRA** and hold or as instructed by ATC. Do not exceed **230 KT** until **SOSHI.**

TRANSITION ALT : 11000
TRANSITION LVL : FL130

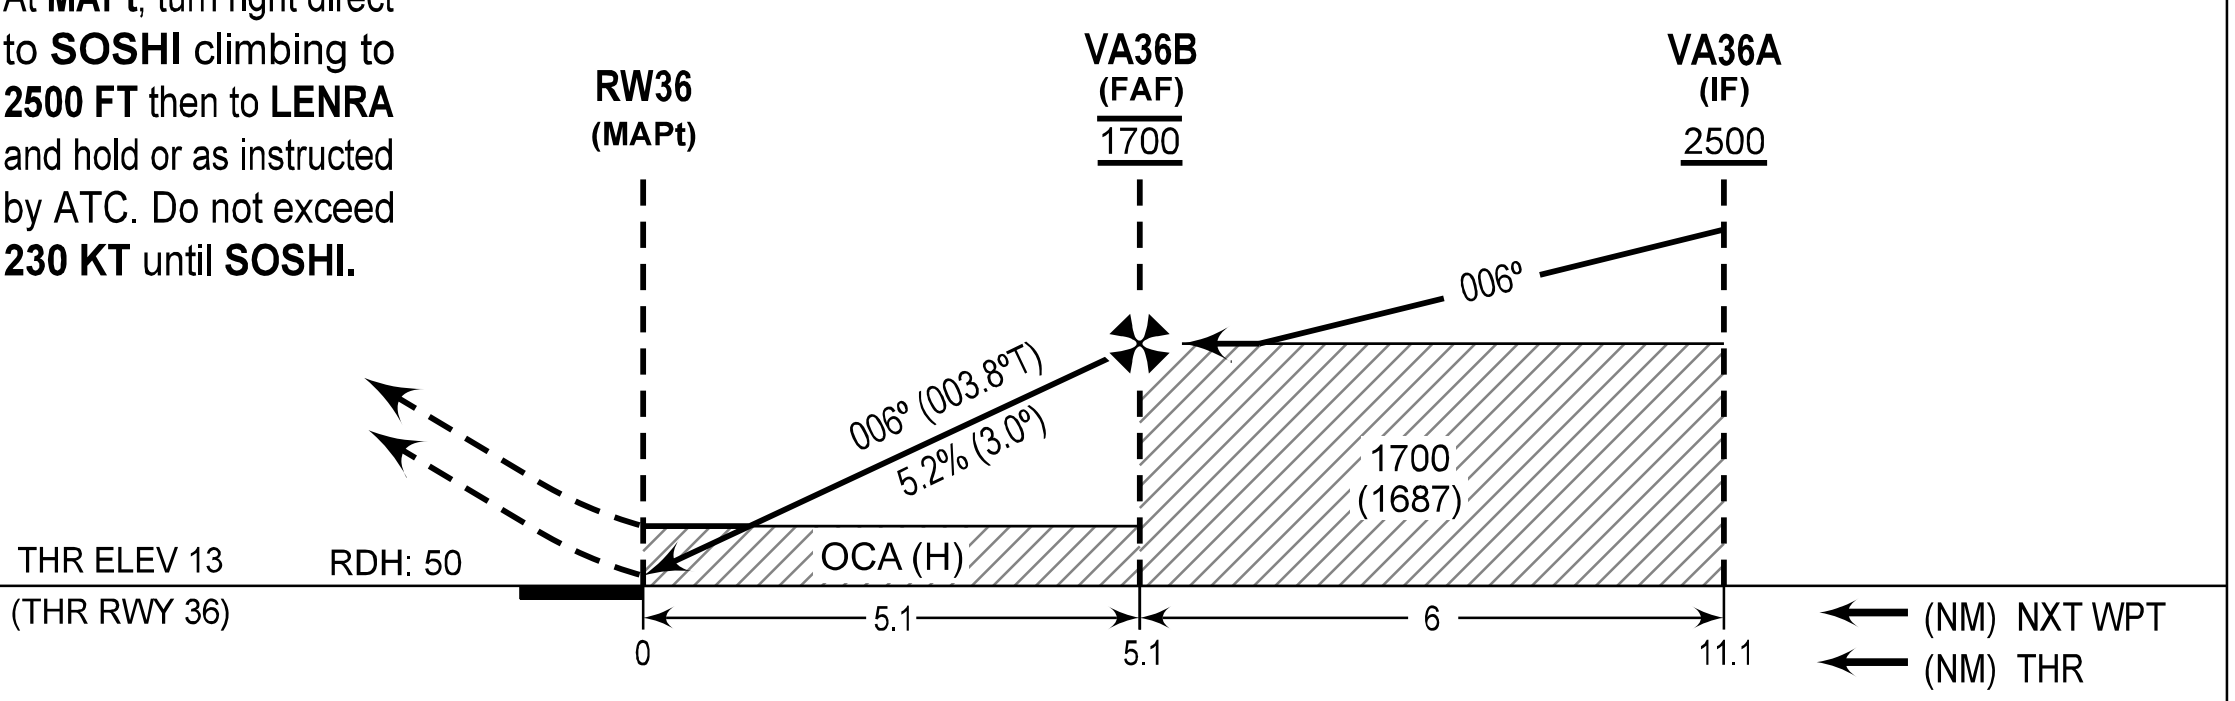

OCA (H)	A	B	C
LNAV/VNAV	310 (297)	320 (307)	
LNAV	420 (407)		

CIRCLING NOT AUTHORIZED

NM TO THR	5.1	4	3	2	1.1
ALT (HGT)	1700 (1687)	1340 (1327)	1020 (1007)	700 (687)	420 (407)

CHANGE: Note.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BIMEK	110217.8N	1245447.7E	Fly-by
GLESI	111549.9N	1245146.8E	Fly-by
JUNIX	105541.5N	1250027.9E	Fly-by
LENRA	110130.4N	1250658.1E	Fly-by
RW36	111304.57N	1250137.58E	Flyover
SOSHI	110731.1N	1250722.3E	Fly-by
VA36A	110154.3N	1250052.8E	Fly-by
VA36B	110755.2N	1250116.9E	Fly-by

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 36

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course ºM (ºT)	Magnetic Variation (º)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	LENRA	-	-	-	-	-	+2500	-240	-	RNP APCH	LENRA
20	TF	VA36A	-	276 (273.8)	+2	6.0	-	+2500	-	-	RNP APCH	LENRA
10	IF	GLESI	-	-	-	-	-	+6000	-240	-	RNP APCH	GLESI
20	TF	BIMEK	-	170 (167.5)	+2	13.8	-	+2500	-	-	RNP APCH	GLESI
30	TF	VA36A	-	096 (093.7)	+2	6.0	-	+2500	-	-	RNP APCH	GLESI
10	IF	JUNIX	-	-	-	-	-	+4000	-240	-	RNP APCH	JUNIX
20	TF	VA36A	-	006 (003.8)	+2	6.2	-	+2500	-	-	RNP APCH	JUNIX
10	IF	VA36A	-	-	-	-	-	+2500	-	-	RNP APCH	-
20	TF	VA36B	-	006 (003.8)	+2	6.0	-	@1700	-	-	RNP APCH	-
30	TF	RW36	Y	006 (003.8)	+2	5.1	-	@63	-	-3.0/-	RNP APCH	-
10	DF	SOSHI	-	-	-	-	R	-	-230	-	RNP APCH	-
20	TF	LENRA	-	186 (183.8)	+2	6.0	-	+2500	-240	-	RNP APCH	-

CHANGES: ALT. COORD Format.

TRAFFIC CIRCUIT CHART

AERODROME ELEV
13 FT

APP - 120.8
TWR - 124.3

TACLOBAN/
Daniel Z. Romualdez (RPVA)
RWY 18

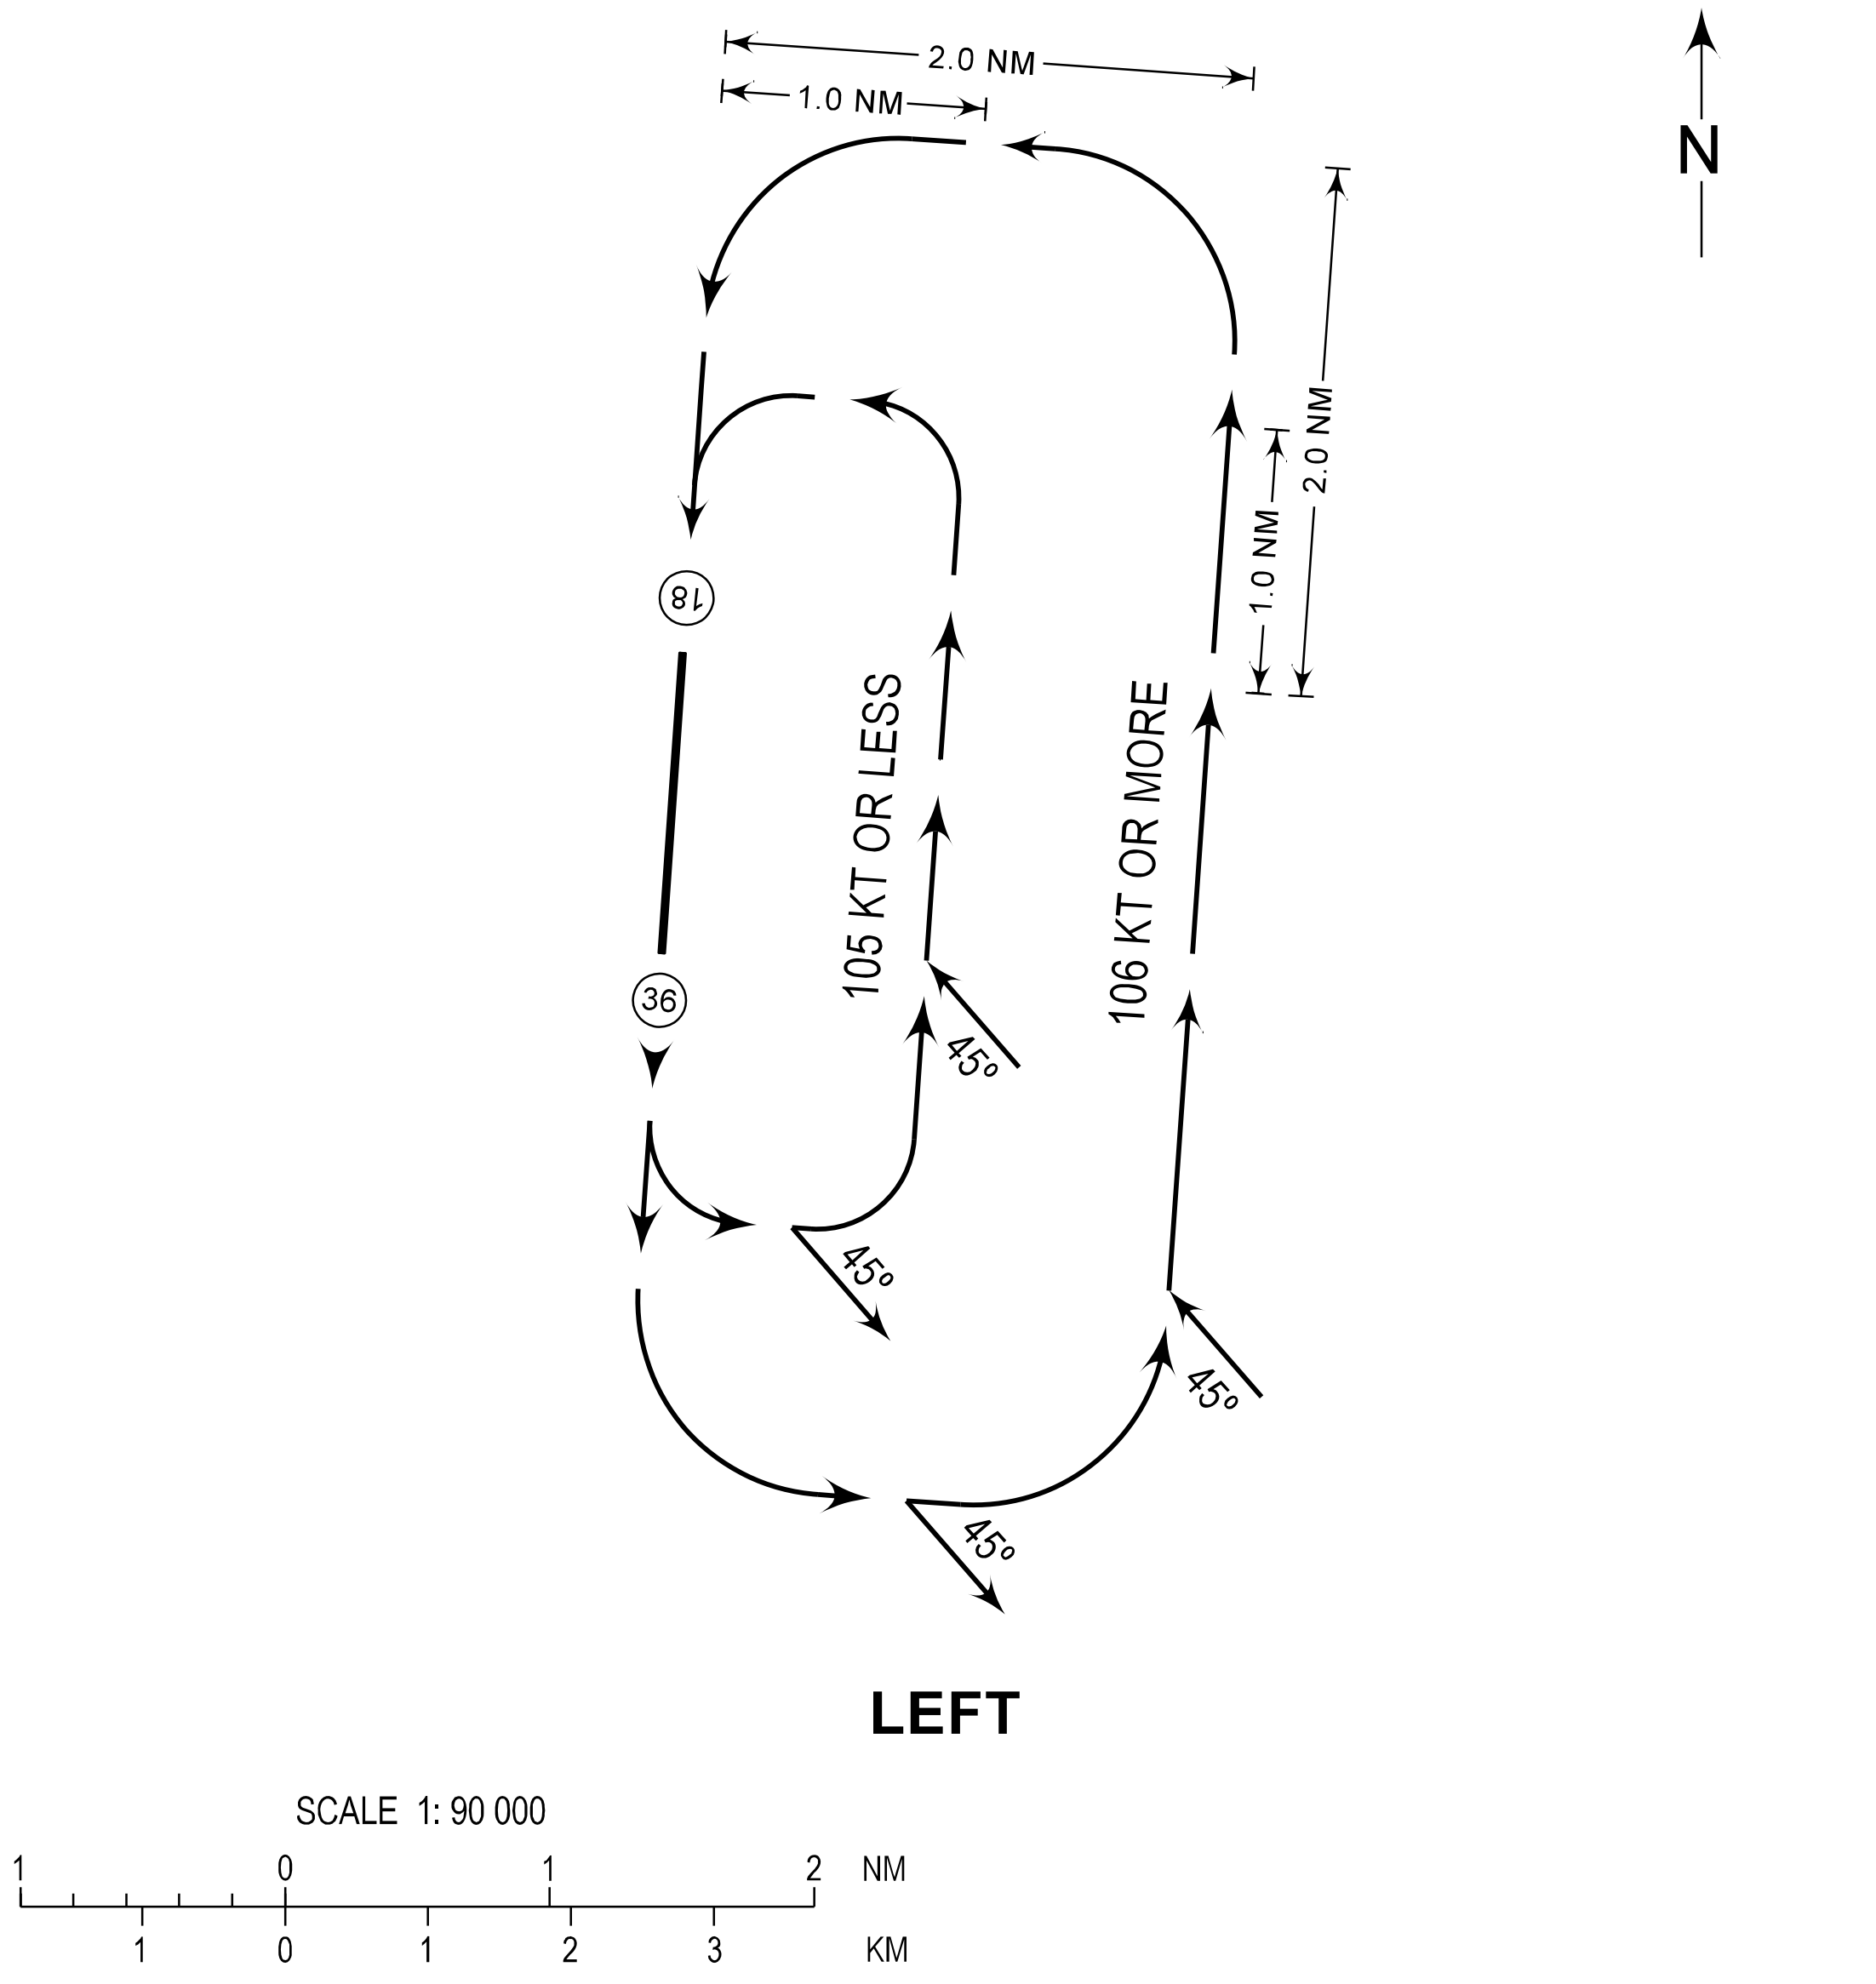

PROCEDURE

A) ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.

B) DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

CHANGE: Chart Page Format.

TRAFFIC CIRCUIT CHART

AERODROME ELEV 13 FT

APP - 120.8
TWR - 124.3

TACLOBAN/
Daniel Z. Romualdez (RPVA)
RWY 36

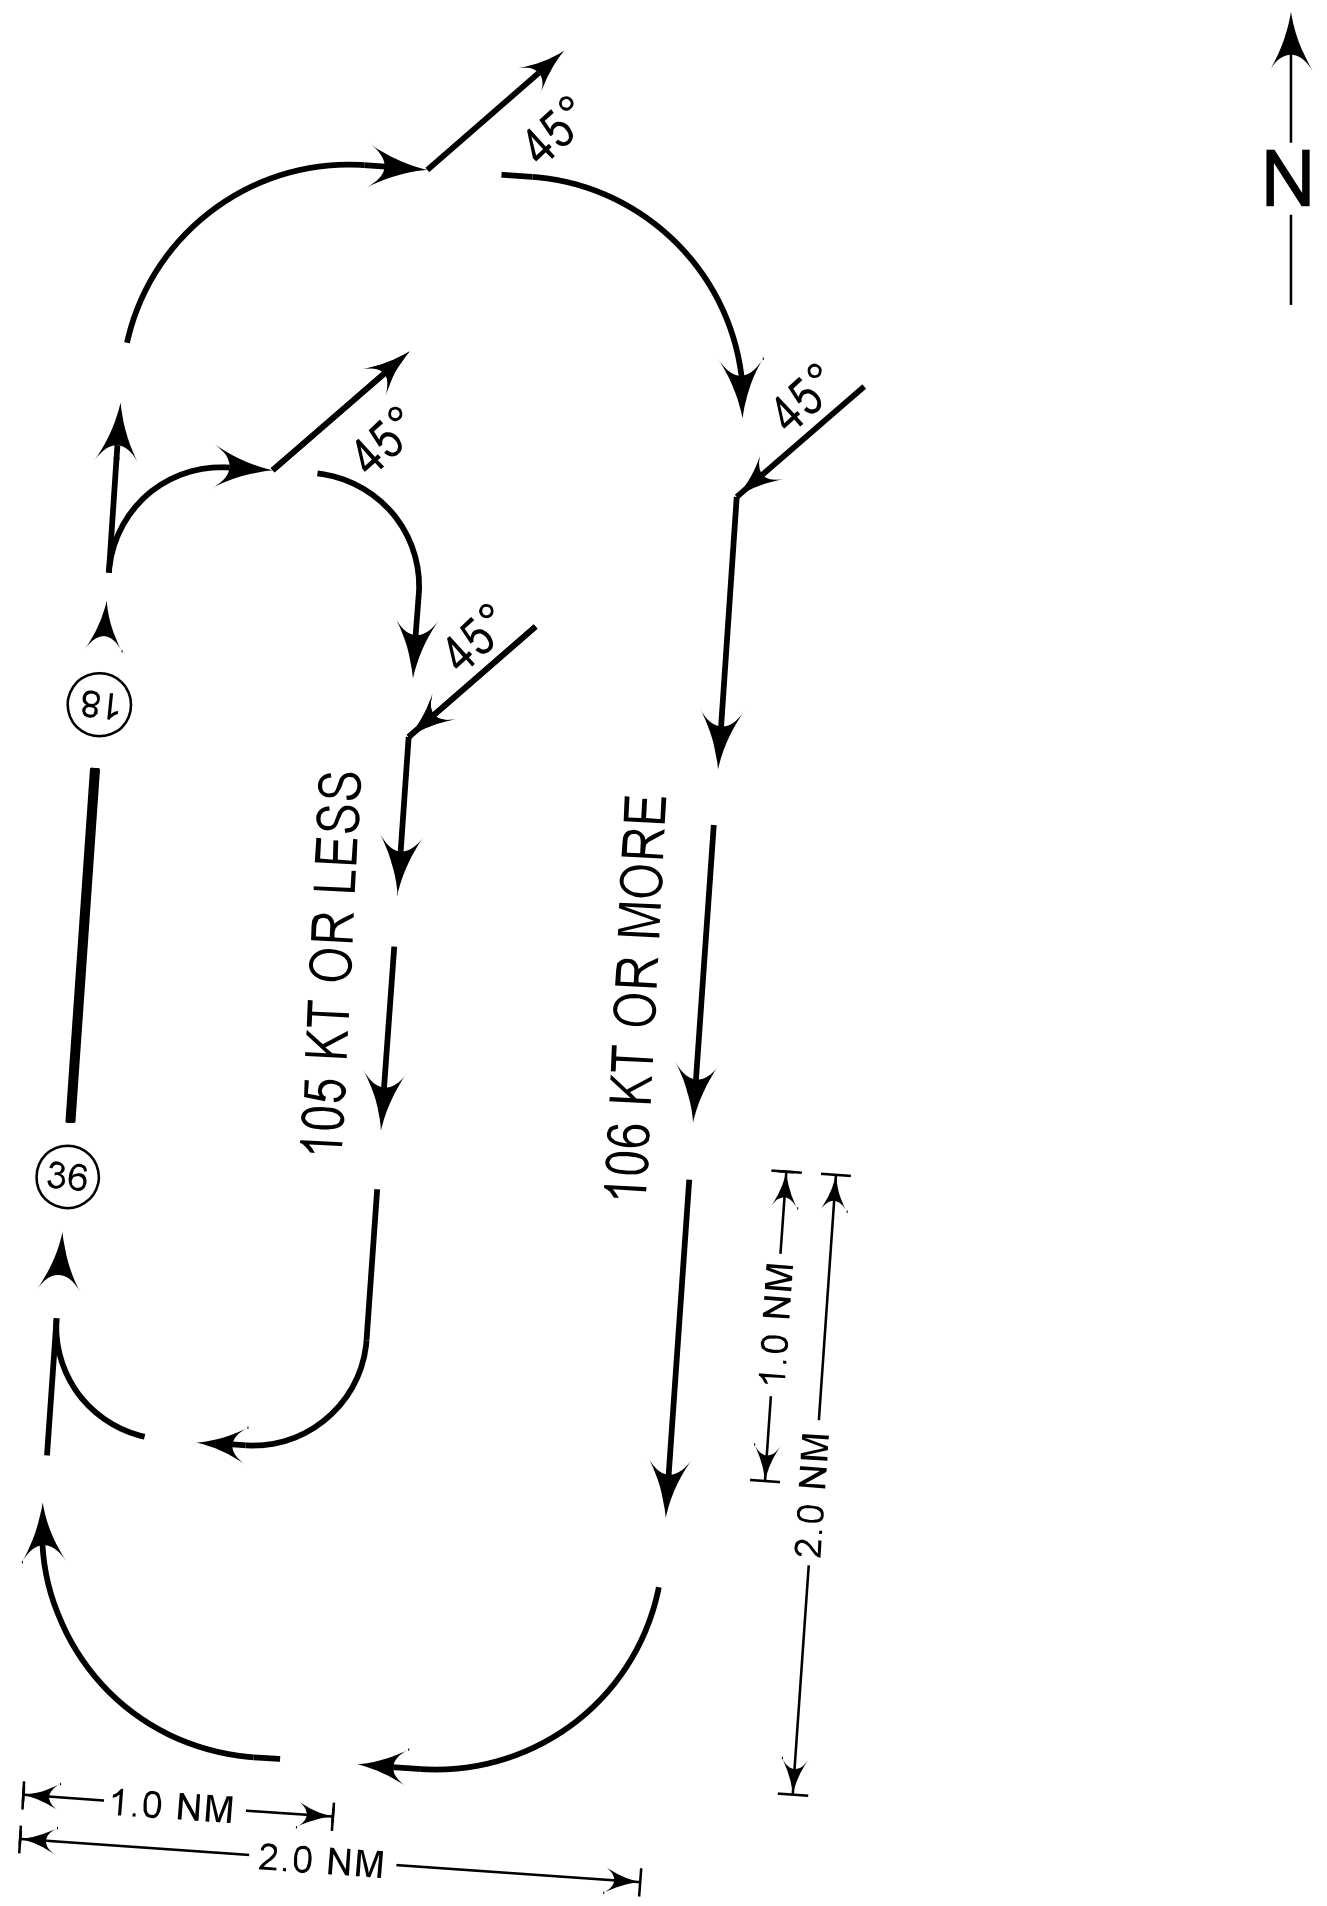

RIGHT

SCALE 1 : 90 000



PROCEDURE

A) ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.

B) DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

CHANGE: Chart Page Format.