# AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.9, AD-2.16, AD-2.20, AD-2.21, AD-2.22, AD-2.23

## RPMC AD 2.1 AERODROME LOCATION INDICATOR AND NAME

## RPMC - COTABATO PRINCIPAL AIRPORT (Class 1)

## RPMC AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

| | | |
|---|---|---|
| 1 | **ARP coordinates and site at AD** | 070953.2589N<br>1241236.5613E. |
| 2 | **Direction and distance from (city)** | 208º / 7165KM from the city. |
| 3 | **Elevation/Reference temperature** | 55.773M (182.982FT). |
| 4 | **Geoid undulation at AD ELEV PSN** | Nil. |
| 5 | **MAG VAR/Annual Change** | 0.3ºW (2014) / 2.6’ increasing. |
| 6 | **AD Operator, address, telephone, telefax, telex, AFS** | Civil Aviation Authority of the Philippines<br>Cotabato Airport, Awang,<br>Datu Odin Sinsuat, Cotabato City<br>9600 Maguindanao<br>Tel.: (064) 431-0104 |
| 7 | **Types of traffic permitted (IFR/VFR)** | VFR. |
| 8 | **Remarks** | Aircraft coming to Cotabato must carry enough fuel for their next AP of destination. |

## RPMC AD 2.3 OPERATIONAL HOURS

| | | |
|---|---|---|
| 1 | **AD Operator** | MON - FRI: 0000 - 0900. |
| 2 | **Customs and immigration** | Nil. |
| 3 | **Health and sanitation** | Nil. |
| 4 | **AIS Briefing Office** | Nil. |
| 5 | **ATS Reporting Office (ARO)** | 2300 - 0800. For extension of SER one (1) day PN is required. |
| 6 | **MET Briefing Office** | Nil. |
| 7 | **ATS** | Nil. |
| 8 | **Fuelling** | Done by Philippine Airlines. |
| 9 | **Handling** | Nil. |
| 10 | **Security** | H24. |
| 11 | **De-icing** | Nil. |
| 12 | **Remarks** | Airport Operations: 2300 - 0800. |

## RPMC AD 2.5 PASSENGER FACILITIES

| | | |
|---|---|---|
| 1 | **Hotels** | In the city. |
| 2 | **Restaurants** | At the AD and in the city. |
| 3 | **Transportation** | Rent a car/public utility vehicle. |
| 4 | **Medical facilities** | In the city. |
| 5 | **Bank and Post Office** | In the city. |
| 6 | **Tourist Office** | In the city. |
| 7 | **Remarks** | Public transportation from 0800-1300. |

## RPMC AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

| | | |
|---|---|---|
| 1 | **AD category for fire fighting** | CAT VI. |
| 2 | **Rescue equipment** | Three (3) fire trucks (SIDES VMA, FUSO FK 102 and Oshkosh Striker 4X4). |
| 3 | **Capability for removal of disabled aircraft** | Towing only light aircraft. |
| 4 | **Remarks** | Nil. |

## RPMC AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

| | | |
|---|---|---|
| 1 | **Apron surface and strength** | Surface: CONC.<br>Strength: Nil. |
| 2 | **Taxiway width, surface and strength** | Nil. |
| 3 | **Altimeter checkpoint location and elevation** | Location: Ramp.<br>Elevation: 192FT. |
| 4 | **VOR checkpoints** | Nil. |
| 5 | **INS checkpoints** | Nil. |
| 6 | **Remarks** | Nil. |

## RPMC AD 2.10 AERODROME OBSTACLES

| In approach/TKOF areas | | | In circling area and at AD | | Remarks |
|---|---|---|---|---|---|
| 1 | | | 2 | | 3 |
| RWY/Area affected | Obstacle type Elevation Markings/LGT | Coordinates | Obstacle type Elevation Markings/LGT | Coordinates | |
| a | b | c | a | b | |
| 10 | Mountain elevated portion N of RWY | | Mountain at the departure end of RWY10 4NM E | E of RWY 4NM | |
| 28 | Trees | | Nil | E of RWY 1NM | |
| 28 | Nil | | Communication Tower/Antenna (Sun Cellular) 1000FT | Nil | N of RWY. |

## RPMC AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

| | | |
|---|---|---|
| 1 | **Associated MET Office** | PAGASA. |
| 2 | **Hours of service**<br>**MET Office outside hours** | HJ.<br>- |
| 3 | **Office responsible for TAF preparation**<br>**Periods of validity** | -<br>Hourly weather report. |
| 4 | **Trend forecast**<br>**Interval of issuance** | -<br>Hourly. |
| 5 | **Briefing/consultation provided** | Tower Cab. |
| 6 | **Flight documentation**<br>**Language(s) used** | Flight plan file at tower or radio.<br>English. |
| 7 | **Charts and other information available for briefing or consultation** | Nil. |

| | | |
|---|---|---|
| **8** | **Supplementary equipment available for providing information** | Nil. |
| **9** | **ATS units provided with information** | Nil. |
| **10** | **Additional information (limitation of service, etc.)** | Nil. |

## RPMC AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

| Designations RWY NR | TRUE BRG | Dimensions of RWY | Strength (PCN) and surface of RWY and SWY | THR coordinates RWY end coordinates THR geoid undulation | THR elevation and highest elevation of TDZ of precision APP RWY |
|---|---|---|---|---|---|
| **1** | **2** | **3** | **4** | **5** | **6** |
| 10 | 103º GEO<br>103º MAG | 1961M X 45M | PCN 44 R/A/W/U<br>RWY/SWY:<br>ASPH | 071000.6430N<br>1241205.4531E<br>(71.975M/<br>236.138FT) | THR 56.237M/<br>184.504FT |
| 28 | 283º GEO<br>283º MAG | 1961M X 45M | PCN 44 R/A/W/U<br>RWY/SWY:<br>ASPH | 070945.8750N<br>1241307.6694E<br>(72.099M/<br>236.545FT) | THR 48.709M/<br>159.806FT |
| **Slope of RWY-SWY** | **SWY dimensions** | **CWY dimensions** | **Strip dimensions** | **OFZ** | **Remarks** |
| **7** | **8** | **9** | **10** | **11** | **12** |
| Nil | 42M X 150M | 42M X 150M | Nil | Nil | Nil |
| Nil | Nil | Nil | Nil | Nil | Nil |

## RPMC AD 2.13 DECLARED DISTANCES

| RWY Designator | TORA | TODA | ASDA | LDA | Remarks |
|---|---|---|---|---|---|
| **1** | **2** | **3** | **4** | **5** | **6** |
| 10 | 1961M | 2003M | 2003M | 1961M | Nil |
| 28 | 1961M | 1961M | 1961M | 1961M | Nil |

## RPMC AD 2.14 APPROACH AND RUNWAY LIGHTING

| RWY Designator | APCH LGT type, LEN, INTST | THR LGT colour, WBAR | VASIS, (MEHT), PAPI | TDZ, LGT LEN |
|---|---|---|---|---|
| **1** | **2** | **3** | **4** | **5** |
| 10 | Nil | Green | PAPI<br>Left<br>3.0° | Nil |
| 28 | Nil | Green | PAPI | Nil |

| RWY Centre Line LGT Length, spacing, colour, INTST | RWY edge LGT LEN, spacing, colour, INTST | RWY End LGT colour, WBAR | SWY LGT LEN, colour | Remarks |
|---|---|---|---|---|
| 6 | 7 | 8 | 9 | 10 |
| Nil | Nil | Nil | Nil | Path WID: 0.4º. VIS RG: 4Mi. VER Obstruction CLNC: >1.0º. Horizontal Obstruction CLNC: ±8º FM RWY CL. |
| Nil | Nil | Nil | Nil | Path WID: 0.33º. VIS RG: 6NM. VER Obstruction CLNC: <1º. Horizontal Obstruction CLNC: 10º FM RWY CL. |

## RPMC AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

| | | |
|---|---|---|
| 1 | **ABN/IBN location, characteristics and hours of operation** | Location: Control Tower.<br>Characteristics: ALTN W G - 25 flashes per minute.<br>HR of OPS: Nil. |
| 2 | **LDI location and LGT<br>Anemometer location and LGT** | Nil. |
| 3 | **TWY edge and centre line lighting** | Nil. |
| 4 | **Secondary power supply/switch-over time** | Secondary power supply to all lighting at AD. |
| 5 | **Remarks** | Nil. |

## RPMC AD 2.17 ATS AIRSPACE

| | | |
|---|---|---|
| 1 | **Designation and lateral limits** | COTABATO AERODROME TRAFFIC ZONE (ATZ):<br>A circle radius 5NM centered on 070953.2589N 1241236.5613E (ARP). |
| 2 | **Vertical limits** | ATZ: Up to but excluding 2000FT. |
| 3 | **Airspace classification** | B. |
| 4 | **ATS unit call sign<br>Languages(s)** | Cotabato Tower.<br>English. |
| 5 | **Transition altitude** | Nil. |
| 6 | **Remarks** | VFR aerodrome traffic are controlled. Aircraft may experience communication difficulty 10NM south (R120 to R240) of Tower. |

## RPMC AD 2.18 ATS COMMUNICATION FACILITIES

| Service Designation | Call Sign | Frequency | Hours of operation | Remarks |
|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 |
| TWR | Cotabato Tower | 118.7MHZ<br>123.3MHZ<br>6795KHZ<br><br>4454KHZ<br>6802.5KHZ<br><br>3671KHZ<br>121.5MHZ | 2300 - 0800 | PRI FREQ.<br>SRY FREQ.<br>P/P PRI FREQ (Zamboanga Network).<br>P/P SRY FREQ.<br>P/P PRI FREQ (Davao Network).<br>P/P SRY FREQ<br>Emergency FREQ<br>For extension of SER one (1) day PN is required. |

## RPMC AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination) | ID | Frequency | Hours of operation | Position of transmitting antenna coordinates | Elevation of DME transmitting antenna | Remarks |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
| VOR/DME | COT | 113.7MHZ<br>CH84X | H24 | 071003.1302N<br>1241232.7881E | 55.712M<br>(182.781FT) | VOR-100W.<br>DME-1KW.<br>VOR unusable on R120 to R170 beyond 30NM below 8500FT; R170 to R280 beyond 30NM below 12000FT. |

## RPMC AD 2.24 CHARTS RELATED TO AN AERODROME

| TITLE | PAGE |
|---|---|
| Traffic Circuit Chart (RWY10) | RPMC AD 2 - 7 |
| Traffic Circuit Chart (RWY28) | RPMC AD 2 - 8 |

**TRAFFIC CIRCUIT CHART**

AD ELEV
**182.98 ft**

TWR - 118.7 / 123.3

**MAGUINDANAO/Cotabato (RPMC)**

**RWY 10**

**ALT, ELEV AND HGT IN FEET**
DIST IN NM
BRG ARE MAG
VAR 0.3° W (2014)

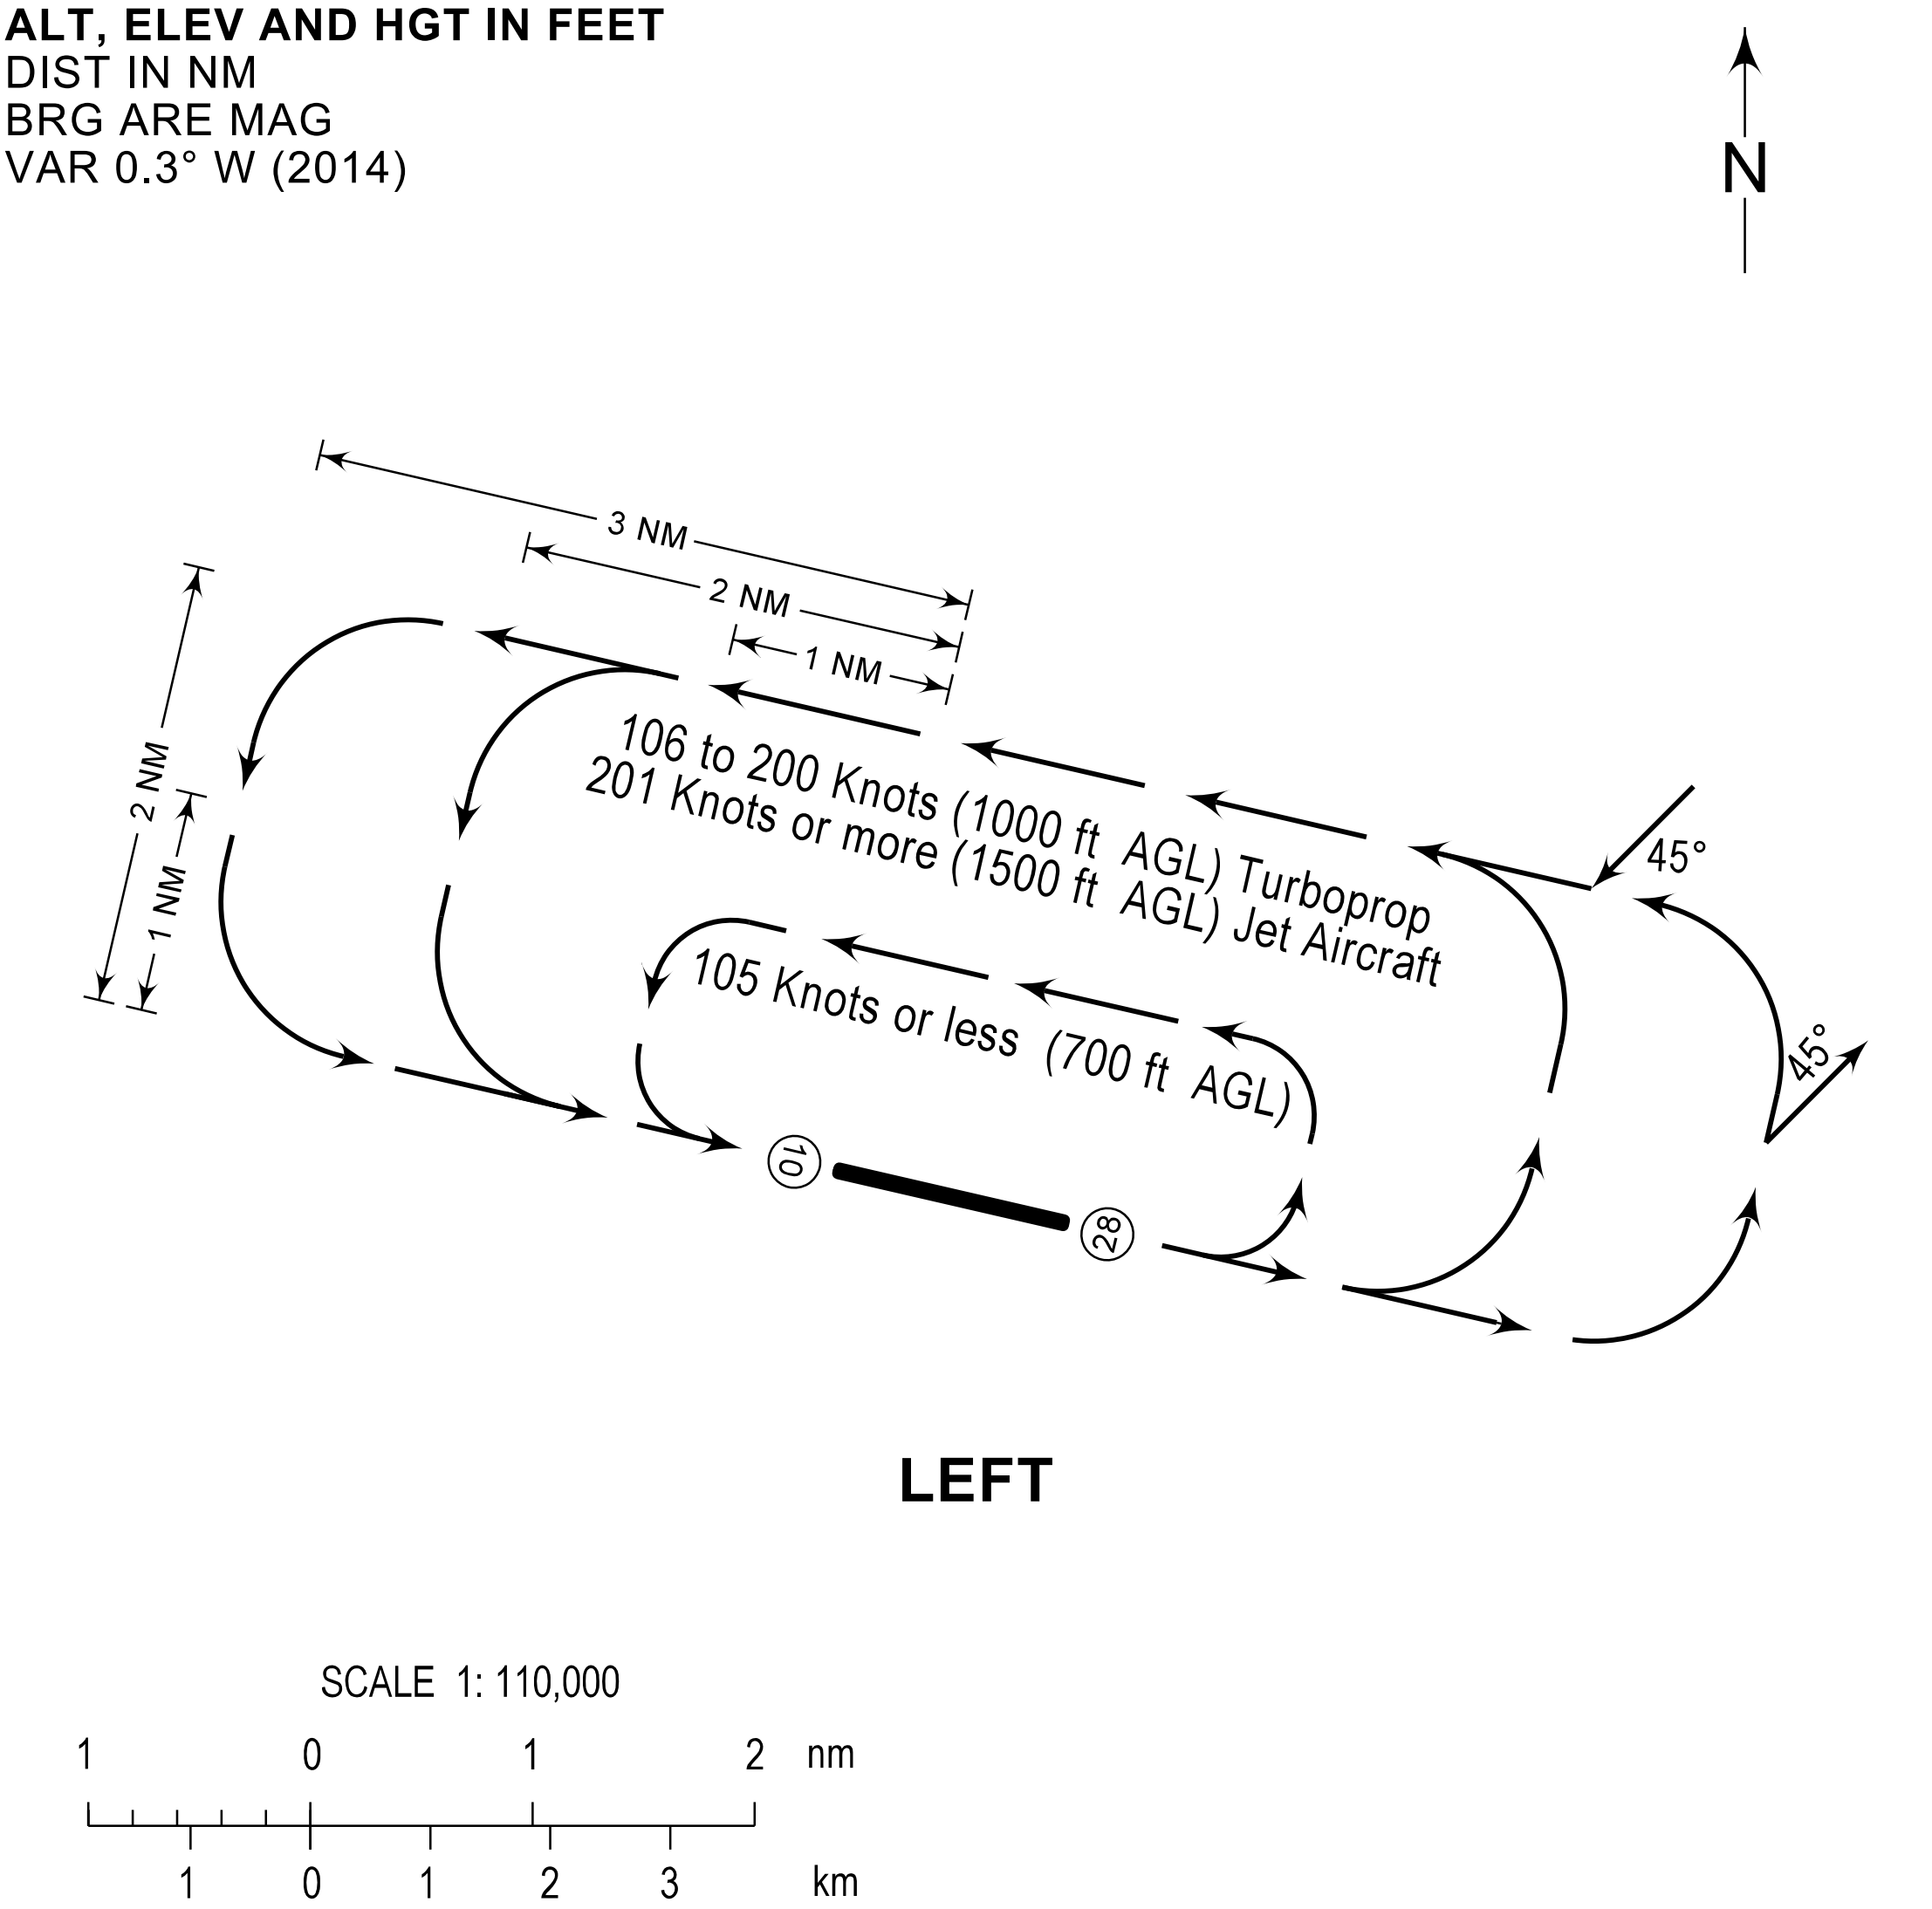


## PROCEDURE

a) Arriving aircraft shall enter the traffic circuit on the downwind leg at an angle of 45 degrees.

b) Departing aircraft shall follow the traffic circuit and leave the circuit at an angle of 45 degrees.

**CHANGES:** City/Town. MAG VAR.
VFR DEP PROC. Chart Re-indexed.

**TRAFFIC CIRCUIT CHART**

AD ELEV
**182.98 ft**

TWR - 118.7 / 123.3

**MAGUINDANAO/Cotabato (RPMC)**

**RWY 28**

**ALT, ELEV AND HGT IN FEET**
DIST IN NM
BRG ARE MAG
VAR 0.3° W (2014)

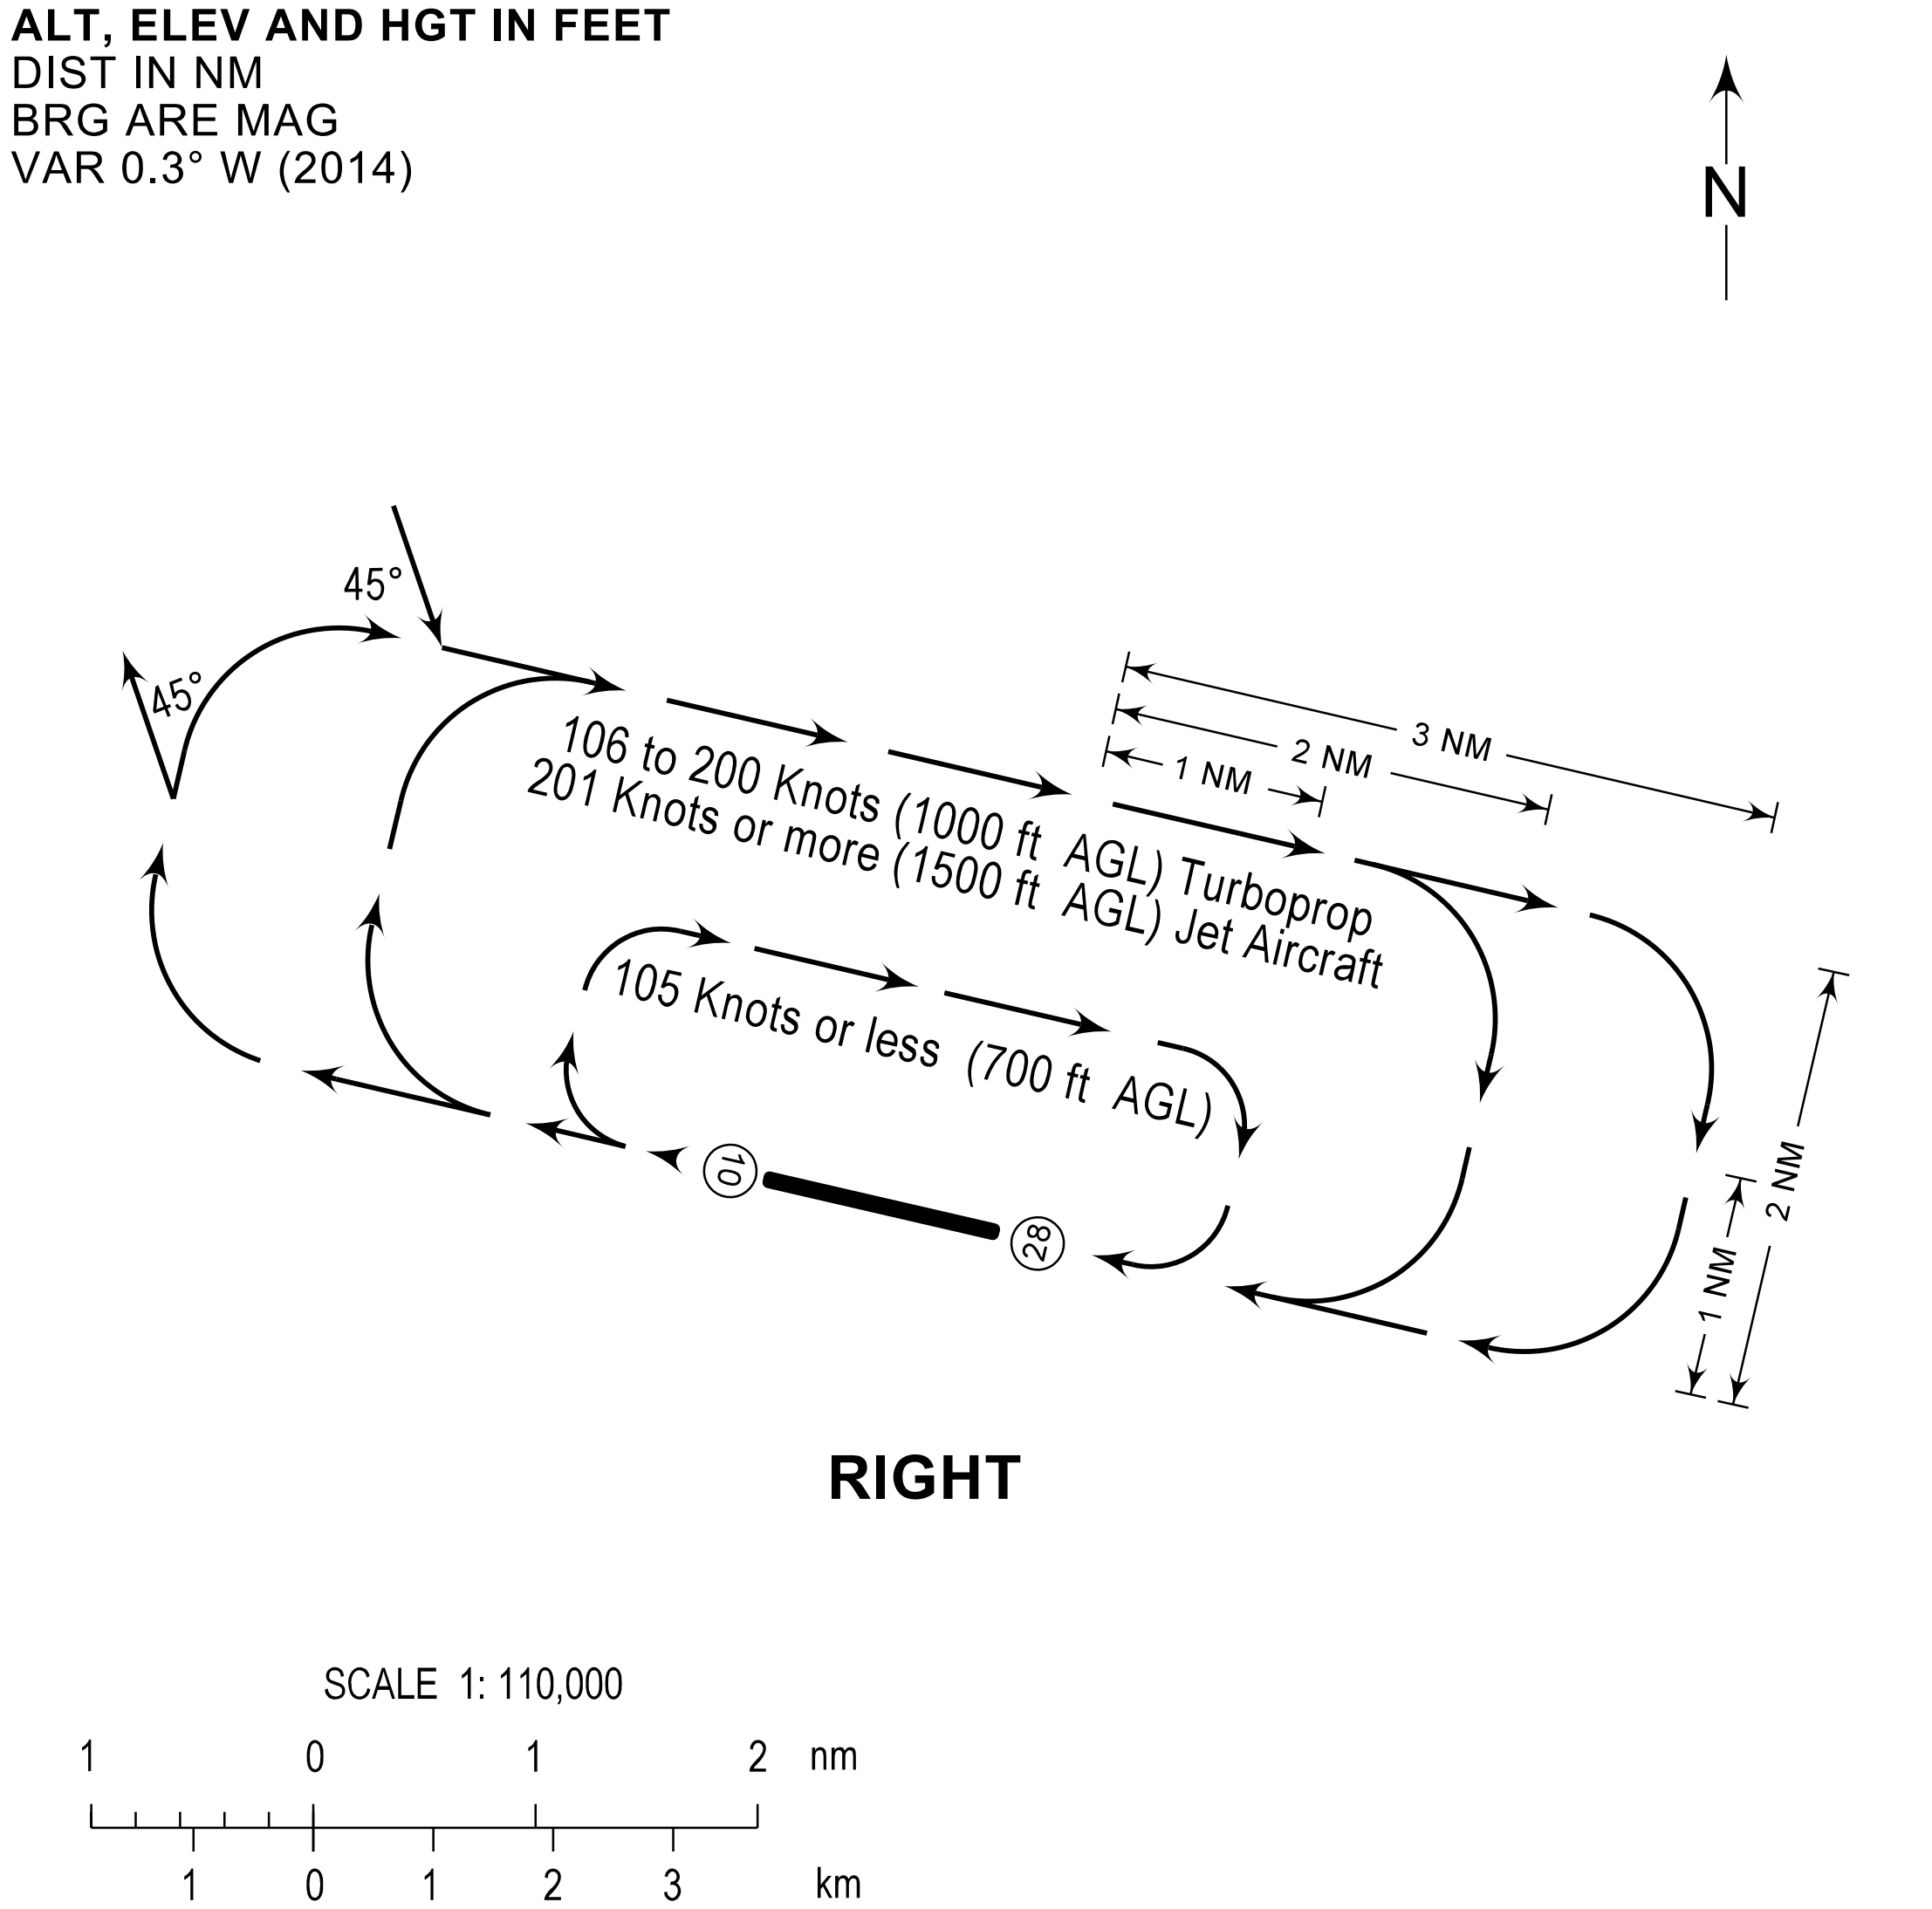


## PROCEDURE

a) Arriving aircraft shall enter the traffic circuit on the downwind leg at an angle of 45 degrees.

b) Departing aircraft shall follow the traffic circuit and leave the circuit at an angle of 45 degrees.

**CHANGES:** City/Town. MAG VAR. VFR DEP PROC. Chart Re-indexed.