AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.9, AD-2.11, AD-2.16, AD-2.19, AD-2.20, AD-2.21, AD-2.22, AD-2.23

RPVF AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPVF - CATARMAN PRINCIPAL AIRPORT (Class 2)

RPVF AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	**ARP coordinates and site at AD**	123008.0304N 1243809.0737E.
2	**Direction and distance from (city)**	4.16M North.
3	**Elevation/Reference temperature**	5.5901M AMSL.
4	**Geoid undulation at AD ELEV PSN**	Nil.
5	**MAG VAR/Annual Change**	1.4ºW (2014) / 2.9’ increasing.
6	**AD Operator, address, telephone, telefax, telex, AFS**	Civil Aviation Authority of the Philippines Catarman Airport, Poblacion, Catarman 6400 Northern Samar Tel. No.: (055) 500-9461.
7	**Types of traffic permitted (IFR/VFR)**	VFR.
8	**Remarks**	Nil.

RPVF AD 2.3 OPERATIONAL HOURS

1	**AD Operator**	0000 - 0900.
2	**Customs and immigration**	Nil.
3	**Health and sanitation**	Nil.
4	**AIS Briefing Office**	Nil.
5	**ATS Reporting Office (ARO)**	2100 - 0500.
6	**MET Briefing Office**	Nil.
7	**ATS**	0000 - 0900.
8	**Fuelling**	Nil.
9	**Handling**	Nil.
10	**Security**	Nil.
11	**De-icing**	Nil.
12	**Remarks**	Airport Operations: 2100 - 0500.

RPVF AD 2.5 PASSENGER FACILITIES

1	**Hotels**	At the town proper.
2	**Restaurants**	At the town proper.
3	**Transportation**	At the town proper.
4	**Medical facilities**	At the town proper.
5	**Bank and Post Office**	At the town proper.
6	**Tourist Office**	Nil.
7	**Remarks**	Nil.

RPVF AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	**AD category for fire fighting**	CAT VI.
2	**Rescue equipment**	Two (2) fire trucks (SIDES VMA 28 & Oshkosh Striker 4x4).
3	**Capability for removal of disabled aircraft**	Nil.
4	**Remarks**	Nil.

RPVF AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	**Apron surface and strength**	Surface: CONC. Strength: Nil.
2	**Taxiway width, surface and strength**	Width: 45M. Surface: Nil. Strength: Nil.
3	**Altimeter checkpoint location and elevation**	Nil.
4	**VOR checkpoints**	Nil.
5	**INS checkpoints**	Nil.
6	**Remarks**	Nil.

RPVF AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
Nil	Nil	Nil	Terrain 625FT	122723.9820N 1243909.0030E	Nil
Nil	Nil	Nil	Terrain 580FT	122848.0040N 1243459.9920E	Nil
Nil	Nil	Nil	Terrain 575FT	122814.9850N 1243542.0160E	Nil
Nil	Nil	Nil	Terrain 500FT	122829.9970N 1243724.0100E	Nil
Nil	Nil	Nil	Terrain 375FT	123023.9820N 1244005.9870E	Nil

RPVF AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
04	044.7º GEO 046.1º MAG	1573M X 30M	PCN 24.5 R/B/W/T CONC	122947.6052N 1243748.2258E	5.0198M/16.469FT
22	224.7º GEO 226.1º MAG	1573M X 30M	PCN 24.5 R/B/W/T CONC	123024.4423N 1243824.4155E	4.7610M/15.620FT
Slope of RWY-SWY	**SWY dimensions**	**CWY dimensions**	**Strip dimensions**	**OFZ**	**Remarks**
7	8	9	10	11	12
Nil	Nil	60M	Nil	Nil	Nil
Nil	Nil	40M	Nil	Nil	Nil

RPVF AD 2.13 DECLARED DISTANCES

RWY Designator	TORA	TODA	ASDA	LDA	Remarks
1	2	3	4	5	6
04	1573M	1633M	1573M	1573M	Nil
22	1573M	1613M	1573M	1573M	Nil

RPVF AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
04	Nil	Nil	PAPI Left 3.5º (46.5FT)	Nil
22	Nil	Nil	PAPI Left 2.95º (41FT)	Nil
RWY Centre Line LGT Length, spacing, colour, INTST	**RWY edge LGT LEN, spacing, colour, INTST**	**RWY End LGT colour, WBAR**	**SWY LGT LEN, colour**	**Remarks**
6	7	8	9	10
Nil	Nil	Nil	Nil	Path WID: 0.3º. VIS RG: 4.0NM. VER Obstruction CLNC: 2.4º. Horizontal Obstruction CLNC: 8.0º FM RWY CL. DIST FM THR: 246M.
Nil	Nil	Nil	Nil	Path WID: 0.3º. VIS RG: 4.0NM. VER Obstruction CLNC: 1.0º. Horizontal Obstruction CLNC: 10.0º FM RWY CL. DIST FM THR: 260M.

RPVF AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	**ABN/IBN location, characteristics and hours of operation**	Nil.
2	**LDI location and LGT** **Anemometer location and LGT**	Nil.
3	**TWY edge and centre line lighting**	Nil.
4	**Secondary power supply/switch-over time**	Secondary power supply to all lighting at AD.
5	**Remarks**	Nil.

RPVF AD 2.17 ATS AIRSPACE

1	**Designation and lateral limits**	CATARMAN AERODROME ADVISORY ZONE (AAZ): A circle radius 5NM centered on 123008.0304N 1243809.0737E (ARP).
2	**Vertical limits**	AAZ: SFC up to but excluding 2000FT.
3	**Airspace classification**	G.
4	**ATS unit call sign** **Languages(s)**	Catarman Radio. English.
5	**Transition altitude**	Nil.
6	**Remarks**	Nil.

RPVF AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
FSS	Catarman Radio	122.7MHZ 5205KHZ	2100 - 0500*	A/G FREQ. G/G FREQ. (SSB - Main) *FSS OPS LTD to the provision of WX and FLT INFO SVC BTN 2100 - SR.

RPVF AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulations

1.1 Number of aircraft in the traffic pattern limited to two (2) at any given time.

RPVF AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	Page
Traffic Circuit Chart (RWY 04)	RPVF AD CHART 2 - 1
Traffic Circuit Chart (RWY 22)	RPVF AD CHART 2 - 2

TRAFFIC CIRCUIT CHART

AERODROME ELEV 18 FT

FSS - 122.7

CATARMAN/ Catarman (RPVF) RWY 04

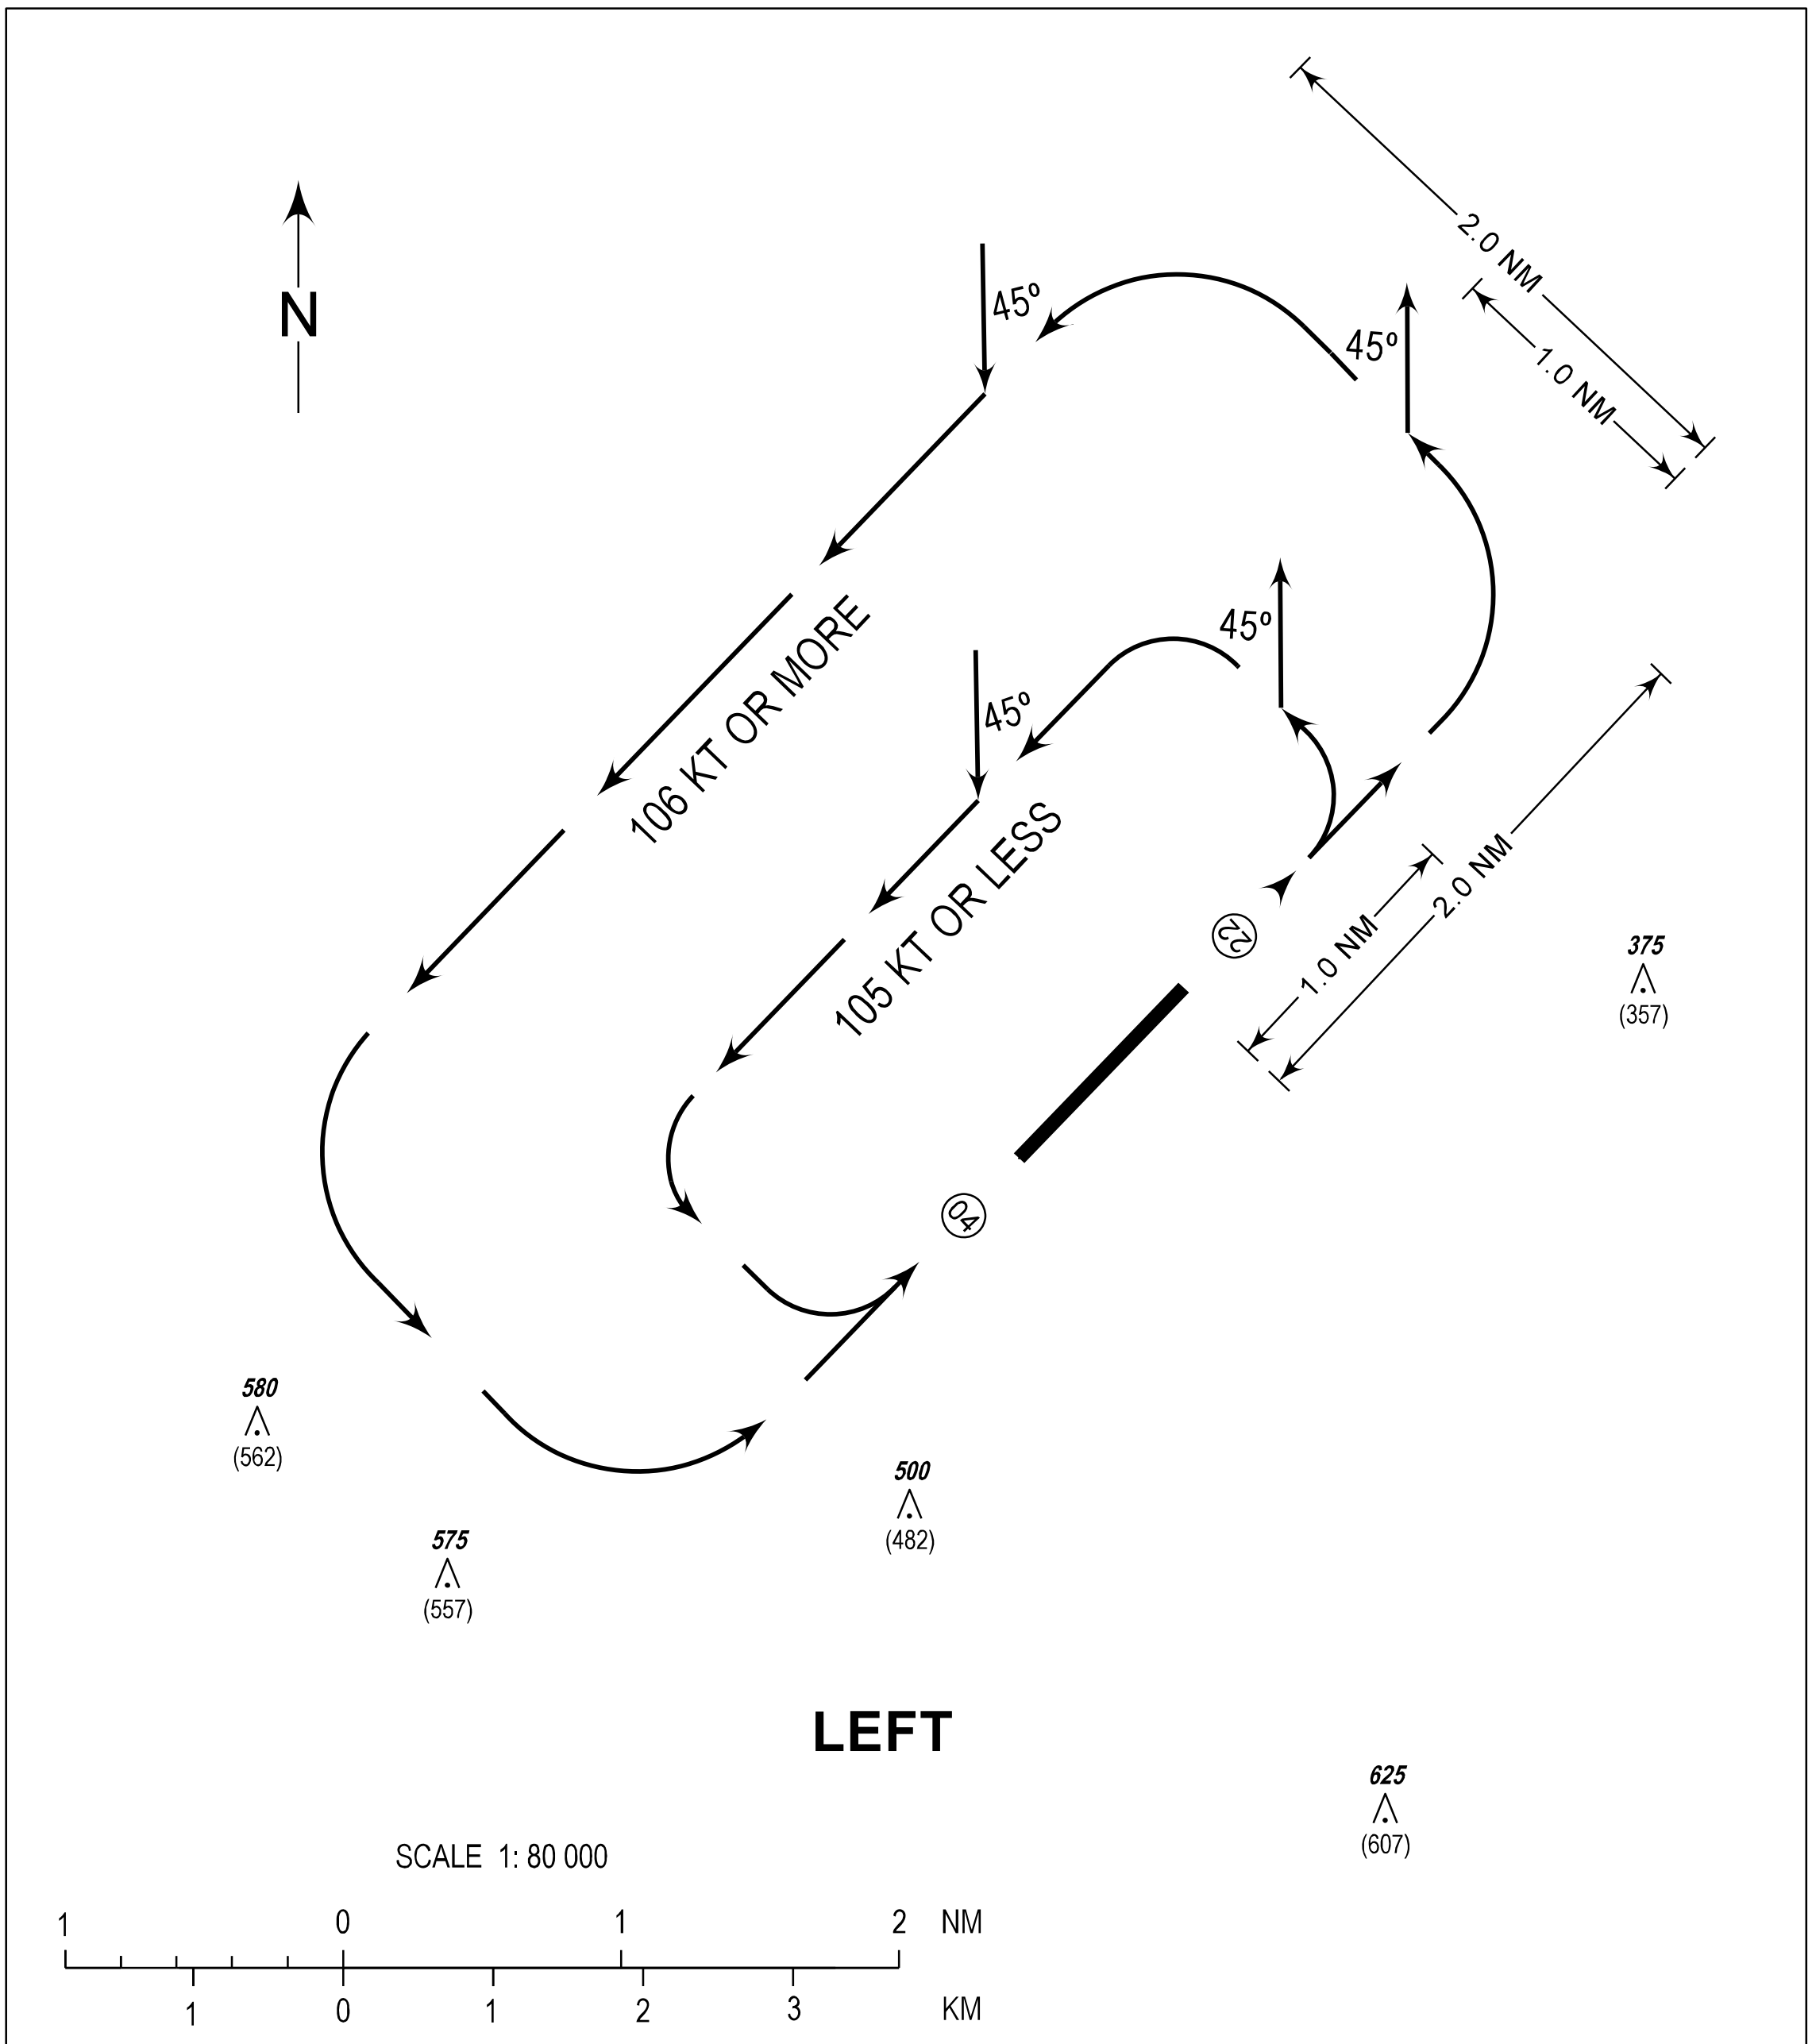

PROCEDURE

A) ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.

B) DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

CHANGES: ACFT CAT, Units of Measurement and VAR Deleted. AD ELEV. Data Resolution. OBST HGT. TFC Pattern Speed. Chart Page Format.

TRAFFIC CIRCUIT CHART

AERODROME ELEV
18 FT

FSS - 122.7

CATARMAN/
Catarman (RPVF)
RWY 22

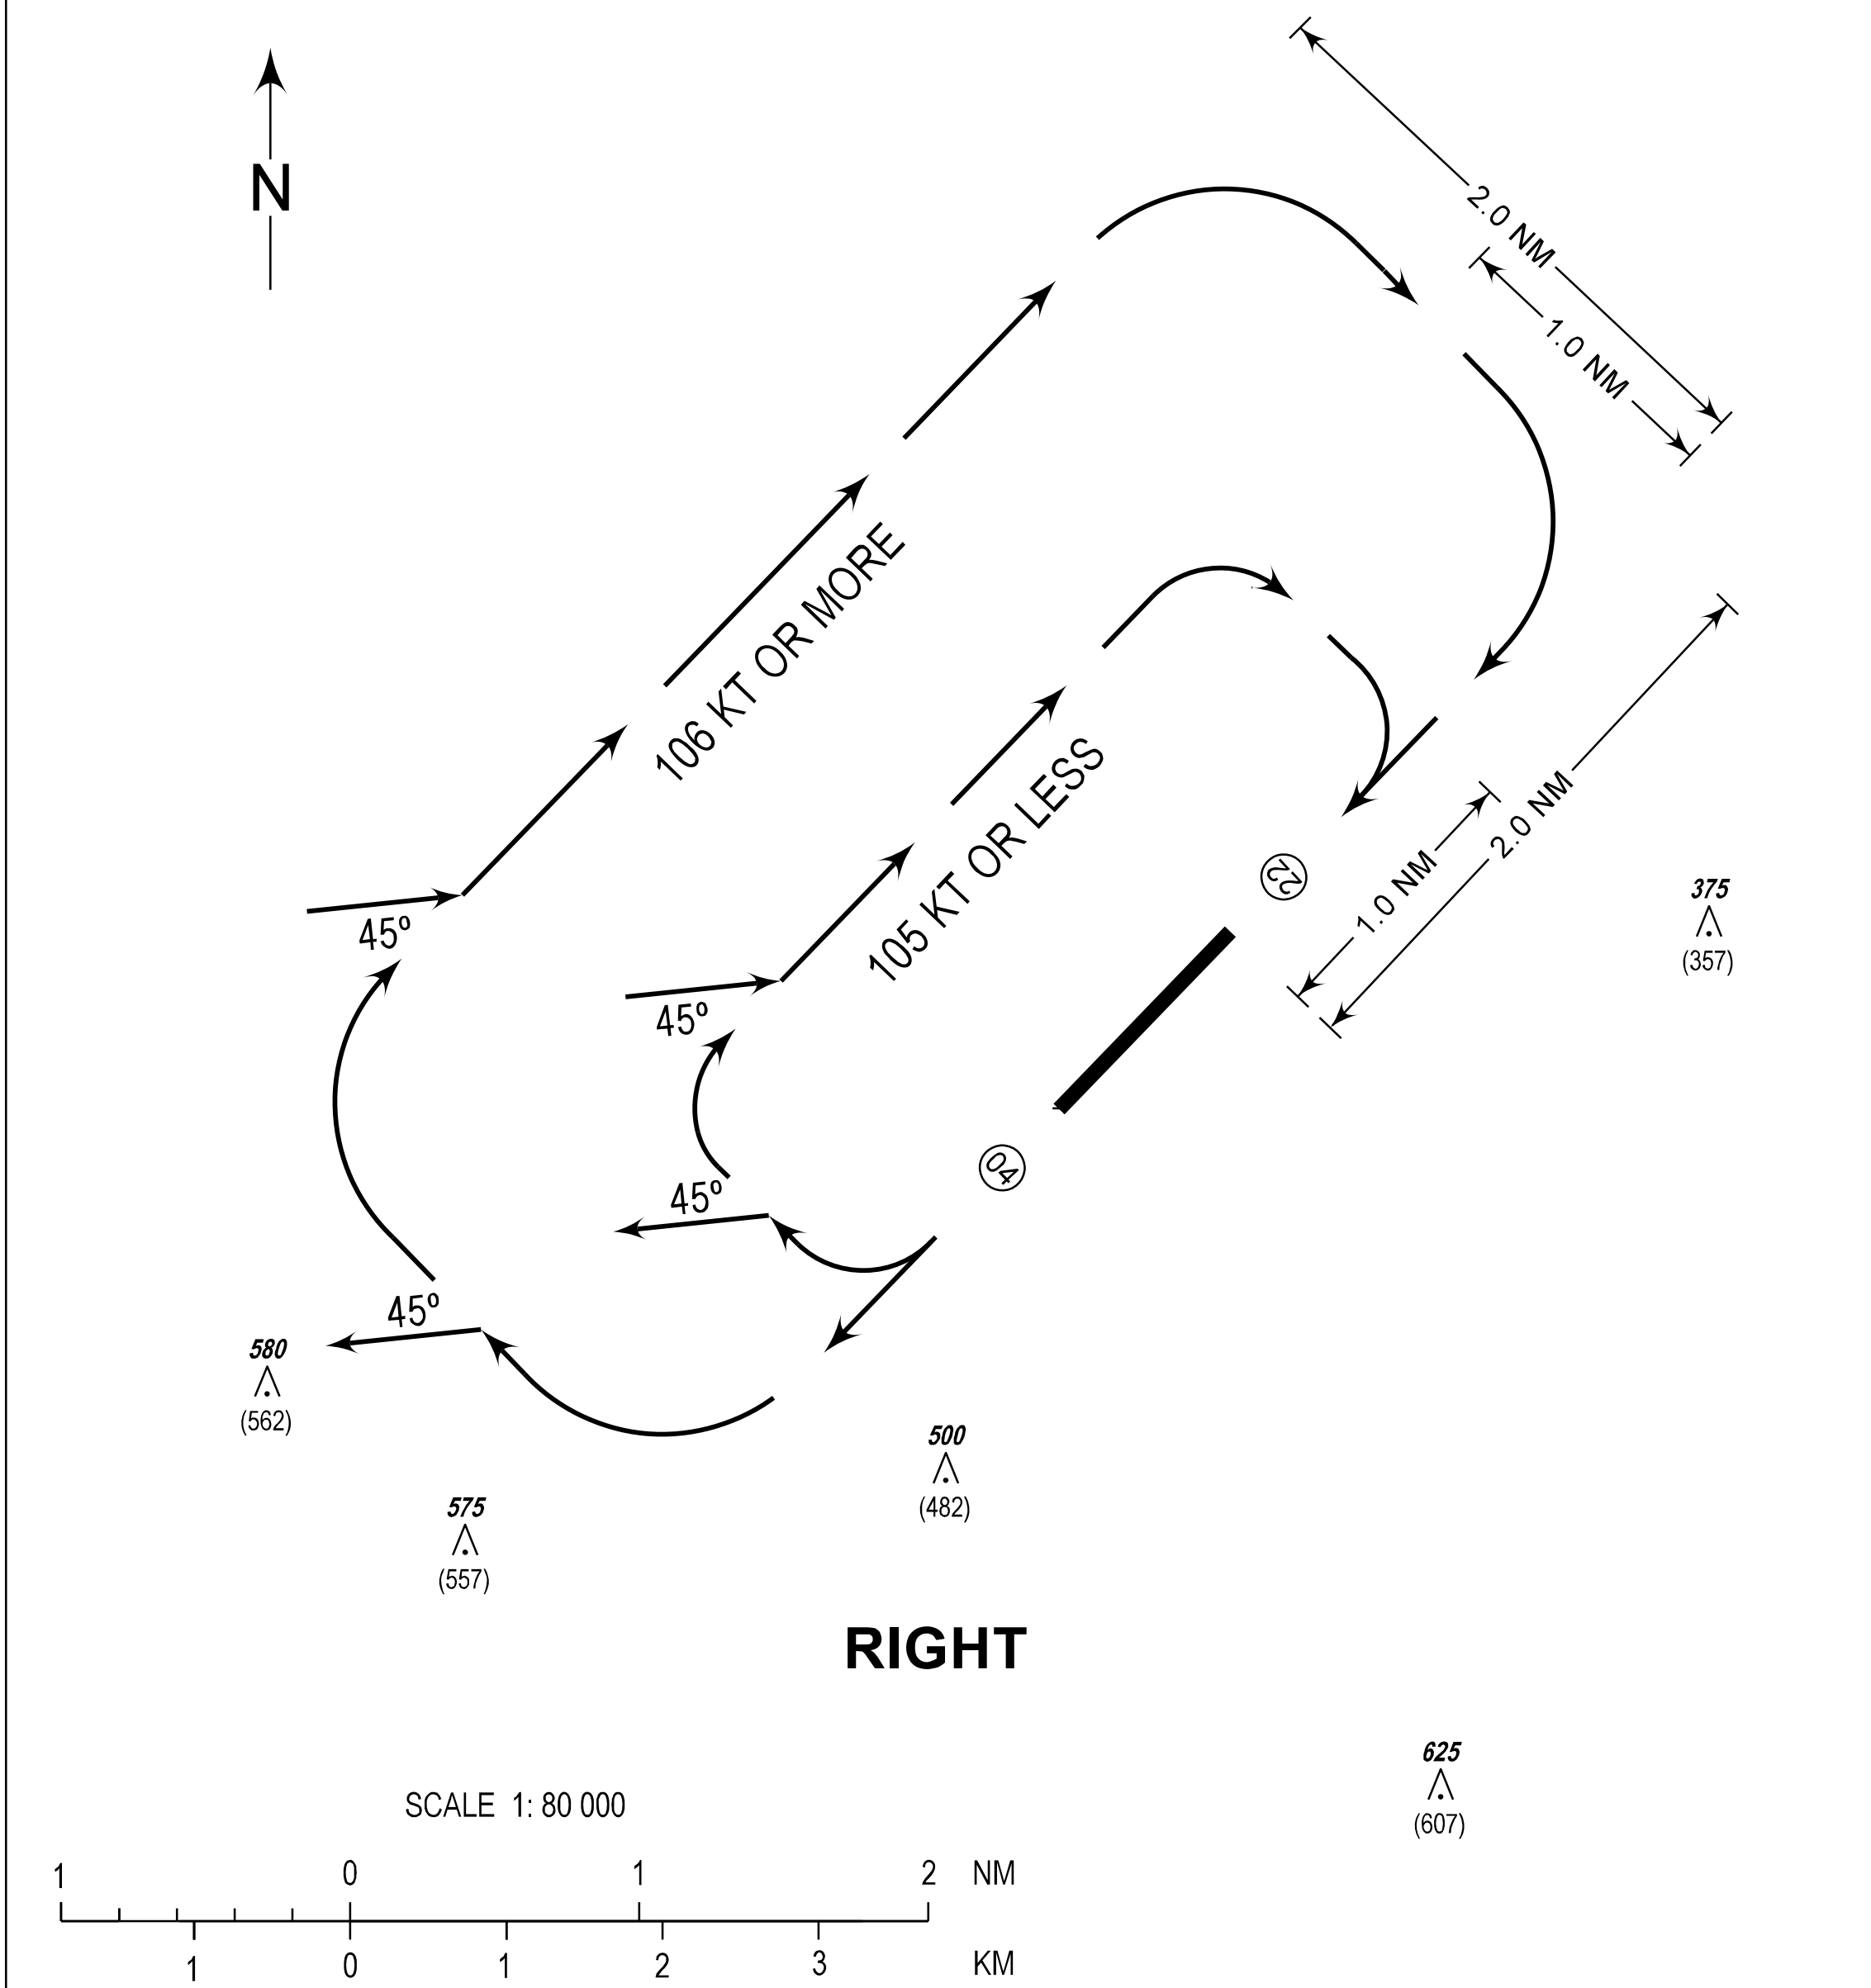

PROCEDURE

A) ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.

B) DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

CHANGES: ACFT CAT, Units of Measurement and VAR Deleted. AD ELEV. Data Resolution. OBST HGT. TFC Pattern Speed. Chart Page Format.