

ENR 1.12 INTERCEPTION OF CIVIL AIRCRAFT

1. Territorial Application

The following procedures and visual signals shall apply over territory and territorial waters of the Republic of the Philippines in the event of interception of an aircraft.

2. Procedures for Intercepting Aircraft

2.1 Approach Phase (Phase I)

- 2.1.1 The intercepting aircraft should approach the intercepted aircraft from astern. The element leader, or the single intercepting aircraft, should normally take up position on the left (port) side of the intercepted aircraft at the same level, within view of the pilot of the intercepted aircraft, and not closer to the aircraft than 300M. Any other participating aircraft should stay well clear of the intercepted aircraft, preferably above and behind. After speed and position have been established, the aircraft should, if necessary, proceed with Phase II of the procedure (see Figure I).

2.2 Identification Phase (Phase II)

- 2.2.1 The element leader, or the single intercepting aircraft, should begin closing gently on the intercepted aircraft, at the level, until no closer than absolutely necessary to obtain the information needed. The element leader, or the single intercepting aircraft, should use caution to avoid startling the flight crew or the passengers of the intercepted aircraft, keeping constantly in mind the fact that maneuvers considered normal to an intercepting aircraft may be considered hazardous to passengers and crew of civil aircraft. Any other participating aircraft should continue to stay well clear of the intercepted aircraft. Upon completion or identification, the intercepting aircraft should withdraw from the immediate vicinity of the intercepted aircraft as outlined in Phase III (see Figure II).

2.3 Post Identification Phase (Phase III)

- 2.3.1 The element leader, or the single intercepting aircraft, should break gently away from the intercepted in a shallow dive. Any participating aircraft should stay well clear of the intercepted aircraft and rejoin their leader (see Figure III).

2.4 Guidance Maneuvers



- 2.4.1 If, following the identification maneuvers in Phase I and II above, it is considered necessary to intervene in the navigation of the intercepted aircraft, the element leader, or the single intercepting aircraft, should normally take up a position slightly forward of, and on the left (port) side of the intercepted aircraft, to enable the pilot-in-command of the latter aircraft to see the visual signals given (see Figure IV).

3. Procedures for Intercepted Aircraft

- 3.1 An aircraft which is intercepted by another aircraft is required to immediately:
- Follow the instructions given by the intercepting aircraft, and respond to visual signals given;
 - Notify the appropriate air traffic services unit;
 - Attempt to establish radio communication with the intercepting aircraft or with the appropriate intercept control unit on frequency 121.5MHZ. If no contact is established, repeat this call on frequency 243MHZ;
 - If equipped with SSR transponder, select Mode A, Code 7700;
 - If radio contact with the intercepting aircraft is established but communication in a common language is not possible, attempt to convey essential information and acknowledge instructions by using the following phrases:

PHRASE	MEANING
WILCO	Understood, Will comply
CAN NOT	Unable to comply
REPEAT	Repeat your instruction
AM LOST	Position unknown
MAY DAY	I am in distress
HIJACK	I have been hijacked
LAND	I request to land
LAND (place name)	I request to land at (place name)
DESCEND	I require descent

- f. If any instructions received by radio from any sources conflict with those given by the intercepting aircraft by visual signals or by radio, request immediate clarification while continuing to comply with the visual or radio instructions given by the intercepting aircraft.

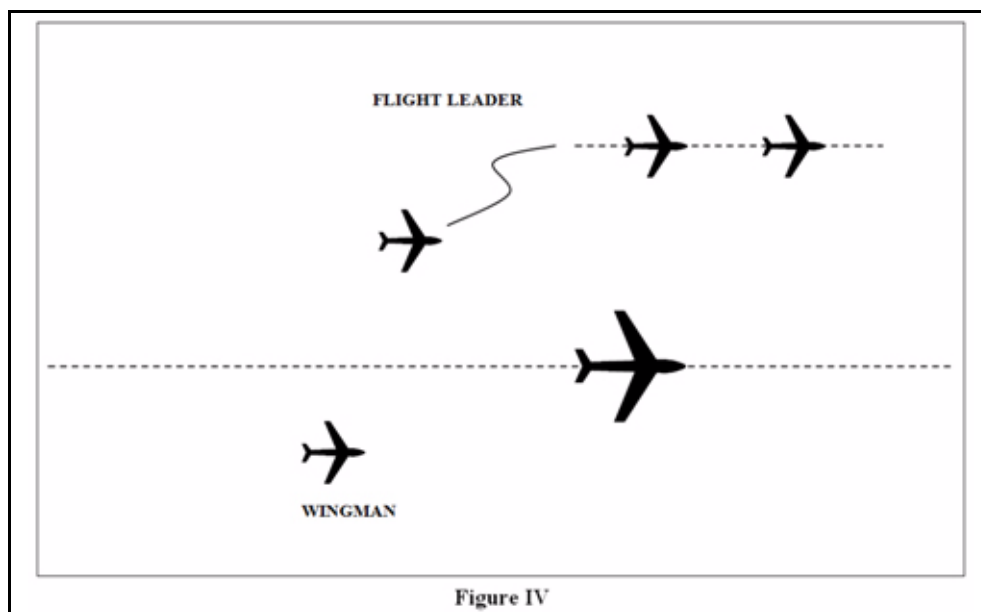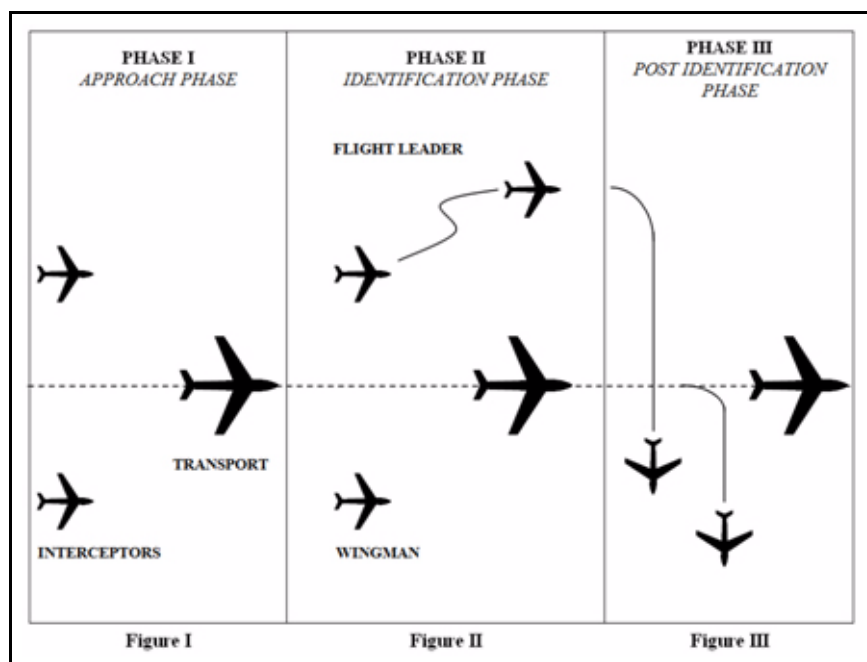

4. Signals in the Event of Interception

4.1 Signals initiated by intercepting aircraft and responses by intercepted aircraft.

SERIES	INTERCEPTING AIRCRAFT SIGNALS	MEANING	INTERCEPTED AIRCRAFT RESPONDS	MEANING
1	DAY - Rocking wings from a position in front and, normally, to the left of intercepted aircraft and, after acknowledgement, a slow level turn, normally to the left, on the desired heading. NIGHT - Same and, in addition, flashing navigational lights at irregular intervals. Note 1: Meteorological conditions or terrain may require the intercepting aircraft to take up a position in front and to the right of the intercepted aircraft and to make the subsequent turn to the right. Note 2: If the intercepted aircraft is not able to keep pace with the intercepting aircraft, the latter is expected to fly a series of racetrack patterns and to rock its wings each time it passes the intercepted aircraft.	You have been intercepted, follow me.	AEROPLANES: DAY - Rocking wings and following. NIGHT - Same and, in addition, flashing navigational lights at irregular intervals. HELICOPTERS: DAY & NIGHT - Rocking aircraft flashing navigational lights at irregular intervals and following.	Understood will comply.
2	DAY or NIGHT - An abrupt break away maneuver from the intercepted aircraft consisting of a climbing turn of 90 degrees or more without crossing the line of flight of the intercepted aircraft.	You may proceed.	AEROPLANES: DAY & NIGHT - Rocking wings. HELICOPTERS: DAY & NIGHT - Rocking aircraft.	Understood will comply.
3	DAY - Circling aerodrome, lowering landing gear and overflying runway in direction of landing or, if the intercepted aircraft is a helicopter, overflying the helicopter landing area. NIGHT - Same and, in addition, showing steady landing lights.	Land at this aerodrome.	AEROPLANES: DAY - Lowering landing gear, following the intercepting aircraft and, if after overflying the runway landing is considered safe, proceed to land. NIGHT - Same and, in addition, showing steady landing lights (if carried).	Understood will comply.

4.2 Signals initiated by intercepted aircraft and responses by intercepting aircraft.

SERIES	INTERCEPTING AIRCRAFT SIGNALS	MEANING	INTERCEPTED AIRCRAFT RESPONDS	MEANING
4	AEROPLANES: DAY - Raising landing gear while passing over landing runway at a height exceeding 300M (1000FT) but not exceeding 600M (2000FT) above the aerodrome level, and continuing to circle the aerodrome. NIGHT - Flashing landing lights while passing over landing runway at a height not exceeding 300M (1000FT) but not exceeding 600M (2000FT) above the aerodrome level, and continuing to circle the aerodrome. If unable to flash landing lights, flash any other lights available.	Aerodrome you have designated is inadequate.	DAY or NIGHT - If it is decided that the intercepted aircraft follow the intercepting aircraft to an alternate aerodrome, the intercepting aircraft release its landing gear and uses the Series 1 signals prescribed for intercepting aircraft. If its decided to release the intercepted aircraft, the intercepting aircraft uses the Series 2 signals prescribed for intercepting aircraft.	Understood follow me. Understood you may proceed.
5	AEROPLANES: DAY or NIGHT - Regular switching on and off of all available lights but in such a manner as to be distinct from flashing lights.	Can not comply.	DAY & NIGHT - Use Series 2 signals prescribed for intercepting aircraft.	Understood.
6	AEROPLANES: DAY & NIGHT - Irregular flashing of all available lights. HELICOPTERS: DAY & NIGHT - Irregular flashing of all available lights.	In distress.	DAY & NIGHT - Use Series 2 signals prescribed for intercepting aircraft.	Understood.