

AD 1.2 RESCUE AND FIRE FIGHTING SERVICES AND SNOW PLAN

1. Rescue and fire fighting services

- 1.1 Rescue and fire fighting equipment and services shall be provided at aerodromes serving commercial air transport operations and aerial works/heliports as mentioned in Civil Aviation Regulations (CAR) Aerodromes 2.6, 2.6.005.

Note: For heliports, special rules will apply.


- 1.2 Information about whether there is service and what the extent of that service is, is given on the relevant page for each aerodrome.
- 1.3 Scheduled or non-scheduled traffic with aeroplane carrying passengers is not allowed to use aerodromes without Rescue and Fire Fighting Services (RFFS).
- 1.4 Each aerodrome is categorized according to the table shown below. Temporary changes will be published by NOTAM.

Aerodrome Category	Foam Meeting Performance Level A		Foam Meeting Performance Level B		Foam Meeting Performance Level C		Complementary Agents	
	Water (L)	Discharge Rate Foam Solution/ Minute (L)	Water (L)	Discharge Rate Foam Solution/ Minute (L)	Water (L)	Discharge Rate Foam Solution/ Minute (L)	Dry Chemical Powders (KG)	Discharge Rate (KG/SEC)
1	2	3	4	5	6	7	8	9
1	350	350	230	230	160	160	45	2.25
2	1000	800	670	550	460	360	90	2.25
3	1800	1300	1200	900	820	630	135	2.25
4	3600	2600	2400	1800	1700	1100	135	2.25
5	8100	4500	5400	3000	3900	2200	180	2.25
6	11800	6000	7900	4000	5800	2900	225	2.25
7	18200	7900	12100	5300	8800	3800	225	2.25
8	27300	10800	18200	7200	12800	5100	450	4.50
9	36400	13500	24300	9000	17100	6300	450	4.50
10	48200	16600	32300	11200	22800	7900	450	4.50

Note: The quantities of water shown in columns 2, 4 and 6 are based on the average overall length of aeroplanes in a given category.

2. Snow plan

- 2.1 The ICAO methodology for assessing and reporting runway surface conditions, commonly known as the Global Reporting Format (GRF), enables the harmonized assessment and reporting of runway surface conditions and a correspondingly improved flight crew assessment of take-off and landing performance.
- 2.2 The CAA of the Philippines (CAAP) has given effect to the implementation of the GRF through the adoption of ICAO Annexes and PANS amendments in the Philippine Civil Aviation Regulations and Standards.
- 2.3 Information Flow
- 2.3.1 Aerodrome Operator provides runway surface information via Runway Condition Reporting (RCR).
- 2.3.2 Aircraft operators utilize the information in conjunction with the performance data provided by the aircraft manufacturer to determine if landing or take-off operations can be conducted safely and provide runway braking action AIREP.

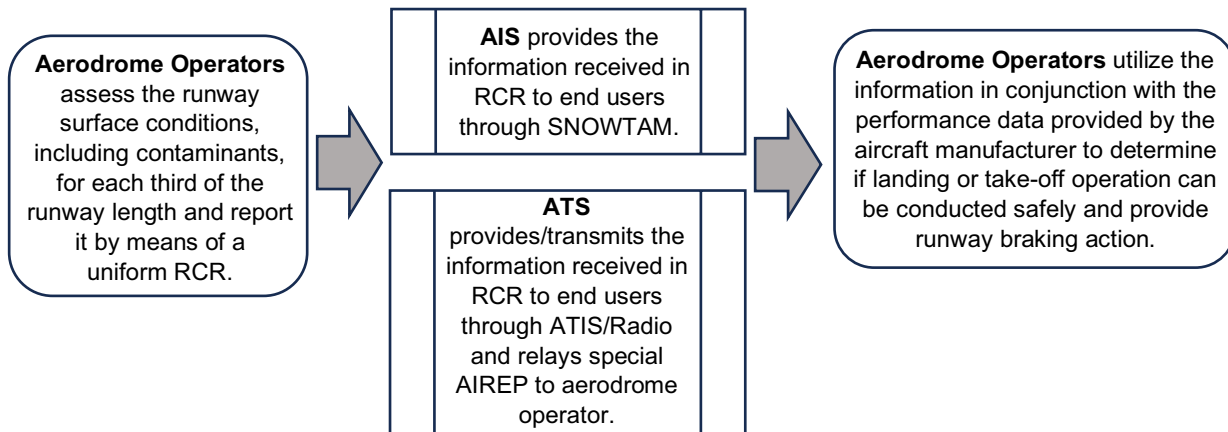

2.3.3 Aerodrome operators are responsible for assessing the condition of the runway for each third of the runway and issuing RCR. This report contains the Runway Condition Code (RWYCC) and information which describes the runway surface condition: type of contamination, depth, coverage for each third of the runway, etc. and other relevant information. This code is derived from the Runway Condition Assessment Matrix (RCAM) provided in the table below and associated procedures for downgrading and upgrading.

Runway Condition Assessment Matrix (RCAM) WET and DRY only


Assessment Criteria		Downgrade Assessment Criteria	
Runway Condition Code	Runway Surface Condition	Aeroplane deceleration or directional control observation	Pilot report of runway braking action
6	DRY	-	-
5	WET (The runway surface is covered by any visible dampness or water up to and including 3 MM depth)	Braking deceleration is normal for the wheel braking effort applied AND directional control is normal.	GOOD
4	-	Braking deceleration OR directional control is between Good and Medium.	GOOD TO MEDIUM
3	WET ("slippery wet" runway)	Braking deceleration is noticeably reduced for the wheel braking effort applied OR directional control is noticeably reduced.	MEDIUM
2	More than 3 MM depth of water: STANDING WATER	Braking deceleration OR directional control is between Medium and Poor.	MEDIUM TO POOR
1	-	Braking deceleration is significantly reduced for the wheel braking effort applied OR directional control is significantly reduced.	POOR
0	-	Braking deceleration is minimal to non-existent for the wheel braking effort applied OR directional control is uncertain.	LESS THAN POOR

2.4 Dissemination of Information

2.4.1 SNOWTAM will be issued to notify the presence of hazardous conditions due to standing water on the movement area.

2.4.2 Dissemination of information is provided through:

- a. AIS (SNOWTAM) and ATS facilities (ATIS/Radio) when runway is wholly or partly contaminated by standing water.
- b. ATS only (ATIS/Radio) when runway is wet with more than 25% coverage but no standing water on any runway third.

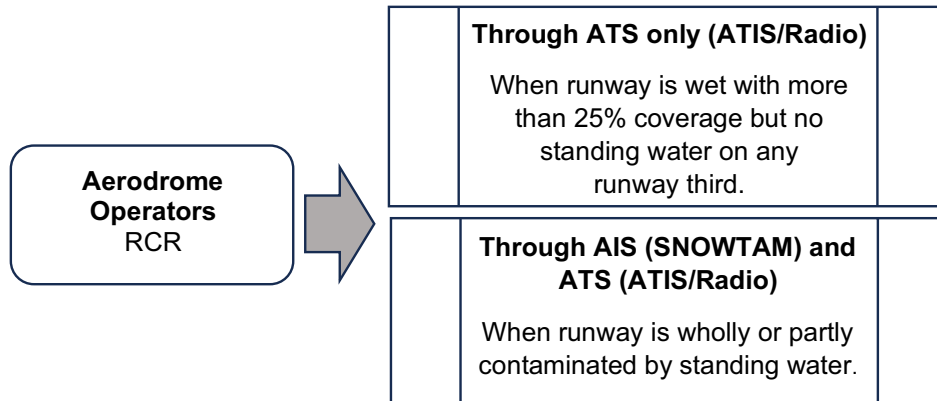

INTENTIONALLY
LEFT
BLANK