

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.16, AD-2.21

RPME AD 2.1 AERODROME LOCATION INDICATOR AND NAME**RPME - BUTUAN PRINCIPAL AIRPORT (Class 1)****RPME AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

1	ARP coordinates and site at AD	085706.6669N 1252841.2366E.
2	Direction and distance from (city)	272° 25', 5.57KM from Butuan town.
3	Elevation/Reference temperature	13.617M (44.675FT) AMSL.
4	Geoid undulation at AD ELEV PSN	Nil.
5	MAG VAR/Annual Change	0.6°W (2014) / 2.9' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Butuan Airport Bancasi, Butuan City 8600 Agusan del Norte Tel. No.: (085) 341-5142 (Telefax) AFS: RPMEYYYYX
7	Types of traffic permitted (IFR/VFR)	IFR-VFR.
8	Remarks	Nil.

RPME AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900.
2	Customs and immigration	Nil.
3	Health and sanitation	0000 - 0900 (First Aid Clinic).
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	2100 - 1300. For extension of SER, one (1) day PN is required.
6	MET Briefing Office	H24.
7	ATS	2100 - 1300.
8	Fuelling	2100 - 1300 (or by request).
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2100 - 1300.

RPME AD 2.5 PASSENGER FACILITIES

1	Hotels	Within the city.
2	Restaurants	Within the city.
3	Transportation	Vehicle for hire.
4	Medical facilities	Within the city.
5	Bank and Post Office	Within the city.
6	Tourist Office	Nil.
7	Remarks	Nil.

RPME AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT VI.
2	Rescue equipment	Two (2) Fire trucks [Two (2) Oshkosh Striker 4x4].
3	Capability for removal of disabled aircraft	Nil.
4	Remarks	Nil.

RPME AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: CONC. Strength: PCN 39.7.
2	Taxiway width, surface and strength	Width: 23M. Surface: CONC. Strength: Nil.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPME AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guidelines and visual docking/parking guidance system of aircraft stands	Nil.
2	RWY and TWY markings and LGT	RWY: Distance-to-go marker - both sides of the RWY, lighted, 300M interval THR to THR. TWY: Nil.
3	Stop bars	Nil.
4	Remarks	Nil.

RPME AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
12/APCH	Terrain 771FT	090055.4920N 1251413.4950E	Nil	Nil	Nil
	Terrain 719FT	085456.7280N 1252927.8450E	Nil	Nil	Nil
	Antenna 173FT	085709.8700N 1252745.3200E	Nil	Nil	Nil
12/TKOF	Terrain 2110FT	092140.8570N 1252958.9540E	Nil	Nil	Nil
30/APCH	Terrain 2750FT	085916.5150N 1254043.5120E	Nil	Nil	Nil
	Terrain 2372FT	085416.4950N 1254125.5080E	Nil	Nil	Nil

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
30/TKOF	Terrain 903FT	085319.3780N 1253655.6320E	Nil	Nil	Nil
	Antenna 223FT	085631.4900N 1253045.4000E	Nil	Nil	Nil
	Antenna 140FT	085645.0500N 1252915.1900E	Nil	Nil	Nil
	Tree 88FT	085724.7400N 1252812.6300E	Nil	Nil	Nil
12/30 LDG/TKOF	Antenna 315FT	085723.7200N 1253040.1900E	Terrain 6417.32FT	090547.9630N 1254217.9900E	Nil
	Antenna 200FT	085746.1600N 1252904.4200E	Terrain 4212.60FT	084735.9960N 1251827.0010E	Nil
	Antenna 190FT	085825.9000N 1252433.9000E	Terrain 3599.08FT	084905.9690N 1252018.0050E	Nil
	Antenna 140FT	085645.0500N 1252915.1900E	Terrain 2700.13FT	085106.2270N 1251337.3580E	Nil
	Tree 120FT	085716.6600N 1252807.0400E	Terrain 2427.82FT	085238.9850N 1252805.9980E	Nil
	Fireplace 115FT	085849.0300N 1252701.1500E	Terrain 2017.72FT	085541.9840N 1251844.9980E	Nil
	Tree 100FT	085657.5000N 1252910.4600E	Terrain 1955.38FT	085323.9720N 1251718.0010E	Nil
	Nil	Nil	Terrain 1778.22FT	091508.9710N 1253120.9800E	Nil
	Nil	Nil	Terrain 1630.68FT	091053.9870N 1253232.9920E	Nil
	Nil	Nil	Terrain 1282.81FT	085214.9720N 1253705.9870E	Nil
	Nil	Nil	Terrain 1184.38FT	085853.9880N 1251509.0030E	Nil
	Nil	Nil	Terrain 1095.80FT	085656.9950N 1251239.0040E	Nil
	Nil	Nil	Terrain 1069.55FT	090217.9890N 1251150.9860E	Nil
	Nil	Nil			
12/30	Terrain 3396FT	093625.4960N 1252634.4900E	Nil	Nil	Nil
	Antenna 391FT	085601.0700N 1253216.0700E	Nil	Nil	Nil

RPME AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	PAGASA.
2	Hours of service MET Office outside hours	H24. -
3	Office responsible for TAF preparation Periods of validity	- -
4	Trend forecast Interval of issuance	METAR. -
5	Briefing/consultation provided	Personal consultation.
6	Flight documentation Language(s) used	- English.
7	Charts and other information available for briefing or consultation	Nil.
8	Supplementary equipment available for providing information	Nil.
9	ATS units provided with information	Butuan Tower.
10	Additional information (limitation of service, etc.)	Nil.

RPME AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
12	116.31° GEO 115.62° MAG	2096M X 45M	PCN 47 R/B/W/U CONC	085721.7884N 1252810.4828E	8.354M
30	296.31° GEO 295.62° MAG	2096M X 45M	PCN 47 R/B/W/U CONC	085651.5453N 1252911.9901E	13.617M
Slope of RWY-SWY	SWY dimensions	CWY dimensions	Strip dimensions	OFZ	Remarks
7	8	9	10	11	12
0.25% uphill towards THR30	60M X 45M	160M X 300M	2301M X 150M	Nil	Nil
0.25% downhill towards THR12	60M X 45M	140M X 300M	2301M X 150M	Nil	Nil

RPME AD 2.13 DECLARED DISTANCES

RWY Designator	TORA	TODA	ASDA	LDA	Remarks
1	2	3	4	5	6
12	2096M	2256M	2156M	2096M	Nil
30	2096M	2236M	2156M	2096M	Nil

RPME AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
12	SALS 300 M LIH	Green WBAR: 2	PAPI Left 3.0° (14.01 M)	Nil
30	SALS 360 M LIH	Green WBAR: 2	PAPI Left 3.0° (15.38 M)	Nil
RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	1976 M, 60 M, White/Yellow (W/Y) White/White (W/W), LIH	Red WBAR: 2	Nil	SALS Location of Cross Bar: 300 M FM RWY THR. THR LGT NR of LGT fixture per WBAR: 6. PAPI Path WID: 0.3°. VIS RG: 6 miles. DIST FM THR: 256 M. RWY End LGT NR of LGT Fixture per WBAR: 6.
Nil	1976 M, 60 M, White/Yellow (W/Y) White/White (W/W), LIH	Red WBAR: 2	Nil	THR LGT NR of LGT Fixture per WBAR: 6. PAPI Path WID: 0.32°. VIS RG: 5 miles. DIST FM THR: 284 M. RWY End LGT NR of LGT Fixture per WBAR: 6.

RPME AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Location: 085656.02N 1252849.05E. Characteristics: ALTN FLG White/Green, 20-30 revolutions per minute. HR of OPS: During inclement weather.
2	LDI location and LGT Anemometer location and LGT	LDI: Nil. Anemometer: 085700.40N 1252849.22E. 748.5 M beyond THR 30, 102.5 M South of CL.
3	TWY edge and centre line lighting	Edge: Both TWY. Center line: Nil.
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at AD. Switch-over time 10 seconds.
5	Remarks	Nil.

RPME AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	BUTUAN AERODROME TRAFFIC ZONE (ATZ): A circle radius 5 NM centered on 085707N 1252841E (ARP). BUTUAN CONTROL ZONE (CTR): A circle radius 10 NM centered on 085707N 1252841E (ARP). BUTUAN TERMINAL CONTROL AREAS (TMA): FM 100610N 1252307E - 100524N 1262649E - 083128N 1262602E - 083133N 1253137E - 091816N 1245001E thence along an arc 44 NM radius centered on 085707.5N 1252901.6E (BN DVOR/DME) clockwise to 094103N 1252252E - 100610N 1252307E.
2	Vertical limits	ATZ: SFC up to but excluding 2000 FT. CTR: SFC up to 1500 FT. TMA: 1500 FT to FL200 (excluding ATS routes at FL130 and above); 1500 FT to <FL130 (ATS routes inside TMA below FL130); FL130 to FL200 (ATS routes inside TMA at FL130 and above).
3	Airspace classification	ATZ - B; CTR - D; TMA - D (exc ATS routes at FL130 and above; ATS routes inside TMA below FL130) and A (ATS routes inside TMA at FL130 and above).
4	ATS unit call sign Language(s)	Butuan Tower / Butuan Approach. English.
5	Transition altitude	11000 FT.
6	Hours of applicability	Nil.
7	Remarks	Nil.

RPME AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
TWR	Butuan Tower	123.2MHZ 122.0MHZ 5205KHZ 6802.5KHZ	2100 - 1300	PRI FREQ. SRY FREQ. P/P PRI FREQ (Mactan Network). P/P SRY FREQ (Davao Network). For extension of SER, one (1) day PN is required.
APP	Butuan Approach	121.3MHZ		Nil.

RPME AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
DVOR/DME	BN	112.5MHZ/ CH72X	H24	085707.5N 1252901.6E	Nil	300 M left of CL. VOR output - 100 W. DME output - 1 KW.

RPME AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulations

1.1 General

1.1.1 Pilots are advised to avoid tight turning on the asphalted portion of the runway.

RPME AD 2.22 FLIGHT PROCEDURES

1. General Procedures for VFR Flights

1.1 The following air traffic procedures shall apply to all VFR flights when entering, leaving or operating within Butuan Aerodrome Traffic Zone:

1.1.1 All arriving VFR flights shall contact Butuan Approach on 121.3MHZ upon entering Butuan TMA.

1.1.2 All instructions and traffic information shall be acknowledged by pilots.

1.1.3 IFR flights shall have priority over VFR flights.

1.1.4 Any deviation from the procedures shall be advised without delay to Butuan ATC.

1.2 VFR Procedures in RWY 12

1.2.1 Departure

- a. Northbound aircraft shall turn left towards Magallanes Shoreline. Report abeam Cabadbaran. Continue towards Tubay Shoreline. Advise switching frequency.
- b. Southbound aircraft shall make a straight-out departure towards Agusan River. Turn right abeam Macapagal Bridge. Keep to the west of Agusan River. Report over Bit-os. Report over Tungao. Advise switching frequency.
- c. Westbound aircraft shall turn left for a Left Downwind departure towards Buenavista Shoreline. Request ATC clearance to cross Final Approach RWY 12. Continue westward direction and report abeam Nasipit. Report abeam Magsaysay. Advise switching frequency.
 - i. If proceeding to Laguindingan Airport: From Magsaysay, continue climb VFR on a WNW direction towards Camiguin Island. Advise Butuan Approach when switching to Cagayan Approach.

1.2.2 Arrival

- a. From the North: Report abeam Tubay Shoreline. Follow Butuan Bay coastline and report abeam Cabadbaran. Report Magallanes Shoreline. Request to join Left Downwind RWY 12 or proceed as instructed by ATC.
- b. From the South: Report abeam Bayugan. Keep to the east side of Agusan River and report over Maguinda. Report abeam Bit-os and request to cross Final Approach of RWY 30. If approved, cross east of Macapagal Bridge to join Left Downwind of RWY 12 or proceed as instructed by ATC.
- c. From the West: Report abeam Odiongan. Follow Gingoog coastline and report abeam Magsaysay. Turn right towards Butuan Airport and report over Nasipit. Report approaching Buenavista and request for straight-in approach RWY 12 or proceed as instructed by ATC.

1.3 VFR Procedures in RWY 30

1.3.1 Departure

- a. Northbound aircraft shall turn right towards Magallanes Shoreline. Continue to the North and report abeam Cabadbaran. Report Tubay Shoreline. Advise switching frequency.
- b. Southbound aircraft shall turn right for a Right Downwind Departure towards Butuan City Hall. Request to cross Final Approach of RWY 30. If approved, cross west of Macapagal Bridge. Keep to the west of Agusan River and report over Bit-os. Report over Tungao. Advise switching frequency.
- c. Westbound aircraft shall turn left towards Buenavista Shoreline. Continue westward direction and report abeam Nasipit. Report abeam Magsaysay. Advise switching frequency.
 - i. If proceeding to Laguindingan Airport: From Magsaysay, continue on a WNW direction towards Camiguin Island. South of Camiguin Island, turn left on a SSW direction towards Laguindingan Airport.

1.3.2 Arrival

- a. From the North: Report abeam Tubay Shoreline. Follow Butuan Bay coastline and report abeam Cabadbaran. Report Magallanes Shoreline. Request to join Right Base of RWY 30 or proceed as instructed by ATC.
- b. From the South: Report when abeam Bayugan. Keep to the east side of Agusan River and report over Maguinda. Report approaching Macapagal Bridge and request for a straight-in approach RWY 30 or proceed as instructed by ATC.
- c. From the West: Report abeam Odiongan. Follow Gingoog coastline and report abeam Magsaysay. Turn right towards Butuan Airport and report over Nasipit. Continue towards Buenavista. Request to cross Final Approach RWY 30 to join Right Downwind of RWY 30 or proceed as instructed by ATC.

1.4 List of VFR Reporting Points

DESIGNATOR	COORDINATES	DISTANCE (NM)	RELATIVE POSITION FROM ARP
BAYUGAN	084255N 1254441E	20.0	SE
BIT-OS	085310N 1253227E	5.0	SE
BUENAVISTA	085857N 1252402E	5.0	WNW
CABADBARAN	090652N 1253129E	10.0	NNW
CITY HALL	085713N 1253145E	3.0	E
MACAPAGAL BRIDGE	085524N 1253327E	5.0	ESE
MAGALLANES	090140N 1253050E	5.0	NNW
MAGSAYSAY	090049N 1251032E	18.0	W
MAGUINDA	084858N 1253448E	10.0	SSE
NASIPIT	085817N 1252105E	10.0	WNW
ODIONGAN	085106N 1250934E	20.0	SW
TUBAY SHORELINE	091219N 1253315E	15.0	NNW
TUNGAO	084642N 1253410E	12.0	SE

2. VFR Departure Procedures from Butuan to Cagayan de Oro

- a. Take-off RWY 12 - Turn left after passing 1000 FT.
- b. Take-off RWY 30 - Straight-out departure.


- 2.1 Climb VFR on a WNW direction towards Camiguin Island maintaining an EVEN plus 500 FT altitude (4500 FT, 6500 FT, 8500 FT, etc).
- 2.2 At the southern tip of Camiguin Island, turn left on a SSW direction towards Cagayan de Oro Airport still maintaining an EVEN plus 500 FT altitude.
- 2.3 Contact Cagayan Tower for landing instructions abeam "SALAY".

VFR
ARR/DEP
CHART

AERODROME ELEV
45 FT

APP - 121.3
TWR - 123.2 / 122.0

AGUSAN DEL NORTE/Butuan (RPME)

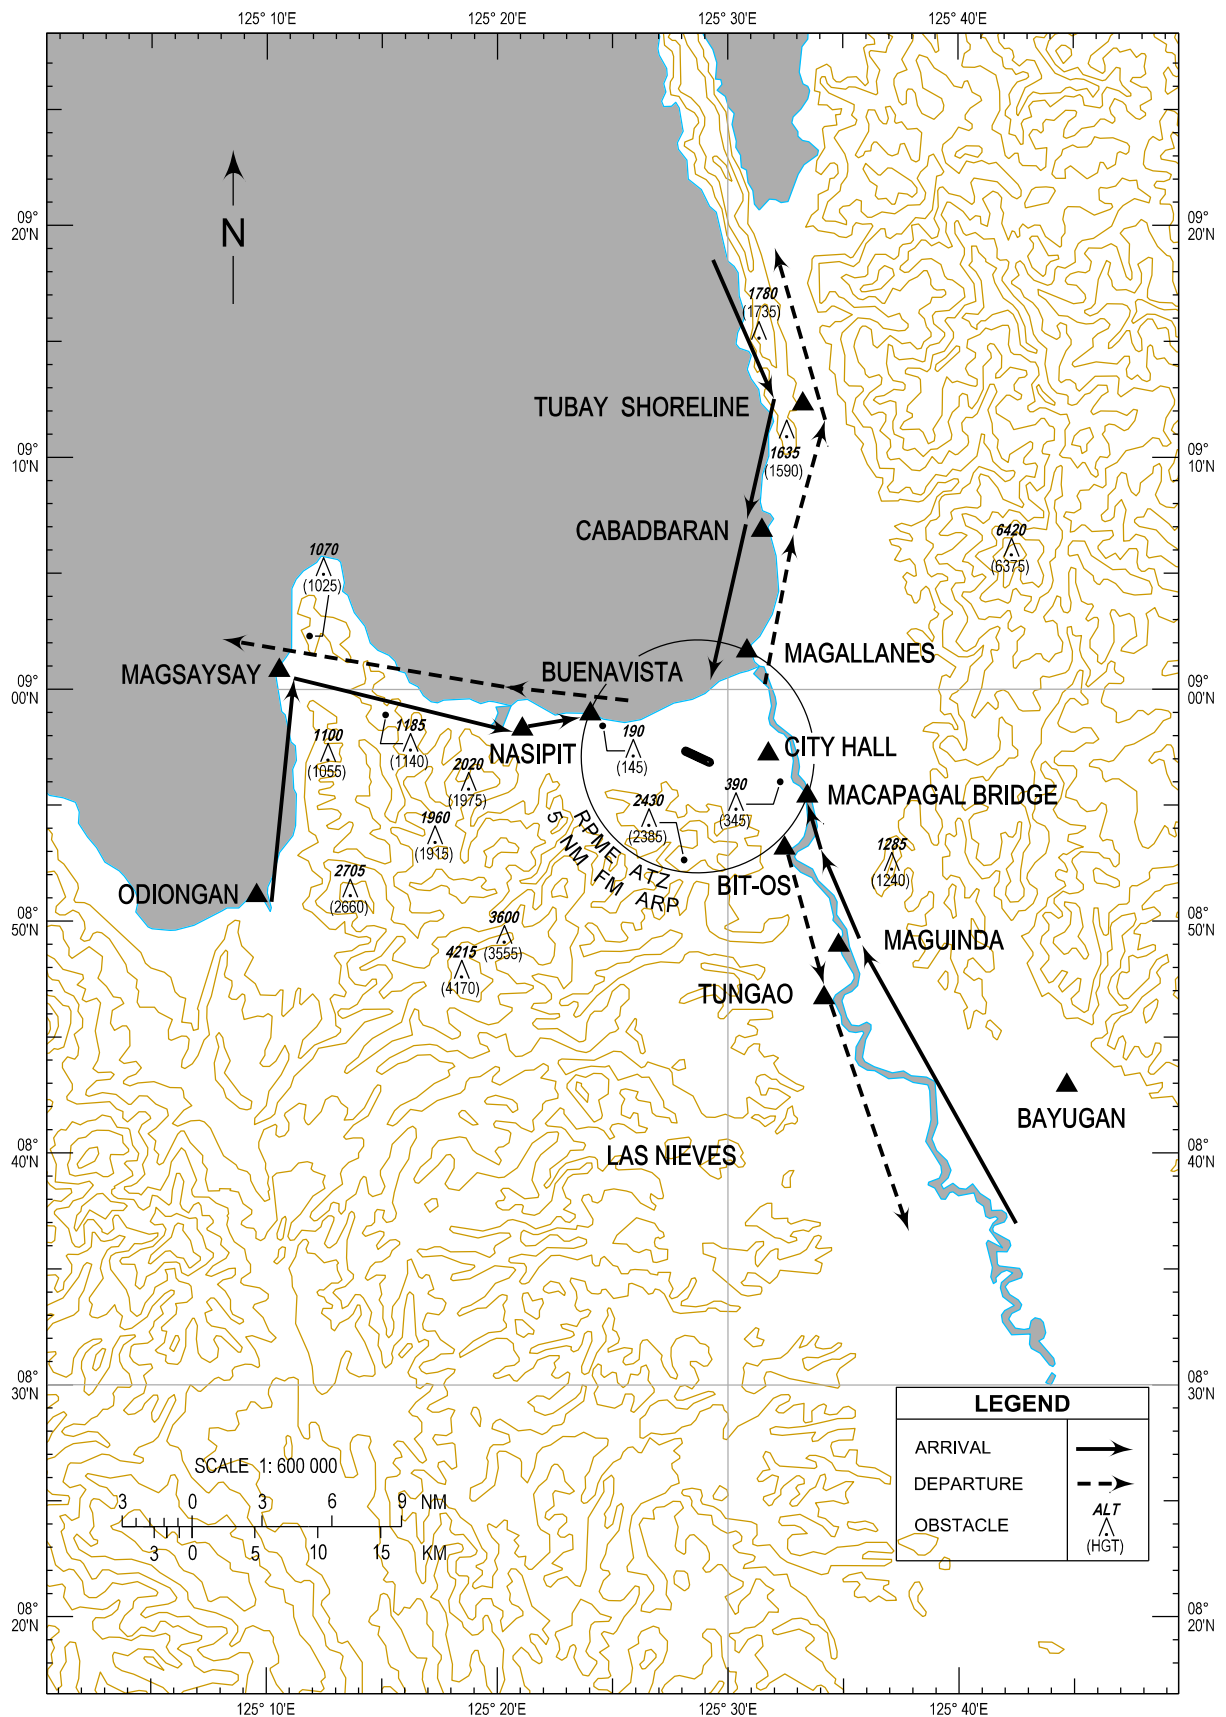

RPME AD 2.23 ADDITIONAL INFORMATION

- 1. Bird concentrations in the vicinity of the airport**
- 1.1 Pilots are advised to exercise caution during landing/take-off RWY 12/30 due to presence of birds in the vicinity.

RPME AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Area Chart - ICAO	RPME AD 2 - 15
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 12)	RPME AD 2 - 17
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 30)	RPME AD 2 - 19
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 12)	RPME AD 2 - 21
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 30)	RPME AD 2 - 23
Instrument Approach Chart - ICAO (RNP RWY 12)	RPME AD 2 - 25
Instrument Approach Chart - ICAO (RNP RWY 30)	RPME AD 2 - 27
Traffic Circuit Chart (RWY 12)	RPME AD 2 - 29
Traffic Circuit Chart (RWY 30)	RPME AD 2 - 30

INTENTIONALLY
LEFT
BLANK

LEGEND		
CONTROL AREA	(TMA)	
	(AWY)	
FLYOVER WAYPOINT		
FLY-BY WAYPOINT		
REPORTING POINT	(COMPULSORY)	
DEPARTURE/ARRIVAL ROUTING		<u>BAMPA1A</u>
DISTANCE IN NAUTICAL MILES		
MINIMUM FLIGHT ALTITUDE		3500
MAGNETIC (TRUE) TRACK		123° (123.1°T)

FOR DETAILS OF SID AND STAR PROCEDURE, SEE APPROPRIATE AD PAGES.

RADIO NAVIGATION AID	
NAME	BUTUAN
NAVAID TYPE AND FREQUENCY	DVOR/DME 112.5 Ch 72X
IDENTIFICATION	BN 
COORDINATES	N08 57 07.5 E125 29 01.6


INTENTIONALLY
LEFT
BLANK

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

TRANSITION
ALTITUDE
11000 FT

TWR - 123.2 / 122.0
APP - 121.3

AGUSAN DEL NORTE/Butuan (RPME)
RNP SID RWY 12
BAMPA1A KAWIT1A TACLO1A

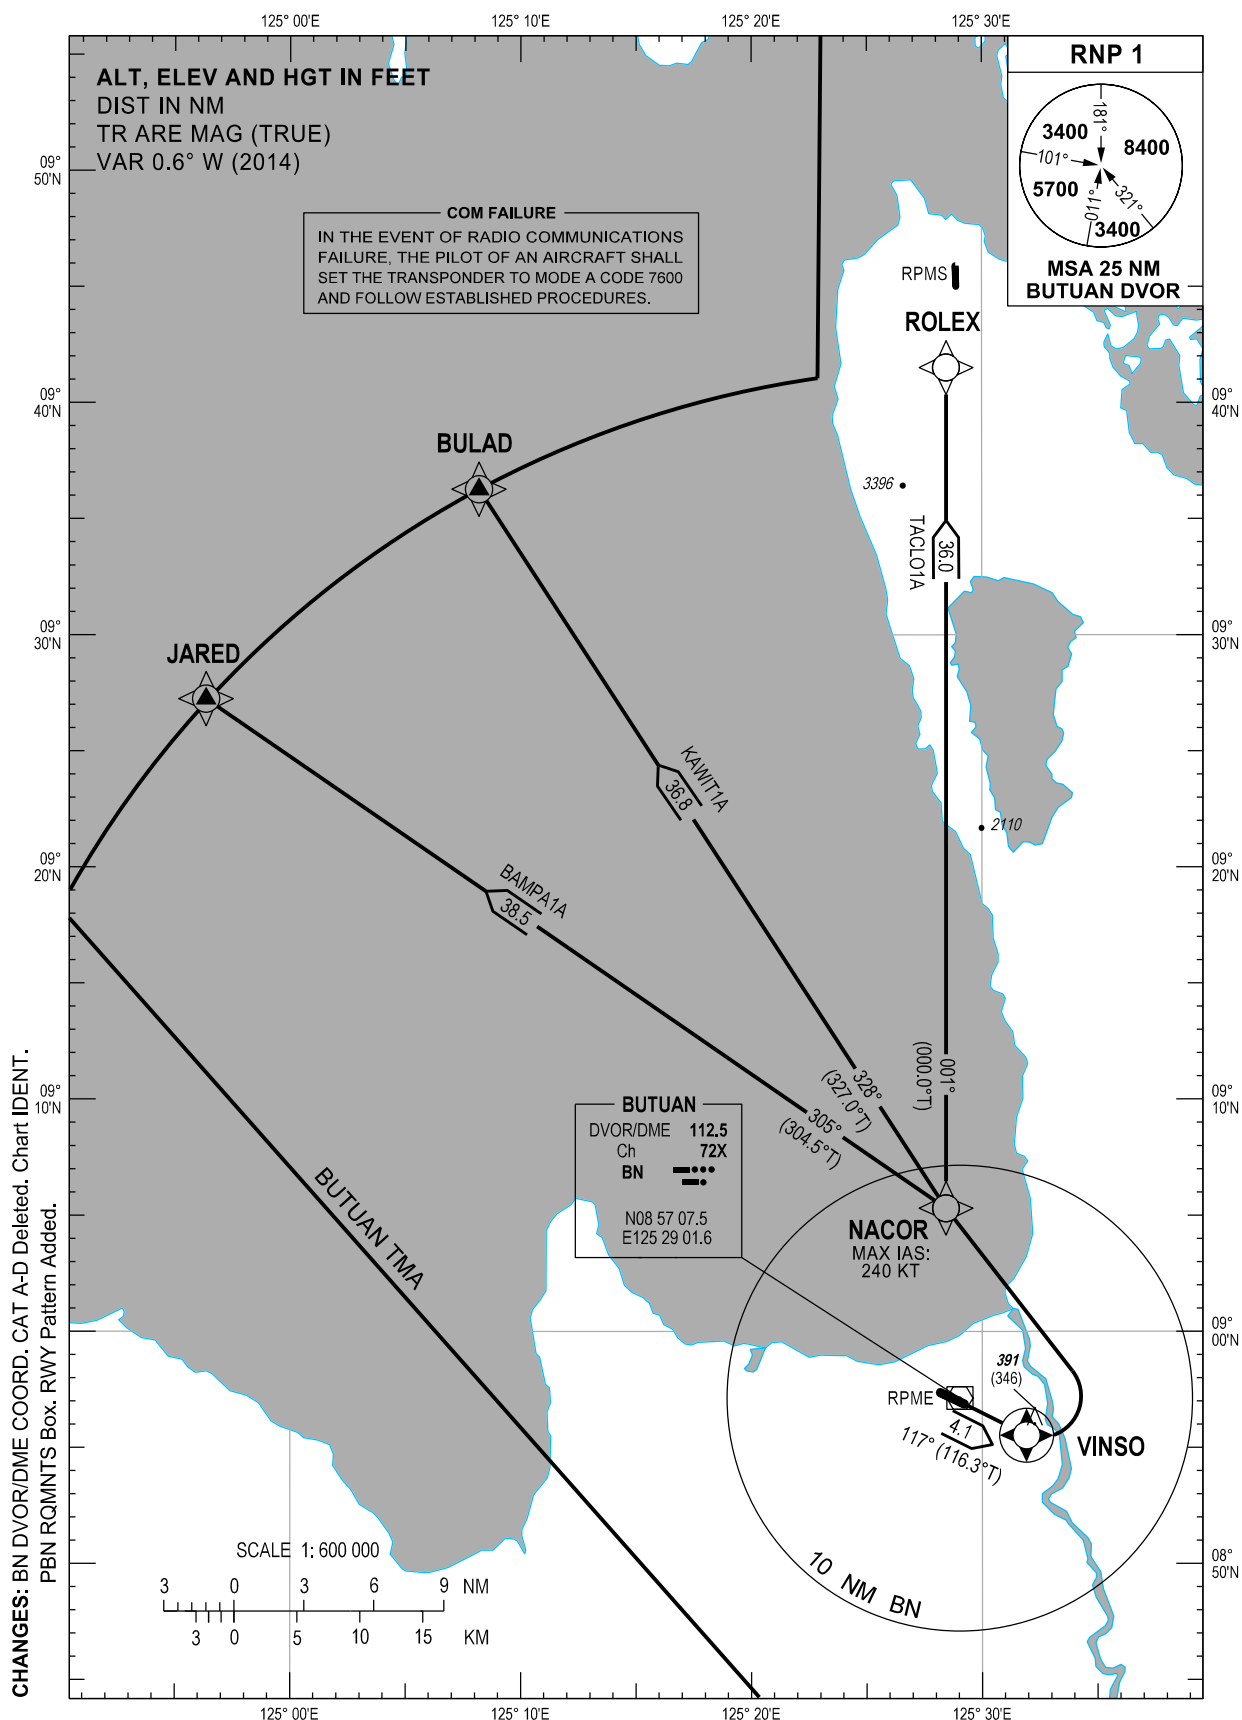

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
BAMPA1A	RWY 12	Climb (1) MAG Track 117°. At <u>VINSO</u> , turn left direct to NACOR, then to JARED. Do not exceed 240 KT until NACOR.	(1) Procedure design gradient of 3.4% until 700 FT, then 3.3%. For all departures, disregard: a) antenna 176 M after DER, 136 M on the right side of the axis, 140 FT (ALT). b) trees 421 M after DER, 7 M on the right side of the axis, 106 FT (ALT).
KAWIT1A		Climb (1) MAG Track 117°. At <u>VINSO</u> , turn left direct to NACOR, then to BULAD. Do not exceed 240 KT until NACOR.	
TACLO1A		Climb (1) MAG Track 117°. At <u>VINSO</u> , turn left direct to NACOR, then to ROLEX. Do not exceed 240 KT until NACOR.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BULAD	N09 36 16	E125 08 11	Fly-by
JARED	N09 27 15	E124 56 21	Fly-by
NACOR	N09 05 18	E125 28 26	Fly-by
ROLEX	N09 41 30	E125 28 27	Fly-by
VINSO	N08 55 31	E125 31 55	Flyover

PROPOSED CODING FOR DEPARTURE RNP SID RWY 12

Table 1: BAMPA1A

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CF	VINSO	Y	117° (116.3°)	-	4.1	-	-	-	-	RNP1	RW12
20	DF	NACOR	N	-	-	-	L	-	240	-	RNP1	RW12
30	TF	JARED	N	305° (304.5°)	-	38.5	-	-	-	-	RNP1	RW12

Table 2: KAWIT1A

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CF	VINSO	Y	117° (116.3°)	-	4.1	-	-	-	-	RNP1	RW12
20	DF	NACOR	N	-	-	-	L	-	240	-	RNP1	RW12
30	TF	BULAD	N	328° (327.0°)	-	36.8	-	-	-	-	RNP1	RW12

Table 3: TACLO1A

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CF	VINSO	Y	117° (116.3°)	-	4.1	-	-	-	-	RNP1	RW12
20	DF	NACOR	N	-	-	-	L	-	240	-	RNP1	RW12
30	TF	ROLEX	N	001° (000.0°)	-	36.0	-	-	-	-	RNP1	RW12

CHANGES: SID PROC Description. WPT COORD. Coding Table Title. DIST. MAG TR NACOR - BULAD.

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO


TRANSITION
ALTITUDE
11000 FT

TWR - 123.2 / 122.0
APP - 121.3

AGUSAN DEL NORTE/Butuan (RPME)

RNP SID RWY 30

BAMPA1B KAWIT1B TACLO1B

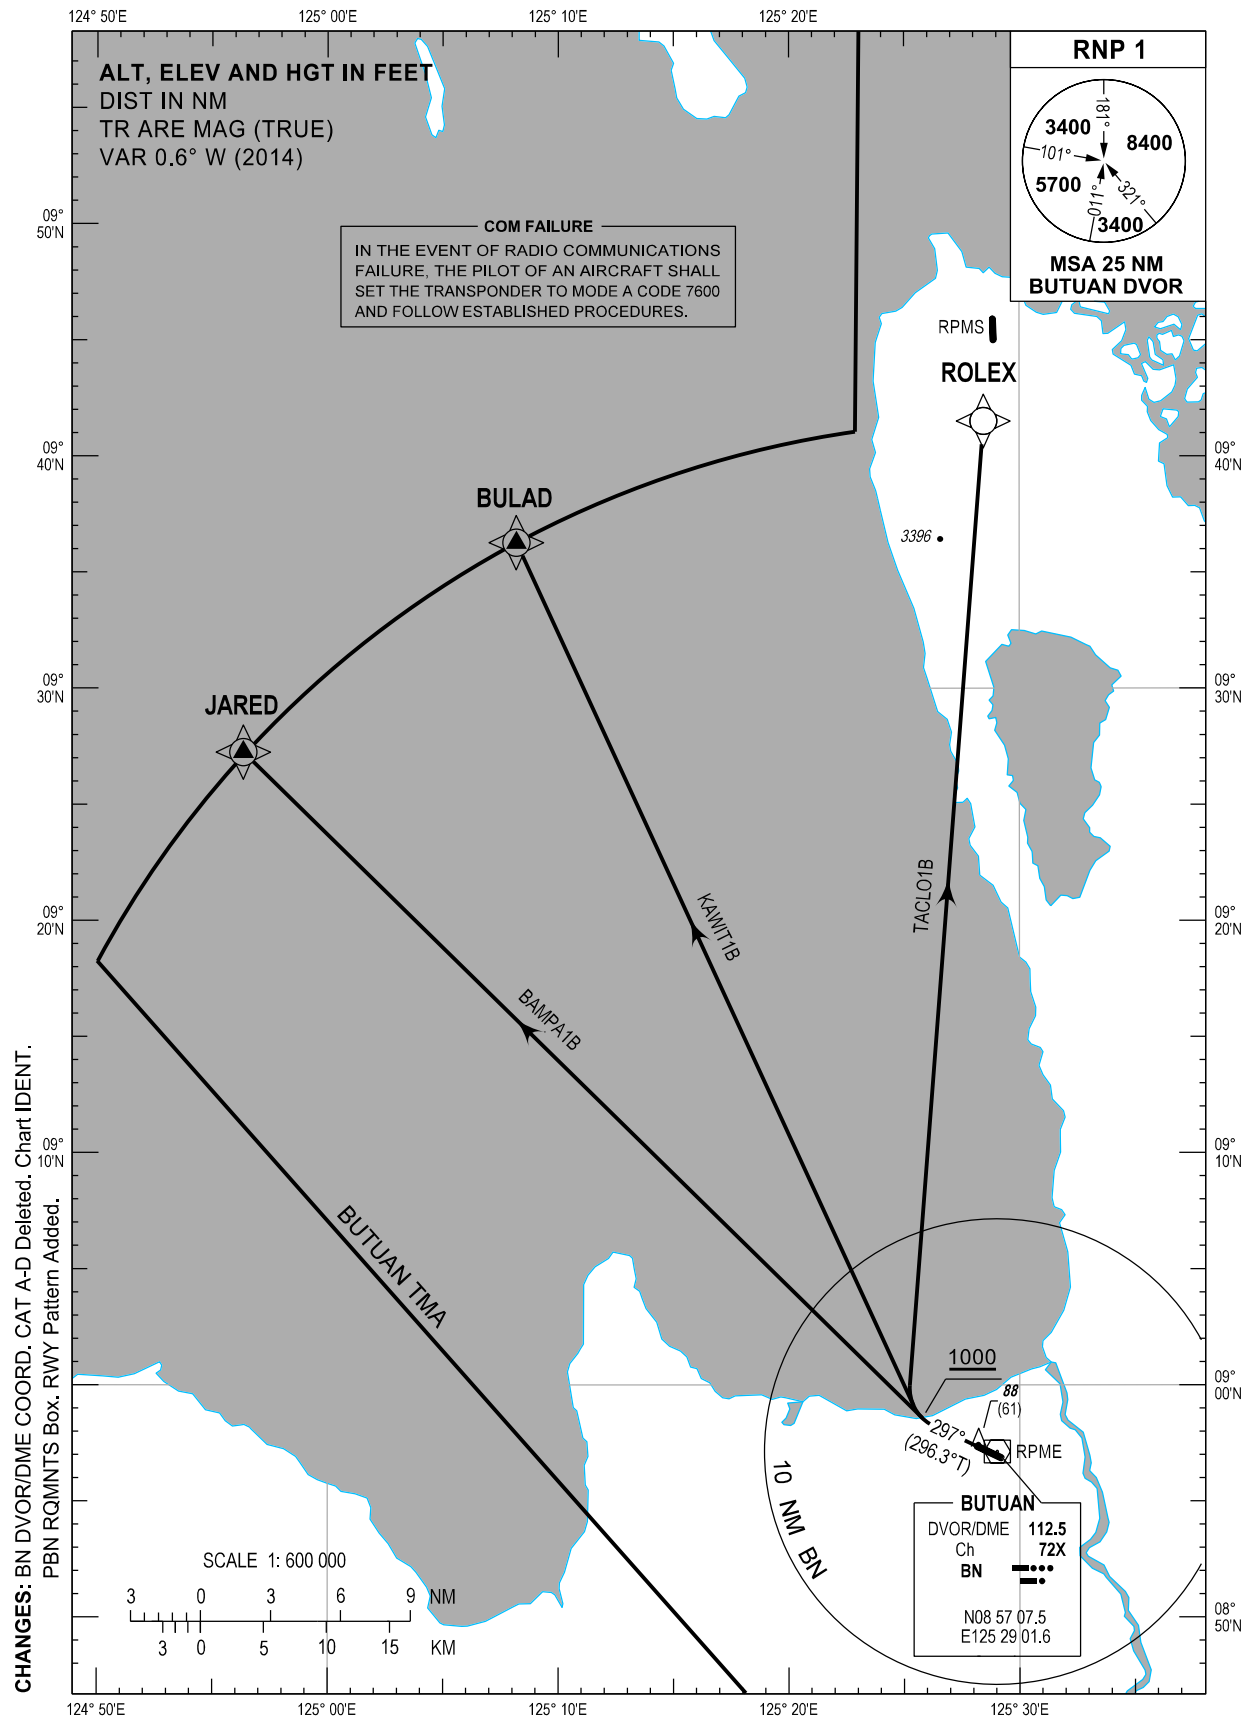

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
BAMPA1B	RWY 30	Climb MAG Track 297°. At 1000 FT (955 FT), turn right direct to JARED.	
KAWIT1B		Climb MAG Track 297°. At 1000 FT (955 FT), turn right direct to BULAD.	
TACLO1B		Climb MAG Track 297°. At 1000 FT (955 FT), turn right direct to ROLEX.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BULAD	N09 36 16	E125 08 11	Fly-by
JARED	N09 27 15	E124 56 21	Fly-by
ROLEX	N09 41 30	E125 28 27	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 30

Table 1: BAMPA1B

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	297° (296.3°)	-	-	-	+1000	-	-	RNP1	RW30
20	DF	JARED	N	-	-	-	R	-	-	-	RNP1	RW30

Table 2: KAWIT1B

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	297° (296.3°)	-	-	-	+1000	-	-	RNP1	RW30
20	DF	BULAD	N	-	-	-	R	-	-	-	RNP1	RW30

Table 3: TACLO1B

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	297° (296.3°)	-	-	-	+1000	-	-	RNP1	RW30
20	DF	ROLEX	N	-	-	-	R	-	-	-	RNP1	RW30

CHANGES: WPT COORD. Coding Table Title.

AGUSAN DEL NORTE/Butuan (RPME)
RNP STAR RWY 12
BAMPA2A KAWIT2A TACLO2A



WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BULAD	N09 36 16	E125 08 11	Fly-by
JARED	N09 27 15	E124 56 21	Fly-by
MERLI	N09 06 49	E125 13 32	Fly-by
RAFIL	N09 20 33	E125 22 06	Fly-by
RALAS	N09 07 47	E125 18 13	Fly-by
ROLEX	N09 41 30	E125 28 27	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 12

Table 1: BAMPA2A

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	JARED	-	-	-	-	-	+10000	-	-	RNP1	-
20	TF	MERLI	N	141° (140.1°)	-	26.5	-	+2500	250	-	RNP1	-

Table 2: KAWIT2A

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	BULAD	-	-	-	-	-	+10000	-	-	RNP1	-
20	TF	MERLI	N	170° (169.8°)	-	29.8	-	+2500	250	-	RNP1	-

Table 3: TACLO2A

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	ROLEX	-	-	-	-	-	+10000	-	-	RNP1	-
20	TF	RAFIL	N	197° (196.8°)	-	21.8	-	+4900	-	-	RNP1	-
30	TF	RALAS	N	197° (196.8°)	-	13.3	-	+2500	250	-	RNP1	-

CHANGES: WPT COORD. Coding Table Title. DIST.

STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO


TRANSITION
ALTITUDE
11000 FT

APP - 121.3
TWR - 123.2 / 122.0

AGUSAN DEL NORTE/Butuan (RPME)

RNP STAR RWY 30

BAMPA2B KAWIT2B TACLO2B

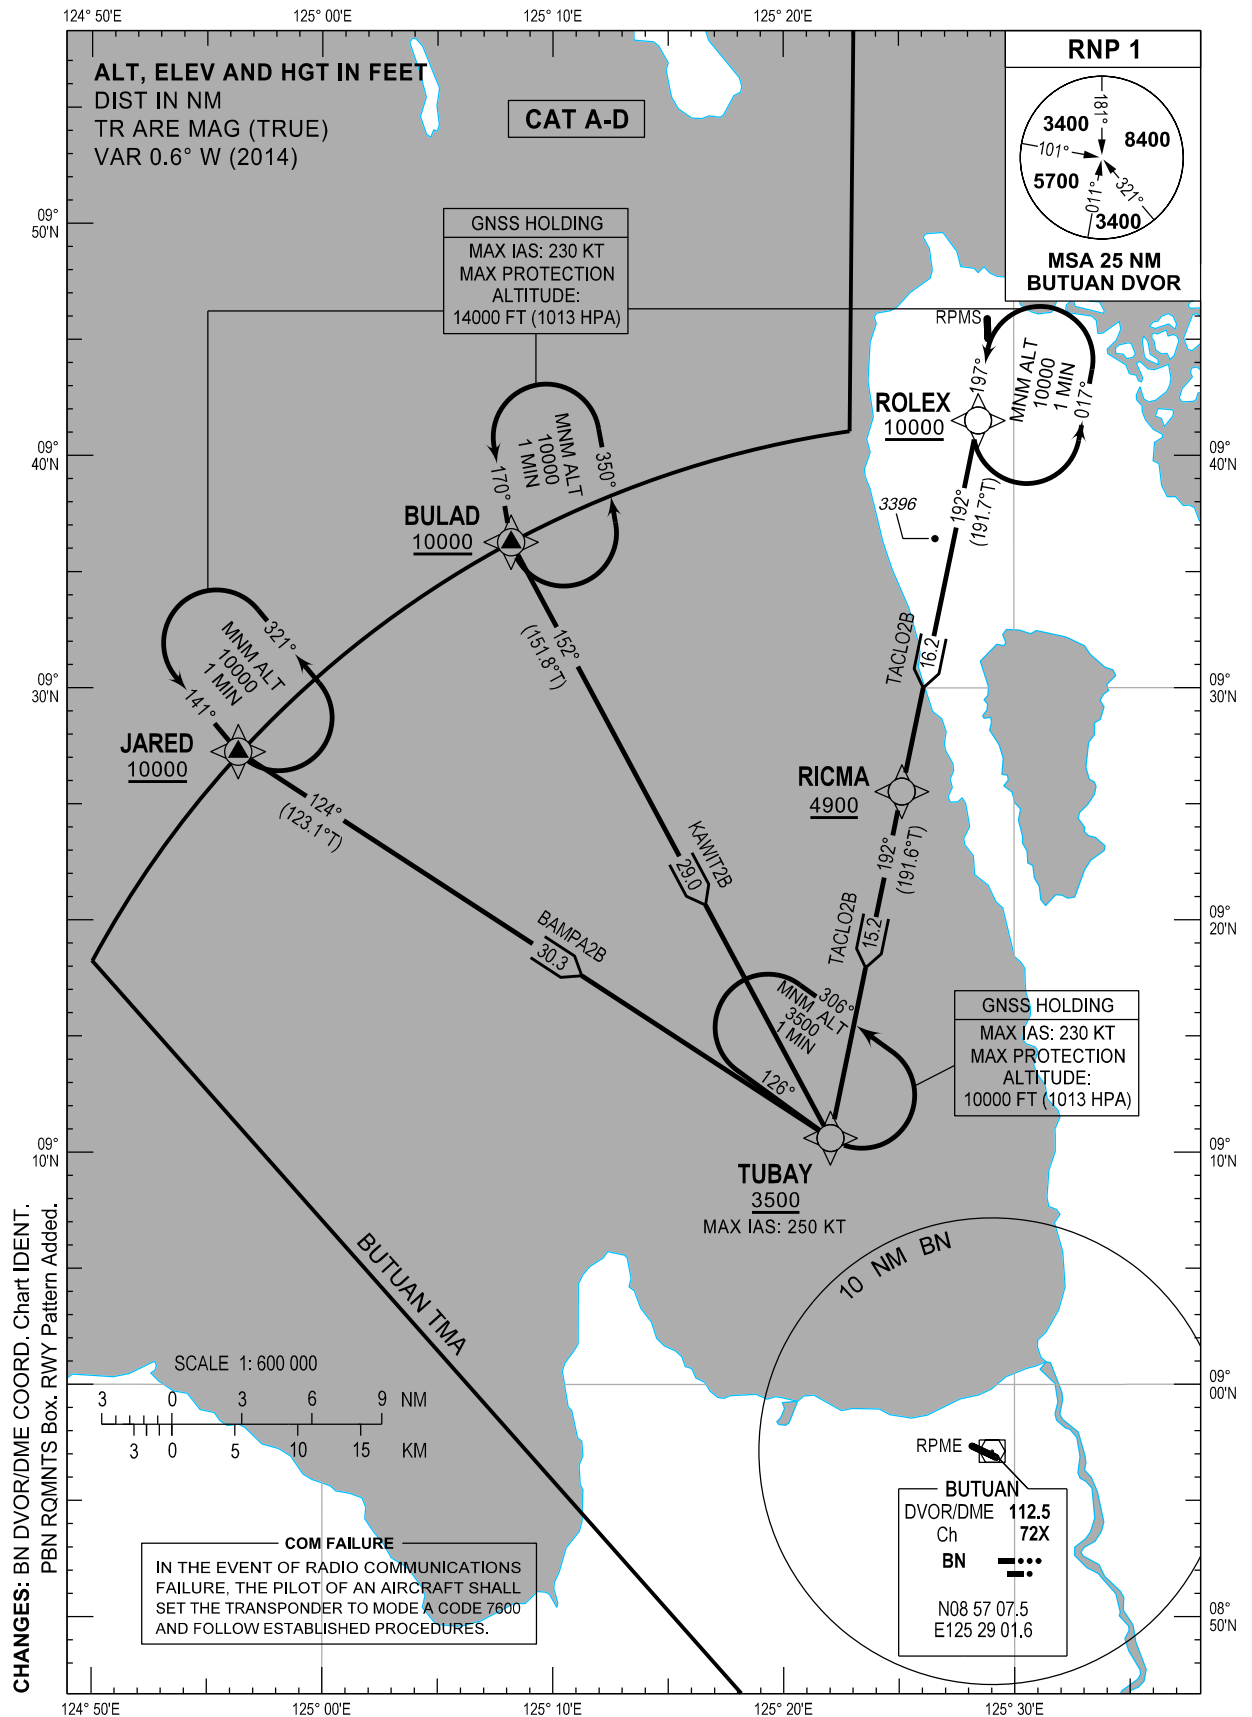

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BULAD	N09 36 16	E125 08 11	Fly-by
JARED	N09 27 15	E124 56 21	Fly-by
RICMA	N09 25 32	E125 25 08	Fly-by
ROLEX	N09 41 30	E125 28 27	Fly-by
TUBAY	N09 10 37	E125 22 02	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 30

Table 1: BAMP2B

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	JARED	-	-	-	-	-	+10000	-	-	RNP1	-
20	TF	TUBAY	N	124° (123.1°)	-	30.3	-	+3500	250	-	RNP1	-

Table 2: KAWIT2B

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	BULAD	-	-	-	-	-	+10000	-	-	RNP1	-
20	TF	TUBAY	N	152° (151.8°)	-	29.0	-	+3500	250	-	RNP1	-

Table 3: TACLO2B


SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	ROLEX	-	-	-	-	-	+10000	-	-	RNP1	-
20	TF	RICMA	N	192° (191.7°)	-	16.2	-	+4900	-	-	RNP1	-
30	TF	TUBAY	N	192° (191.6°)	-	15.2	-	+3500	250	-	RNP1	-

CHANGES: WPT COORD. Coding Table Title.

HEIGHTS RELATED TO
THR RWY 12 - ELEV **27 FT**

APP - 121.3
TWR - 123.2 / 122.0


RNP RWY 12

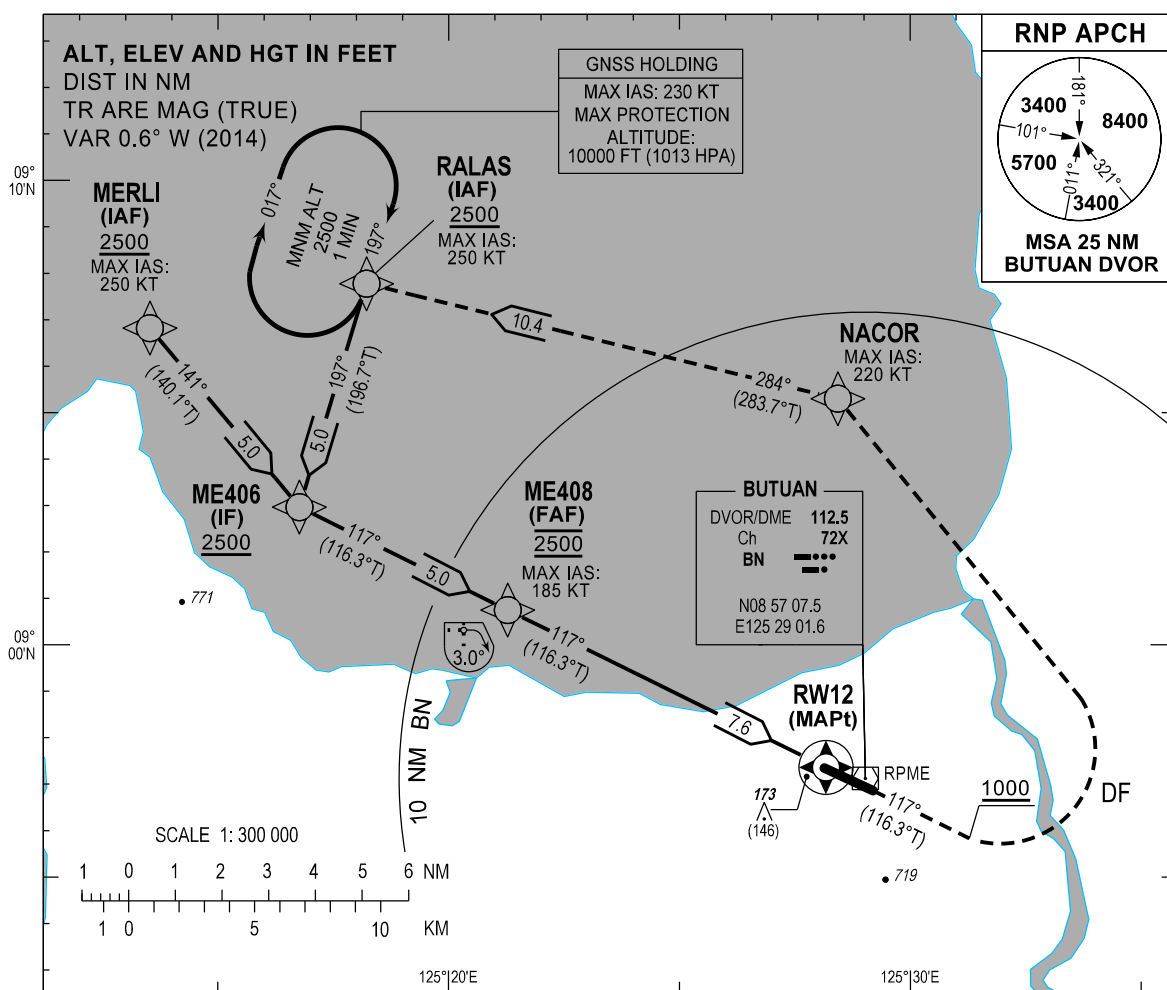

TRANSITION ALT : 11000 FT
TRANSITION LEVEL : FL130

MISSED APPROACH

Climb MAG track **117°**. At **1000 FT (973 FT)**, turn left direct to **NACOR** climbing to **2500 FT (2473 FT)**, then to **RALAS**. Do not turn before **MAPt**. Do not exceed **220 KT** until **NACOR**.

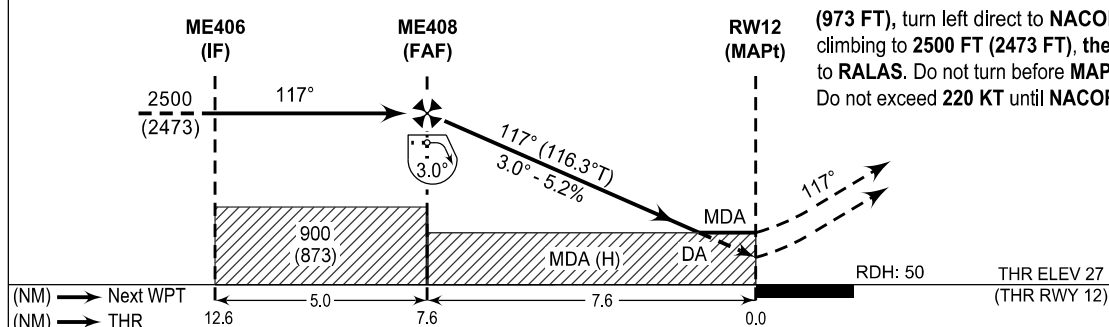

CHANGE: MA TO READ AS MISSED APCH.

OCA/H	MISSED APCH CLIMB GRADIENT	A	B	C	D
LNAV/VNAV	2.50%	475 (448)	500 (473)	526 (499)	549 (522)
	3.00%	427 (400)	454 (427)	483 (456)	507 (480)
	4.00%	419 (392)			437 (410)
	5.00%	419 (392)			
LNAV	2.50%	508 (481)	531 (504)	554 (527)	574 (547)
	3.00%	465 (438)	493 (466)	521 (494)	544 (517)
	4.00%	419 (392)		455 (428)	486 (459)
	5.00%	419 (392)			427 (400)

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
MERLI	N09 06 49	E125 13 32	Fly-by
ME406	N09 02 58	E125 16 46	Fly-by
ME408	N09 00 45	E125 21 17	Fly-by
NACOR	N09 05 18	E125 28 26	Fly-by
RALAS	N09 07 47	E125 18 13	Fly-by
RW12	N08 57 21.79	E125 28 10.48	Flyover

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 12

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	RALAS	-	-	-	-	-	+2500	250	-	RNP APCH	RALAS
20	TF	ME406	N	197° (196.7°)	-	5.0	-	-	-	-	RNP APCH	RALAS
10	IF	MERLI	-	-	-	-	-	+2500	250	-	RNP APCH	MERLI
20	TF	ME406	N	141° (140.1°)	-	5.0	-	-	-	-	RNP APCH	MERLI
10	IF	ME406	-	-	-	-	-	+2500	-	-	RNP APCH	-
20	TF	ME408	N	117° (116.3°)	-	5.0	-	@2500	185	-	RNP APCH	-
30	TF	RW12	Y	117° (116.3°)	-	7.6	-	+95	-	-3.0	RNP APCH	-
40	CA	-	-	117° (116.3°)	-	-	-	+1000	-	-	RNP APCH	-
50	DF	NACOR	N	-	-	-	L	-	220	-	RNP APCH	-
60	TF	RALAS	-	284° (283.7°)	-	10.4	-	+2500	250	-	RNP APCH	-


INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 45 FT
HEIGHTS RELATED TO
THR RWY 30 - ELEV 45 FT

APP - 121.3
TWR - 123.2 / 122.0

AGUSAN DEL NORTE/Butuan (RPME)

RNP RWY 30

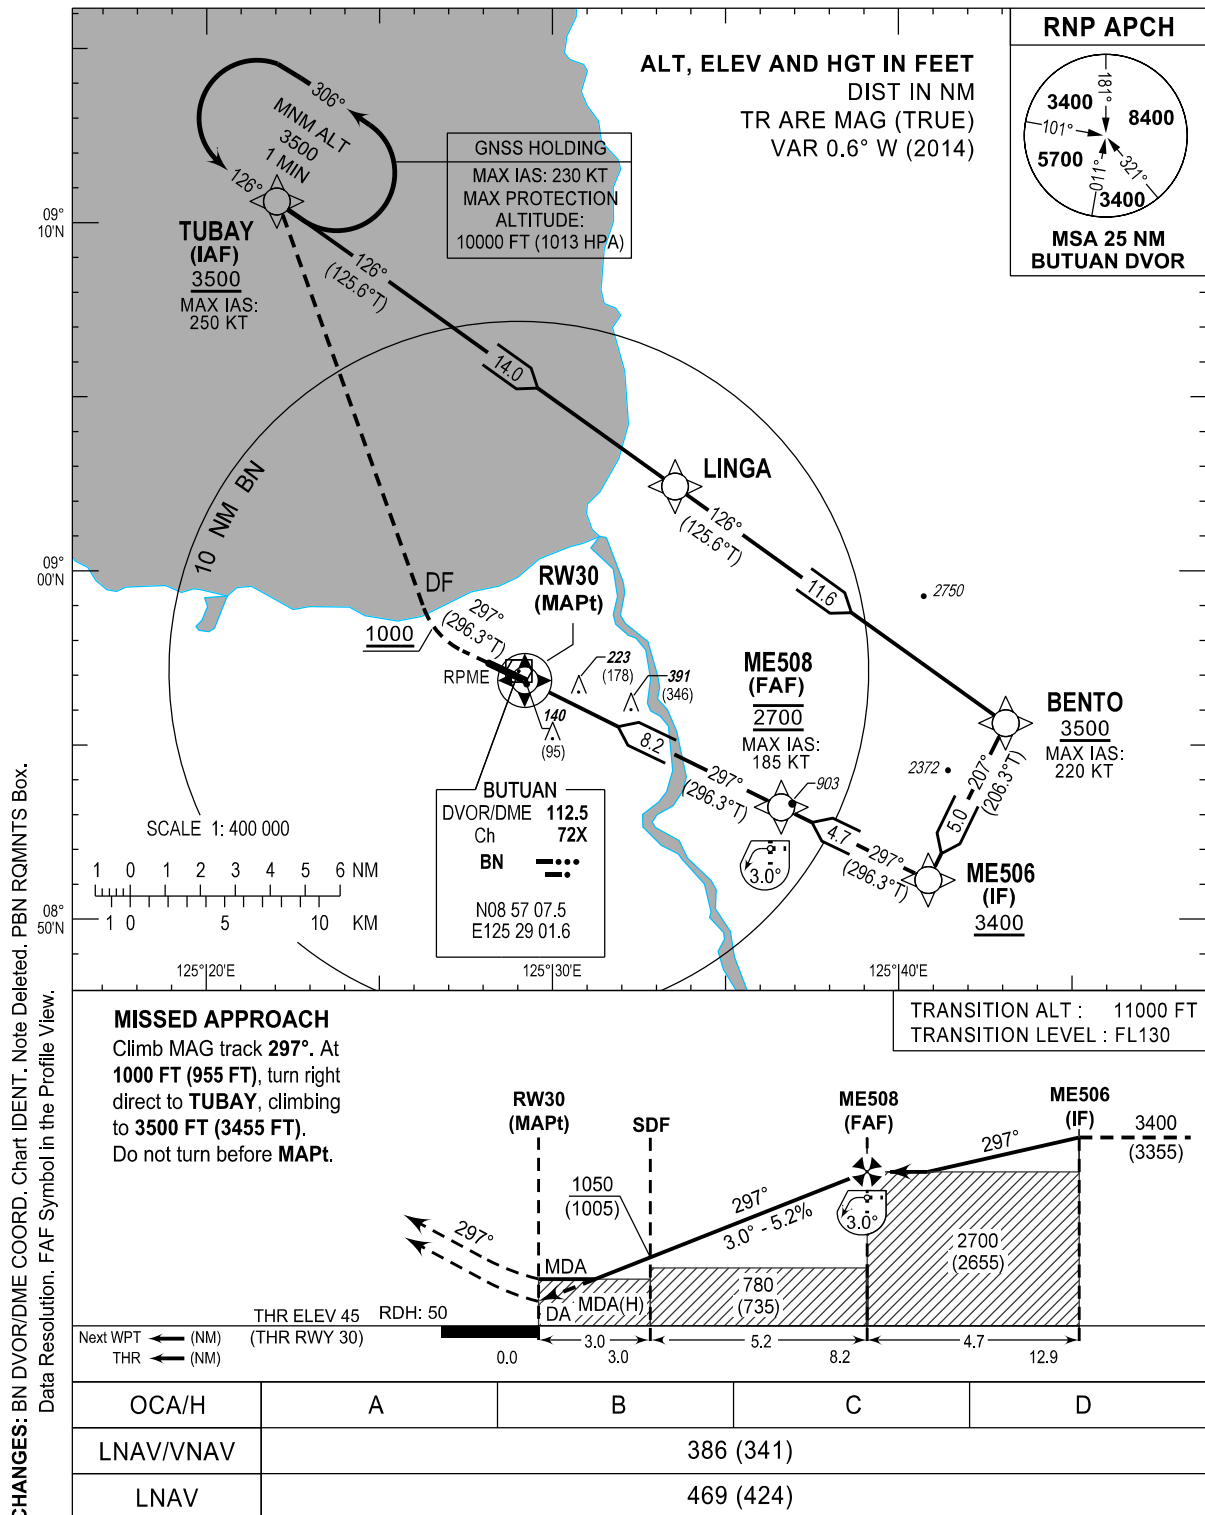

CHANGES: BN DVOR/DME COORD. Chart IDENT. Note Deleted. PBN RQMNTS Box.
Data Resolution: FAF Symbol in the Profile View.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BENTO	N08 55 38	E125 43 06	Fly-by
LINGA	N09 02 26	E125 33 33	Fly-by
ME506	N08 51 07	E125 40 51	Fly-by
ME508	N08 53 13	E125 36 36	Fly-by
RW30	N08 56 51.54	E125 29 11.99	Flyover
TUBAY	N09 10 37	E125 22 02	Fly-by

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 30

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	TUBAY	-	-	-	-	-	+3500	250	-	RNP APCH	-
20	TF	LINGA	N	126° (125.6°)	-	14.0	-	-	-	-	RNP APCH	-
30	TF	BENTO	N	126° (125.6°)	-	11.6	-	+3500	220	-	RNP APCH	-
40	TF	ME506	N	207° (206.3°)	-	5.0	-	+3400	-	-	RNP APCH	-
50	TF	ME508	N	297° (296.3°)	-	4.7	-	@2700	185	-	RNP APCH	-
60	TF	RW30	Y	297° (296.3°)	-	8.2	-	+95	-	-3.0	RNP APCH	-
70	CA	-	-	297° (296.3°)	-	-	-	+1000	-	-	RNP APCH	-
80	DF	TUBAY	N	-	-	-	R	+3500	250	-	RNP APCH	-

CHANGES: WPT COORD. Coding Table Title. NAV SPEC.


TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
45 FT

TWR - 123.2 / 122.0

AGUSAN DEL NORTE/Butuan (RPME)

RWY 12

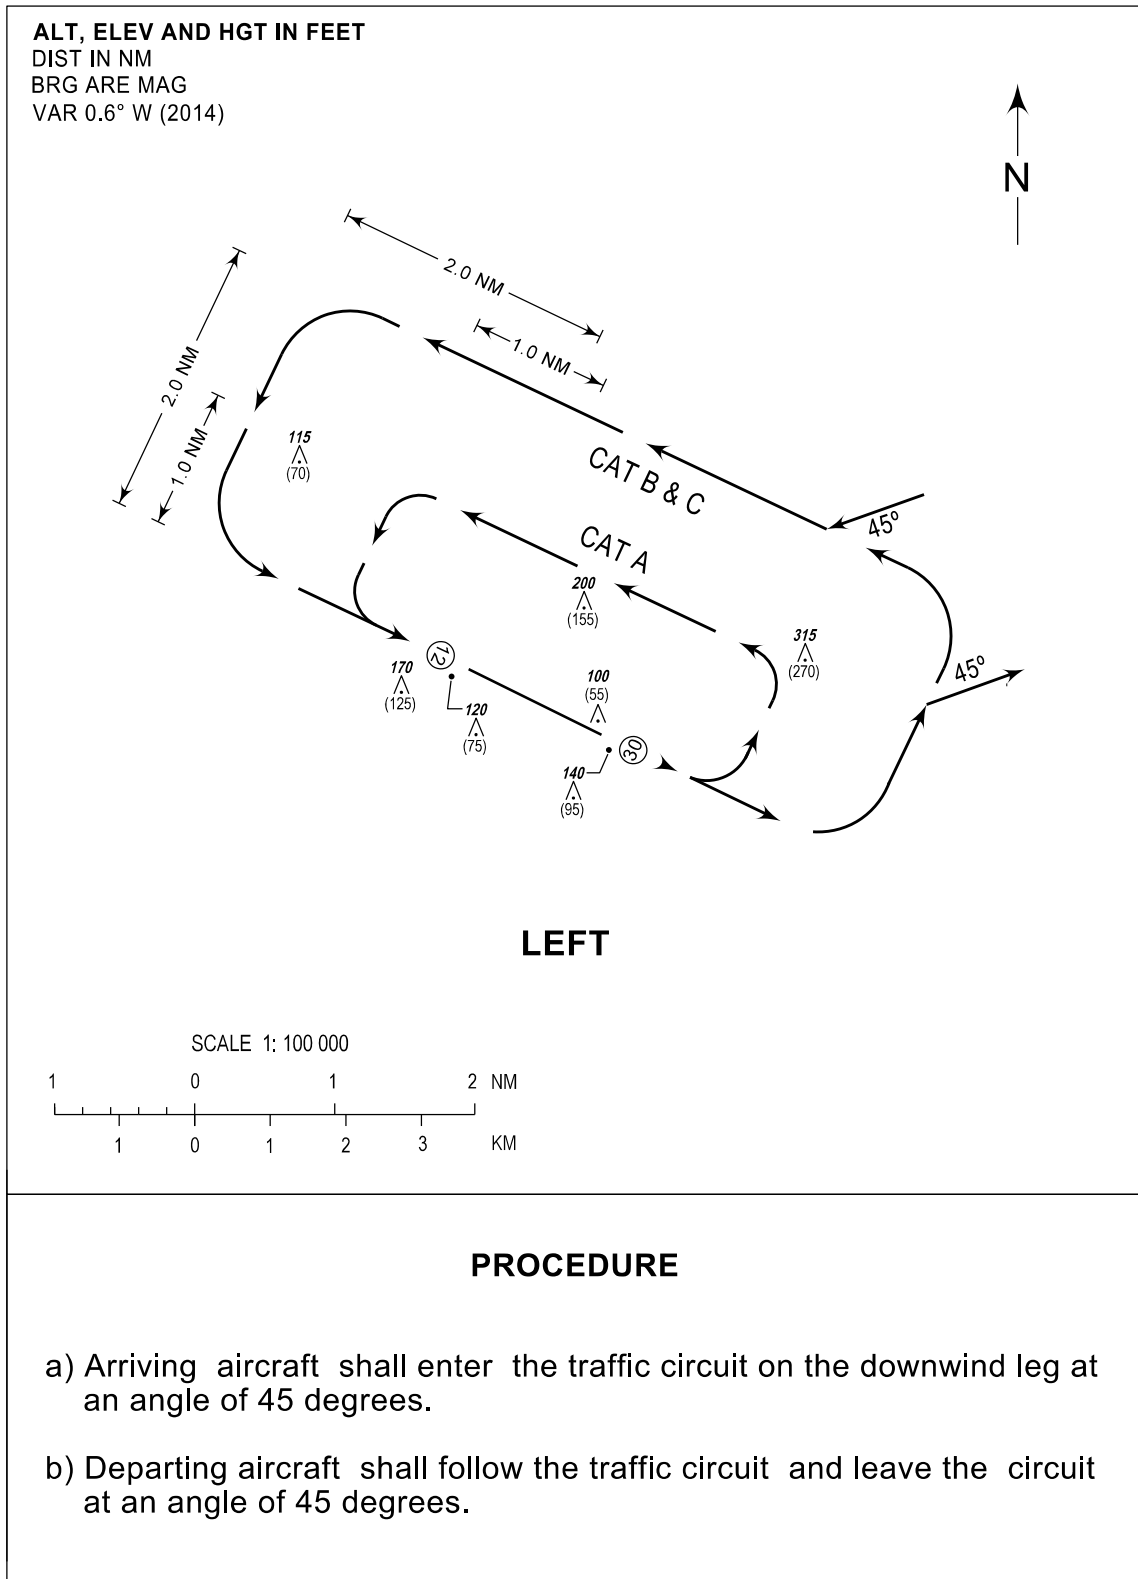

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
45 FT

TWR - 123.2 / 122.0

AGUSAN DEL NORTE/Butuan (RPME)


RWY 30

ALT, ELEV AND HGT IN FEET

DIST IN NM


BRG ARE MAG

VAR 0.6° W (2014)

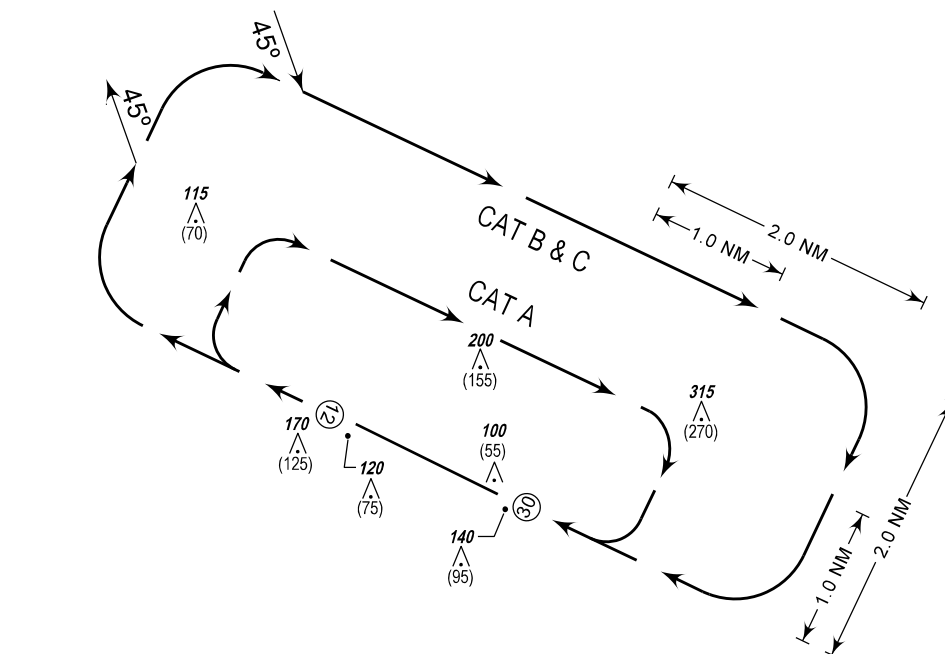

RIGHT

SCALE 1: 100 000



PROCEDURE

- Arriving aircraft shall enter the traffic circuit on the downwind leg at an angle of 45 degrees.
- Departing aircraft shall follow the traffic circuit and leave the circuit at an angle of 45 degrees.

CHANGES: Data Resolution, OBST HGT.