

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.7, AD-2.16, AD-2.19, AD-2.20, AD-2.21, AD-2.22, AD-2.23, AD-2.24

RPMO AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPMO - OZAMIS COMMUNITY AIRPORT

RPMO AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	081046.1163N 1235031.3162E.
2	Direction and distance from (city)	6KM NE.
3	Elevation/Reference temperature	4.88M AMSL.
4	Geoid undulation at AD ELEV PSN	Nil.
5	MAG VAR/Annual Change	0.5°W (2014) / 2.6' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Ozamis Airport Ganco, Ozamis City 7200 Misamis Occidental Tel. No.: (088) 521-1785
7	Types of traffic permitted (IFR/VFR)	VFR.
8	Remarks	Nil.

RPMO AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900.
2	Customs and immigration	Nil.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	2100 - 0500.
6	MET Briefing Office	Nil.
7	ATS	MON - FRI: 0000 - 0900.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2100 - 0500.

RPMO AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Nil.
2	Fuel/oil types	Nil.
3	Fuelling facilities/capacity	Nil.
4	De-icing facilities	Nil.
5	Hangar space for visiting aircraft	Utilized available apron space.
6	Repair facilities for visiting aircraft	Nil.
7	Remarks	Nil.

RPMO AD 2.5 PASSENGER FACILITIES

1	Hotels	In the city.
2	Restaurants	Limited at the airport/unlimited in the city.
3	Transportation	Vehicle for hire.
4	Medical facilities	Hospital in the city.
5	Bank and Post Office	In the city.
6	Tourist Office	Office in the city Tel. No. (088) 521-1260
7	Remarks	Nil.

RPMO AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT VI.
2	Rescue equipment	Two (2) fire trucks (SIDES VMA 28 & Oshkosh Striker 4x4).
3	Capability for removal of disabled aircraft	Nil.
4	Remarks	Nil.

RPMO AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: CONC. Strength: PCN 42 R/B/W/U.
2	Taxiway width, surface and strength	Width: 30M. Surface: CONC (SOUTH TWY). Strength: PCN 42 R/B/W/U.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPMO AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing guide lines at TWY/RWY/Center lines distance-to-go marker.
2	RWY and TWY markings and LGT	RWY: Designators, Threshold, Center line (No lights) SWY: RWY21 TWY: TWY center line (No lights).
3	Stop bars	Nil.
4	Remarks	Nil.

RPMO AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
03/21	Coconut trees	Nil	Mt. Malindang 2400FT No lights	WNW APRX 10KM FM STN	Final approach of both RWY not visible from cab due presence of coconut trees

RPMO AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	Ozamis FSS.
2	Hours of service MET Office outside hours	- -
3	Office responsible for TAF preparation Periods of validity	- -
4	Trend forecast Interval of issuance	- -
5	Briefing/consultation provided	Personal consultation.
6	Flight documentation Language(s) used	Abbreviated plain language text. English.
7	Charts and other information available for briefing or consultation	Nil.
8	Supplementary equipment available for providing information	WSPD Indicator, RTI, WDI, barometer, wind cone.
9	ATS units provided with information	Nil.
10	Additional information (limitation of service, etc.)	Nil.

RPMO AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
03	033.0° GEO 033.5° MAG	1745M X 30M	PCN 42 R/B/W/U CONC	Nil	Nil
21	213.0° GEO 213.5° MAG	1745M X 30M	PCN 42 R/B/W/U CONC	Nil	Nil
Slope of RWY-SWY	SWY dimensions	CWY dimensions	Strip dimensions	OFZ	Remarks
7	8	9	10	11	12
0.108%	60M X 30M	0	Nil	Nil	First 708M - ASPH, the rest CONC.
Nil	Nil	0	Nil	Nil	First 828M - CONC, the rest ASPH.

RPMO AD 2.13 DECLARED DISTANCES

RWY Designator	TORA	TODA	ASDA	LDA	Remarks
1	2	3	4	5	6
03	1745M	1745M	1805M	1745M	Nil
21	1745M	1745M	1745M	1745M	Nil

RPMO AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
03	Nil	Nil	PAPI Left 3.0°	Nil
21	Nil	Nil	PAPI Left 3.0°	Nil
RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	Nil	Nil	Nil	Path WID: 0.34°. VIS RG: 5.0Mi. VER Obstruction CLNC: >1.0°. Horizontal Obstruction CLNC: ±10° FM RWY CL. DIST FM THR: 275M.
Nil	Nil	Nil	Nil	Path WID: 0.38°. VIS RG: 5.0Mi. VER Obstruction CLNC: >1.0°. Horizontal Obstruction CLNC: ±10° FM RWY CL. DIST FM THR: 176M.

RPMO AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Nil.
2	LDI location and LGT Anemometer location and LGT	Nil.
3	TWY edge and centre line lighting	Nil.
4	Secondary power supply/switch-over time	All lighting at AD.
5	Remarks	Nil.

RPMO AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	OZAMIS AERODROME ADVISORY ZONE (AAZ): A circle radius 5NM centered on 081046.1163N 1235031.3162E (ARP).
2	Vertical limits	AAZ: SFC up to but excluding 2000FT.
3	Airspace classification	G.
4	ATS unit call sign Language(s)	Ozamis Radio. English.
5	Transition altitude	Nil.
6	Remarks	Nil.

RPMO AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	SATVOICE number	Logon Address	Hours of operation	Remarks
1	2	3	4	5	6	7
FSS	Ozamis Radio	124.1 MHZ	Nil	Nil	2100 - 0500*	A/G FREQ. *FSS operations limited to the provision of weather and FIS between 2100 - SR.

RPMO AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulations

- 1.1 Number of aircraft in the traffic pattern limited to two (2) at any given time.
- 1.2 Avoid tight turning during landing and take-off on RWY 03/21.

RPMO AD 2.22 FLIGHT PROCEDURES

1. General Procedures for VFR flights

- 1.1 The following air traffic procedures shall apply to all VFR flights when entering, leaving, operating, or transiting the vicinity of Ozamis AAZ.
- 1.1.1 All departing VFR flights shall maintain a listening watch on Ozamis Radio frequency 124.1 MHZ until twenty (20) NM.
- 1.1.2 All arriving VFR flights shall establish contact and remain on listening watch with Ozamis Radio on 124.1 MHZ approaching twenty (20) NM inbound the station.
- 1.1.3 Advisories and traffic information shall be acknowledged by the pilots.
- 1.1.4 Any deviation from the procedures herein shall be advised without delay to Ozamis Radio.

2. Arrival and Departure Procedures

2.1 VFR Procedures RWY 03

Note: Procedures apply to Light (7000 KG or lesser) and Medium to Heavy (higher than 7000 KG) aircraft unless otherwise specified.

2.1.1 Departure

- a. North Bound: After airborne, turn left and fly over water towards abeam East of MOAP. Keep flying over water following the coastline towards abeam East of ALORAN. Continue following the coastline towards abeam East of OROQUIETA or proceed as advised by Ozamis Radio.
- b. Southwest Bound: After airborne, make a right downwind departure. Fly towards abeam TANGUB (bay side) or proceed as advised by Ozamis Radio.

2.1.2 Arrival

- a. From the North
1. For Medium to Heavy aircraft: Report approaching ILIGAN BAY. Continue towards North of MAIGO. Advise to join right downwind RWY 03 or proceed as advised by Ozamis Radio.
 2. For Light aircraft: Report approaching OROQUIETA. Fly over land following the national highway towards West of ALORAN. Continue towards West of MOAP. Request to cross final approach RWY 21 to join right downwind RWY 03 or proceed as advised by Ozamis Radio.
- b. From the Southwest: Report abeam West of TANGUB. Advise to join right downwind RWY 03 or proceed as advised by Ozamis Radio.

2.2 VFR Procedures RWY 21

2.2.1 Departure

- a. North Bound: After airborne, turn left or make a left downwind departure. Request to cross final approach RWY 21 and fly over water towards abeam East of MOAP. Keep flying over water following the coastline towards abeam East of ALORAN. Continue following the coastline towards East of OROQUIETA or proceed as advised by Ozamis Radio.
- b. Southwest Bound: After airborne, fly towards abeam TANGUB (bay side) or proceed as advised by Ozamis Radio.

2.2.2 **Arrival**

a. **From the North:**

1. For Medium-Heavy aircraft: Report approaching ILIGAN BAY. Continue towards North of MAIGO. Advise to join left downwind RWY 21 or proceed as advised by Ozamis Radio.
2. For Light aircraft: Report approaching OROQUIETA. Fly over land following the national highway towards West of ALORAN. Continue towards West of MOAP. Request to cross THR RWY 21 to join left downwind RWY 21 or proceed as advised by Ozamis Radio.

b. **From the Southwest: Report abeam West of TANGUB. Request to cross final approach RWY 03 to join left downwind RWY 21 or proceed as advised by Ozamis Radio.**

2.3 **VFR Procedures for Overflights to and from Pagadian**

2.3.1 **To Pagadian: Report approaching ILIGAN BAY. Continue on a southerly direction to MAIGO. Fly southwest towards abeam TANGUB (bay side) or proceed as advised by Ozamis Radio.**

2.3.2 **From Pagadian: Report abeam West of TANGUB. Proceed towards Ozamis and report abeam the station. Follow North Bound VFR departure routes or proceed as advised by Ozamis Radio.**

3. Helicopter Operations

3.1 **VFR helicopter flights shall be treated as fixed-wing aircraft and will follow the same established VFR routes and procedures for Ozamis Principal Airport.**

3.2 **Except when clearance is obtained from Ozamis Radio, VFR helicopter flights shall not take-off or land at the Ozamis Principal Airport or enter its AAZ when the:**

- a.** **ceiling is less than 150 M (500 FT); and**
- b.** **ground visibility is less than 1.5 KM (1 mile).**


3.3 **Helicopters operating VFR may be allowed outside advisory airspace with flight visibility below 1.5 KM (1 mile) provided that:**

- a.** **the helicopter is clear of clouds and ground or water is in sight at all times.**
- b.** **the helicopter shall be maneuvered at a speed that will give adequate opportunity to observe other traffic or any obstruction to avoid collision.**

4. List of Visual Landmarks and Reporting Points

4.1 The following visual reference and reporting points as mentioned in the procedure are identified using local available maps, Google Maps and Google Earth Satellite images.

VISUAL REPORTING POINTS	COORDINATES	DISTANCE FROM ARP (NM)	RELATIVE POSITION FROM ARP	DESCRIPTION
ALORAN	082439N 1234952E	14.0	N	Aloran Winding River
ILIGAN BAY	082700N 1235700E	17.0	NE	Iligan Bay
MAIGO	080941N 1235736E	7.0	E	Maigo Municipality
MOAP	081605N 1235055E	5.0	N	Misamis Occidental Aquamarine Park
OROQUIETA	082853N 1234828E	18.0	N	Oroquieta City Bridge
TANGUB	080344N 1234512E	9.0	SW	Tangub City

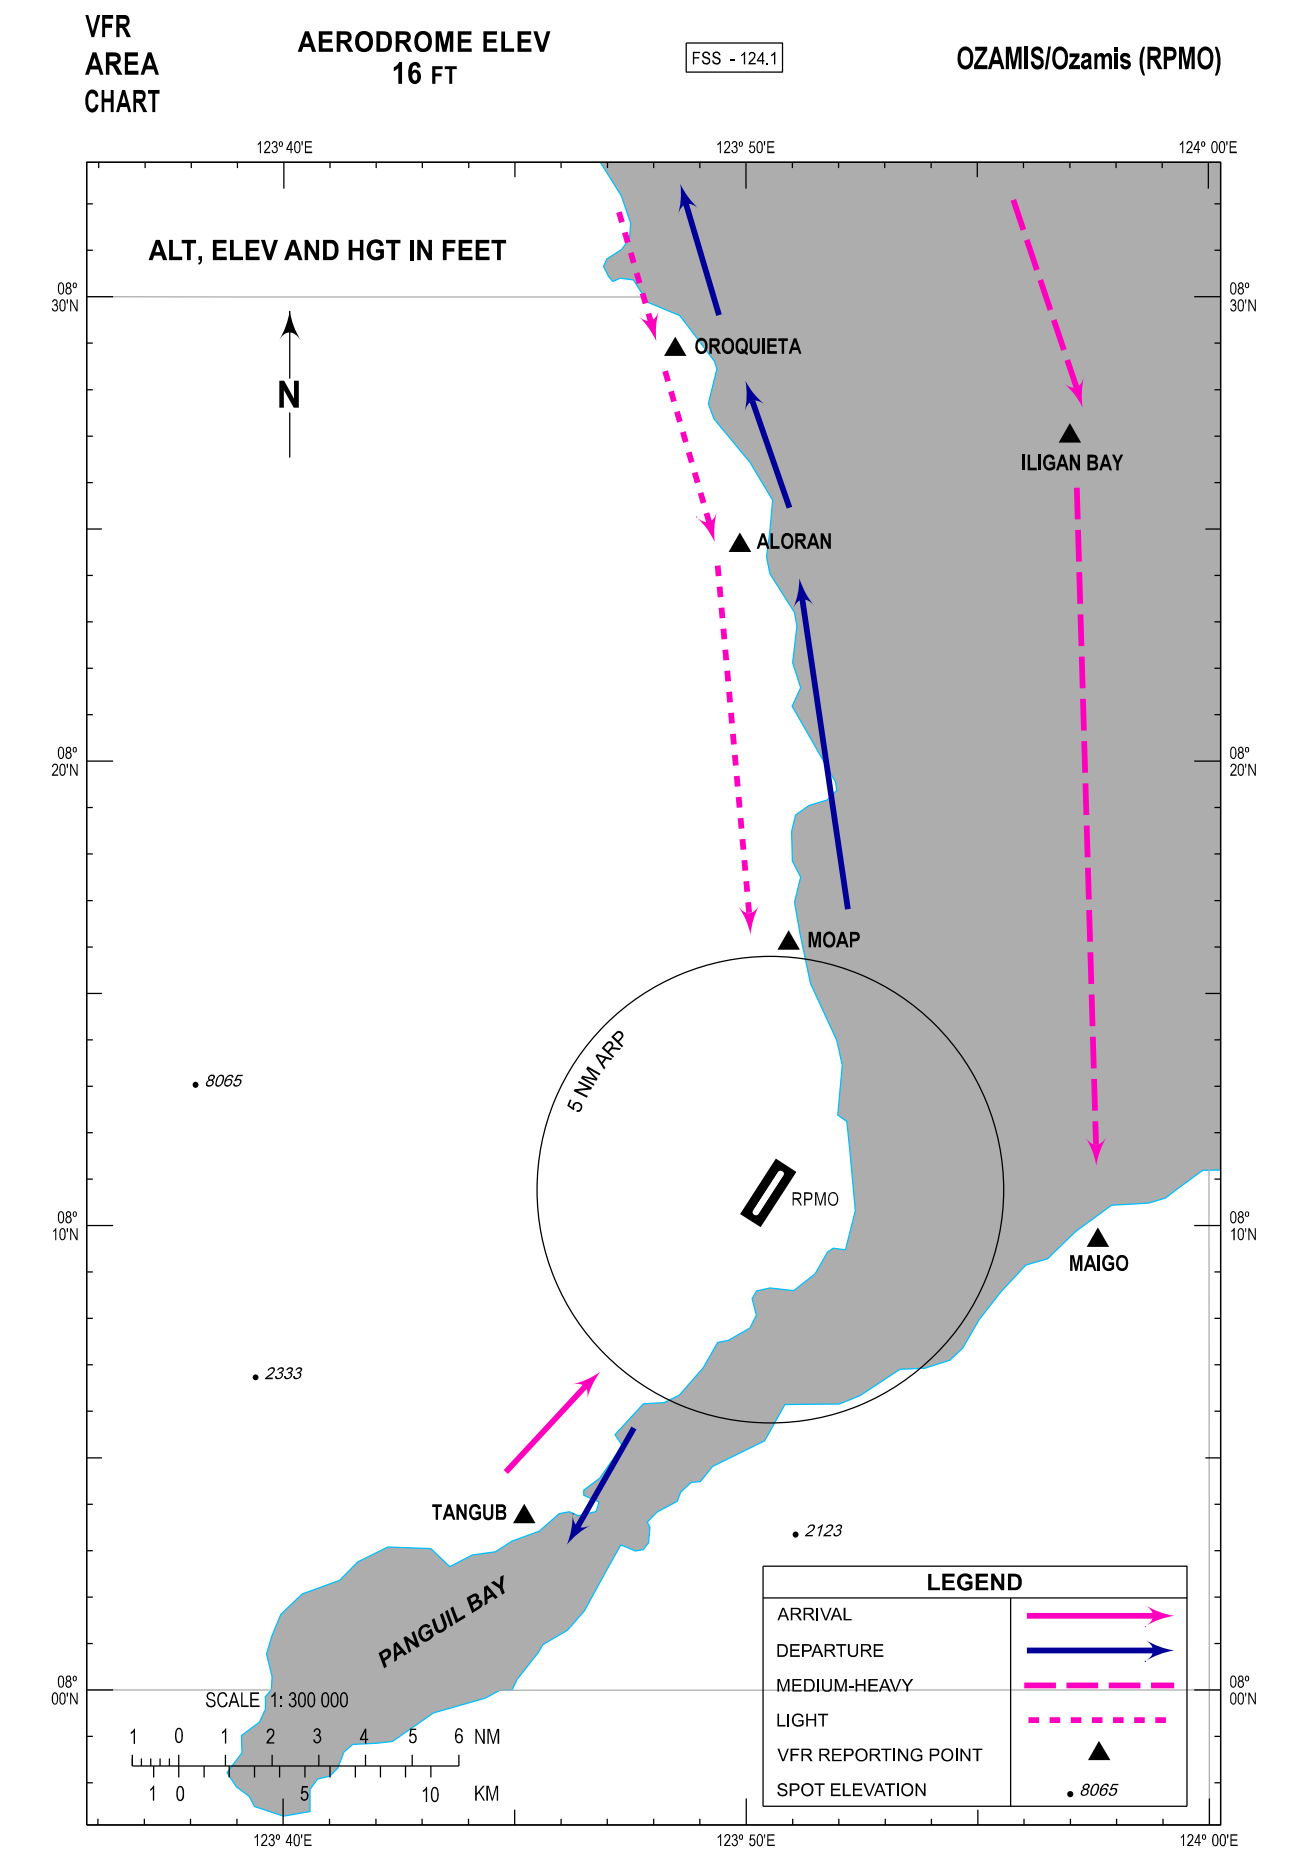

AIRAC AIP AMDT 002/25

CIVIL AVIATION AUTHORITY
OF THE PHILIPPINES

RPMO AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Traffic Circuit Chart (RWY 03)	RPMO AD CHART 2 - 1
Traffic Circuit Chart (RWY 21)	RPMO AD CHART 2 - 2

INTENTIONALLY
LEFT
BLANK

TRAFFIC
CIRCUIT
CHART


AERODROME ELEV
16 FT

FSS - 124.1

OZAMIS/Ozamis (RPMO)

RWY 03

CHANGES: QDR, Units of Measurement and VAR Deleted. Chart Page Format.

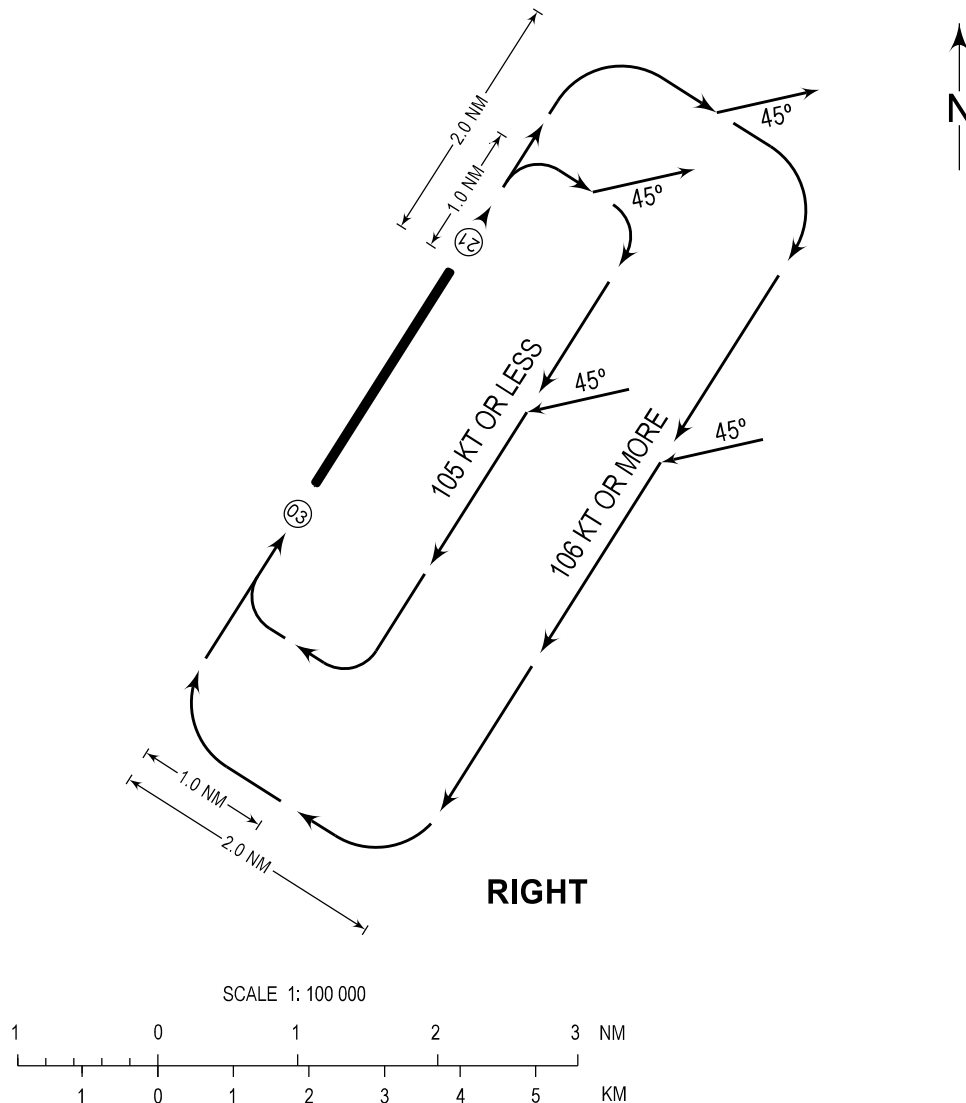

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

TRAFFIC
CIRCUIT
CHART


AERODROME ELEV
16 FT

FSS - 124.1

OZAMIS/Ozamis (RPMO)

RWY 21

CHANGES: QDR, Units of Measurement and VAR Deleted. Chart Page Format.

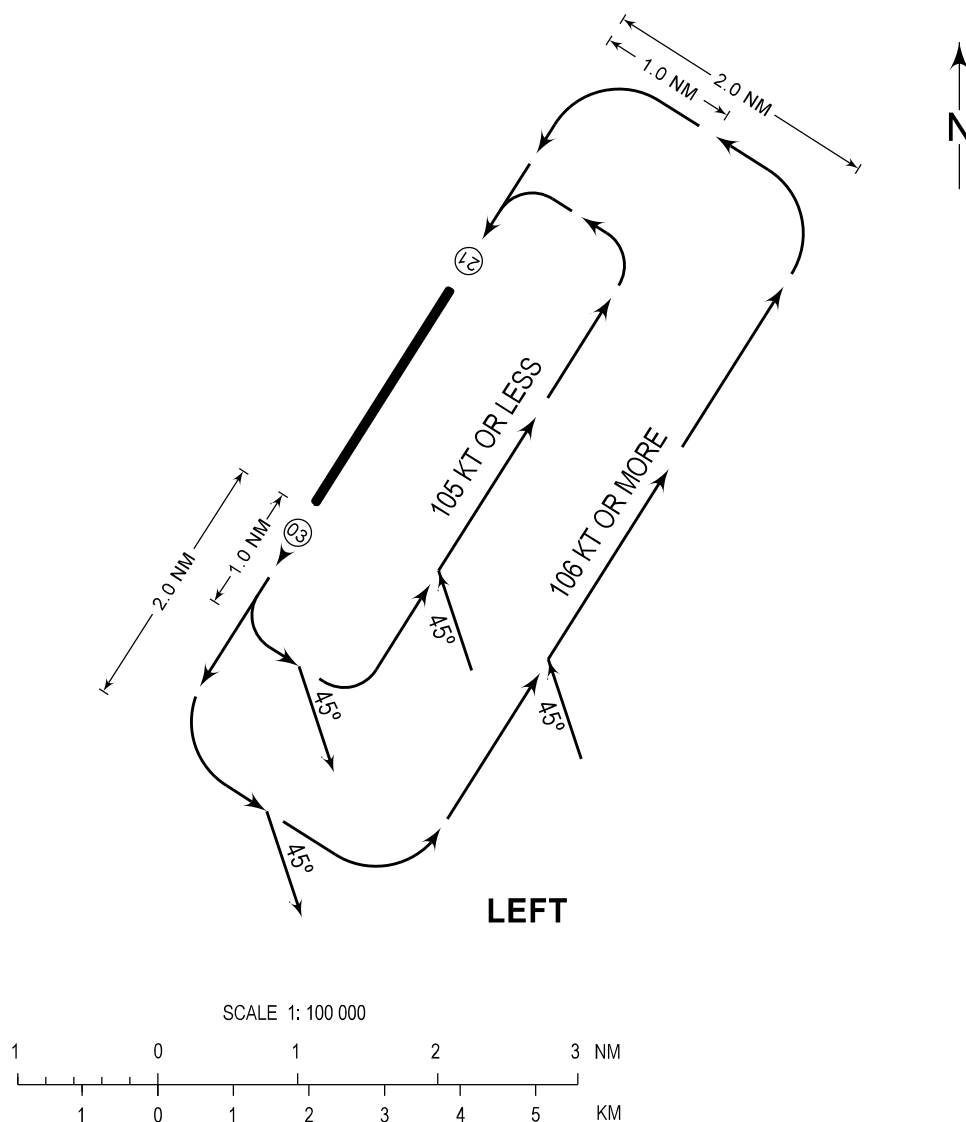

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.