

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.11, AD-2.16, AD-2.19, AD-2.20, AD-2.21, AD-2.22, AD-2.23, AD-2.24

RPMP AD 2.1 AERODROME LOCATION INDICATOR AND NAME**RPMP - PAGADIAN PRINCIPAL AIRPORT (Class 1)****RPMP AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

1	ARP coordinates and site at AD	074936.1370N 1232735.8000E.
2	Direction and distance from (city)	5KM.
3	Elevation/Reference temperature	1.52M (5FT) AMSL.
4	Geoid undulation at AD ELEV PSN	Nil.
5	MAG VAR/Annual Change	0.4°W (2014) / 2.6' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Pagadian Airport, Pagadian City 7016 Zamboanga del Sur Tel No.: (062) 353-1338 AFS: RPMPYYYYX
7	Types of traffic permitted (IFR/VFR)	VFR.
8	Remarks	Nil.

RPMP AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900.
2	Customs and immigration	Nil.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	2300 - 0700. For extension of SER one (1) day PN is required.
6	MET Briefing Office	HJ.
7	ATS	2300 - 0700.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2300 - 0700.

RPMP AD 2.5 PASSENGER FACILITIES

1	Hotels	Limited at the airport/unlimited in the city.
2	Restaurants	Limited at the airport/unlimited in the city.
3	Transportation	Car for hire.
4	Medical facilities	Within the city.
5	Bank and Post Office	Unlimited in the city.
6	Tourist Office	Handled by immigration office in the city.
7	Remarks	Nil.

RPMP AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT VI.
2	Rescue equipment	Two (2) fire trucks (SIDES VMA 28 and Oshkosh Striker 4x4).
3	Capability for removal of disabled aircraft	Nil.
4	Remarks	Nil.

RPMP AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: ASPH. Strength: Nil.
2	Taxiway width, surface and strength	Width: S TWY - 127M. N TWY - 127M. Surface: S TWY - ASPH. N TWY - ASPH. Strength: S TWY - 3.80MPa. N TWY - 3.80MPa.
3	Altimeter checkpoint location and elevation	Location: At Apron. Elevation: APRX 6M.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPMP AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	TWY CL, parking line, marshal guided parking limited.
2	RWY and TWY markings and LGT	RWY and TWY CL.
3	Stop bars	Nil.
4	Remarks	Nil.

RPMP AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
02/20 / APCH zone	Trees and buildings	Nil	Nil	Nil	Barb wire fence located on both sides of RWY and APRX 35M from the center line.

RPMP AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
02	017° GEO 017° MAG	2004M X 45M	PCN 42 R/B/W/U CONC+ASPH	074903.2933N 1232726.3892E (68.822M/ 225.794FT)	THR 3.006M/ 9.862FT
20	197° GEO 197° MAG	2004M X 45M	PCN 42 R/B/W/U CONC+ASPH	075006.0370N 1232744.3670E (68.770M/ 225.623FT)	THR 4.633M/ 15.200FT
Slope of RWY-SWY	SWY dimensions	CWY dimensions	Strip dimensions	OFZ	Remarks
7	8	9	10	11	12
0.082% uphill towards THR20	60M X 45M Nil	100M 100M	2175M X 66M 2175M X 66M	Nil Nil	Nil Nil

RPMP AD 2.13 DECLARED DISTANCES

RWY Designator	TORA	TODA	ASDA	LDA	Remarks
1	2	3	4	5	6
02	2004M	2104M	2064M	2004M	Nil
20	2004M	2104M	2004M	2004M	Nil

RPMP AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
02	Nil	Nil	PAPI 3.0°	Nil
20	Nil	Nil	PAPI 3.2°	Nil
RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	Nil	Nil	Nil	DIST FM THR: 241M. Path WID: 0.3°. VIS RG: 6 Miles.
Nil	Nil	Nil	Nil	DIST FM THR: 249M. Path WID: 0.3°. VIS RG: 6 Miles.

RPMP AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Nil.
2	LDI location and LGT Anemometer location and LGT	Nil.
3	TWY edge and centre line lighting	Nil.
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at AD.
5	Remarks	Nil.

RPMP AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	PAGADIAN AERODROME ADVISORY ZONE (AAZ): A circle radius 5NM centered on 074936.1370N 1232735.8000E (ARP).
2	Vertical limits	AAZ: SFC up to but excluding 2000FT.
3	Airspace classification	G.
4	ATS unit call sign Languages(s)	Pagadian Radio. English.
5	Transition altitude	Nil.
6	Remarks	Nil.

RPMP AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
FSS	Pagadian Radio	122.0MHZ 5205.0KHZ 3872.5KHZ	2300 - 0700	A/G FREQ. P/P PRI FREQ (Mactan Network). P/P SRY FREQ (Mactan Network). For extension of SER, one (1) day PN is required.

RPMP AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulation

- 1.1 Number of aircraft in the traffic pattern limited to two (2) at any given time.

RPMP AD 2.22 FLIGHT PROCEDURES

1. General Procedures for VFR flights

- 1.1 The following air traffic procedures shall apply to all VFR flights when entering, leaving, operating, or transiting the vicinity of Pagadian ATZ.
 - 1.1.1 All departing VFR flights shall maintain a listening watch on Pagadian Tower frequency 122.0 MHZ until twenty (20) NM.
 - 1.1.2 All arriving VFR flights shall establish contact and remain on listening watch with Pagadian Tower on 122.0 MHZ approaching twenty (20) NM inbound the station.
 - 1.1.3 ATC instructions shall be acknowledged and complied with.
 - 1.1.4 Any deviation from the procedures herein shall be subject to ATC approval.

2. Arrival and Departure Procedures

Note: Procedures apply to Light (7000 KG or lesser) and Medium to Heavy (higher than 7000 KG) aircraft unless otherwise specified.

2.1 VFR Procedures RWY 02

2.1.1 Departure

- a. Northeast Bound: After airborne, turn right towards TUKURAN. Fly northeastward towards AURORA. Continue towards MIGPANGI. Continue towards West of TANGUB or proceed as instructed by ATC.
- b. North Bound (for Medium to Heavy aircraft only): After airborne, turn left towards PULACAN. Continue northward following the national highway to MAGSAYSAY. Continue towards MOLAVE or proceed as instructed by ATC.
- c. Southeast Bound: After airborne, make a right downwind departure. Fly southward towards BIBILIK. Continue towards SAN PABLO or proceed as instructed by ATC.

2.1.2 Arrival

- a. From the Northeast:
 - 1. For Medium to Heavy aircraft: Report TANGUB. Fly southward following the national highway to KAPATAGAN. Continue towards SND JUNCTION. Proceed westward towards abeam TUKURAN (bay side). Request clearance to join right downwind RWY 02 or proceed as instructed by ATC.
 - 2. For Light aircraft: Report over PANGUIL BAY. Continue southwestward towards AURORA. Continue towards TUKURAN. Request clearance to join right downwind RWY 02 or proceed as instructed by ATC.
- b. From the North (for Medium to Heavy aircraft only): Report approaching MOLAVE. Continue southward towards MAGSAYSAY. Request clearance to cross final approach RWY 20 towards TUKURAN to join right downwind RWY 02 or proceed as instructed by ATC.
- c. From the Southeast: Report approaching TICALA. Keep flying over water towards REBI BEACH. Continue towards PUTING BALAS. Request clearance to join right downwind RWY 02 or proceed as instructed by ATC.

2.2 VFR Procedures RWY 20

2.2.1 Departure

- a. Northeast Bound: After airborne, make a left downwind departure. Fly towards TUKURAN. Fly northeastward towards AURORA. Proceed towards MIGPANGI. Continue towards West of TANGUB or proceed as instructed by ATC.
- b. North Bound (for Medium to Heavy aircraft only): After airborne, make a left downwind departure. Request clearance to cross final approach RWY 20 and fly towards PULACAN. Continue northward following the national highway to MAGSAYSAY. Continue towards MOLAVE or proceed as instructed by ATC.
- c. Southeast Bound: After airborne, turn left towards BIBILIK. Continue southward towards SAN PABLO or proceed as instructed by ATC.

2.2.2 Arrival

- a. From the Northeast:
 1. For Medium to Heavy aircraft: Report TANGUB. Fly southward following the national highway to KAPATAGAN. Continue towards SND JUNCTION. Proceed westward towards abeam TUKURAN (bay side). Request clearance to join left downwind RWY 20 or proceed as instructed by ATC.
 2. For Light aircraft: Report over PANGUIL BAY. Continue southwestward towards AURORA. Continue towards TUKURAN. Request clearance to join left downwind RWY 20 or proceed as instructed by ATC.
- b. From the North (for Medium to Heavy aircraft only): Report approaching MOLAVE. Continue southward towards MAGSAYSAY. Request clearance to cross final approach RWY 20 towards TUKURAN to join left downwind RWY 20 or proceed as instructed by ATC.
- c. From the Southeast: Report approaching TICALA. Keep flying over water on a northerly direction towards REBI BEACH. Continue towards PUTING BALAS. Request clearance to join left downwind RWY 20 or proceed as instructed by ATC.

3. Helicopter Operations

3.1 General

3.1.1 Except when clearance is obtained from Pagadian Tower, VFR helicopter flights shall not take-off or land at the Pagadian Principal Airport or enter its ATZ when the:

- a. ceiling is less than 150 M (500 FT); and
- b. ground visibility is less than 1.5 KM (1 mile).

3.1.2 Helicopters operating VFR may be allowed outside controlled airspace with flight visibility below 1.5 KM (1 mile) provided that:

- a. the helicopter is clear of clouds and ground or water is in sight at all times; and
- b. the helicopter shall be maneuvered at a speed that will give adequate opportunity to observe other traffic or any obstruction to avoid collision.

3.1.3 Advise Pagadian Tower when ready for take-off.

3.1.4 Advise Pagadian Tower of departure time once airborne.

- 3.1.5 After crossing final approach RWY 02/20, report to Pagadian Tower when clear.
- 3.1.6 Monitor Pagadian Tower frequency for position report and traffic information.
- 3.2 Civilian Helicopter Procedures
 - 3.2.1 Civilian VFR helicopter flights shall be treated as fixed-wing aircraft and will follow the same established VFR routes and procedures for Pagadian Principal Airport.
 - 3.2.2 Civilian VFR helicopters performing utility maintenance flight (e.g. transmission line inspection) are advised to coordinate the activity with the Philippine Air Force Tactical Operations Group Pulacan (TOG-9).
- 3.3 Military Helicopter Procedures
 - 3.3.1 Contact Pagadian Tower prior to take-off/landing at TABAK.
 - 3.3.2 Helicopter Departure
 - a. North Bound: Take-off from TABAK. Request clearance to cross final approach RWY 20. Fly northward towards MAGSAYSAY. Report fifteen (15) NM out or as instructed by ATC.
 - b. East Bound: Take-off from TABAK. Fly towards TUKURAN. Report ten (10) NM out or as instructed by ATC.
 - c. Southwest Bound: Take-off from TABAK. Request clearance to cross final approach RWY 20 via LABANGAN RIVER. Fly towards DAODAO. Continue on a southwesterly direction towards REBOKON. Report ten (10) NM out or as instructed by ATC.
 - d. West Bound: Take-off from TABAK. Request clearance to cross final approach RWY 20 via LABANGAN RIVER. Fly towards BINAYAN. Report ten (10) NM out or as instructed by ATC.
 - 3.3.3 Helicopter Arrival
 - a. From the North: Approaching fifteen (15) NM, contact Pagadian Tower. Fly towards MAGSAYSAY. Request clearance to cross final approach RWY 20. Proceed direct TABAK for landing and terminate flight at TABAK.
 - b. From the East: Approaching ten (10) NM, contact Pagadian Tower. Fly towards TUKURAN. Proceed TABAK for landing and terminate flight at TABAK.
 - c. From the Southeast: Approaching DINAS, contact Pagadian Tower. Fly towards REBOKON. Continue towards DAODAO. Proceed to LABANGAN RIVER and request clearance to cross final approach RWY 20. Land and terminate flight at TABAK.
 - d. From the West: Approaching LAKEWOOD, contact Pagadian Tower. Fly towards BINAYAN. Proceed to LABANGAN RIVER and request clearance to cross final approach RWY 20. Land and terminate flight at TABAK.

4. List of Visual Landmarks and Reporting Points

4.1 The following visual reference and reporting points as mentioned in the procedure are identified using local available maps, Google Maps and Google Earth Satellite images.


VISUAL REPORTING POINT	COORDINATES	DISTANCE FROM ARP (NM)	RELATIVE POSITION FROM ARP	DESCRIPTION
AURORA	075617N 1233735E	12.0	NE	Aurora Mountain Resort
BIBILIK	074428N 1232814E	5.0	S	Coastal Barangay
BINAYAN	075433N 1232633E	5.0	NNW	Binayan Municipality
DAODAO	074736N 1232607E	2.0	SW	Dao-Dao Island
DINAS	073651N 1232019E	15.0	SW	Dinas Municipality
KAPATAGAN	075403N 1234613E	19.0	E	Kapatagan Municipality
LABANGAN RIVER	075403N 1232746E	4.0	N	Labangan River
MAGSAYSAY	075916N 1232918E	10.0	N	Pagadian - Magsaysay - Aurora Junction Road
MIGPANGI	080153N 1233817E	16.0	NE	Migpangi River
MOLAVE	080528N 1232913E	16.0	N	Molave Municipality
PULACAN	075418N 1232912E	5.0	NE	Lower Pulacan Proper
PUTING BALAS	074651N 1232934E	3.0	SE	Puting Balas Sand Bar
REBI BEACH	074140N 1232851E	8.0	S	Rebi Beach Resort
REBOKON	074522N 1232500E	5.0	SW	Rebokon Agricultural Vocational School
SAN PABLO	073918N 1232732E	10.0	S	San Pablo Central Elementary School
SND JUNCTION	074838N 1234154E	14.0	E	Sultan Naga Dimaporo Municipality
TABAK	075430N 1232954E	5.0	NNE	1st Infantry Division TOG9 Helipad
TANGUB	080344N 1234512E	22.0	NE	Tangub City
TICALA	073653N 1232735E	13.0	S	Ticala Island
TUKURAN	075059N 1233430E	7.0	E	Tukuran Municipality

VFR
AREA
CHART

AERODROME ELEV
5 FT

TWR - 122.0

PAGADIAN/Pagadian (RPMP)

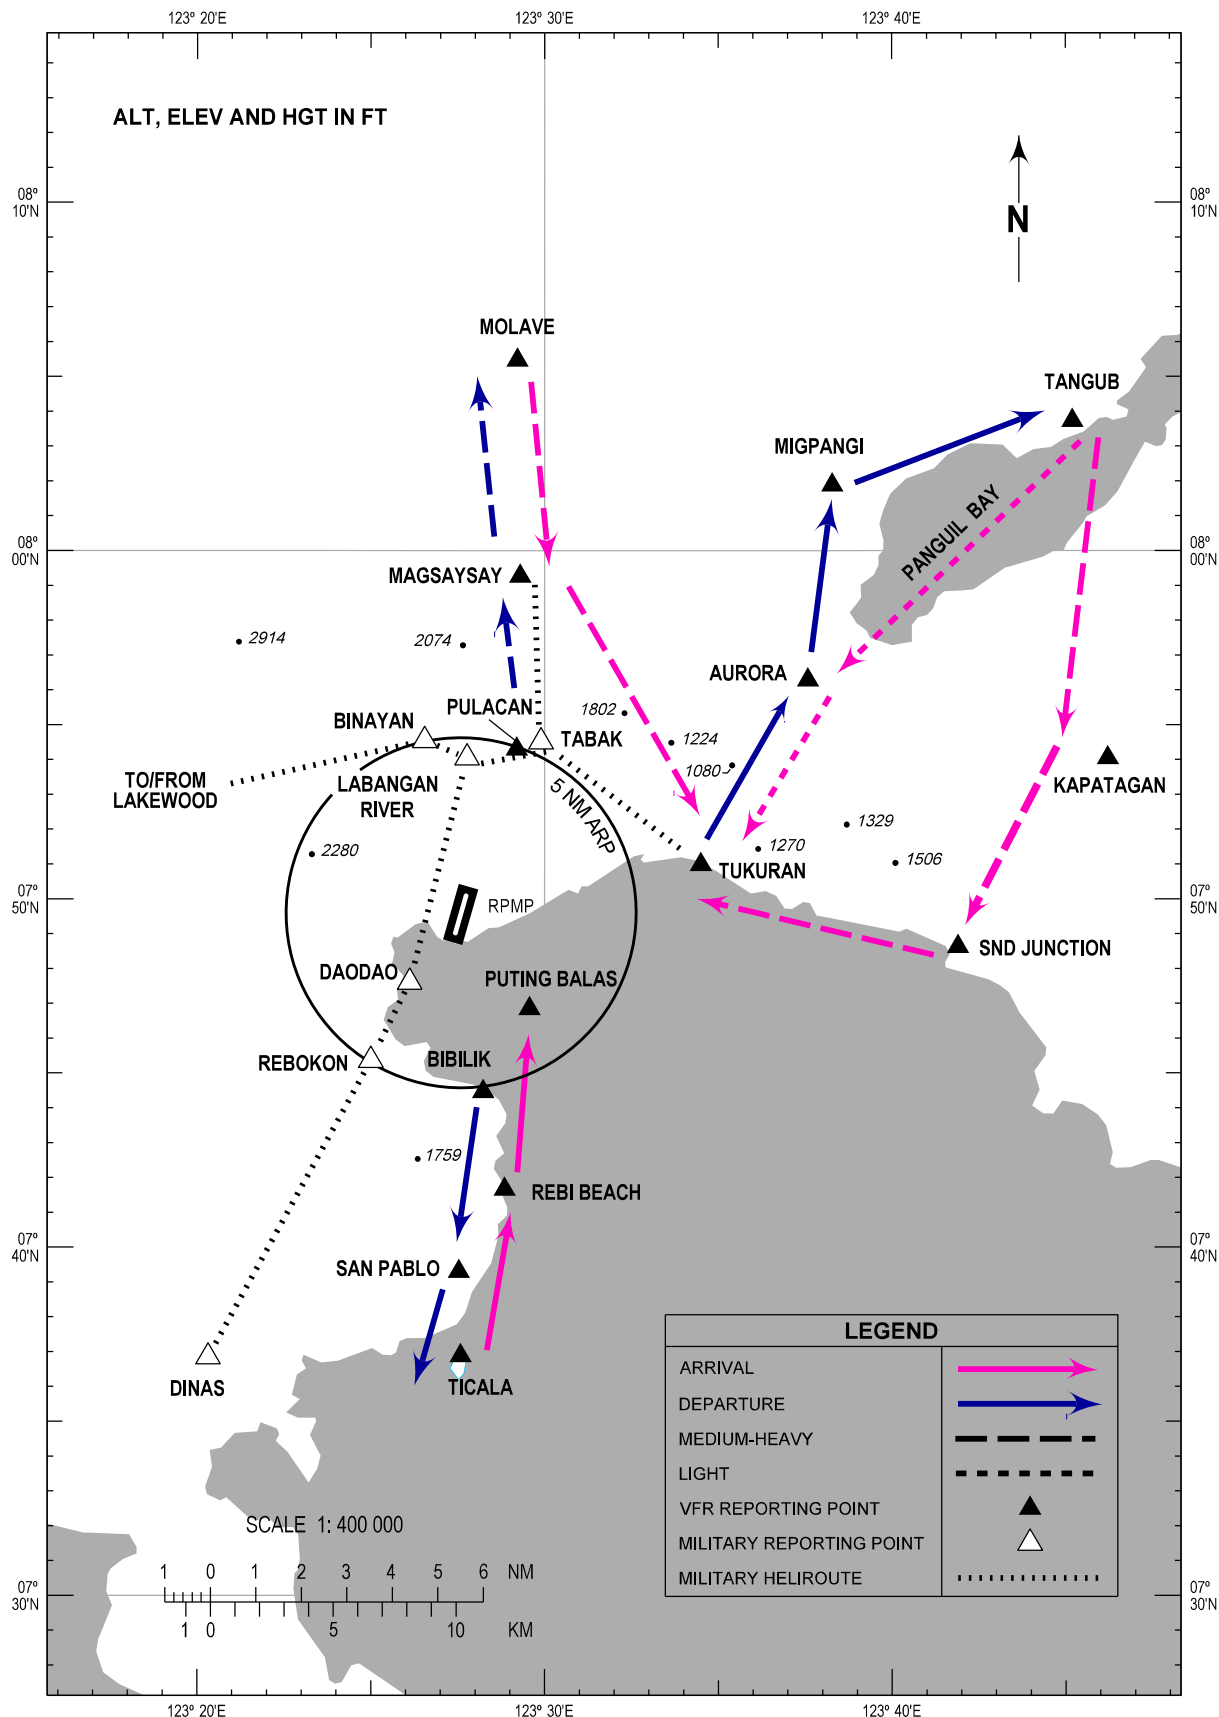

RPMP AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Traffic Circuit Chart (RWY 02)	RPMP AD CHART 2 - 1
Traffic Circuit Chart (RWY 20)	RPMP AD CHART 2 - 2

INTENTIONALLY
LEFT
BLANK


TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
5 FT

TWR - 122.0

PAGADIAN/Pagadian (RPMP)

RWY 02

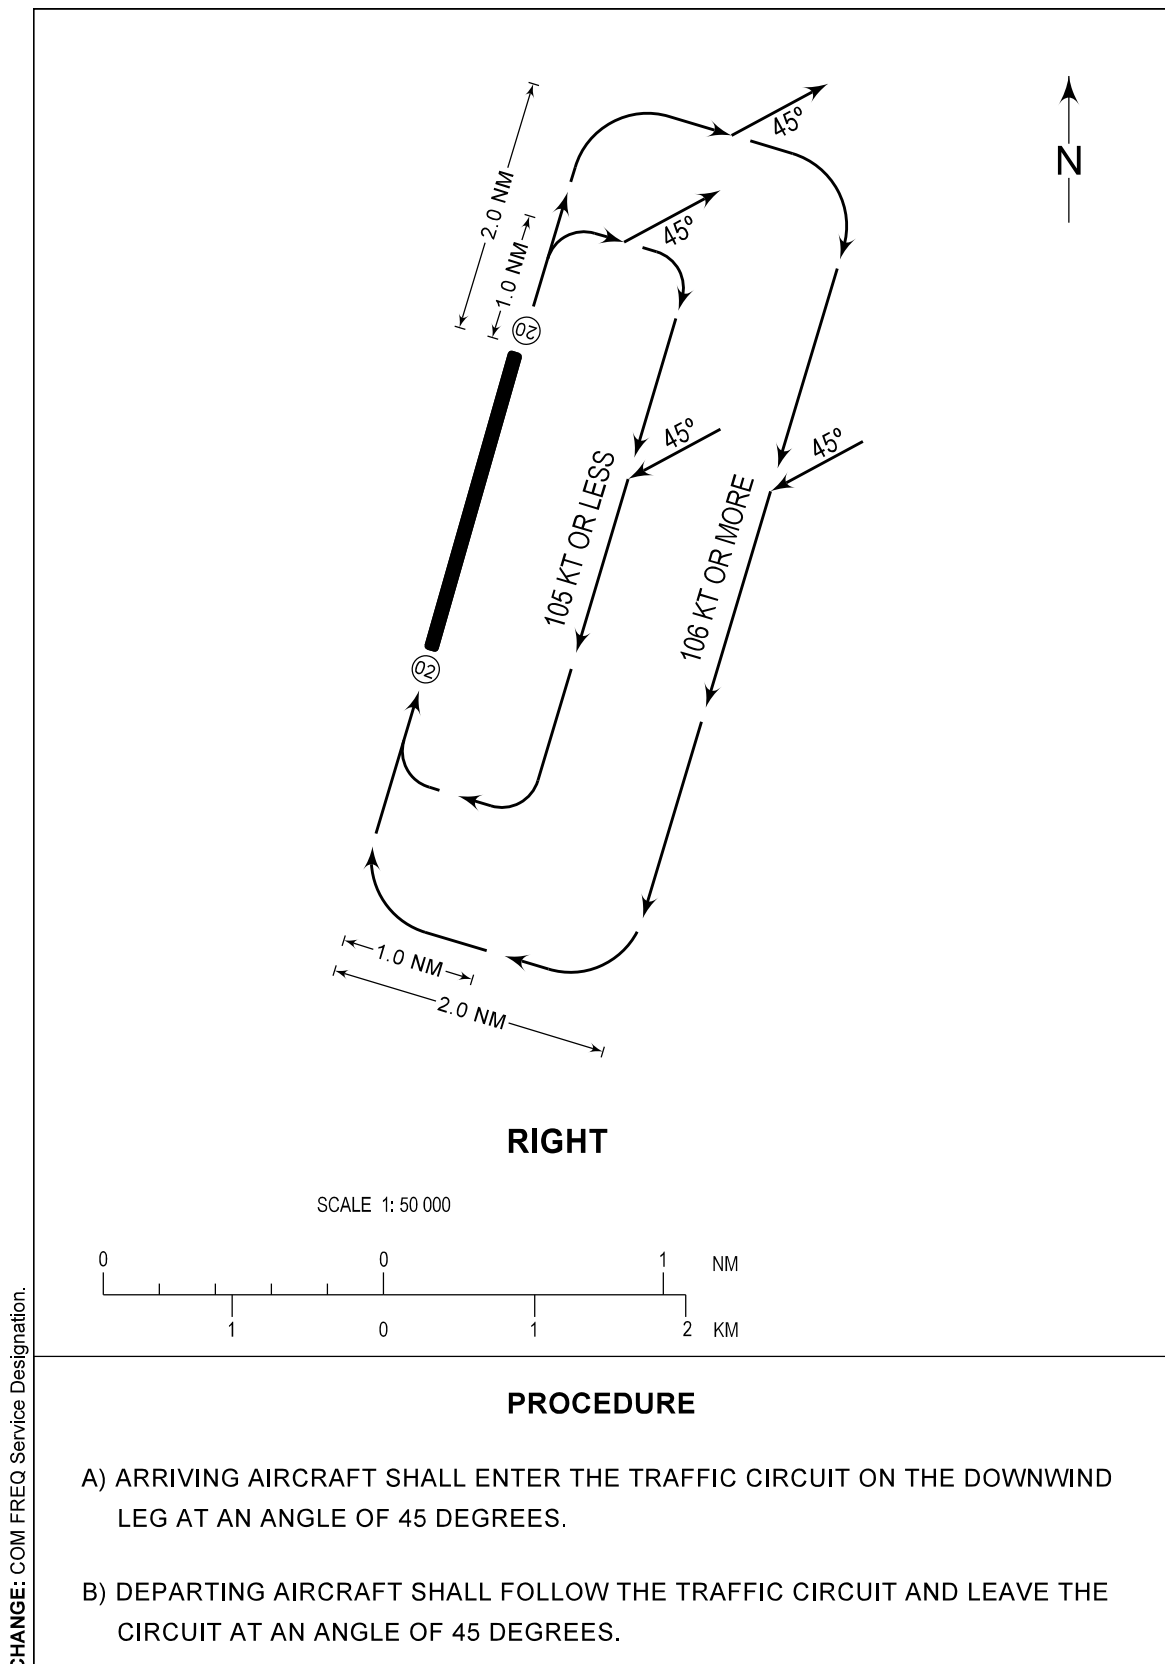


TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
5 FT

TWR - 122.0

PAGADIAN/Pagadian (RPMP)

RWY 20

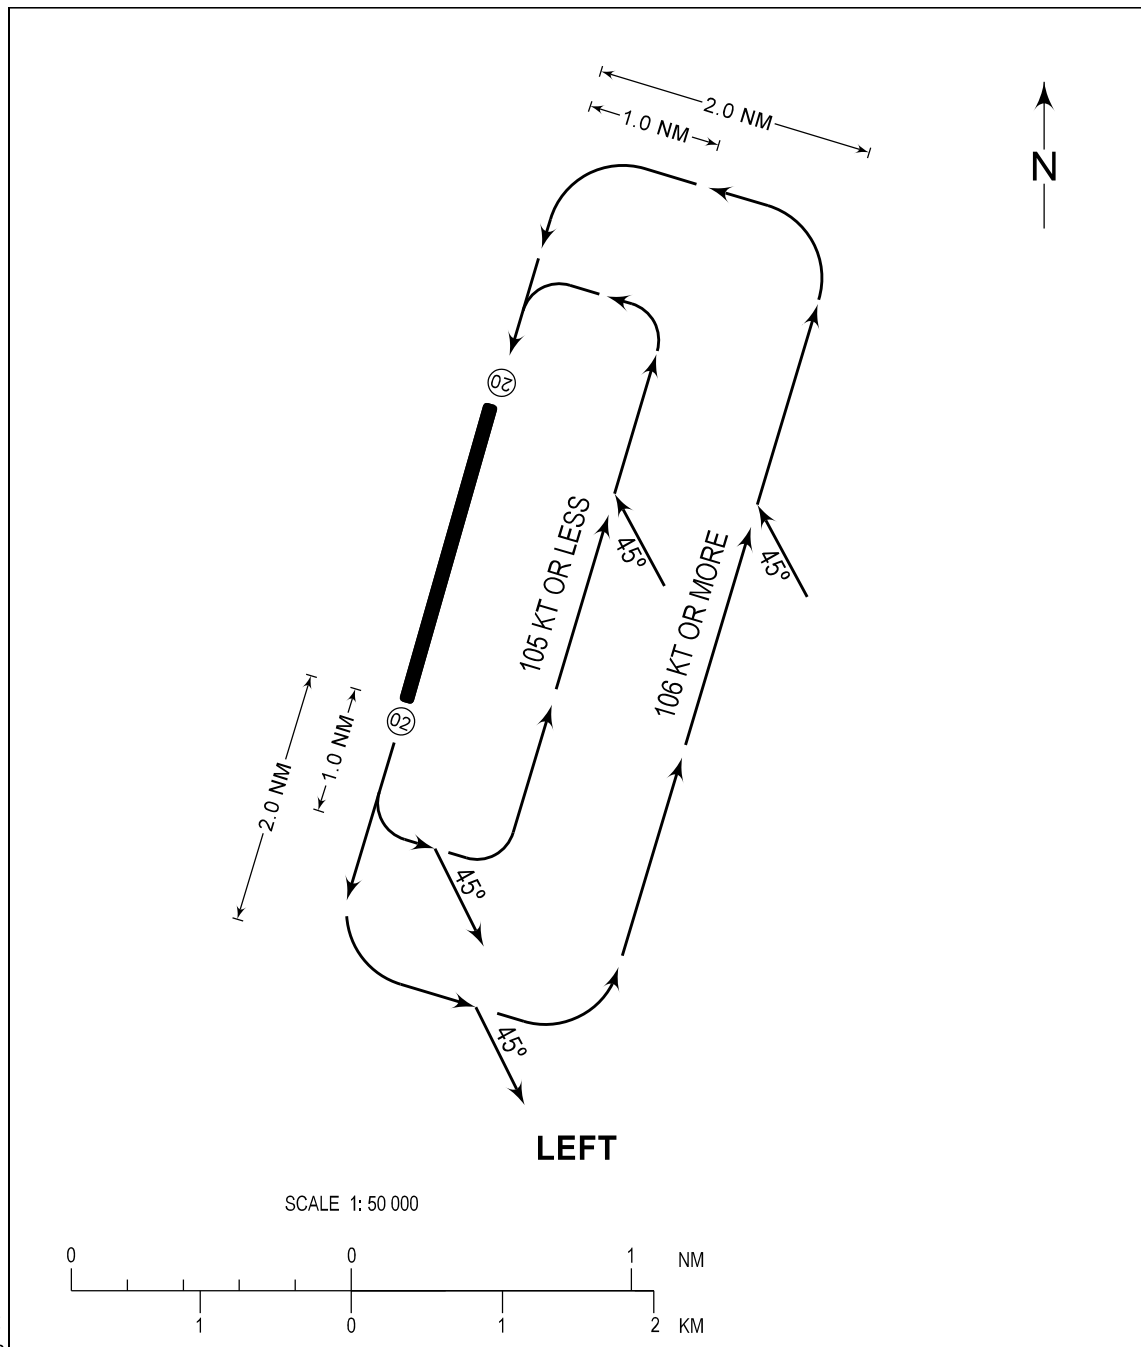

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

CHANGE: COM FREQ Service Designation.