

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.7, AD-2.10, AD-2.11, AD-2.16, AD-2.21, AD-2.23, AD-2.25

RPMY AD 2.1 AERODROME LOCATION INDICATOR AND NAME**RPMY - LAGUINDINGAN PRINCIPAL AIRPORT (Class 1)****RPMY AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

1	ARP coordinates and site at AD	083644N 1242723E.
2	Direction and distance from (city)	30 KM Northwest of Cagayan de Oro City (CDO).
3	Elevation/Reference temperature	191 FT / 26.3°C.
4	Geoid undulation at AD ELEV PSN	222 FT.
5	MAG VAR/Annual Change	1°W (2021) / 6.0' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Laguindingan Airport Laguindingan, Misamis Oriental Phone: (+63) (088) 555-1881, (+63) (088) 555-1886 (Fax) Email: oic.caap10@gmail.com
7	Types of traffic permitted (IFR/VFR)	IFR-VFR.
8	Remarks	Nil.

RPMY AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900.
2	Customs and immigration	On request.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	H24.
6	MET Briefing Office	Nil.
7	ATS	MON - FRI: 0000 - 0900.
8	Fuelling	2200 - 0800 (On request for later hours).
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2100 - 1300.

RPMY AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Cargo Terminal Building; B4S (Baggage claim - 2; Check-in - 1).
2	Fuel/oil types	Jet A-1.
3	Fuelling facilities/capacity	Petron fuel truck; 23000 liters / 1500 liters/minute.
4	De-icing facilities	Nil.
5	Hangar space for visiting aircraft	Nil.
6	Repair facilities for visiting aircraft	Nil.
7	Remarks	Jet A-1 fuel truck for request (08822) 720-331. AVGAS, pick up basis (08822) 740-263.

RPMY AD 2.5 PASSENGER FACILITIES

1	Hotels	Outside aerodrome; 35 KM from Laguindingan Airport.
2	Restaurants	At the aerodrome, near the city.
3	Transportation	Buses, jeepneys, taxi and car for hire from the aerodrome.
4	Medical facilities	First aid at the aerodrome. Hospitals near the city.
5	Bank and Post Office	At the aerodrome, near the city.
6	Tourist Office	At the aerodrome, near the city.
7	Remarks	Nil.

RPMY AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	Category 7.
2	Rescue equipment	Two (2) fire trucks [Two (2) Oshkosh (6000 liters each)].
3	Capability for removal of disabled aircraft	Disabled Aircraft Removal Plan (DARP) capability to remove aircraft A321 and below. DARP Coordinator: Deputy Operations Head - Airport Operations Control Center (AOCC) Phone: 09171755172 (Mobile)
4	Remarks	Foam Meeting Performance: Level C.

RPMY AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: CONC. Strength: 608/R/B/W/U.
2	Taxiway width, surface and strength	TWY Alpha Width: 27 M. Surface: CONC. Strength: 608/R/B/W/U. TWY Bravo Width: 27 M. Surface: CONC. Strength: 608/R/B/W/U.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPMY AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing guide lines from RWY to APN to parking bays.
2	RWY and TWY markings and LGT	RWY: Designation, THR CL, Touchdown zones and edge appropriately marked. TWY: CL.
3	Stop bars and RWY guard lights	Nil.
4	Other RWY protection measures	Nil.
5	Remarks	Nil.

RPMY AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY (M)	Strength (PCR) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY	Slope of RWY-SWY
1	2	3	4	5	6	7
09	085.55°	2100 X 45	608/R/B/W/U CONC	083641.28N 1242649.14E	189 FT	0.005%
27	265.55°	2100 X 45	608/R/B/W/U CONC	083646.58N 1242757.62E	189 FT	0.022%
SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	RESA dimensions (M)	Location/ description of arresting system	OFZ	Remarks
8	9	10	11	12	13	14
Nil	150 X 300	2900 X 300	90 X 90	Nil	Nil	End Strip: 60 M X 300 M
Nil	150 X 300	2900 X 300	90 X 90	Nil	Nil	End Strip: 60 M X 300 M

RPMY AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
09	2100	2250	2100	2100	Nil
27	2100	2250	2100	2100	Nil

RPMY AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
09	SALS, 420 M, LIH with Sequenced Flashing LGT	THR LGT Green RTIL Flashing White LGT	PAPI 3.0° Left/Right (63.07 FT)	Nil
27	PALS, 720 M, LIH with Sequenced Flashing LGT	THR LGT Green	PAPI 3.0° Left/Right (61.27 FT)	Nil

RWY Centre Line LGT LEN, spacing, colour, INTST	RWY Edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	1980 M, 60 M, White/Yellow White/White, LIH	Red	Nil	SALS Category 1. NR of barrette: 7 barrettes spaced 60 M. Distance of crossbar from THR: 300 M. Sequenced flashing light color: White flashes every 0.5 seconds provided for 3 barrettes. RWY THR Identification Light (RTIL) Visibility range: Within IF segment/leg. Distance from edge light: 13 M. Interval: 60 - 120 per minute. Intensity: LIH. PAPI Path width: 0.33°. Visibility range: 5.0 NM. Distance from THR: 360 M. Vertical obstruction CLR: >1.0°.
Nil	1980 M, 60 M, White/Yellow White/White, LIH	Red	Nil	PALS NR of barrette: 24 CL barrettes spaced 30 M. Distance of crossbar from THR: 300 M. Sequenced flashing light color: White flashes every 0.5 seconds provided for 15 barrettes. PAPI Path width: 0.33°. Visibility range: 5.0 NM. Distance from THR: 380 M. Vertical obstruction CLR: >1.0°.

RPMY AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Location: 083630.06N 1242723.17E. Characteristics: Alternate flashing white green every 24 - 30 flashes per minute. HR of OPS: During inclement weather.
2	LDI location and LGT Anemometer location and LGT	Nil.
3	TWY edge and centre line lighting	TWY edge: Blue; Number of lights: 91.
4	Secondary power supply/switch-over time	Switch-over time 14 seconds.
5	Remarks	Nil.

RPMY AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	LAGUINDINGAN AERODROME TRAFFIC ZONE (ATZ): A circle radius 5 NM centered on 083644N 1242723E (ARP). LAGUINDINGAN CONTROL ZONE (CTR): A circle radius 10 NM centered on 083644N 1242723E (ARP). LAGUINDINGAN TERMINAL CONTROL AREA (TMA): From 090133N 1235941E - 090131N 1244000E - 082036N 1250124E - 075807N 1245825E - 075806N 1240409E - 090133N 1235941E.
2	Vertical limits	ATZ: SFC up to but excluding 2000 FT. CTR: SFC up to 1500 FT. TMA: 1500 FT to FL200 (excluding ATZ and ATS routes below FL160).
3	Airspace classification	ATZ - B; CTR - D; TMA - D; ATS routes inside TMA below FL160 - D; ATS routes inside TMA above FL160 - A.
4	ATS unit call sign Language(s)	ATZ: Laguindingan Tower. CTR/TMA: Laguindingan Approach. English.
5	Transition altitude	11000 FT.
6	Hours of applicability	Nil.
7	Remarks	Nil.

RPMY AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	SATVOICE number	Logon address	Hours of operation	Remarks
1	2	3	4	5	6	7
TWR	Laguindingan Tower	122.6 MHZ 118.6 MHZ 5205 KHZ 121.5 MHZ	Nil	Nil	H24	PRI FREQ. SRV FREQ. P/P PRI FREQ (Mactan Network). EMERG FREQ.
APP	Laguindingan Approach	125.5 MHZ 122.3 MHZ				PRI FREQ. SRV FREQ.
ATIS	Laguindingan ATIS	127.6 MHZ				Nil.

RPMY AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
DVOR/DME	LGD	116.1 MHZ / CH108X	H24	083648.9N 1242708.2E	200 FT	DME output power: 1000 watts. DVOR output power: 100 watts.
LOC 27 ILS CAT I	ILGD	111.3 MHZ		083640.5N 1242639.5E	-	Usable distance: 25 NM. Course width: 5.08° (Transmitter 1), 5.06° (Transmitter 2). Output power: 25 watts.
GP 27 CAT I		332.3 MHZ		083649.7N 1242746.8E	-	Usable distance: 10 NM. Path width: 0.68° (Transmitter 1), 0.7° (Transmitter 2). Glide angle: 3.02° (Transmitter 1), 3.01° (Transmitter 2). Output power: 10 watts.
DME 27 CAT I		CH50X		083649.7N 1242746.8E	Nil	Coverage range: 17.32 NM. Output power: 100 watts.

RPMY AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulations

1.1 General

1.1.1 Entry and departure of aircraft on international flights:

- a. all international non-scheduled aircraft landing at Laguindingan Principal Airport shall park at the assigned bay for Customs, Immigration and Quarantine (CIQ) clearance;
- b. all international bound non-scheduled aircraft intending to depart Laguindingan Principal Airport shall remain on its assigned bay for CIQ clearance; and
- c. loading and unloading of cargoes and embarkation/disembarkation of passengers shall be done at the assigned bay.

1.1.2 Aircraft under security threat shall park at the isolation area located at the turn-around pad of RWY 09 or RWY 27 with prior clearance from airport authorities.

1.2 Local Flying Restriction

1.2.1 Laguindingan Principal Airport is close to aircraft without a functioning two-way radio.

2. Taxiing to and from stands

2.1 Arrival

2.1.1 Laguindingan Tower, upon issuance of taxiing instructions, shall include parking bay assignment.

2.1.2 Aircraft entering the apron must follow closely the apron taxi guide lines to ensure safe distance between taxiing and parked aircraft.

2.1.3 All parkings bays are allocated on a first come first serve basis with due regard to aircraft type, location of airline handling facilities, CIQ and the prevailing traffic situation.

Note: Long term parking of aircraft or intending to stay overnight may be required to park/reposition at bay number 1 or at the General Aviation Ramp.

2.1.4 All aircraft may taxi-in with power to their respective bay assignment and must be assisted with wing marshals/walkers.

2.1.5 Bay numbers 1, 2, 3, 4 and 5 are exclusively for aircraft A320 and lower category. Higher category aircraft may be allowed to use the bay provided that no other aircraft are parked or are expected to park adjacent to it.

2.1.6 General aviation aircraft intending to remain overnight should park their aircraft at the General Aviation Ramp or as instructed by ATC.

2.2 Departure

2.2.1 Clearance from Laguindingan Tower must be obtained prior to commencing push-back/tow or taxi of all aircraft.

2.2.2 All aircraft push-back and tow-out operations must be assisted by wing marshals/walkers.

2.2.3 All aircraft must strictly follow the respective nose wheel stop bars.

3. Parking

- 3.1 General aviation aircraft shall park, load and/or unload passengers at the General Aviation Ramp unless authorized by ATC to other bays.
- 3.1.1 Assignment of Parking Bays
- 3.1.1.1 Bays number 1, 2, 3, 4 and 5 - A320 and lower category aircraft.

4. Removal of Disabled Aircraft from Runway

- 4.1 Removal of disabled aircraft on the runway is the sole responsibility of the aircraft owner/operator.

5. Handling of oversized aircraft

- 5.1 All operations of an oversized aircraft larger than those normally handled at the Laguindingan Principal Airport required prior notice/approval from the airport management for the assessment of runway, taxiway, parking and weight limitation requirements.
- 5.2 The airport management upon granting the approval shall disseminate the information to all CAA of the Philippines (CAAP) Operations unit head/chief for the proper handling of the flight.
- 5.3 The aircraft operator shall be responsible for coordinating the ground handling services including the refueling and other services as well as the documentary requirement for the said flight.
- 5.4 The ATS upon receiving the information shall provide the necessary assistance in providing service as defined on their Manual of Operations taking into consideration local conditions, operational factors, operating restrictions and the application of mitigation or alternative measures for its safe operation.
- 5.5 Special handling may be required including the use of a wing marshal/walkers.
- 5.6 After the landing and departure of the oversized aircraft, the Aerodrome Rescue and Fire Fighting (ARFF)/CAAP Security and Intelligence Service (CSIS) shall conduct runway inspection for possible presence of Foreign Object Debris (FOD) or any damage on the runway, taxiway and/or apron.

6. Updating of Aeronautical Information Publication

- 6.1 The CAAP-Laguindingan Airport Safety Office, upon receiving notification from concerned airport units/services regarding any changes in airport information, shall coordinate with CAAP (Manila) and AIS for the changes/revisions/amendments to ensure that information is updated and accurate.

RPMY AD 2.22 FLIGHT PROCEDURES

1. General Procedures for VFR flights

- 1.1 The following air traffic procedures shall apply to all VFR flights when entering, leaving, operating or transiting the vicinity of Laguindingan ATZ.
 - 1.1.1 All departing VFR flights shall maintain a listening watch on Laguindingan Tower frequency 122.6 MHZ until instructed to leave the frequency or to contact Laguindingan Approach frequency on 125.5 MHZ while operating within Laguindingan TMA.
 - 1.1.2 All arriving VFR flights shall establish contact and remain on listening watch with Laguindingan Approach frequency on 125.5 MHZ upon entering Laguindingan TMA or to establish two-way radio contact with Laguindingan Tower on frequency 122.6 MHZ fifteen (15) NM inbound to the airport.
 - 1.1.3 ATC instructions and traffic information shall be acknowledged and complied with.
 - 1.1.4 When operating within Laguindingan TMA, pilots of VFR aircraft are to conform to the following altitude restrictions unless otherwise specified in the succeeding procedures or authorized by ATC:
 - a. from five (5) NM up to ten (10) NM from Laguindingan ARP, not higher than 1500 FT; and
 - b. from ten (10) NM up to fifteen (15) NM from Laguindingan ARP, not higher than 2500 FT.
 - 1.1.5 All VFR traffic shall secure approval from Laguindingan Control Tower before crossing the final approach of RWY 09/27.
 - 1.1.6 Any deviation from the procedures shall be subject to ATC approval.

2. Arrival and Departure Procedures

2.1 VFR Procedures RWY 09

2.1.1 Departure

- a. Southeast bound: After airborne, make a right turn and fly towards East of ASIA BREWERY or proceed as instructed by ATC.
- b. Southwest bound: After airborne, make a right downwind departure. Fly over water following the shoreline towards West of MATANGAD or proceed as instructed by ATC.
- c. North/northeast/northwest bound: After airborne, make a left turn and fly towards northeast. Report 5 NM NE or proceed as instructed by ATC.

2.1.2 Arrival

- a. From the East/southeast: Report approaching CAGAYAN DE ORO PORT. Continue towards West of ASIA BREWERY. Request clearance to join right downwind RWY 09 or proceed as instructed by ATC.
- b. From the South: Report ten (10) NM South. Proceed towards West of ASIA BREWERY. Request clearance to join right downwind RWY 09 or proceed as instructed by ATC.
- c. From the West/southwest: Report approaching MIDWAY BEACH. Follow the Butuan - Cagayan de Oro - Iligan Road towards East of LIBERTAD. Request clearance to join right downwind RWY 09 or proceed as instructed by ATC.
- d. From the North/northwest/northeast: Report ten (10) NM North. Proceed and report 5 NM N. Request clearance to join left downwind RWY 09 or proceed as instructed by ATC.

2.2 VFR Procedures RWY 27

2.2.1 Departure

- a. Southeast bound: After airborne, make a left downwind departure. Fly over water following the shoreline towards East of ASIA BREWERY or proceed as instructed by ATC.
- b. Southwest bound: After airborne, make a left turn and fly over water following the shorelines towards West of MATANGAD or proceed as instructed by ATC.
- c. North/northeast/northwest bound: After airborne, make a right turn and fly northwest. Report 5 NM NW or proceed as instructed by ATC.

2.2.2 Arrival

- a. From the East/southeast: Report approaching CAGAYAN DE ORO PORT. Continue towards West of ASIA BREWERY. Request clearance to join left downwind RWY 27 or proceed as instructed by ATC.
- b. From the South: Report ten (10) NM South. Proceed towards West of ASIA BREWERY. Request clearance to join downwind RWY 27 or proceed as instructed by ATC.
- c. From the West/southwest: Report approaching MIDWAY BEACH. Follow the Butuan - Cagayan de Oro - Iligan Road towards East of LIBERTAD. Request clearance to join left downwind RWY 27 or proceed as instructed by ATC.
- d. From the North/northwest/northeast: Report ten (10) NM North. Proceed and report 5 NM N. Request clearance to join right downwind RWY 27 or proceed as instructed by ATC.

3. List of Visual Landmarks and Reporting Points

- 3.1 The following visual reference and reporting points as mentioned in the procedure are identified using local available maps, Google Maps and Google Earth Satellite images.


VISUAL REPORTING POINT	COORDINATES	DISTANCE FROM ARP (NM)	RELATIVE POSITION FROM ARP	DESCRIPTION
5 NM N	084145N 1242724E	5.0	N	5 NM North over water
5 NM NE	084016N 1243058E	5.0	NE	5 NM northeast over water
5 NM NW	084009N 1242341E	5.0	NW	5 NM northwest over water
ASIA BREWERY	083342N 1243047E	4.5	SE	Asia Brewery Plant in El Salvador
CAGAYAN DE ORO PORT	082944N 1243944E	14.1	SE	Philippine Ports Authority Cagayan de Oro
LIBERTAD	083347N 1242107E	6.9	SW	Libertad Municipality
MATANGAD	083501N 1242218E	5.3	SW	Matangad Beach
MIDWAY BEACH	083201N 1241843E	9.8	SW	Midway White Beach in Initao

VFR
AREA
CHART

AERODROME ELEV
191 FT

APP - 125.5 / 122.3
TWR - 122.6 / 118.6

MISAMIS ORIENTAL/
Laguindingan (RPMY)

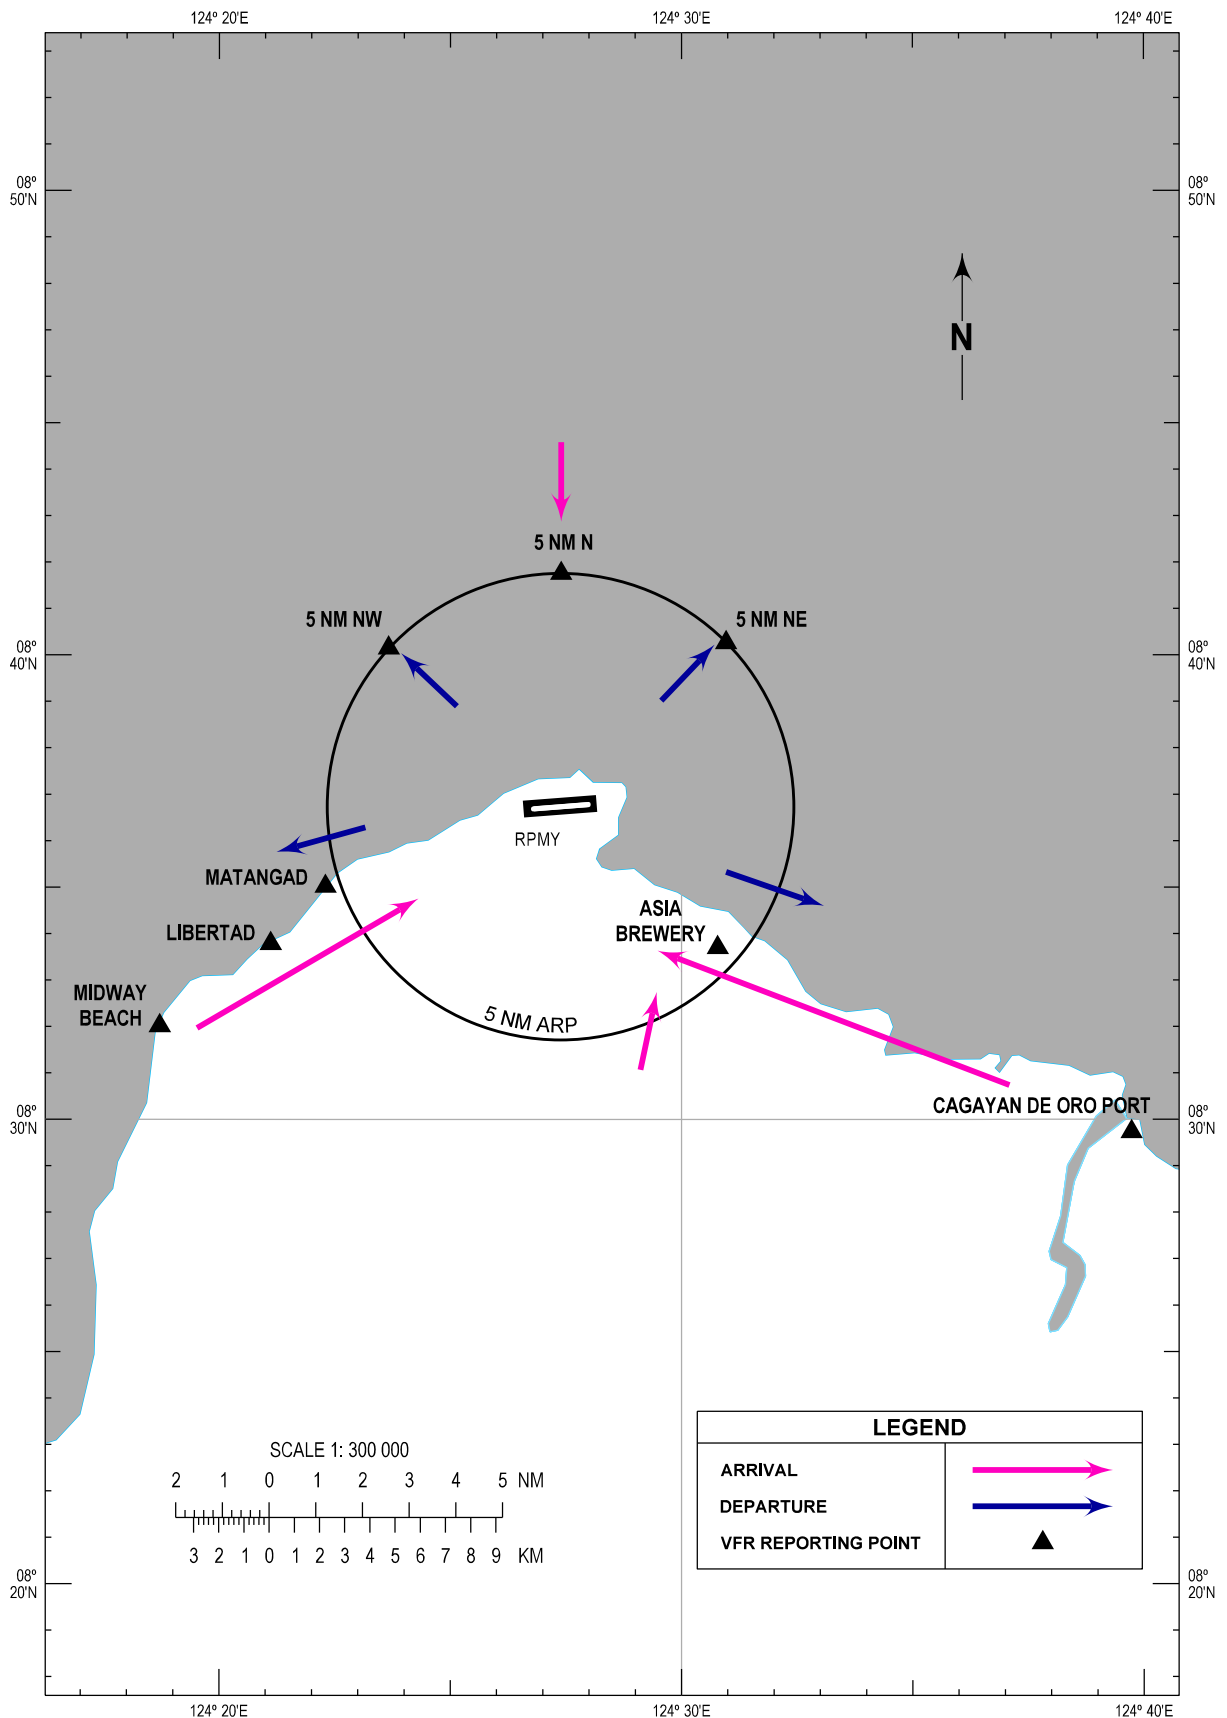


RPMY AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Area Chart	RPMY AD CHART 2 - 1
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 09)	RPMY AD CHART 2 - 3
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 27)	RPMY AD CHART 2 - 7
Standard Arrival Chart - Instrument - ICAO (RWY 27)	RPMY AD CHART 2 - 11
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 09)	RPMY AD CHART 2 - 13
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 27)	RPMY AD CHART 2 - 17
Instrument Approach Chart - ICAO (ILS OR LOC RWY 27)	RPMY AD CHART 2 - 21
Instrument Approach Chart - ICAO (RNP RWY 09)	RPMY AD CHART 2 - 23
Instrument Approach Chart - ICAO (RNP RWY 27)	RPMY AD CHART 2 - 25
Traffic Circuit Chart (RWY 09)	RPMY AD CHART 2 - 27
Traffic Circuit Chart (RWY 27)	RPMY AD CHART 2 - 28

AREA CHART

LAGUINDINGAN TMA

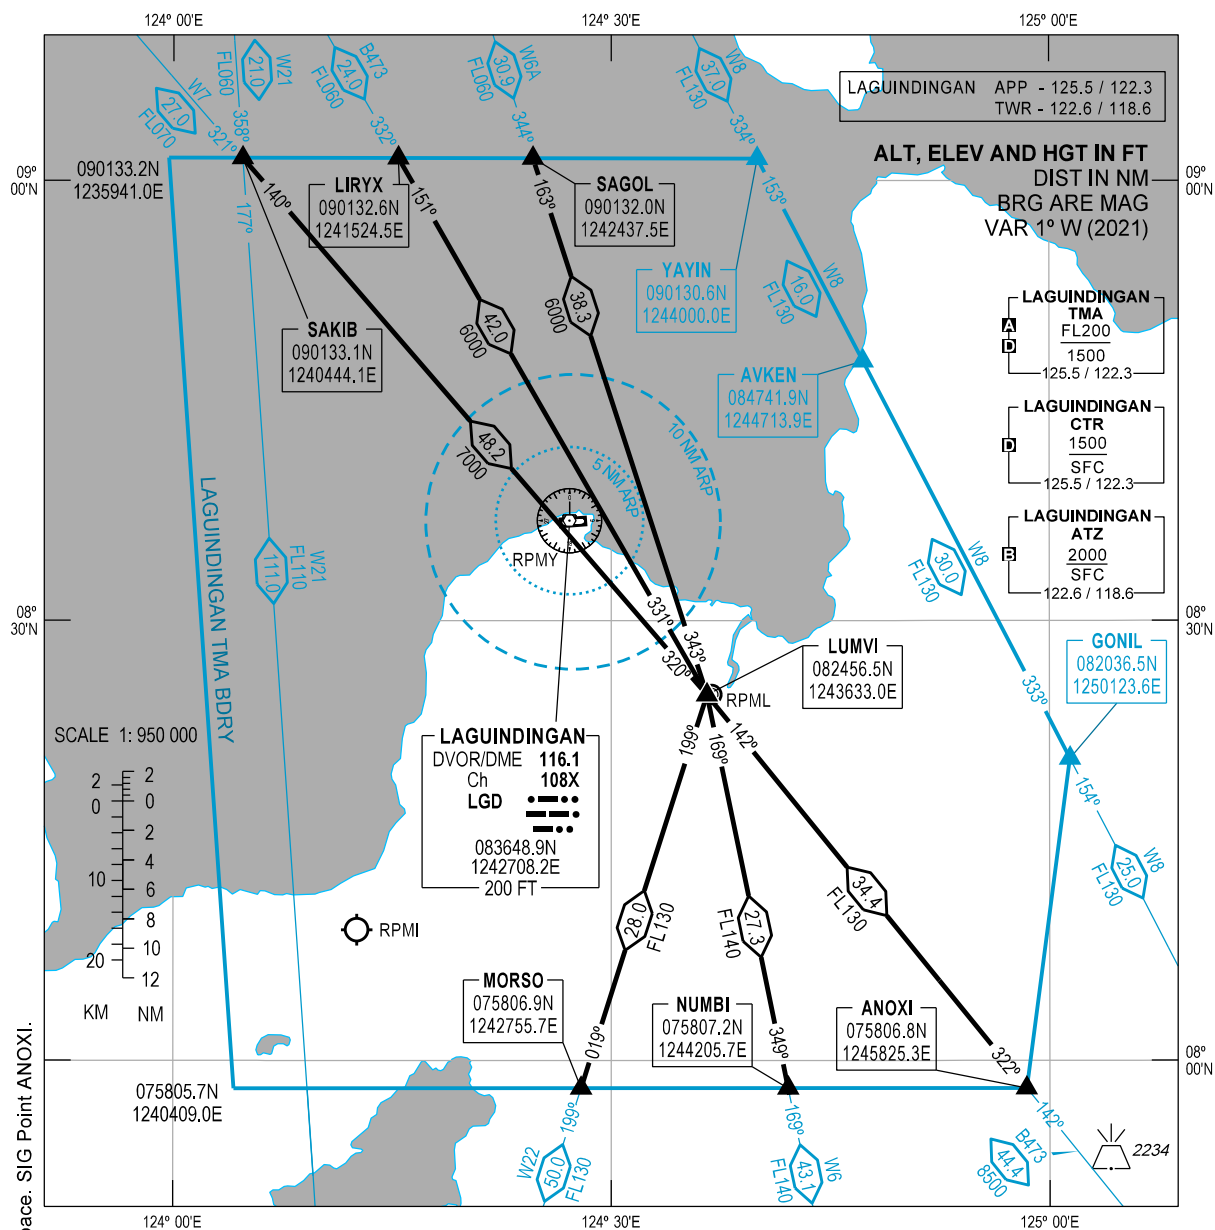

CHANGES: ALT, DIST and QDR ANOXI. ATS Airspace. SIG Point ANOXI.

LEGEND		
CTA	(TMA)	
	(AWY)	
ATZ		
CRP		
DEPARTURE/ARRIVAL ROUTING		
DIST		
MNM FLT ALT		6000
QDR		320°
COM FAILURE		
- SET TRANSPONDER MODE A CODE 7600		
- FOLLOW COM FAILURE PROC ON RELEVANT SID/STAR		

RDO NAVAID	
NAME	LAGUINDINGAN
NAVAID TYPE AND FREQ	DVOR/DME 116.1
IDENT	Ch 108X
COORD	083648.9N 1242708.2E
ELEV OF DME ANTENNA	200 FT
NOTE:	
FOR DETAILS OF SID AND STAR PROC. SEE APPROPRIATE AD PAGES.	


INTENTIONALLY
LEFT
BLANK

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

TRANSITION
ALTITUDE
11000 FT

TWR - 122.6 / 118.6
APP - 125.5 / 122.3
ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)

MISAMIS ORIENTAL/
Laguindingan (RPMY)
RNP SID RWY 09
ANOXI5A LIRYX5A MORSO5A
NUMBI5A SAKIB5A

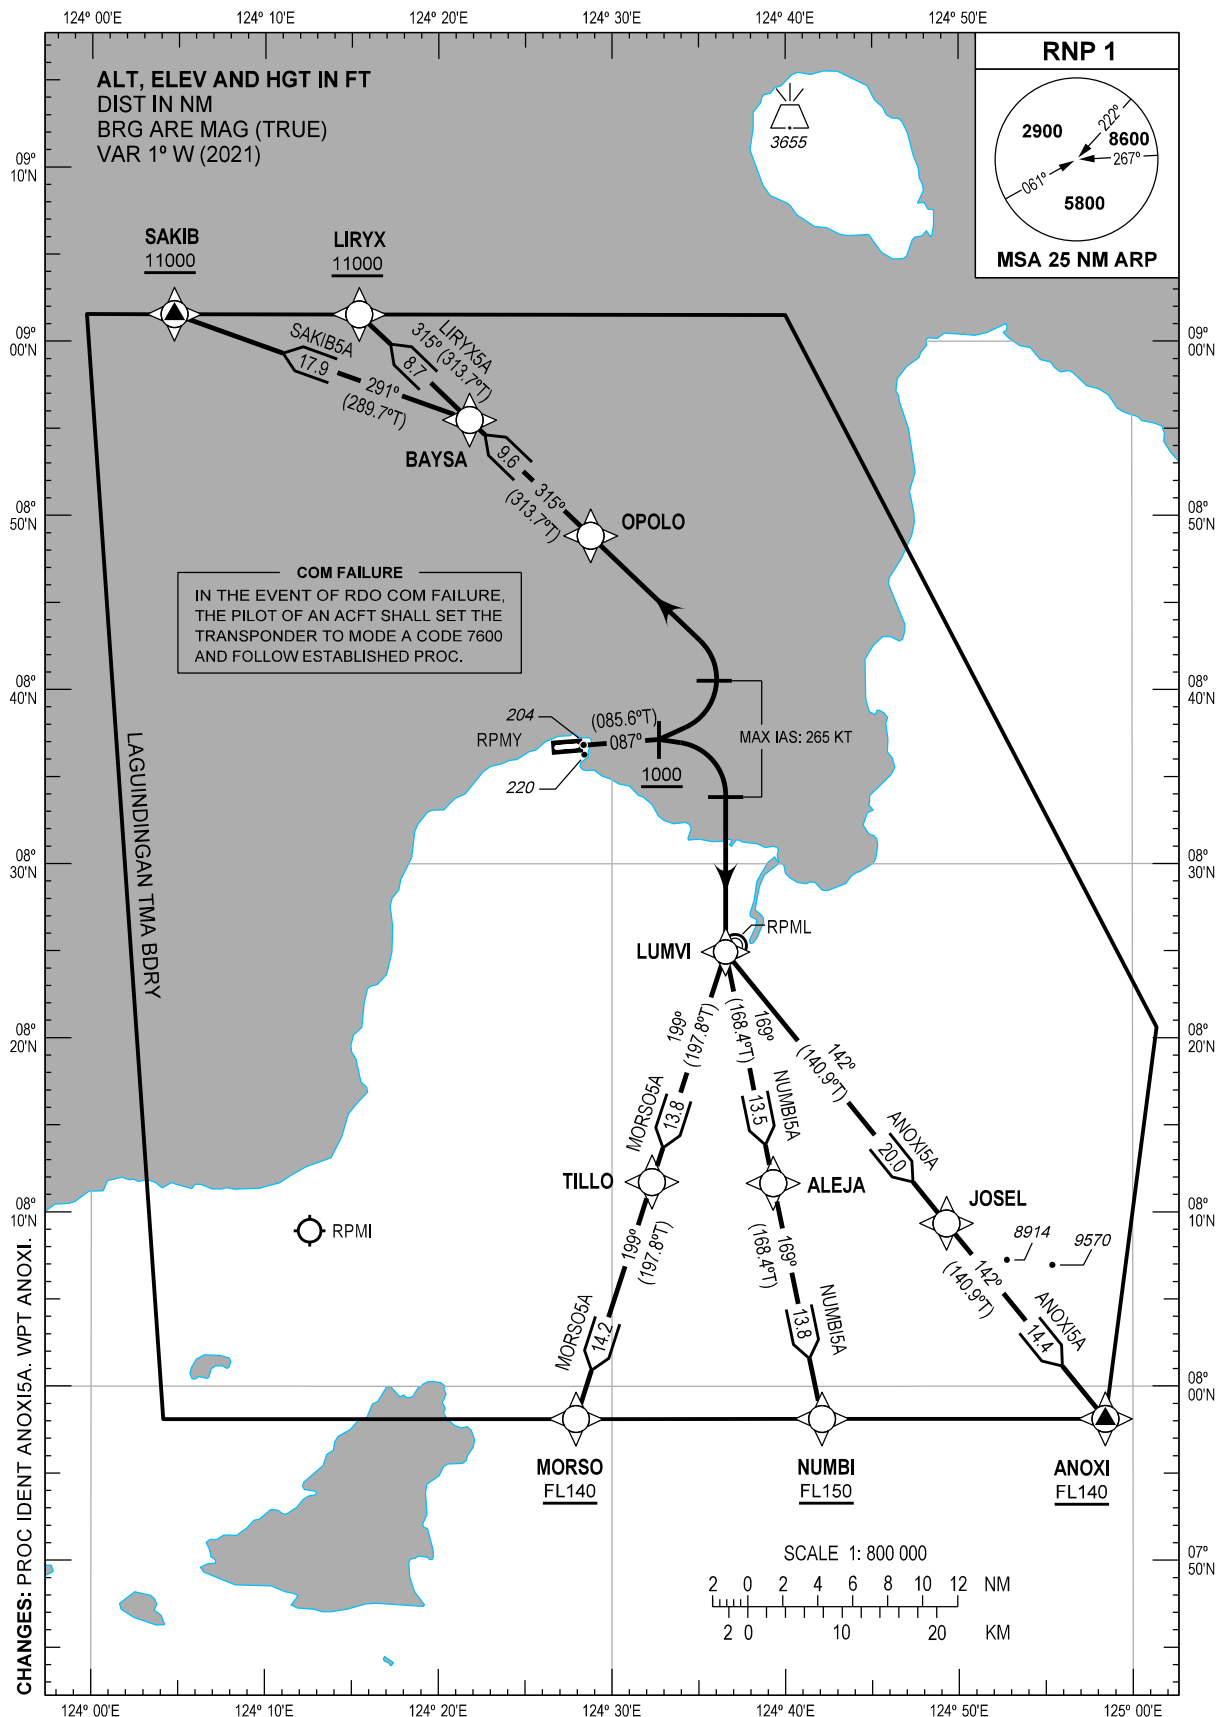

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
ANOXI5A	RWY 09	Climb on course 087°M to 1000 FT, turn right direct to LUMVI, to JOSEL, to ANOXI.	(1) ATS gradient of 4.6% to reach ANOXI at or above FL140. (2) PDG of 4.6%. Maintain MAX IAS of 265 KT up to LUMVI.
LIRYX5A		Climb on course 087°M to 1000 FT, turn left direct to OPOLO, to BAYSA, to LIRYX.	ATS gradient of 5.4% to reach LIRYX at or above 11000 FT. Maintain MAX IAS of 265 KT up to OPOLO.
MORSO5A		Climb on course 087°M to 1000 FT, turn right direct to LUMVI, to TILLO, to MORSO.	ATS gradient of 5.2% to reach MORSO at or above FL140. Maintain MAX IAS of 265 KT up to LUMVI.
NUMBI5A		Climb on course 087°M to 1000 FT, turn right direct to LUMVI, to ALEJA, to NUMBI.	ATS gradient of 5.6% to reach NUMBI at or above FL150.
SAKIB5A		Climb on course 087°M to 1000 FT, turn left direct to OPOLO, to BAYSA, to SAKIB.	ATS gradient of 4.2% to reach SAKIB at or above 11000 FT. Maintain MAX IAS of 265 KT up to OPOLO.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ALEJA	081139.3N	1243917.5E	Fly-by
ANOXI	075806.8N	1245825.3E	Fly-by
BAYSA	085529.0N	1242146.9E	Fly-by
JOSEL	080920.8N	1244916.3E	Fly-by
LIRYX	090132.6N	1241524.5E	Fly-by
LUMVI	082456.5N	1243633.0E	Fly-by
MORSO	075806.9N	1242755.7E	Fly-by
NUMBI	075807.2N	1244205.7E	Fly-by
OPOLO	084850.1N	1242846.1E	Fly-by
SAKIB	090133.1N	1240444.1E	Fly-by
TILLO	081143.7N	1243218.0E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 09

Table 1: ANOXI5A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	087 (085.6)	+1	-	-	+1000	-265	-	RNP1	RW09
20	DF	LUMVI	-	-	-	-	R	-	-265	-	RNP1	RW09
30	TF	JOSEL	-	142 (140.9)	+1	20.0	-	-	-	-	RNP1	RW09
40	TF	ANOXI	-	142 (140.9)	+1	14.4	-	+FL140	-	-	RNP1	RW09

CHANGES: PROC IDENT ANOXI5A. WPT ANOXI.

Table 2: LIRYX5A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	087 (085.6)	+1	-	-	+1000	-265	-	RNP1	RW09
20	DF	OPOLO	-	-	-	-	L	-	-265	-	RNP1	RW09
30	TF	BAYSA	-	315 (313.7)	+1	9.6	-	-	-	-	RNP1	RW09
40	TF	LIRYX	-	315 (313.7)	+1	8.7	-	+11000	-	-	RNP1	RW09

Table 3: MORSO5A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	087 (085.6)	+1	-	-	+1000	-265	-	RNP1	RW09
20	DF	LUMVI	-	-	-	-	R	-	-265	-	RNP1	RW09
30	TF	TILLO	-	199 (197.8)	+1	13.8	-	-	-	-	RNP1	RW09
40	TF	MORSO	-	199 (197.8)	+1	14.2	-	+FL140	-	-	RNP1	RW09

Table 4: NUMBI5A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	087 (085.6)	+1	-	-	+1000	-265	-	RNP1	RW09
20	DF	LUMVI	-	-	-	-	R	-	-265	-	RNP1	RW09
30	TF	ALEJA	-	169 (168.4)	+1	13.5	-	-	-	-	RNP1	RW09
40	TF	NUMBI	-	169 (168.4)	+1	13.8	-	+FL150	-	-	RNP1	RW09

Table 5: SAKIB5A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	087 (085.6)	+1	-	-	+1000	-265	-	RNP1	RW09
20	DF	OPOLO	-	-	-	-	L	-	-265	-	RNP1	RW09
30	TF	BAYSA	-	315 (313.7)	+1	9.6	-	-	-	-	RNP1	RW09
40	TF	SAKIB	-	291 (289.7)	+1	17.9	L	+11000	-	-	RNP1	RW09


INTENTIONALLY
LEFT
BLANK

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

TRANSITION
ALTITUDE
11000 FT

TWR - 122.6 / 118.6
APP - 125.5 / 122.3
ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)

MISAMIS ORIENTAL/
Laguindingan (RPMY)
RNP SID RWY 27
ANOXITA LIRYX7A MORSO7A
NUMBITA SAKIB7A

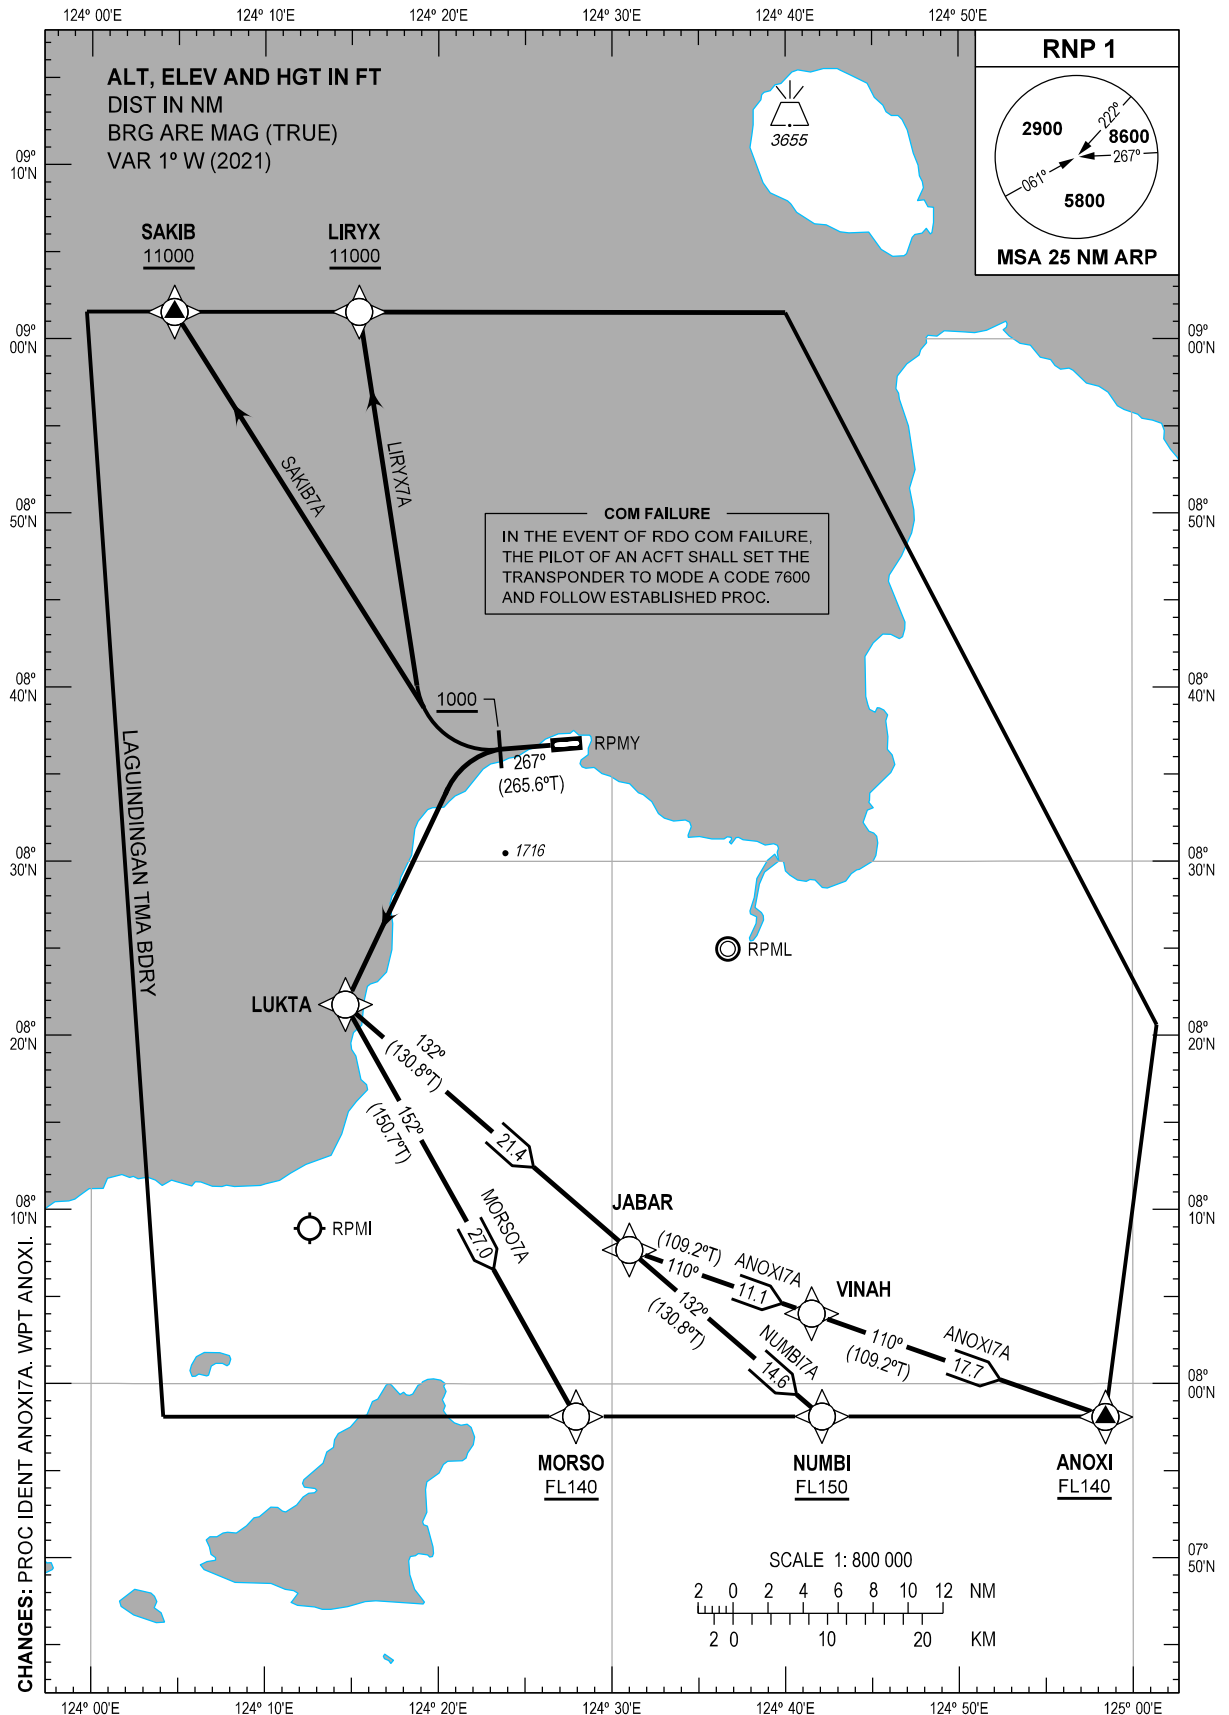

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
ANOXI7A	RWY 27	Climb on course 267°M to 1000 FT, turn left direct to LUKTA, to JABAR, to VINAH then to ANOXI.	(1) ATS gradient of 4.4% to cross ANOXI at or above FL140. (2) Required climb gradient of 3.6% to LUKTA.
LIRYX7A		Climb on course 267°M to 1000 FT, turn right direct to LIRYX.	ATS gradient of 5.8% to reach LIRYX at or above 11000 FT.
MORSO7A		Climb on course 267°M to 1000 FT, turn left direct to LUKTA, then to MORSO.	(1) ATS gradient of 4.9% to reach MORSO at or above FL140. (2) Required climb gradient of 3.6% to LUKTA.
NUMBI7A		Climb on course 267°M to 1000 FT, turn left direct to LUKTA, to JABAR, then to NUMBI.	(1) ATS gradient of 4.5% to reach NUMBI at or above FL150. (2) Required climb gradient of 3.6% to LUKTA.
SAKIB7A		Climb on course 267°M to 1000 FT, turn right direct to SAKIB.	ATS gradient of 5.1% to reach SAKIB at or above 11000 FT.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ANOXI	075806.8N	1245825.3E	Fly-by
JABAR	080741.0N	1243100.0E	Fly-by
LIRYX	090132.6N	1241524.5E	Fly-by
LUKTA	082146.3N	1241437.8E	Fly-by
MORSO	075806.9N	1242755.7E	Fly-by
NUMBI	075807.2N	1244205.7E	Fly-by
SAKIB	090133.1N	1240444.1E	Fly-by
VINAH	080401.5N	1244129.9E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 27

Table 1: ANOXI7A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	267 (265.6)	+1	-	-	+1000	-	-	RNP1	RW27
20	DF	LUKTA	-	-	-	-	L	-	-	-	RNP1	RW27
30	TF	JABAR	-	132 (130.8)	+1	21.4	L	-	-	-	RNP1	RW27
40	TF	VINAH	-	110 (109.2)	+1	11.1	L	-	-	-	RNP1	RW27
50	TF	ANOXI	-	110 (109.2)	+1	17.7	-	+FL140	-	-	RNP1	RW27

Table 2: LIRYX7A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	267 (265.6)	+1	-	-	+1000	-	-	RNP1	RW27
20	DF	LIRYX	-	-	-	-	R	+11000	-	-	RNP1	RW27

CHANGES: PROC IDENT ANOXI7A. WPT ANOXI.

Table 3: MORSO7A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	267 (265.6)	+1	-	-	+1000	-	-	RNP1	RW27
20	DF	LUKTA	-	-	-	-	L	-	-	-	RNP1	RW27
30	TF	MORSO	-	152 (150.7)	+1	27.0	-	+FL140	-	-	RNP1	RW27

Table 4: NUMBI7A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	267 (265.6)	+1	-	-	+1000	-	-	RNP1	RW27
20	DF	LUKTA	-	-	-	-	L	-	-	-	RNP1	RW27
30	TF	JABAR	-	132 (130.8)	+1	21.4	L	-	-	-	RNP1	RW27
40	TF	NUMBI	-	132 (130.8)	+1	14.6	-	+FL150	-	-	RNP1	RW27

Table 5: SAKIB7A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	267 (265.6)	+1	-	-	+1000	-	-	RNP1	RW27
20	DF	SAKIB	-	-	-	-	R	+11000	-	-	RNP1	RW27

INTENTIONALLY
LEFT
BLANK

**MISAMIS ORIENTAL/
Laguindingan (RPMY)
RWY 27**
ANOXI2C GONIL2C MORSO2C
NUMBI2C SAGOL2C SAKIB2C



ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
ANOXI2C	ANOXI - JOBUD - EDONG - CASEY - WINIR - LGD DVOR/DME	From ANOXI on LGD DVOR/DME Radial 142, to JOBUD at or above FL130, to EDONG at or above 11000 FT, to CASEY at or above 6000 FT, to WINIR at or above 4000 FT, to LGD DVOR/DME.	
GONIL2C	GONIL - JASMI - IPLER - LUTIL - LGD DVOR/DME	From GONIL on LGD DVOR/DME Radial 116, to JASMI at or above 8500 FT, to IPLER at or above 4000 FT, to LUTIL, to LGD DVOR/DME.	
MORSO2C	MORSO - ECTIN - MICOL - VICAR - LGD DVOR/DME	From MORSO on LGD DVOR/DME Radial 180, to ECTIN at or above 6500 FT, to MICOL at or above 5500 FT, to VICAR at or above 5000 FT, to LGD DVOR/DME at or above 4000 FT.	
NUMBI2C	NUMBI - AYYAN - KALIX - YUBEE - LGD DVOR/DME	From NUMBI on LGD DVOR/DME Radial 160, to AYYAN at or above 9500 FT, to KALIX at or above 5500 FT, to YUBEE at or above 4000 FT, to LGD DVOR/DME.	
SAGOL2C	SAGOL - BODIE - LGD DVOR/DME	From SAGOL on LGD DVOR/DME Radial 355, to BODIE at or above 4000 FT, to LGD DVOR/DME.	
SAKIB2C	SAKIB - CRIZU - LGD DVOR/DME	From SAKIB on LGD DVOR/DME Radial 319, to CRIZU at or above 4000 FT, to LGD DVOR/DME.	


CHANGES: PROC IDENT ANOXI2C. SIG Point ANOXI.

STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO

TRANSITION
ALTITUDE
11000 FT

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)
APP - 125.5 / 122.3
TWR - 122.6 / 118.6

MISAMIS ORIENTAL/
Laguindingan (RPMY)
RNP STAR RWY 09
ANOXI4A MORSO4A NUMBI4A
SAGOL4A SAKIB4A

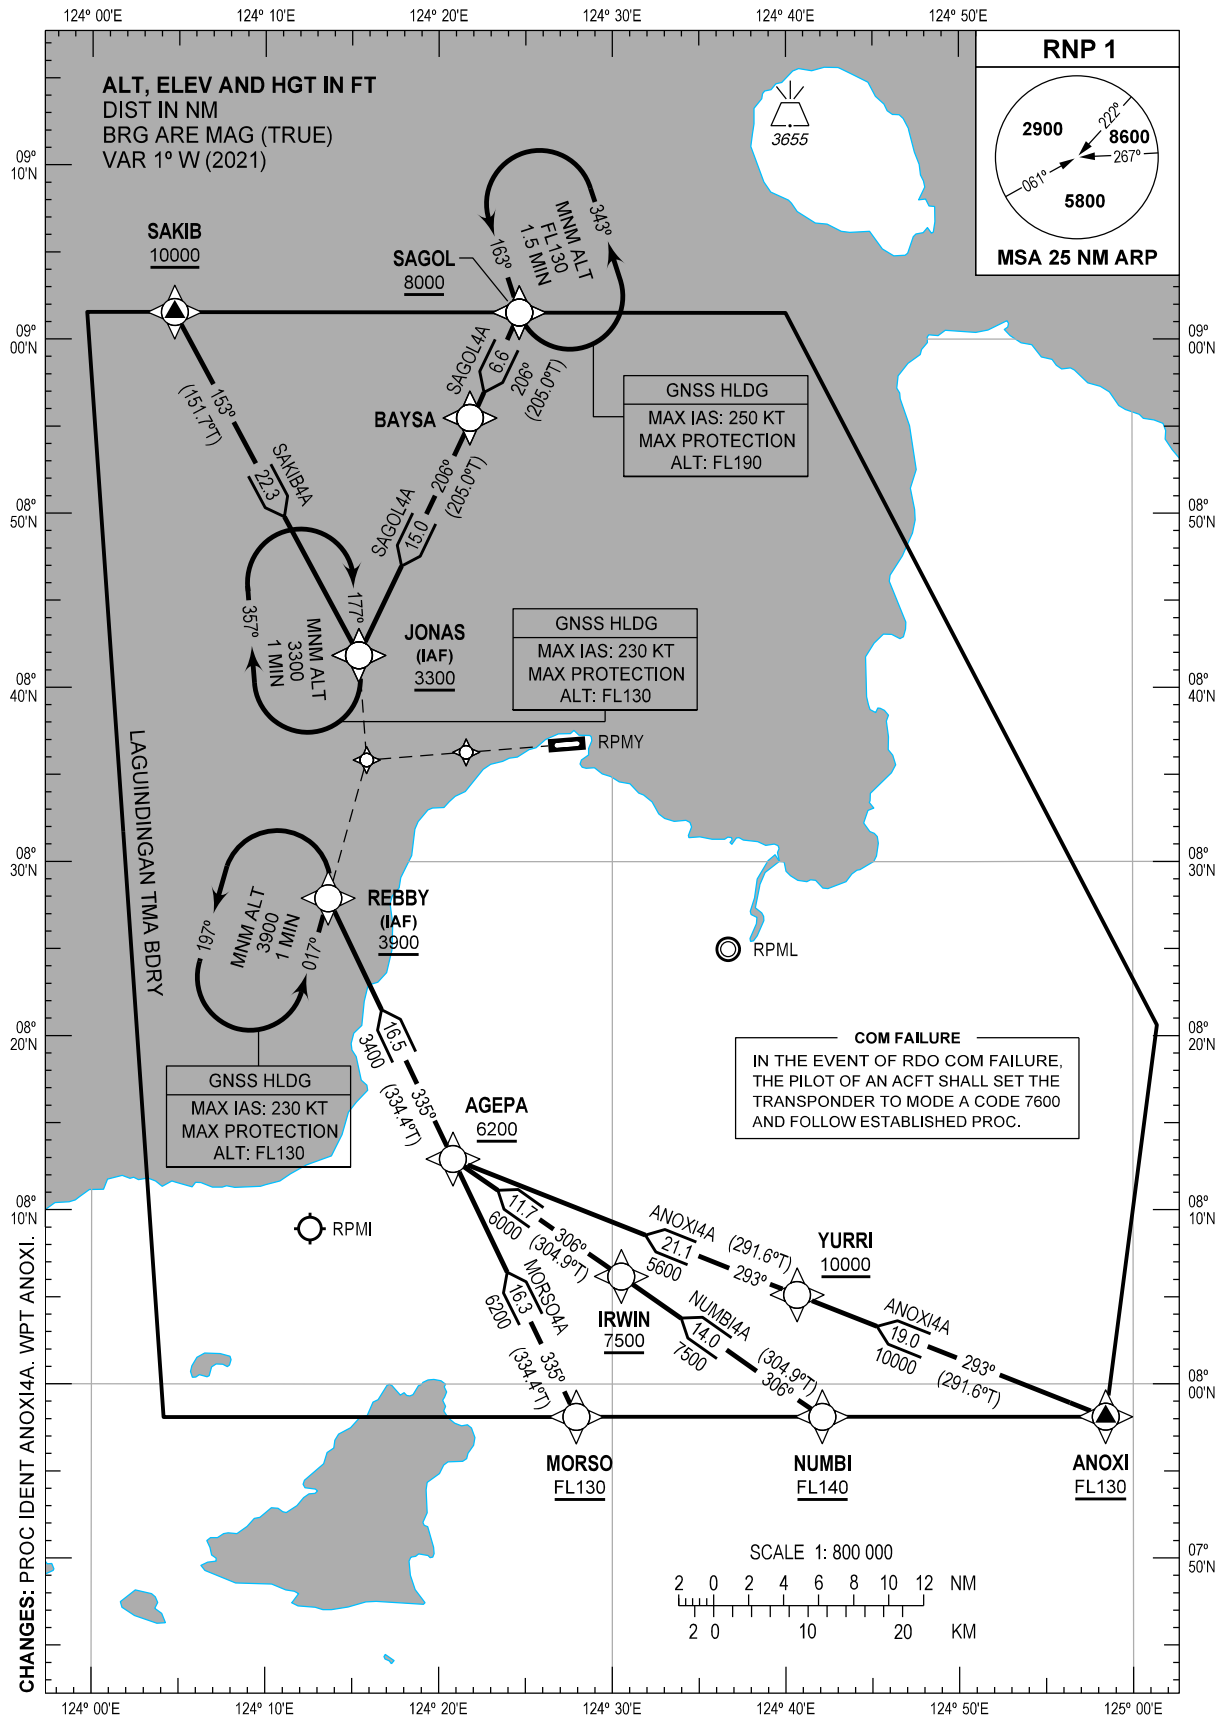

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
ANOXI4A	ANOXI - YURRI - AGEPA - REBBY	From ANOXI at or above FL130, to YURRI at or above 10000 FT, to AGEPA at or above 6200 FT, to REBBY at or above 3900 FT.	
MORSO4A	MORSO - AGEPA - REBBY	From MORSO at or above FL130, to AGEPA at or above 6200 FT, to REBBY at or above 3900 FT.	
NUMBI4A	NUMBI - IRWIN - AGEPA - REBBY	From NUMBI at or above FL140, to IRWIN at or above 7500 FT, to AGEPA at or above 6200 FT, to REBBY at or above 3900 FT.	
SAGOL4A	SAGOL - BAYSA - JONAS	From SAGOL at or above 8000 FT, to BAYSA, to JONAS at or above 3300 FT.	
SAKIB4A	SAKIB - JONAS	From SAKIB at or above 10000 FT, to JONAS at or above 3300 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
AGEPA	081255.4N	1242049.0E	Fly-by
ANOXI	075806.8N	1245825.3E	Fly-by
BAYSA	085529.0N	1242146.9E	Fly-by
IRWIN	080610.8N	1243031.0E	Fly-by
JONAS	084150.7N	1241522.8E	Fly-by
MORSO	075806.9N	1242755.7E	Fly-by
NUMBI	075807.2N	1244205.7E	Fly-by
REBBY	082753.8N	1241337.0E	Fly-by
SAGOL	090132.0N	1242437.5E	Fly-by
SAKIB	090133.1N	1240444.1E	Fly-by
YURRI	080507.3N	1244038.9E	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 09

Table 1: **ANOXI4A**

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	ANOXI	-	-	-	-	-	+FL130	-	-	RNP1	RW09
20	TF	YURRI	-	293 (291.6)	+1	19.0	-	+10000	-	-	RNP1	RW09
30	TF	AGEPA	-	293 (291.6)	+1	21.1	-	+6200	-	-	RNP1	RW09
40	TF	REBBY	-	335 (334.4)	+1	16.5	R	+3900	-	-	RNP1	RW09

CHANGES: PROC IDENT ANOXI4A. WPT ANOXI.

Table 2: MORSO4A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	MORSO	-	-	-	-	-	+FL130	-	-	RNP1	RW09
20	TF	AGEPA	-	335 (334.4)	+1	16.3	-	+6200	-	-	RNP1	RW09
30	TF	REBBY	-	335 (334.4)	+1	16.5	-	+3900	-	-	RNP1	RW09

Table 3: NUMBI4A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	NUMBI	-	-	-	-	-	+FL140	-	-	RNP1	RW09
20	TF	IRWIN	-	306 (304.9)	+1	14.0	-	+7500	-	-	RNP1	RW09
30	TF	AGEPA	-	306 (304.9)	+1	11.7	-	+6200	-	-	RNP1	RW09
40	TF	REBBY	-	335 (334.4)	+1	16.5	R	+3900	-	-	RNP1	RW09

Table 4: SAGOL4A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	SAGOL	-	-	-	-	-	+8000	-	-	RNP1	RW09
20	TF	BAYSA	-	206 (205.0)	+1	6.6	-	-	-	-	RNP1	RW09
30	TF	JONAS	-	206 (205.0)	+1	15.0	-	+3300	-	-	RNP1	RW09

Table 5: SAKIB4A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	SAKIB	-	-	-	-	-	+10000	-	-	RNP1	RW09
20	TF	JONAS	-	153 (151.7)	+1	22.3	-	+3300	-	-	RNP1	RW09


INTENTIONALLY
LEFT
BLANK

STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO

TRANSITION
ALTITUDE
11000 FT

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)
APP - 125.5 / 122.3
TWR - 122.6 / 118.6

MISAMIS ORIENTAL/
Laguindingan (RPMY)
RNP STAR RWY 27
ANOXI6A MORSO6A NUMBI6A
SAGOL6A SAKIB6A

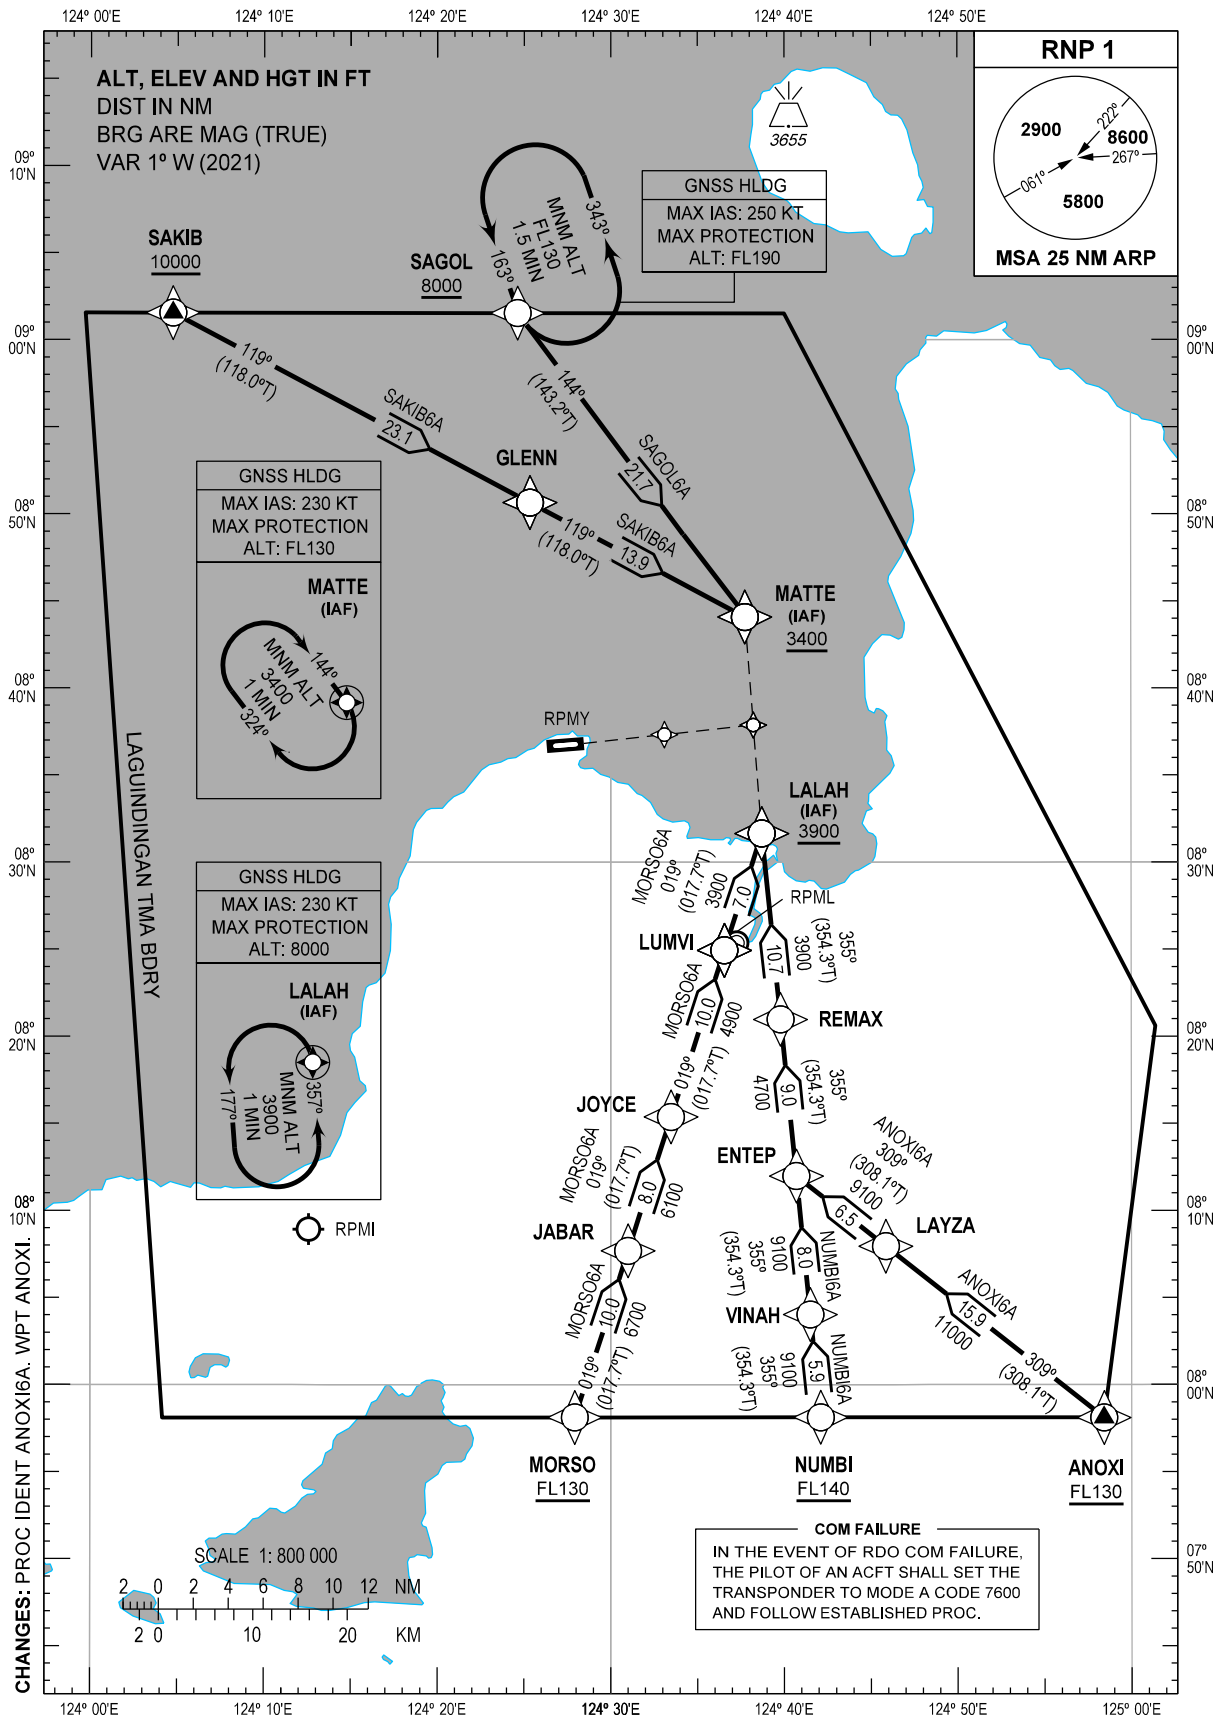

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
ANOXI6A	ANOXI - LAYZA - ENTEP - REMAX - LALAH	From ANOXI at or above FL130, to LAYZA, to ENTEP, to REMAX, to LALAH at or above 3900 FT.	
MORSO6A	MORSO - JABAR - JOYCE - LUMVI - LALAH	From MORSO at or above FL130, to JABAR, to JOYCE, to LUMVI, to LALAH at or above 3900 FT.	
NUMBI6A	NUMBI - VINAH - ENTEP - REMAX - LALAH	From NUMBI at or above FL140, to VINAH, to ENTEP, to REMAX, to LALAH at or above 3900 FT.	
SAGOL6A	SAGOL - MATTE	From SAGOL at or above 8000 FT, to MATTE at or above 3400 FT.	
SAKIB6A	SAKIB - GLENN - MATTE	From SAKIB at or above 10000 FT, to GLENN, to MATTE at or above 3400 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ANOXI	075806.8N	1245825.3E	Fly-by
ENTEP	081158.7N	1244041.7E	Fly-by
GLENN	085039.2N	1242520.2E	Fly-by
JABAR	080741.0N	1243100.0E	Fly-by
JOYCE	081522.4N	1243328.3E	Fly-by
LALAH	083139.1N	1243842.4E	Fly-by
LAYZA	080756.9N	1244551.2E	Fly-by
LUMVI	082456.5N	1243633.0E	Fly-by
MATTE	084404.8N	1243744.1E	Fly-by
MORSO	075806.9N	1242755.7E	Fly-by
NUMBI	075807.2N	1244205.7E	Fly-by
REMAX	082058.6N	1243947.2E	Fly-by
SAGOL	090132.0N	1242437.5E	Fly-by
SAKIB	090133.1N	1240444.1E	Fly-by
VINAH	080401.5N	1244129.9E	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 27

Table 1: ANOXI6A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	ANOXI	-	-	-	-	-	+FL130	-	-	RNP1	RW27
20	TF	LAYZA	-	309 (308.1)	+1	15.9	-	-	-	-	RNP1	RW27
30	TF	ENTEP	-	309 (308.1)	+1	6.5	-	-	-	-	RNP1	RW27
40	TF	REMAX	-	355 (354.3)	+1	9.0	-	-	-	-	RNP1	RW27
50	TF	LALAH	-	355 (354.3)	+1	10.7	-	+3900	-	-	RNP1	RW27

CHANGES: PROC IDENT ANOXI6A. WPT ANOXI.

Table 2: MORSO6A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	MORSO	-	-	-	-	-	+FL130	-	-	RNP1	RW27
20	TF	JABAR	-	019 (017.7)	+1	10.0	-	-	-	-	RNP1	RW27
30	TF	JOYCE	-	019 (017.7)	+1	8.0	-	-	-	-	RNP1	RW27
40	TF	LUMVI	-	019 (017.7)	+1	10.0	-	-	-	-	RNP1	RW27
50	TF	LALAH	-	019 (017.7)	+1	7.0	-	+3900	-	-	RNP1	RW27

Table 3: NUMBI6A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	NUMBI	-	-	-	-	-	+FL140	-	-	RNP1	RW27
20	TF	VINAH	-	355 (354.3)	+1	5.9	-	-	-	-	RNP1	RW27
30	TF	ENTEP	-	355 (354.3)	+1	8.0	-	-	-	-	RNP1	RW27
40	TF	REMAX	-	355 (354.3)	+1	9.0	-	-	-	-	RNP1	RW27
50	TF	LALAH	-	355 (354.3)	+1	10.7	-	+3900	-	-	RNP1	RW27

Table 4: SAGOL6A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	SAGOL	-	-	-	-	-	+8000	-	-	RNP1	RW27
20	TF	MATTE	-	144 (143.2)	+1	21.7	-	+3400	-	-	RNP1	RW27

Table 5: SAKIB6A

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	SAKIB	-	-	-	-	-	+10000	-	-	RNP1	RW27
20	TF	GLENN	-	119 (118.0)	+1	23.1	-	-	-	-	RNP1	RW27
30	TF	MATTE	-	119 (118.0)	+1	13.9	-	+3400	-	-	RNP1	RW27

INTENTIONALLY
LEFT
BLANK


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 191 FT

HEIGHTS RELATED TO
THR RWY 27 - ELEV 189 FT

APP - 125.5 / 122.3
TWR - 122.6 / 118.6

**MISAMIS ORIENTAL/
Laguindingan (RPMY)
ILS OR LOC RWY 27**

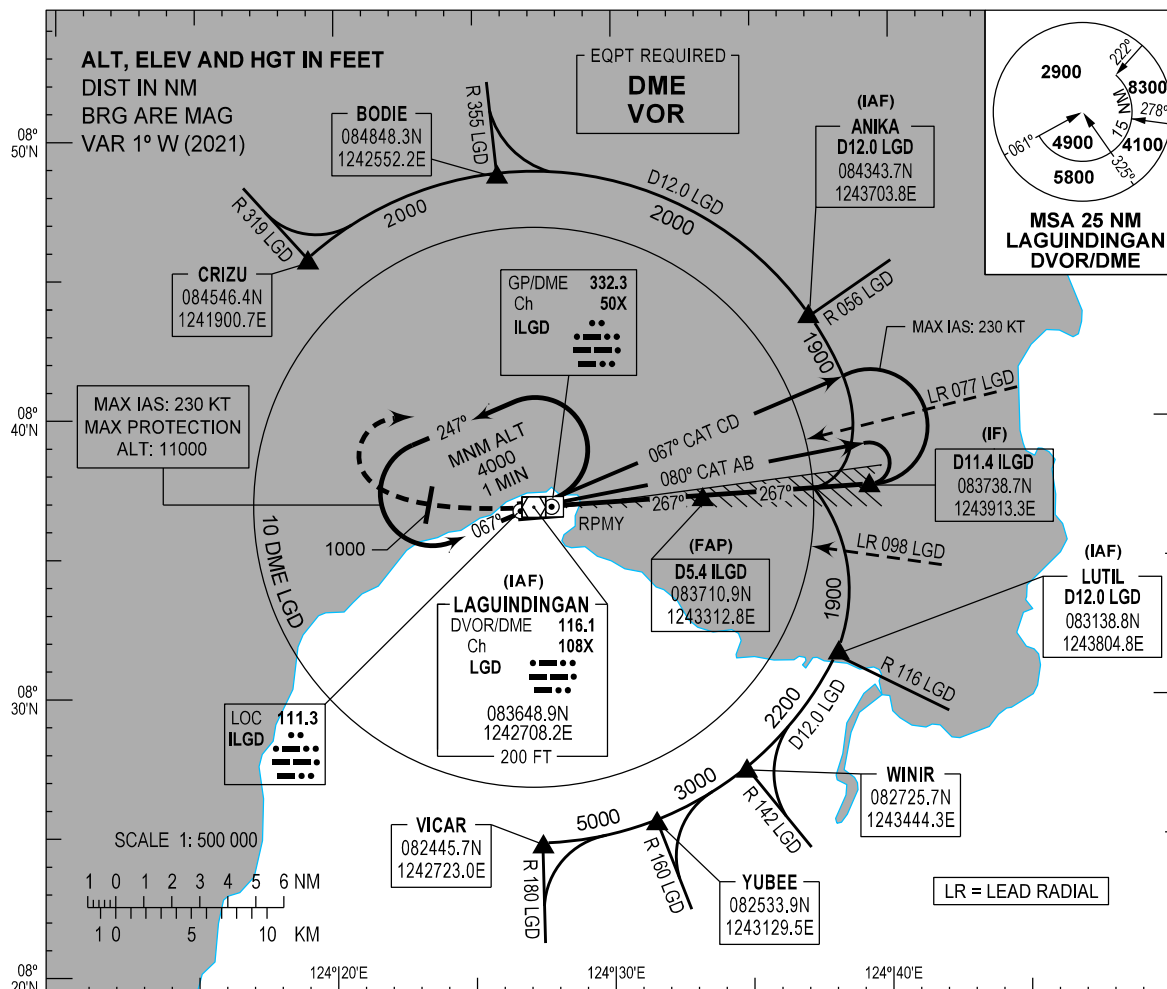

MISSED APPROACH

Climb runway heading to **4000 FT**. After passing **1000 FT**, turn right direct to the **LGD DVOR/DME** and hold or as instructed by ATC.

No turns before the **LGD DVOR/DME**.

THR ELEV 189
(THR RWY 27)

RDH: 50

THR (NM) →
ILGD (NM) →

LGD DVOR/DME
(IAF)

4000

ILGD DME

D0.7 ILGD (MAPt)

067° CAT CD

080° CAT AB

GP 3.0°

OCA(H)

550 (361)

700 (511)

0.5 0.7 3.4 3.9 5.2 6

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

0.5 0.7 3.9 5.2 11.2

D5.4 ILGD
(FAP)

1900

ILGD

D4.1 ILGD

1490

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

267°

TRANSITION ALT : 11000
TRANSITION LVL : FL130

OCA (H)	A	B	C	D		
ILS	390 (201)					
LOC	550 (361)					
CIRCLING	890 (699)	1010 (819)	1180 (989)	1320 (1129)		
NM TO ILGD	5.4	5	4	3	2	1.1
ALT (HGT)	1900 (1711)	1770 (1581)	1450 (1261)	1140 (951)	820 (631)	550 (361)

NEW CHART

INTENTIONALLY
LEFT
BLANK


INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 191 FT

HEIGHTS RELATED TO
THR RWY 09 - ELEV 189 FT

APP - 125.5 / 122.3
TWR - 122.6 / 118.6

MISAMIS ORIENTAL/
Laguindingan (RPMY)
RNP RWY 09

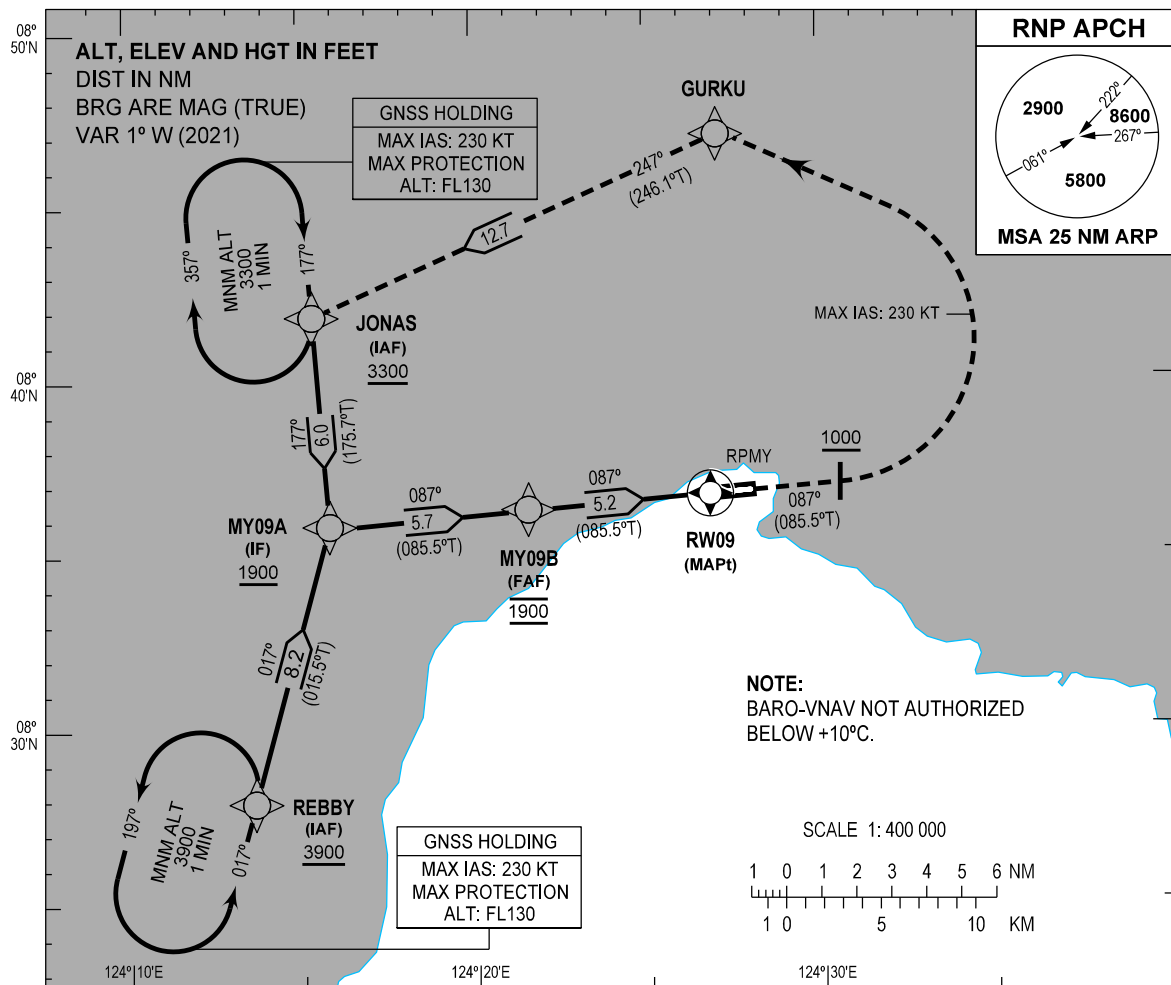


TRANSITION ALT : 11000
TRANSITION LVL : FL130

MISSED APPROACH

MAX IAS : 230 KT.

Climb on course 087°M to 1000 FT,
turn left direct to GURKU, then
JONAS and hold at 3300 FT or
as instructed by the ATC.

Do not turn before MAPt.

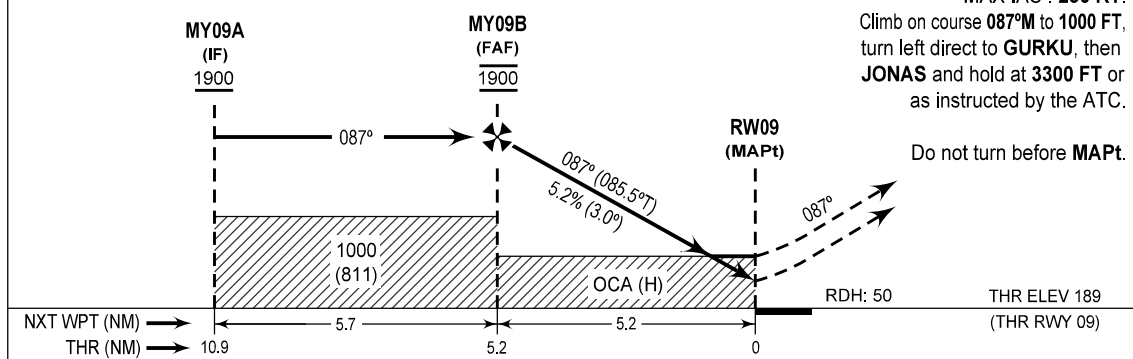

OCA (H)	A	B	C	D
LNAV/VNAV	470 (281)	480 (291)	490 (301)	510 (321)
LNAV	620 (431)			

CIRCLING NOT AUTHORIZED

NM TO THR	5.2	4	3	2	1.2
ALT (HGT)	1900 (1711)	1460 (1271)	1140 (951)	820 (631)	620 (431)

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
GURKU	084700.3N	1242705.8E	Fly-by
JONAS	084150.7N	1241522.8E	Fly-by
MY09A	083550.1N	1241549.9E	Fly-by
MY09B	083616.8N	1242134.1E	Fly-by
REBBY	082753.8N	1241337.0E	Fly-by
RW09	083641.28N	1242649.14E	Flyover

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 09

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	JONAS	-	-	-	-	-	+3300	-	-	RNP APCH	JONAS
20	TF	MY09A	-	177 (175.7)	+1	6.0	-	+1900	-	-	RNP APCH	JONAS
10	IF	REBBY	-	-	-	-	-	+3900	-	-	RNP APCH	REBBY
20	TF	MY09A	-	017 (015.5)	+1	8.2	-	+1900	-	-	RNP APCH	REBBY
10	IF	MY09A	-	-	-	-	-	+1900	-	-	RNP APCH	-
20	TF	MY09B	-	087 (085.5)	+1	5.7	-	@1900	-	-	RNP APCH	-
30	TF	RW09	Y	087 (085.5)	+1	5.2	-	@239	-	-3.0/-	RNP APCH	-
10	CA	-	-	087 (085.5)	+1	-	-	+1000	-230	-	RNP APCH	-
20	DF	GURKU	-	-	-	-	L	-	-230	-	RNP APCH	-
30	TF	JONAS	-	247 (246.1)	+1	12.7	L	-	-230	-	RNP APCH	-


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 191 FT

HEIGHTS RELATED TO
THR RWY 27 - ELEV 189 FT

APP - 125.5 / 122.3
TWR - 122.6 / 118.6

**MISAMIS ORIENTAL/
Laguindingan (RPMY)
RNP RWY 27**

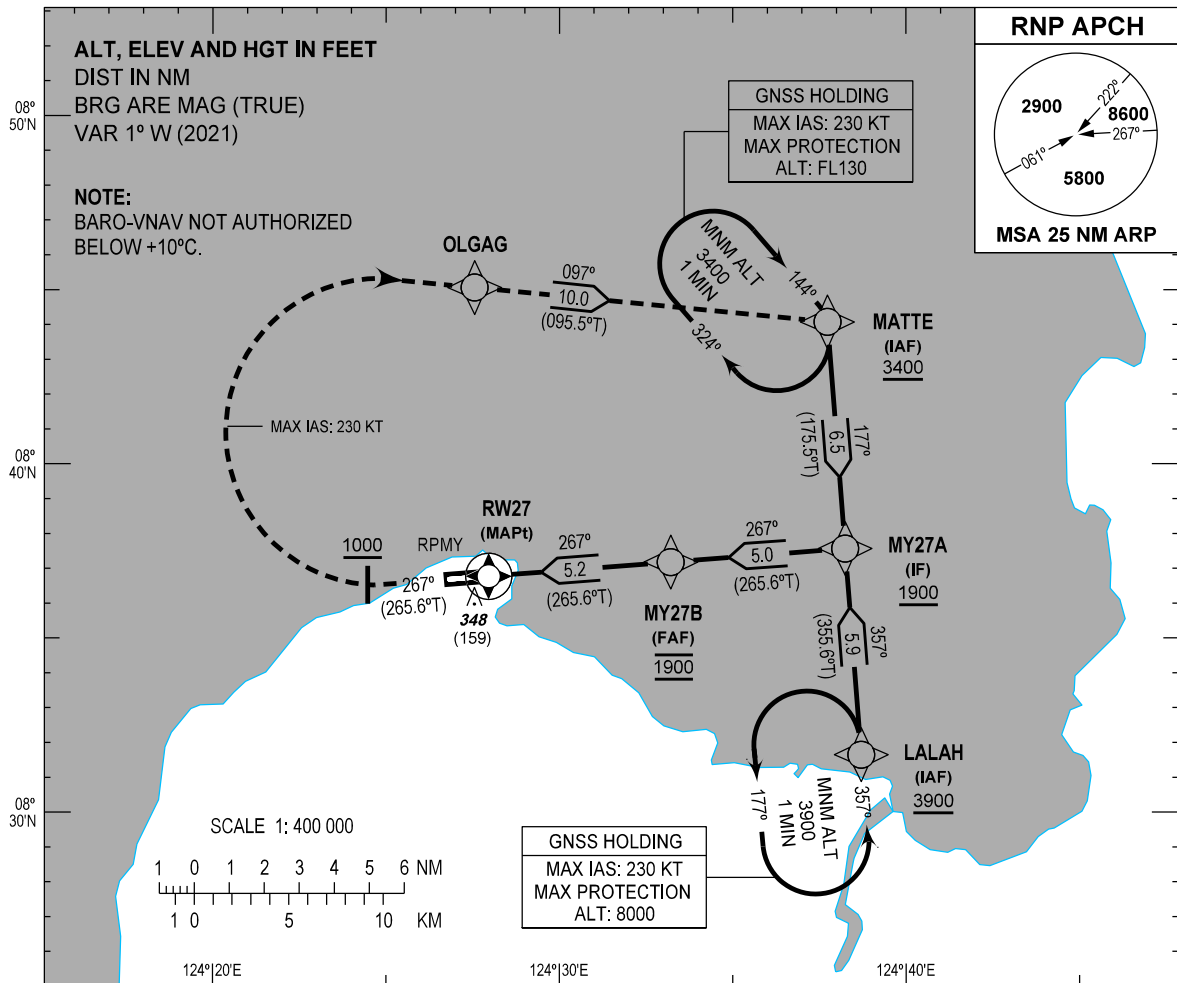


MISSED APPROACH

MAX IAS : 230 KT.

Climb on course **267°M** to **1000 FT**,
turn right direct to **OLGAG**, then
MATTE and hold at **3400 FT** or
as instructed by the ATC.

Do not turn before **MAPt**.

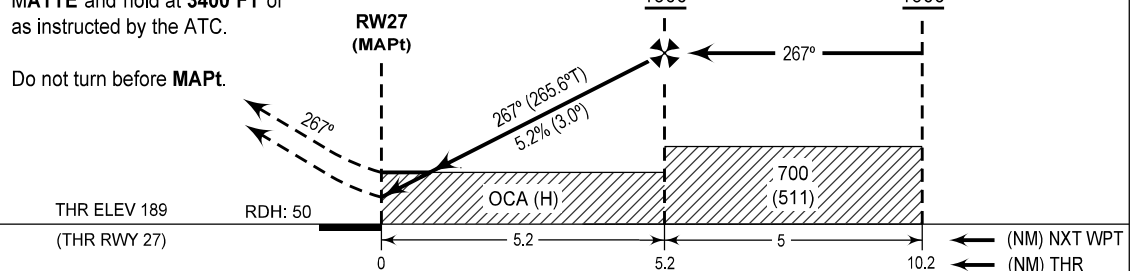

OCA (H)	A	B	C	D
LNAV/VNAV	510 (321)	530 (341)	540 (351)	610 (421)
LNAV	610 (421)			

CIRCLING NOT AUTHORIZED

NEW CHART

NM TO THR	5.2	4	3	2	1.1
ALT (HGT)	1900 (1711)	1460 (1271)	1140 (951)	820 (631)	610 (421)

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
LALAH	083139.1N	1243842.4E	Fly-by
MATTE	084404.8N	1243744.1E	Fly-by
MY27A	083734.2N	1243814.6E	Fly-by
MY27B	083710.9N	1243312.7E	Fly-by
OLGAG	084503.9N	1242733.3E	Fly-by
RW27	083646.58N	1242757.62E	Flyover

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 27


Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	MATTE	-	-	-	-	-	+3400	-	-	RNP APCH	MATTE
20	TF	MY27A	-	177 (175.5)	+1	6.5	-	+1900	-	-	RNP APCH	MATTE
10	IF	LALAH	-	-	-	-	-	+3900	-	-	RNP APCH	LALAH
20	TF	MY27A	-	357 (355.6)	+1	5.9	-	+1900	-	-	RNP APCH	LALAH
10	IF	MY27A	-	-	-	-	-	+1900	-	-	RNP APCH	-
20	TF	MY27B	-	267 (265.6)	+1	5.0	-	@1900	-	-	RNP APCH	-
30	TF	RW27	Y	267 (265.6)	+1	5.2	-	@239	-	-3.0/-	RNP APCH	-
10	CA	-	-	267 (265.6)	+1	-	-	+1000	-230	-	RNP APCH	-
20	DF	OLGAG	-	-	-	-	R	-	-230	-	RNP APCH	-
30	TF	MATTE	-	097 (095.5)	+1	10.0	R	-	-230	-	RNP APCH	-

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
191 FT

APP - 125.5 / 122.3
TWR - 122.6 / 118.6
ATIS - 127.6

MISAMIS ORIENTAL/
Laguindingan (RPMY)
RWY 09

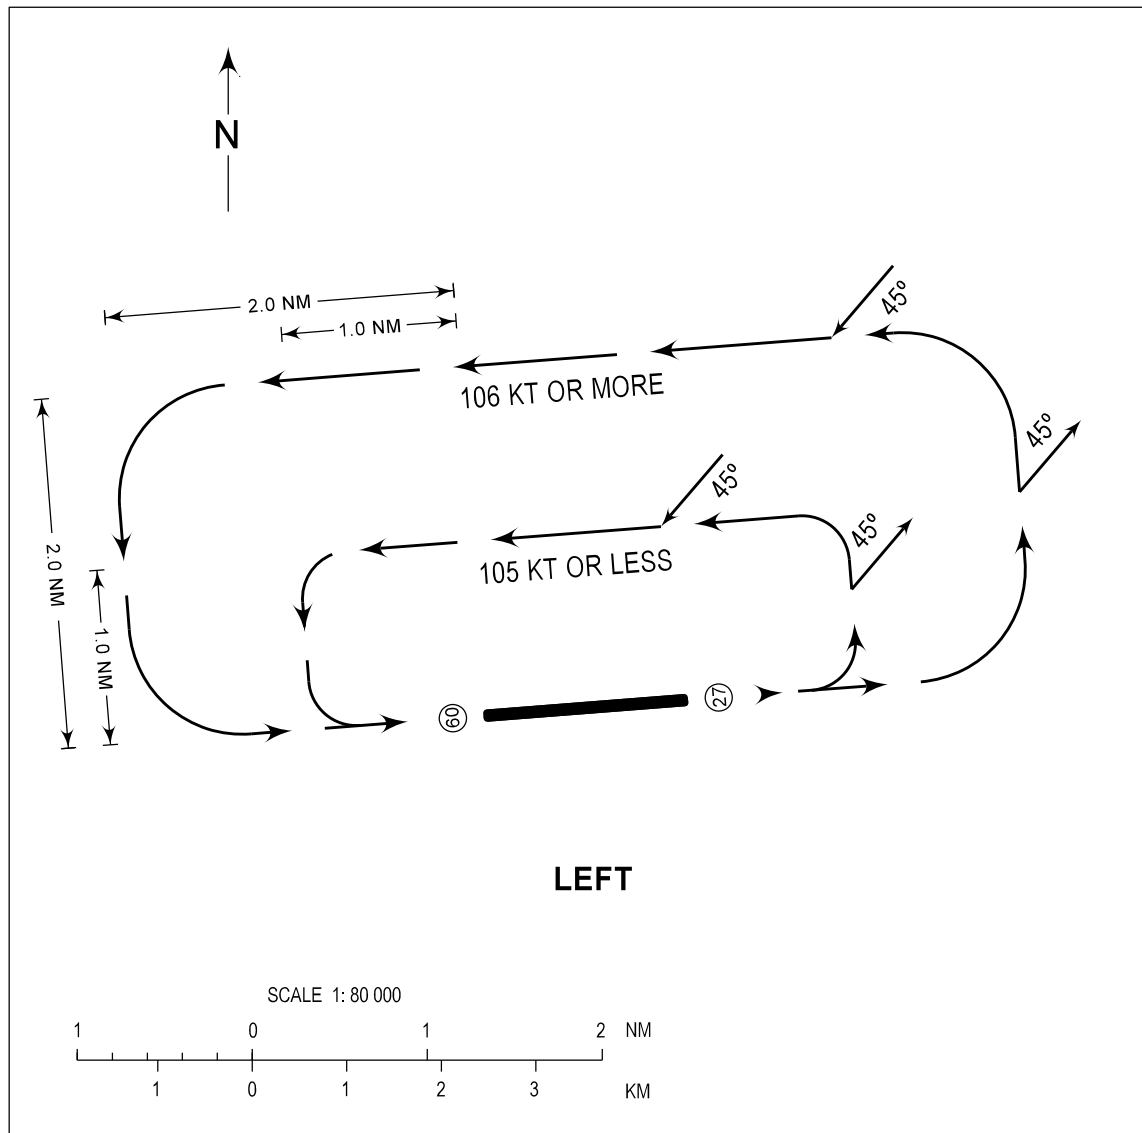

PROCEDURE

- A) ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- B) DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.


NEW CHART

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
191 FT

APP - 125.5 / 122.3
TWR - 122.6 / 118.6
ATIS - 127.6

MISAMIS ORIENTAL/
Laguindingan (RPMY)
RWY 27

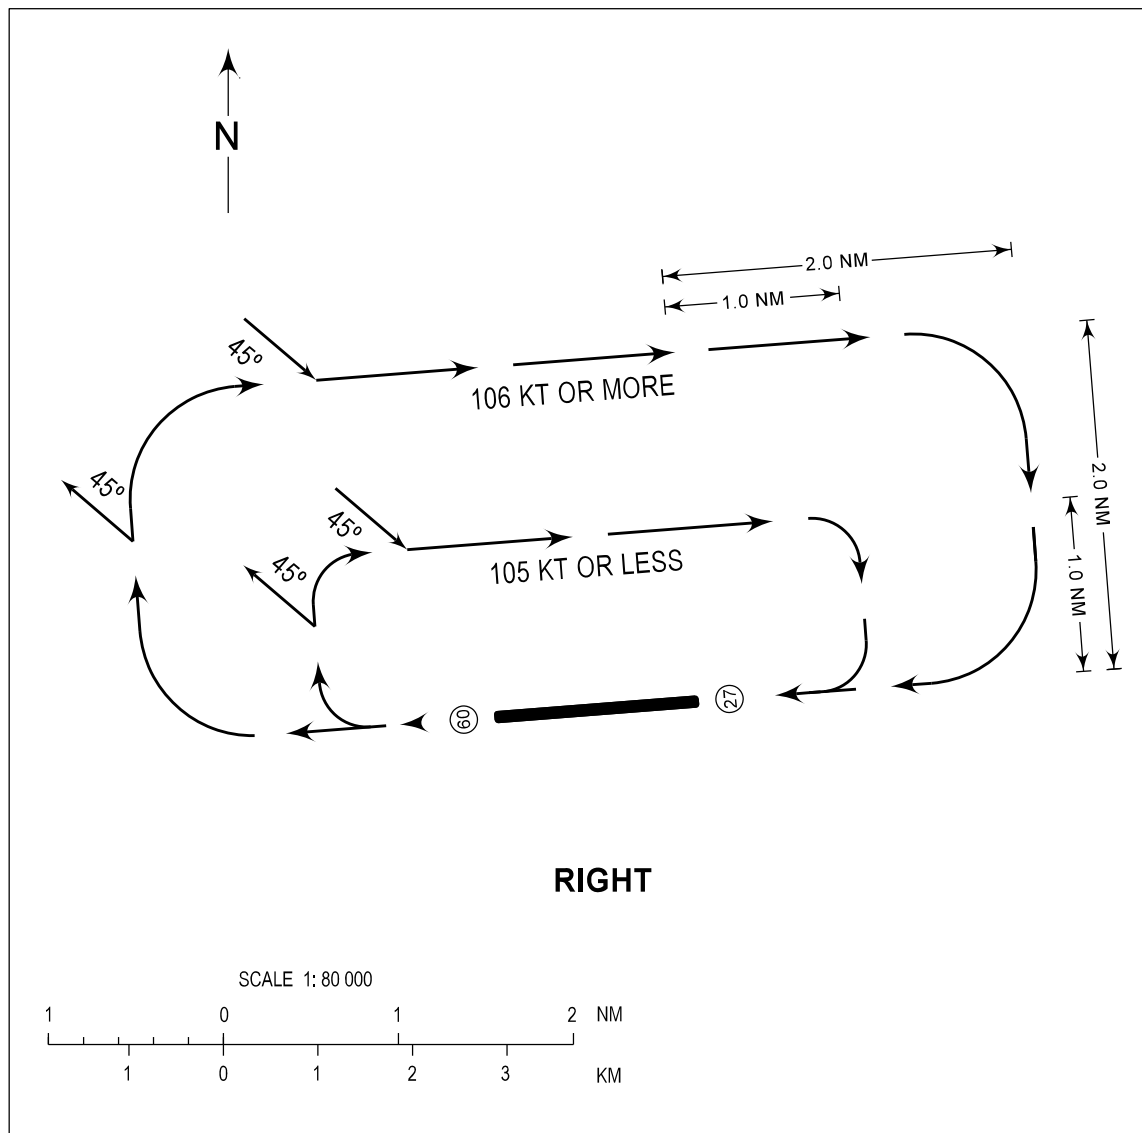

PROCEDURE

- A) ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- B) DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

NEW CHART