

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.16, AD-2.21, AD-2.23, AD-2.25

RPSP AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPSP - BOHOL-PANGLAO INTERNATIONAL AIRPORT

RPSP AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	093426N 1234614E.
2	Direction and distance from (city)	12 KM SW of Tagbilaran City; 289° 38' and 2.13 KM from ARP to Panglao proper.
3	Elevation/Reference temperature	43 FT / 34°C.
4	Geoid undulation at AD ELEV PSN	208 FT.
5	MAG VAR/Annual Change	2°W (2021) / 6.0' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Bohol-Panglao Airport Tawala, Panglao, Bohol Phone: (+63) (038) 412-9998 AFS: RPSPYYYYX
7	Types of traffic permitted (IFR/VFR)	IFR-VFR.
8	Remarks	Nil.

RPSP AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900.
2	Customs and immigration	Upon request.
3	Health and sanitation	Upon request.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	2200 - 1400.
6	MET Briefing Office	2200 - 1000.
7	ATS	2200 - 1400.
8	Fuelling	2200 - 1000.
9	Handling	2100 - 0900.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2200 - 1400. Refuel request of the airline company and General Aviation beyond working hours shall have an advance notice/advice.

RPSP AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Provided by airlines. Baggage handling system (baggage claim: 2; check-in: 1).
2	Fuel/oil types	Jet A1, AVGAS 100.
3	Fuelling facilities/capacity	Tank truck. Prior notice required.
4	De-icing facilities	Nil.
5	Hangar space for visiting aircraft	Utilize available apron upon request.
6	Repair facilities for visiting aircraft	Nil.
7	Remarks	Nil.

RPSP AD 2.5 PASSENGER FACILITIES

1	Hotels	Unlimited near the aerodrome and in the city.
2	Restaurants	Unlimited near the aerodrome and in the city.
3	Transportation	For rent, public and provided by hotel.
4	Medical facilities	Available H24 in the city.
5	Bank and Post Office	Near the aerodrome and in the city.
6	Tourist Office	In the city.
7	Remarks	Nil.

RPSP AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	Category 7.
2	Rescue equipment	Two (2) fire trucks [Two (2) Oshkosh (6000 liters each)]. One (1) water tank truck (4000 liters) and one (1) ambulance.
3	Capability for removal of disabled aircraft	A321 largest aircraft removal by aircraft owner/operator. Removal of disabled aircraft on the runway is the sole responsibility of the owner/operator. Disabled Aircraft Recovery Plan (DARP) Coordinator: Bohol-Panglao Airport (BPA) Safety Manager Phone: (+63) (038) 412-9989 Third Party Contractor: 1. CCMaluenda Construction Phone: (+63) (038) 412-0805, 501-0498 2. LABB Construction Phone: (+63) (038) 501-8895
4	Remarks	Nil.

RPSP AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	Types of clearing equipment	Shovel tractor with backhoe, road sweeper, dump truck and rotary/hand mowers.
2	Clearance priorities	1. RWY, 2. TWY, 3. APN, 4. RWY Strip.
3	Remarks	Nil.

RPSP AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Main Apron Surface: CONC. Strength: 668/R/B/W/U.
2	Taxiway width, surface and strength	TWY E1 Width: 30 M. Surface: ASPH. Strength: 524/F/B/X/U. TWY E2 Width: 30 M. Surface: ASPH. Strength: 524/F/B/X/U.

3	Altimeter checkpoint location and elevation	ACFT stand NR 3x Location: 093406.75N 1234617.09E. Elevation: 39 FT. ACFT stand NR 4 Location: 093407.88N 1234617.76E. Elevation: 39 FT. ACFT stand NR 5x Location: 093409.01N 1234618.44E. Elevation: 39 FT. ACFT stand NR 6 Location: 093410.15N 1234619.12E. Elevation: 39 FT. ACFT stand NR 7x Location: 093411.28N 1234619.80E. Elevation: 40 FT. ACFT stand NR 8 Location: 093412.42N 1234620.47E. Elevation: 40 FT. ACFT stand NR 9x Location: 093413.55N 1234621.15E. Elevation: 40 FT.
4	VOR checkpoints	Nil.
5	INS checkpoints	ACFT stand NR 3x Location: 093406.75N 1234617.09E ACFT stand NR 4 Location: 093407.88N 1234617.76E ACFT stand NR 5x Location: 093409.01N 1234618.44E ACFT stand NR 6 Location: 093410.15N 1234619.12E ACFT stand NR 7x Location: 093411.28N 1234619.80E ACFT stand NR 8 Location: 093412.42N 1234620.47E ACFT stand NR 9x Location: 093413.55N 1234621.15E
6	Remarks	Nil.

RPSP AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing aircraft should follow the TWY guide lines and the ground controller/marshaller.
2	RWY and TWY markings and LGT	RWY 03/21: Designation, THR, TDZ CL and aiming point. The lights on RWY 03/21 unidirectional with green lights activated. Red end lights installed at the end of RWY 03/21, RWY edge marking. TWY: CL, holding positions, TWY edge marking.
3	Stop bars and RWY guard lights	Nil.
4	Other RWY protection measures	Nil.
5	Remarks	Nil.

RPSP AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
03	Tree 94 FT	093319.2N 1234528.0E	Mountain 262 FT	093336.2N 1234739.6E	Nil
	Tree 94 FT	093320.8N 1234526.6E	Communication Antenna 233 FT LGTD	093420.1N 1234715.2E	
	Tree 92 FT	093319.6N 1234527.8E			
21	Tower Crane 180 FT	093601.0N 1234708.7E			
	Mobile Crane 146 FT	093558.4N 1234705.5E			
	Cluster of trees 113 FT	093528.2N 1234649.3E			
	Coconut Tree 111 FT	093524.6N 1234654.6E			
	Coconut Tree 108 FT	093529.6N 1234648.4E			
	Coconut Tree 104 FT	093528.7N 1234646.0E			
	Coconut Tree 104 FT	093529.5N 1234647.1E			
	Cluster of Trees 103 FT	093524.6N 1234654.8E			
	Coconut Tree 100 FT	093529.4N 1234646.9E			

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
21	Cluster of Trees 96 FT	093527.0N 1234652.0E			
	Cluster of Trees 91 FT	093528.9N 1234646.2E			
	Cluster of Trees 87 FT	093527.1N 1234650.0E			
	Coconut Tree 87 FT	093527.9N 1234648.8E			

RPSP AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	Philippine Atmospheric, Geophysical and Astronomical Services Administration (PAGASA.)
2	Hours of service MET Office outside hours	H24. -
3	Office responsible for TAF preparation Periods of validity	METAR hourly. H24.
4	Trend forecast Interval of issuance	ATIS. Hourly.
5	Briefing/consultation provided	PAGASA.
6	Flight documentation Language(s) used	- English.
7	Charts and other information available for briefing or consultation	-
8	Supplementary equipment available for providing information	AWOS RWY 03/21 - RWY Temperature Indicator, WDI, Barometer, Relative Humidity, Anemometer, Transmissometer, and Ceilometer.
9	ATS units provided with information	Panglao Tower.
10	Additional information (limitation of service, etc.)	Nil.

RPSP AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY (M)	Strength (PCR) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY	Slope of RWY-SWY
1	2	3	4	5	6	7
03	030.63°	2500 X 45	524/F/B/X/U ASPH	093351.11N 1234553.52E 207 FT	THR 35 FT TDZ 36 FT	0.099% uphill towards THR 21
21	210.63°	2500 X 45	524/F/B/X/U ASPH	093501.13N 1234635.30E 208 FT	THR 43 FT TDZ 42 FT	
SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	RESA dimensions (M)	Location/ description of arresting system	OFZ	Remarks
8	9	10	11	12	13	14
Nil	150 X 150	2620 X 300	90 X 90	Nil	Nil	Nil
Nil	150 X 150	2620 X 300	90 X 90	Nil	Nil	Nil

RPSP AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
03	2500	2650	2500	2500	Nil
21	2500	2650	2500	2500	Nil

RPSP AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
03	SALS, 427 M, LIH	Green	PAPI 3.0° Left (55.17 FT)	Nil
21	PALS, 900 M, LIH	Green WBAR: 10	PAPI 3.0° Left (55.17 FT)	Nil

RWY Centre Line LGT LEN, spacing, colour, INTST	RWY Edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	2350 M, 60 M, White/Yellow White/White, LIH	Red	Nil	SALS Color: White. NR of barrettes: 7. NR of fixtures per barrette: 5. Spacing between barrettes: 60 M. PAPI Path width: 0.33°. Visibility range: 5 NM. Vertical OBST CLR: >1.0°. Horizontal OBST CLR: Clear. Distance from THR: 329 M.
Nil	2350 M, 60 M, White/Yellow White/White, LIH	Red	Nil	PALS Color: White. NR of barrettes: 30. NR of fixtures per barrette: 5. Spacing between barrettes: 30 M. PAPI Path width: 0.50°. Visibility range: 5 NM. Vertical OBST CLR: >1.0°. Horizontal OBST CLR: Clear. Distance from THR: 354 M.

RPSP AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Location: 093416.80N 1234625.89E. Characteristics: White green alternate 26 flashes per minute. HR of OPS: Night time or during inclement weather.
2	LDI location and LGT Anemometer location and LGT	LDI WDI RWY 03: 093357.47N 1234552.36E; LGTD. WDI RWY 21: 093454.77N 1234636.46E; LGTD. Anemometer: 093452.98N 1234625.90E; LGTD.
3	TWY edge and centre line lighting	TWY Edge: Blue; NR of light: 82. Center line: Nil.
4	Secondary power supply/switch-over time	5 seconds.
5	Remarks	Nil.

RPSP AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	PANGLAO AERODROME TRAFFIC ZONE (ATZ): A circle radius 5 NM centered on 093426N 1234614E (ARP). PANGLAO CONTROL ZONE (CTR): A circle radius 10 NM centered on 093426N 1234614E (ARP). MACTAN SUB-TERMINAL CONTROL AREA (TMA): From 095358N 1234459E - 095345N 1240104E - 092229N 1240315E - 090935N 1235745E - 090454N 1234214E - 090701N 1231804E - 092838N 1231345E - 095358N 1234459E.
2	Vertical limits	ATZ: SFC up to but excluding 2000 FT. CTR: SFC up to 1500 FT. TMA: 1500 FT to FL200 (excluding ATZ and ATS routes at FL160 and above).
3	Airspace classification	ATZ - B; CTR - D; TMA - D; ATS routes inside TMA below FL160 - D; ATS routes inside TMA above FL160 - A.
4	ATS unit call sign Language(s)	ATZ - Panglao Tower. CTR/Mactan SUB-TMA - Mactan Approach. English.
5	Transition altitude	11000 FT.
6	Hours of applicability	Nil.
7	Remarks	Nil.

RPSP AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	SATVOICE number	Logon address	Hours of operation	Remarks
1	2	3	4	5	6	7
TWR	Panglao Tower	124.5 MHZ 128.8 MHZ 121.5 MHZ	Nil	Nil	2200 - 1400	PRI FREQ. SRY FREQ. Distress FREQ.
ATIS	Panglao ATIS	126.5 MHZ				Nil
GND	Ground Control	121.6 MHZ				Nil

RPSP AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP (for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
DVOR/DME (2°W / 2021)	BHL	116.2 MHZ/ CH109X	H24	093421.7N 1234603.4E	100 FT	DVOR output power: 100 watts. DME output power: 1000 watts. Distance from CL: 220.8 M. 219° MAG / 1537 M from THR RWY 21.
LOC21 ILS CAT I (2°W / 2021)	IBOH	111.1 MHZ	H24	093334.3N 1234543.5E	Nil	Usable distance: 25 NM. Course width: 3.88° (Transmitter 1), 3.89° (Transmitter 2). 212° MAG / 3100 M from THR RWY 21.
GP21		331.7 MHZ		093454.1N 1234626.5E	Nil	Usable distance: 10 NM. Glide angle: 3.0° (Transmitter 1), 3.0° (Transmitter 2). Path width: 0.71° (Transmitter 1), 0.72° (Transmitter 2). Distance from CL: 120 M. 231° MAG / 322 M from THR RWY 21.
IDME21		CH48X		093454.1N 1234626.5E	Nil	Usable distance: 17 NM. 231° MAG / 322 M from THR RWY 21.

RPSP AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulations

1.1 General

1.1.1 Entry and departure of international flights:

- a. all Bohol bound international scheduled/non-scheduled air carriers must land at Bohol-Panglao International Airport and shall park at the assigned bay for Customs, Immigration and Quarantine (CIQ) clearance;
- b. no aircraft shall be released from the assigned bay to other bays unless officially released by the Office of the Military Supervisor and CIQ;
- c. all international scheduled/non-scheduled air carriers intending to depart from Bohol shall proceed to the assigned bay for CIQ clearance; and
- d. loading and unloading of cargoes and embarkation/disembarkation of passengers shall be done at the assigned bays.

1.1.2 All aircraft from A319 and above shall not be allowed to make a 180-degree turn on any part of the runway except at the turn pad areas at the end of runway and must strictly follow the nose wheel guide.

1.2 Local Flying Restriction

1.2.1 Closed to aircraft without a functioning two-way radio. However, agricultural aircraft may be allowed to operate when under maintenance only prior to coordination with Panglao Tower.

2. Taxiing to and from stands

2.1 Arrival

2.1.1 Panglao Tower upon issuance of taxiing instructions shall include parking bay assignment.

2.1.2 Aircraft entering the apron must follow closely the apron taxi guide lines to ensure safe distance between taxiing and parked aircraft.

2.1.3 Unless otherwise instructed by ATC, all aircraft landing RWY 03 shall taxi-in via TWY E2. For aircraft landing on RWY 21, taxi-in via TWY E1.

2.1.4 All parking bays are assigned by Panglao Tower with due regard to aircraft type, location of airline handling facilities and the prevailing traffic situation.

Note: Long term parking of aircraft or intending to stay overnight may be required to park-reposition at bays NR 8 or 9 or as instructed by ATC.

2.1.5 All aircraft may taxi-in with power to their respective bay assignment and must be assisted with wing marshals/walkers.

2.1.6 All bays NR 3 to 9 may be used by A321 or lower category aircraft which wing span is less than 36 M. Higher category aircraft may be allowed to use the bays NR 3y, 5y, 7y, and 9y provided that no other aircraft are parked or are expected to park adjacent to it.

2.1.7 General aviation aircraft intending to remain overnight should park their aircraft at bays NR 8 or 9 or as instructed by ATC.

- 2.2 Departure
- 2.2.1 Clearance from Panglao Tower must be obtained prior to commencing push-back/tow or taxi of all aircraft.
- 2.2.2 All aircraft push-back and tow-out operations must be assisted by wing marshals/walkers.
- 2.2.3 All aircraft must strictly follow the respective nose wheel stop bars.
- 2.2.4 All departing aircraft must be pushed-back and start parallel to the runway position S1 or S2 or as instructed by ATC.
- 3. Parking**
- 3.1 General aviation aircraft shall park, load and/or unload passengers at bays NR 8 or 9 or as instructed by ATC.
- 3.2 Assignment of Parking Bays:
- Bays NR 3y, 5y, 7y, 9y : B777, A330, B787, B767 or higher category (straight parking with tube).
- Bays NR 3x, 5x, 7x : A321, A320, B737 or lower category (straight parking with tube).
- Bays NR 4A, 6A, 8A : A321, A320, B737 or lower category (angled parking with tube).
- Bays NR 4, 6, 8, 9x : A321, A320, B737 or lower category (straight parking without tube).
- Notes: Bays NR 3 and 4: International gates.
- Bays NR 5 and 6: Swing gates.
- Bays NR 7 and 8: Domestic gate.
- Bay NR 9: Remote apron.

RPSP AD 2.22 FLIGHT PROCEDURES

1. General Procedures for VFR Flights

- 1.1 The following air traffic procedures shall apply to all VFR flights when entering, leaving, operating or transiting the vicinity of Panglao ATZ.
- 1.2 All departing VFR flights shall maintain a listening watch on Panglao Tower frequency 124.5 MHZ until instructed to leave the frequency or to contact Mactan Approach frequency on 121.2 MHZ while operating within Mactan TMA.
- 1.3 All arriving VFR flights shall establish contact and remain on listening watch with Mactan Approach frequency on 121.2 MHZ upon entering Mactan TMA or to establish two-way radio contact with Panglao Tower on frequency 124.5 MHZ 20 NM inbound to the airport.
- 1.4 ATC instructions and traffic information shall be acknowledged and complied with.
- 1.5 When operating within Mactan TMA, pilots of VFR aircraft are to conform to the following altitude restrictions unless authorized by ATC:
 - a. from 5 NM up to 10 NM from Panglao ARP, not higher than 1500 FT; and
 - b. from 10 NM up to 20 NM from Panglao ARP, not higher than 2500 FT.
- 1.6 Any deviation from the procedures shall be subject to ATC approval.

2. Arrival and Departure Procedures

2.1 VFR Procedures RWY 03

2.1.1 Departure

- a. North Bound: After airborne, fly northward to PUNTA CRUZ, proceed towards LOON. Continue northeastward to TUBIGON PORT or proceed as instructed by ATC.
- b. Northeast Bound: After airborne, turn right towards South of ASHIRA. Fly on easterly direction towards LOAY PORT and proceed towards BILAR or as instructed by ATC.
- c. Northwest Bound: After airborne, turn left towards DOLJO POINT. Proceed towards East of BOLJOON, turn right fly over water towards East of ALCOY or proceed as instructed by ATC.
- d. Southeast Bound: After airborne, turn right towards South of ASHIRA. Fly on a southeasterly direction towards East of PAMILACAN or proceed as instructed by ATC.
- e. Southwest Bound: After airborne, turn left towards DOLJO POINT. Proceed towards BOLJOON, turn left fly over land following the shoreline towards OSLOB or proceed as instructed by ATC.

2.1.2 Arrival

- a. From the Northeast: Report approaching SAGBAYAN. Fly on a southwesterly direction towards HANOPOL. Proceed towards SEVILLA and BACLAYON PORT. Continue towards ASHIRA. Request clearance to join right downwind of RWY 03 or proceed as instructed by ATC.

From the Northwest: Report approaching ALCOY. Fly on a southeasterly direction towards North of DOLJO POINT. Request clearance to join left downwind RWY 03 or proceed as instructed by ATC.

- b. From the Southeast: Report approaching PAMILACAN. Fly on a northwesterly direction towards 5 NM SE of the airport. Request clearance to join right downwind RWY 03 or proceed as instructed by ATC.
- c. From the Southwest: Report approaching East of OSLOB. Fly on a northeasterly direction towards South of DOLJO POINT. Request clearance to join left downwind RWY 03 or proceed as instructed by ATC.

2.2 VFR Procedures RWY 21

2.2.1 Departure

North Bound: After airborne, make a right downwind departure towards PUNTA CRUZ. Proceed towards LOON. Continue northeastward to TUBIGON PORT or proceed as instructed by ATC

- d. Northeast Bound: After airborne, make a left downwind departure towards South of ASHIRA. Fly on a northeasterly direction towards LOAY PORT and proceed towards BILAR or proceed as instructed by ATC.
- e. Northwest Bound: After airborne, turn right towards DOLJO POINT. Proceed towards East of BOLJOON, turn right fly over water towards East of ALCOY or proceed as instructed by ATC.

Southeast Bound: After airborne, make a left downwind departure towards South of ASHIRA. Fly on a southeasterly direction towards East of PAMILACAN or proceed as instructed by ATC.

Southwest Bound: After airborne, turn right towards DOLJO POINT. Proceed towards BOLJOON, turn left fly over land following the shoreline towards OSLOB or proceed as instructed by ATC.

2.2.2 Arrival

- a. From the Northeast: Report approaching SAGBAYAN. Fly on a southwesterly direction towards HANOPOL. Proceed towards SEVILLA and BACLAYON PORT. Continue towards ASHIRA. Request clearance to join left base RWY 21 or proceed as instructed by ATC.
- b. From the Northwest: Report approaching ALCOY. Fly on a southeasterly direction towards North of DOLJO POINT. Request clearance to join right downwind RWY 21 or proceed as instructed by ATC.

From the Southeast: Report approaching PAMILACAN. Fly on a northwesterly direction towards 5 NM SE of the airport. Request clearance to join left downwind RWY 21 or proceed as instructed by ATC.

- c. From the Southwest: Report approaching East of OSLOB. Fly on northeasterly direction towards South of DOLJO POINT. Request clearance to join right downwind RWY 21 or proceed as instructed by ATC.

2.3 VFR Procedures for Overflights

- 2.3.1 From the Northeast to the South/West: Report approaching over PAMILACAN, fly towards SALAGDOONG not above 2000 FT. Fly westward to LARENA, approaching LARENA contact Dumaguete Tower frequency on 129.7 MHZ or proceed as instructed by ATC. Report switching or leaving Panglao Tower frequency.

- 2.3.2 From the South/West to the Northeast: Report approaching South of SALAGDOONG. Fly northeastward towards East of PAMILACAN or proceed as instructed by ATC. Report switching or leaving Panglao Tower frequency.
- 2.3.3 From the Southwest to the Northwest: Report approaching East of OSLOB, fly northerly over water towards East of BOLJOON. Continue towards East of ALCOY or proceed as instructed by ATC. Report switching or leaving Panglao Tower frequency.
- 2.3.4 From the Northwest to the Southwest: Report approaching ALCOY, fly southwesterly over land following the shoreline towards BOLJOON. Continue towards OSLOB or proceed as instructed by ATC. Report switching or leaving Panglao Tower frequency.

3. Helicopter Operations


- 3.1 VFR helicopter flights shall be treated as fixed-wing aircraft and will follow the same established VFR routes and procedures for Bohol-Panglao International Airport.
- 3.2 Except when clearance is obtained from Bohol-Panglao International Airport, VFR helicopter flights shall not take-off or land at Bohol-Panglao International Airport or enter its ATZ when the:
- a. ceiling is less than 150 M (500 FT); and
 - b. ground visibility is less than 1.5 KM (1 mile).
- 3.3 Helicopters operating VFR may be allowed outside controlled airspace with flight visibility below 1.5 KM (1 mile) provided that:
- a. the helicopter is clear of clouds and ground or water is in sight at all times; and
 - b. the helicopter shall be maneuvered at a speed that will give adequate opportunity to observe other traffic or any obstruction to avoid collision.

4. List of Visual Landmarks and Reporting Points

- 4.1 The following visual reference and reporting points as mentioned in the procedure are identified using local available maps, Google Maps and Google Earth Satellite images.

VISUAL REPORTING POINT	COORDINATES	DISTANCE FROM ARP (NM)	RELATIVE POSITION FROM ARP	DESCRIPTION
5 NM SE	093203N 1235044E	5.0	SE	5 NM Southeast of RPSP
ALCOY	094232N 1233028E	17.5	NW	Alcoy Municipal Hall
ASHIRA	093549N 1235105E	5.0	NE	Azienda Ashira Properties
BACLAYON PORT	093715N 1235446E	8.9	NE	Baclayon Port
BILAR	094220N 1240613E	21.2	NE	Bilar Public Market
BOLJOON	093743N 1232847E	17.5	W	Boljoon Municipal Hall
DOLJO POINT	093516N 1234305E	3.2	W	Tip of Doljo Beach
HANOPOL	094730N 1240253E	21.0	NE	Hanopol Gymnasium
LARENA	091505N 1233525E	22.0	SW	Larena Port

VISUAL REPORTING POINT	COORDINATES	DISTANCE FROM ARP (NM)	RELATIVE POSITION FROM ARP	DESCRIPTION
LOAY PORT	093602N 1240034E	14.2	E	Loay Port
LOON	094818N 1234751E	13.9	N	Loon Municipal Hall
OSLOB	093114N 1232601E	20.2	SW	Oslob Municipal Hall
PAMILACAN	092932N 1235523E	10.3	SE	Pamilacan Island
PUNTA CRUZ	094406N 1234724E	9.7	N	Punta Cruz Watch Tower
SAGBAYAN	095447N 1240535E	27.8	NE	Sagbayan Municipal Hall
SALAGDOONG	091247N 1234054E	22.2	SW	Salagdoong Beach
SEVILLA	094210N 1240244E	18.0	NE	Sevilla Municipal Hall
TUBIGON PORT	095722N 1235728E	25.4	NE	Tubigon Port

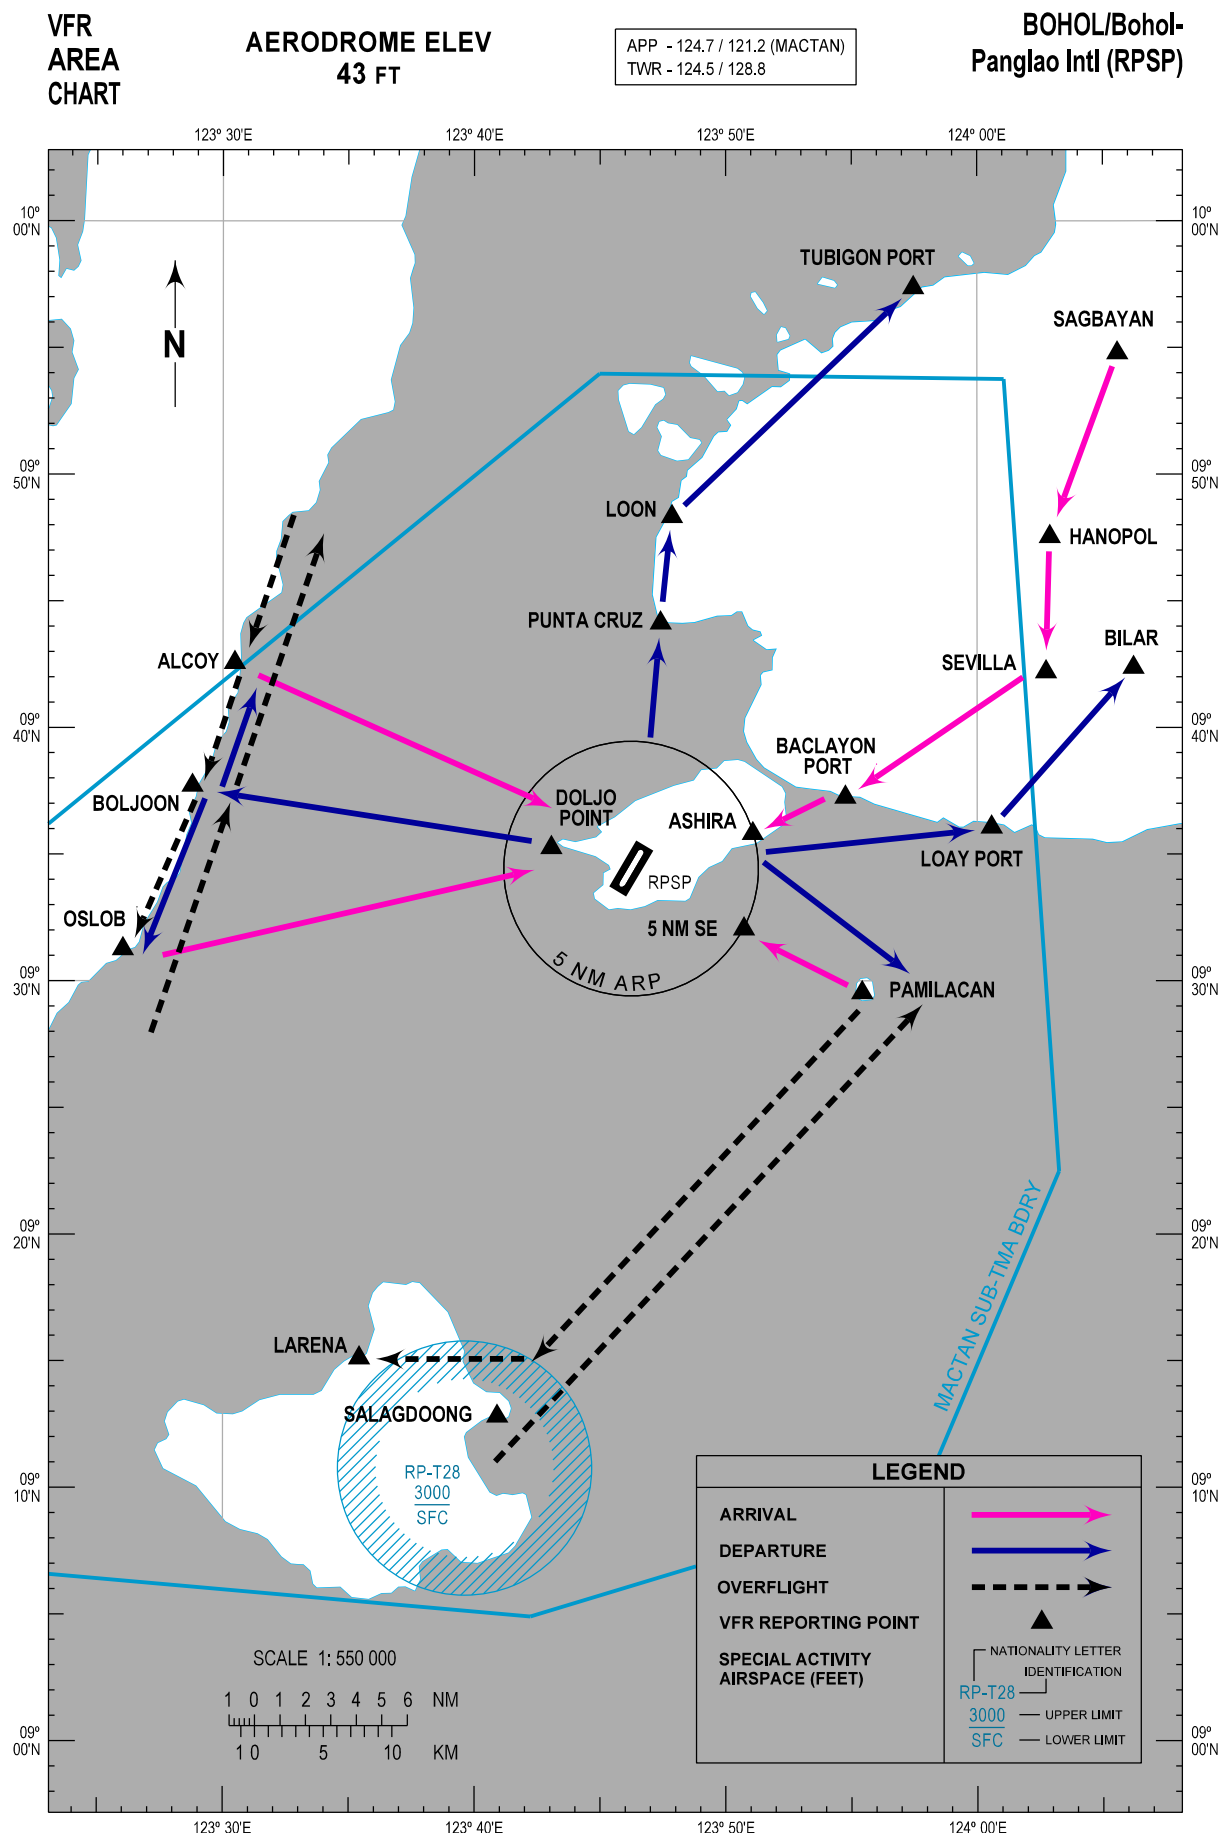

RPSP AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Aerodrome Chart	RPSP AD CHART 2 - 1
Aircraft Parking/Docking Chart	RPSP AD CHART 2 - 2
Aerodrome Obstacle Chart Type A (Operating Limitations)	RPSP AD CHART 2 - 3
Aerodrome Obstacle Chart Type B	RPSP AD CHART 2 - 4
Standard Departure Chart - Instrument - ICAO (RWY 03)	RPSP AD CHART 2 - 5
Standard Departure Chart - Instrument - ICAO (RWY 21)	RPSP AD CHART 2 - 7
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 03 - LAMOK2P, ZENKY2P)	RPSP AD CHART 2 - 9
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 03 - ZENKY2B)	RPSP AD CHART 2 - 11
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 21)	RPSP AD CHART 2 - 13
Standard Arrival Chart - Instrument - ICAO (RWY 03)	RPSP AD CHART 2 - 15
Standard Arrival Chart - Instrument - ICAO (RWY 21)	RPSP AD CHART 2 - 17
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 03)	RPSP AD CHART 2 - 19
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 21)	RPSP AD CHART 2 - 23
Instrument Approach Chart - ICAO (ILS OR LOC RWY 21)	RPSP AD CHART 2 - 27
Instrument Approach Chart - ICAO (VOR RWY 03)	RPSP AD CHART 2 - 28
Instrument Approach Chart - ICAO (VOR RWY 21)	RPSP AD CHART 2 - 29
Instrument Approach Chart - ICAO (RNP RWY 03)	RPSP AD CHART 2 - 31
Instrument Approach Chart - ICAO (RNP RWY 21)	RPSP AD CHART 2 - 33
Traffic Circuit Chart (RWY 03)	RPSP AD CHART 2 - 35
Traffic Circuit Chart (RWY 21)	RPSP AD CHART 2 - 36

INTENTIONALLY
LEFT
BLANK


AERODROME
CHART

093426N
1234614E

AERODROME ELEV
43 FT

TWR - 124.5 / 128.8

BOHOL/Bohol-
Panglao Intl

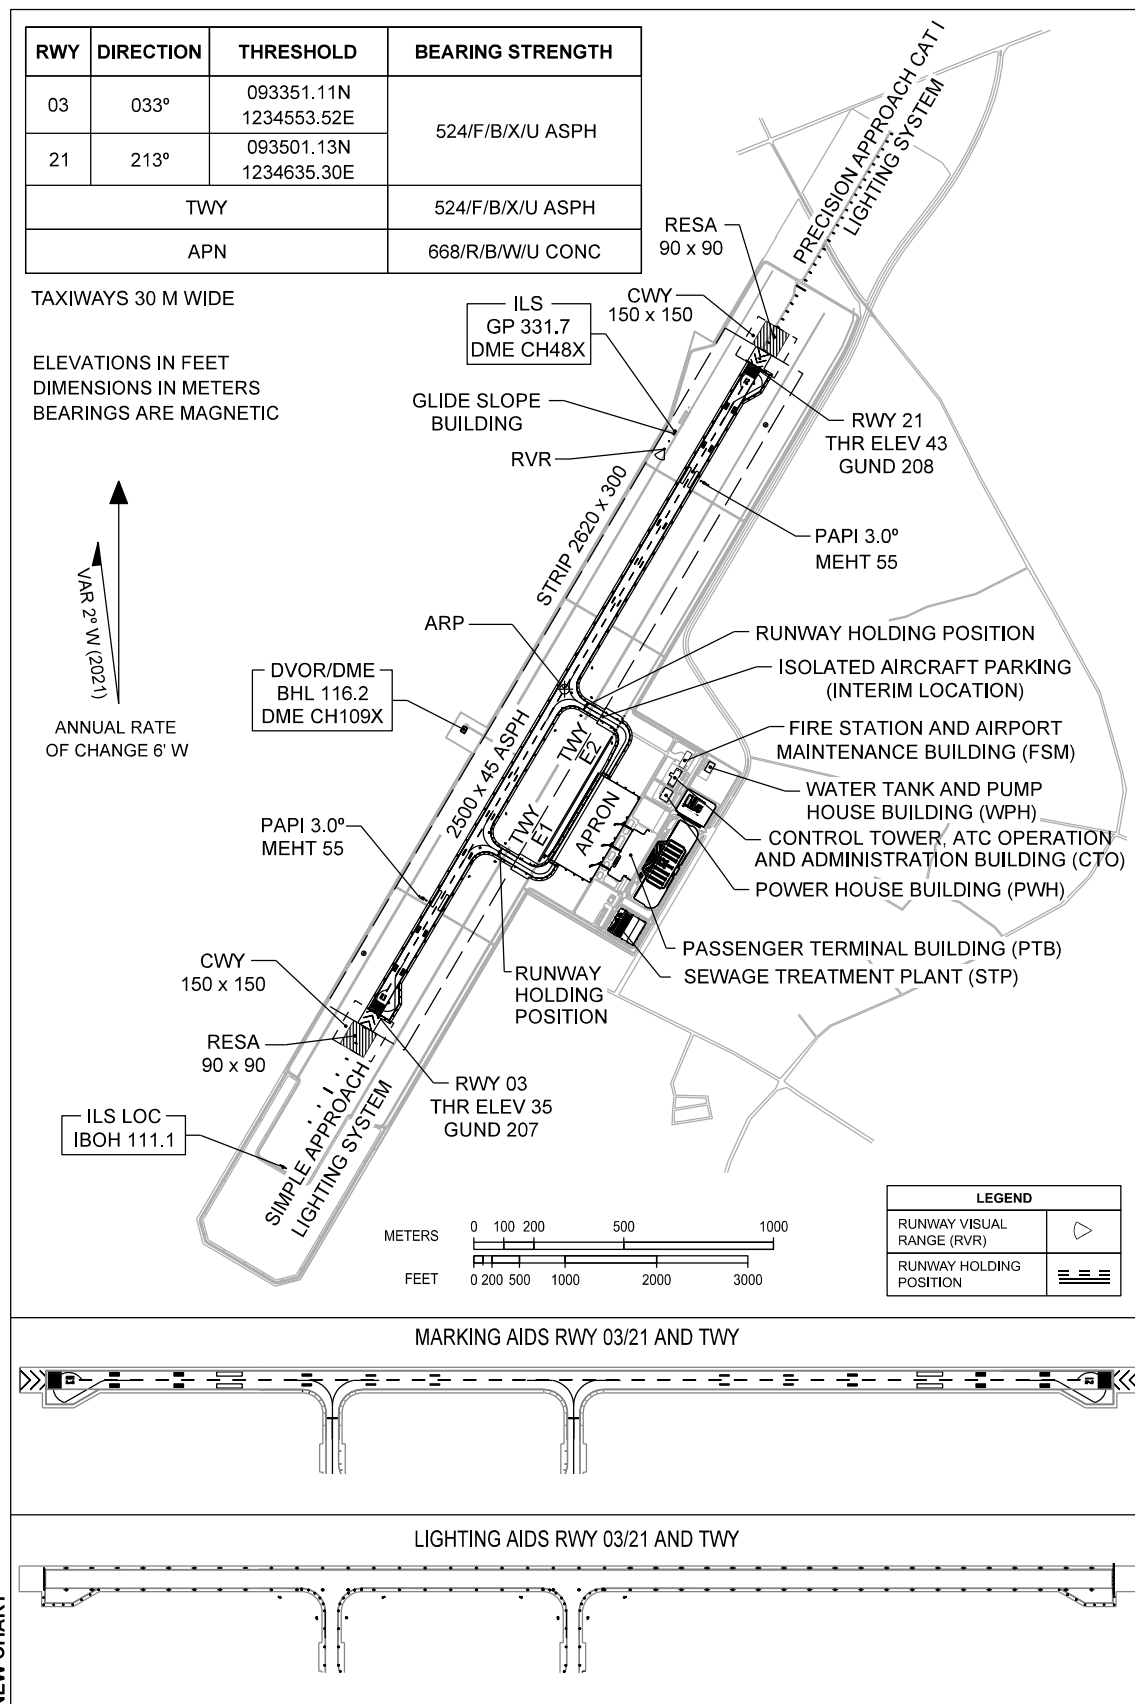


AIRCRAFT PARKING/
DOCKING CHART

APRON ELEV
39 FT


TWR - 124.5 / 128.8

BOHOL/Bohol-
Panglao Intl

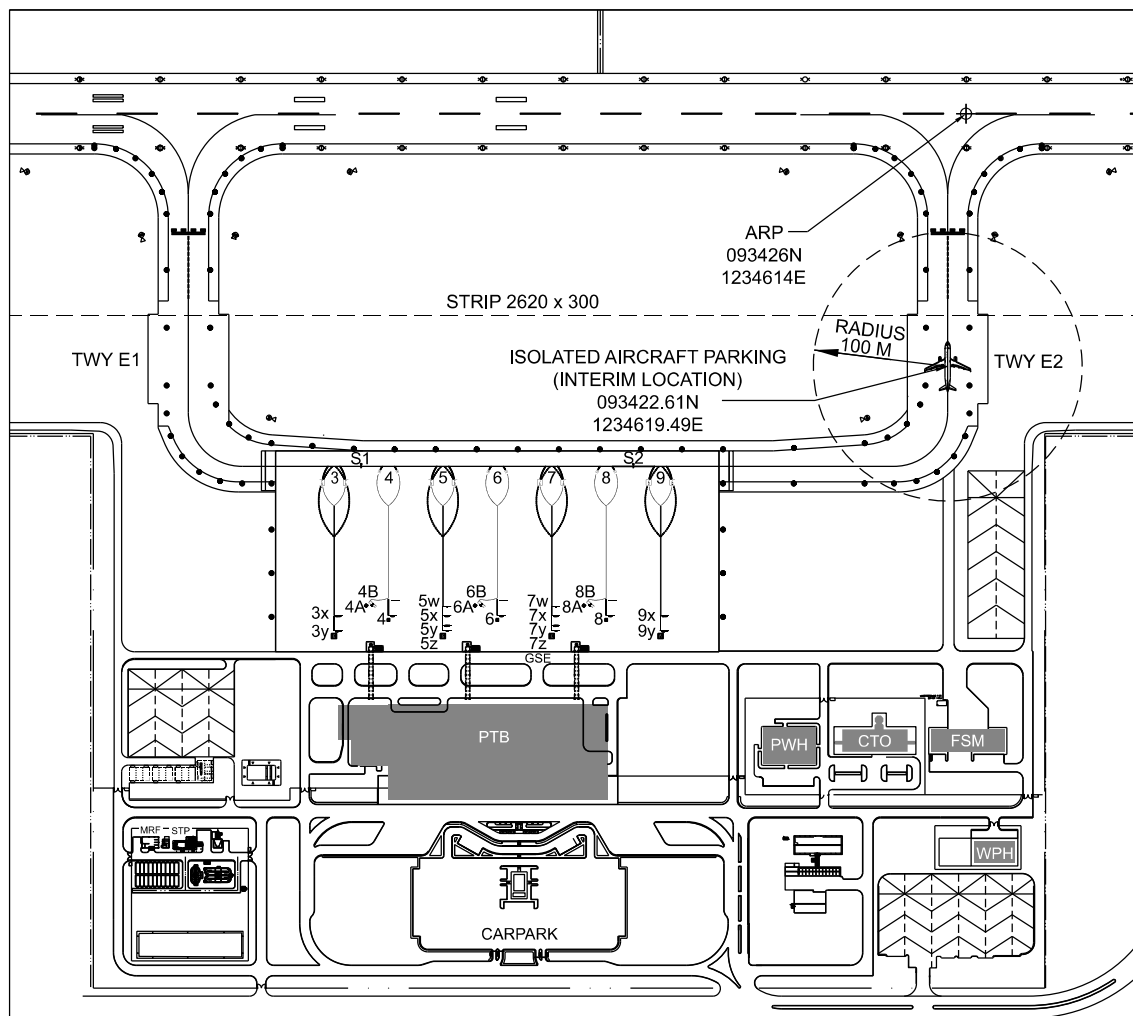

ELEVATIONS IN FEET
DIMENSIONS IN METERS

ANNUAL RATE OF CHANGE 6' W



LEGEND

AIRCRAFT STAND	3
TAXIWAY LIGHT	●
TAXIING GUIDANCE SIGN	⬢
RUNWAY HOLDING POSITION	≡
MATERIAL RECOVERY FACILITY	MRF
GROUND SUPPORT EQUIPMENT	GSE

AIRCRAFT STANDS 3x, 5x, 7x AND 9x
FOR A321/B767-200
AIRCRAFT STANDS 3y AND 9y
FOR A330-300/B777-300
AIRCRAFT STANDS 4, 4A, 6, 6A, 8 AND 8A
FOR A321
AIRCRAFT STANDS 4B, 5w, 6B, 7w AND 8B
FOR B737
AIRCRAFT STANDS 5y AND 7y
FOR A330-300/B777-200
AIRCRAFT STANDS 5z AND 7z
FOR B777-300

TWY 30 M WIDE
TWY EDGE LIGHTS
ON ALL TWY
TWY BEARING STRENGTH
524/F/B/X/U ASPH
APN BEARING STRENGTH
668/R/B/W/U CONC

STARTING POINT MARKING

START	WGS - 84 COORDINATES LATITUDE	LONGITUDE
S1	093409.16N	1234614.29E
S2	093414.83N	1234617.68E

WGS - 84 COORDINATES

PRKG BAYS NR	LATITUDE	LONGITUDE	PRKG BAYS NR	LATITUDE	LONGITUDE	PRKG BAYS NR	LATITUDE	LONGITUDE
3x	093406.75N	1234617.09E	5y	093408.90N	1234618.64E	7y	093411.17N	1234620.00E
3y	093406.56N	1234617.40E	5z	093408.83N	1234618.75E	7z	093411.10N	1234620.10E
4	093407.88N	1234617.76E	6	093410.15N	1234619.12E	8	093412.42N	1234620.47E
4A	093407.63N	1234617.24E	6A	093409.90N	1234618.59E	8A	093412.17N	1234619.95E
4B	093407.68N	1234617.23E	6B	093409.95N	1234618.58E	8B	093412.22N	1234619.94E
5w	093409.13N	1234618.25E	7w	093411.40N	1234619.60E	9x	093413.55N	1234621.15E
5x	093409.01N	1234618.44E	7x	093411.28N	1234619.80E	9y	093413.37N	1234621.46E

NEW CHART

AERODROME OBSTACLE CHART

BOHOL/Bohol-Panglao Intl

ELEVATIONS IN FEET
DIMENSIONS IN METERS

TYPE A (OPERATING LIMITATIONS)


RWY 03/21

MAGNETIC VARIATION 2° W (2021)

RWY 03/21

DECLARED DISTANCES

RWY 03		RWY 21
2500	TAKE-OFF RUN AVAILABLE (TORA)	2500
2650	TAKE-OFF DISTANCE AVAILABLE (TODA)	2650
2500	ACCELERATE-STOP DISTANCE AVAILABLE (ASDA)	2500
2500	LANDING DISTANCE AVAILABLE (LDA)	2500

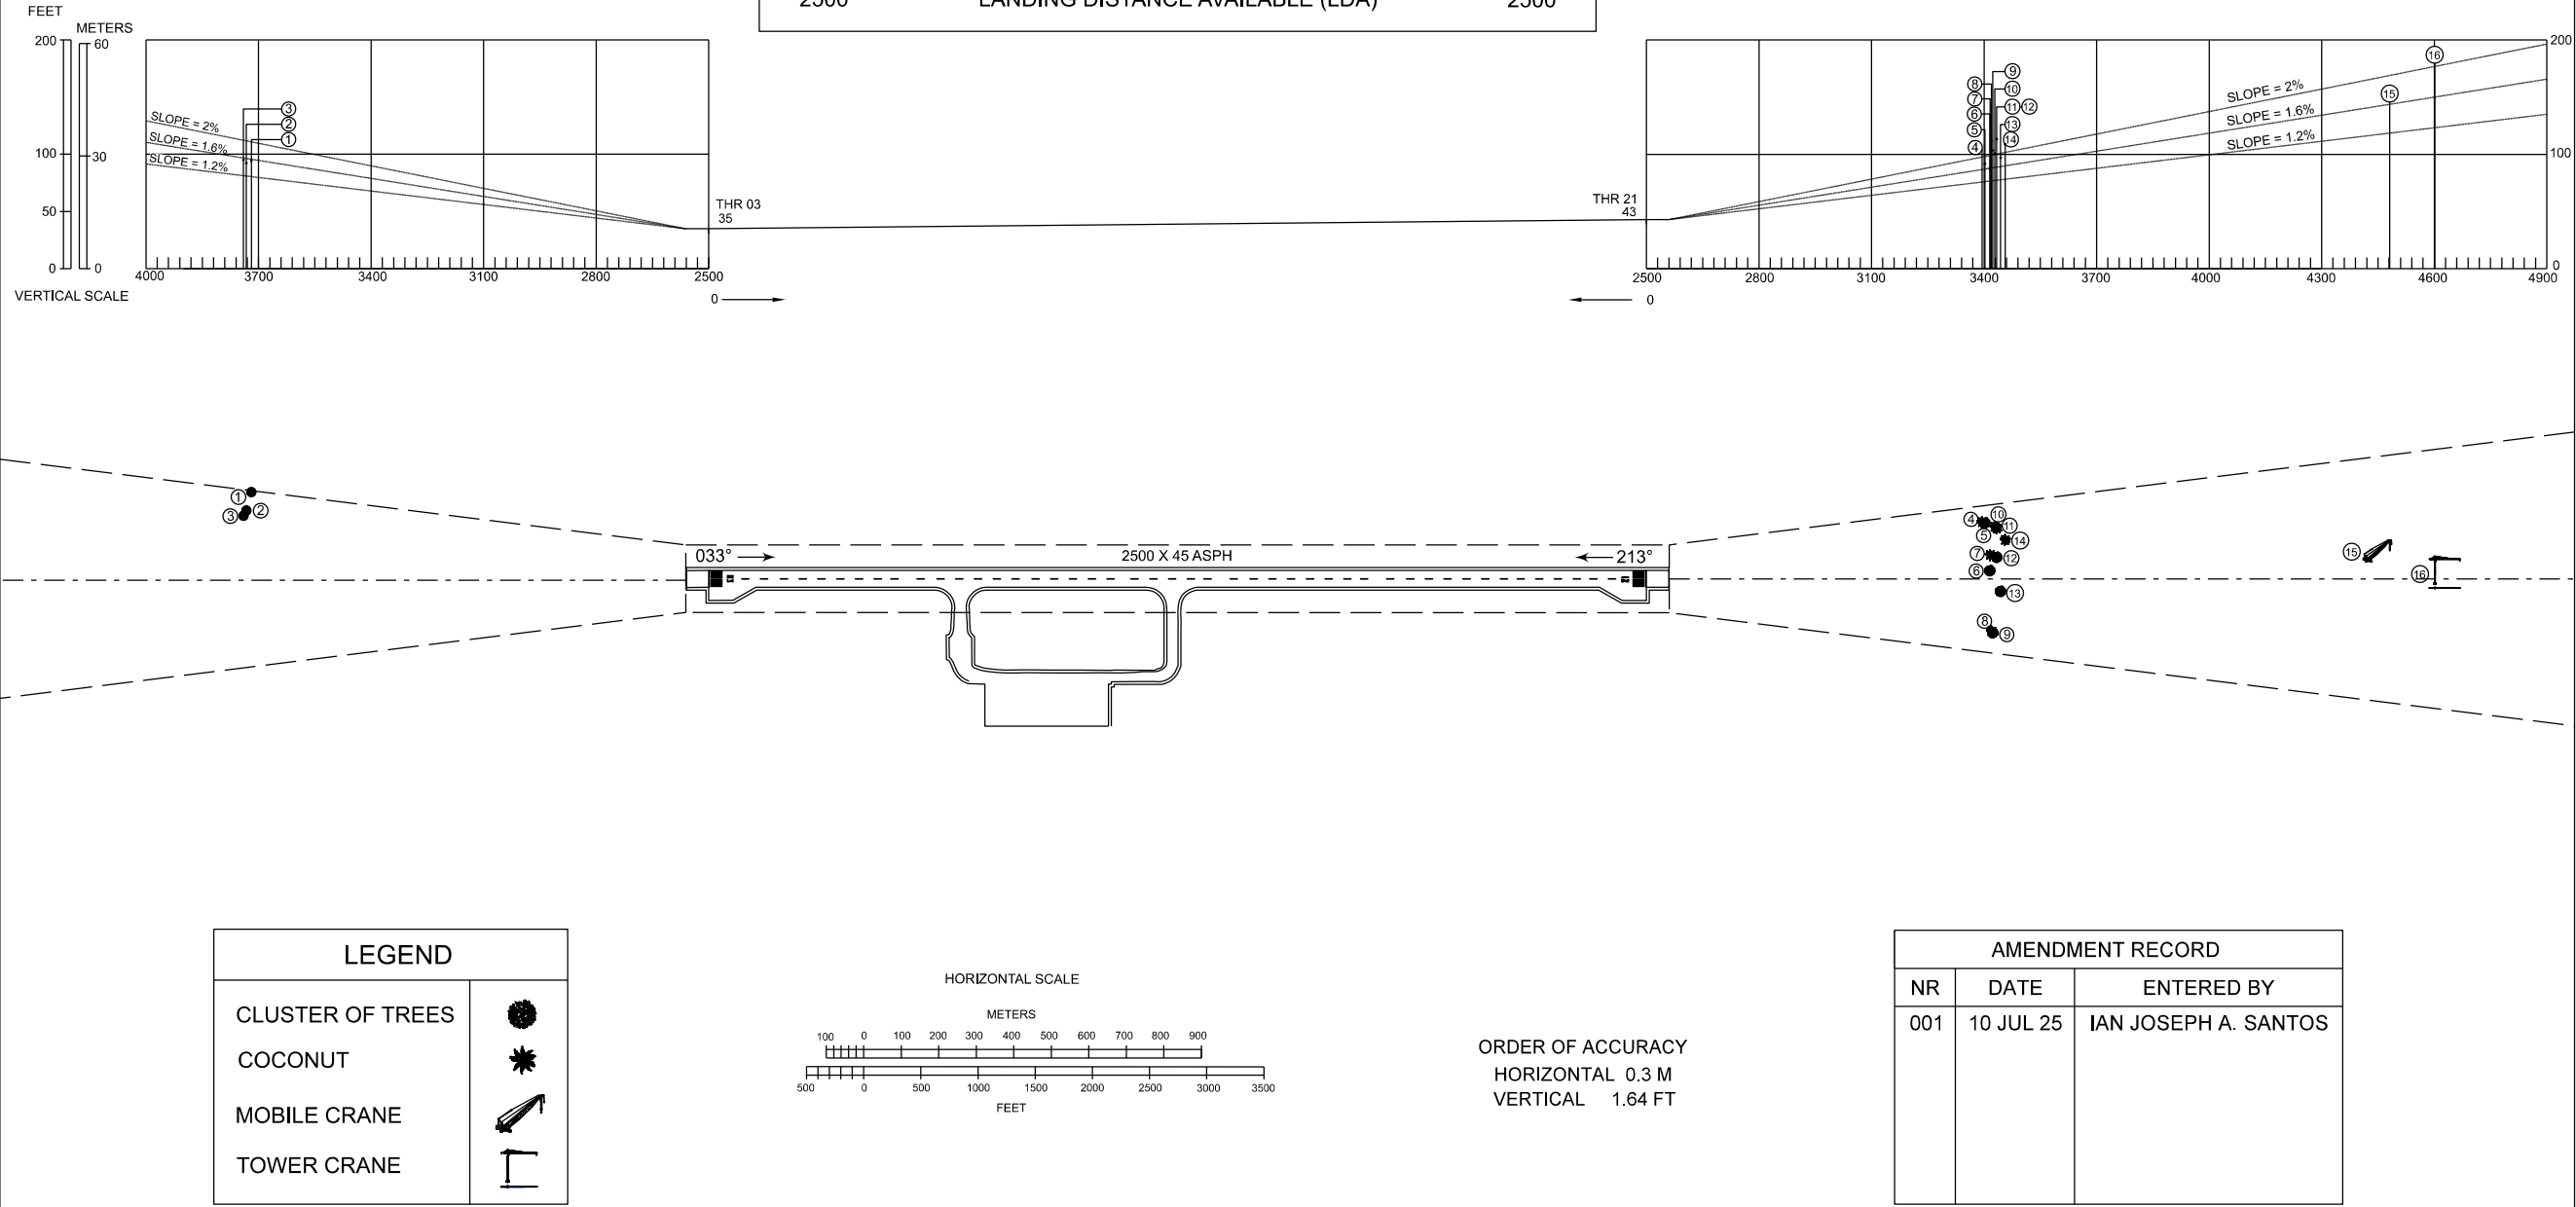


AERODROME OBSTACLE CHART

TYPE B

BOHOL/Bohol-Panglao Intl

ELEVATIONS IN FEET
DIMENSIONS IN METERS

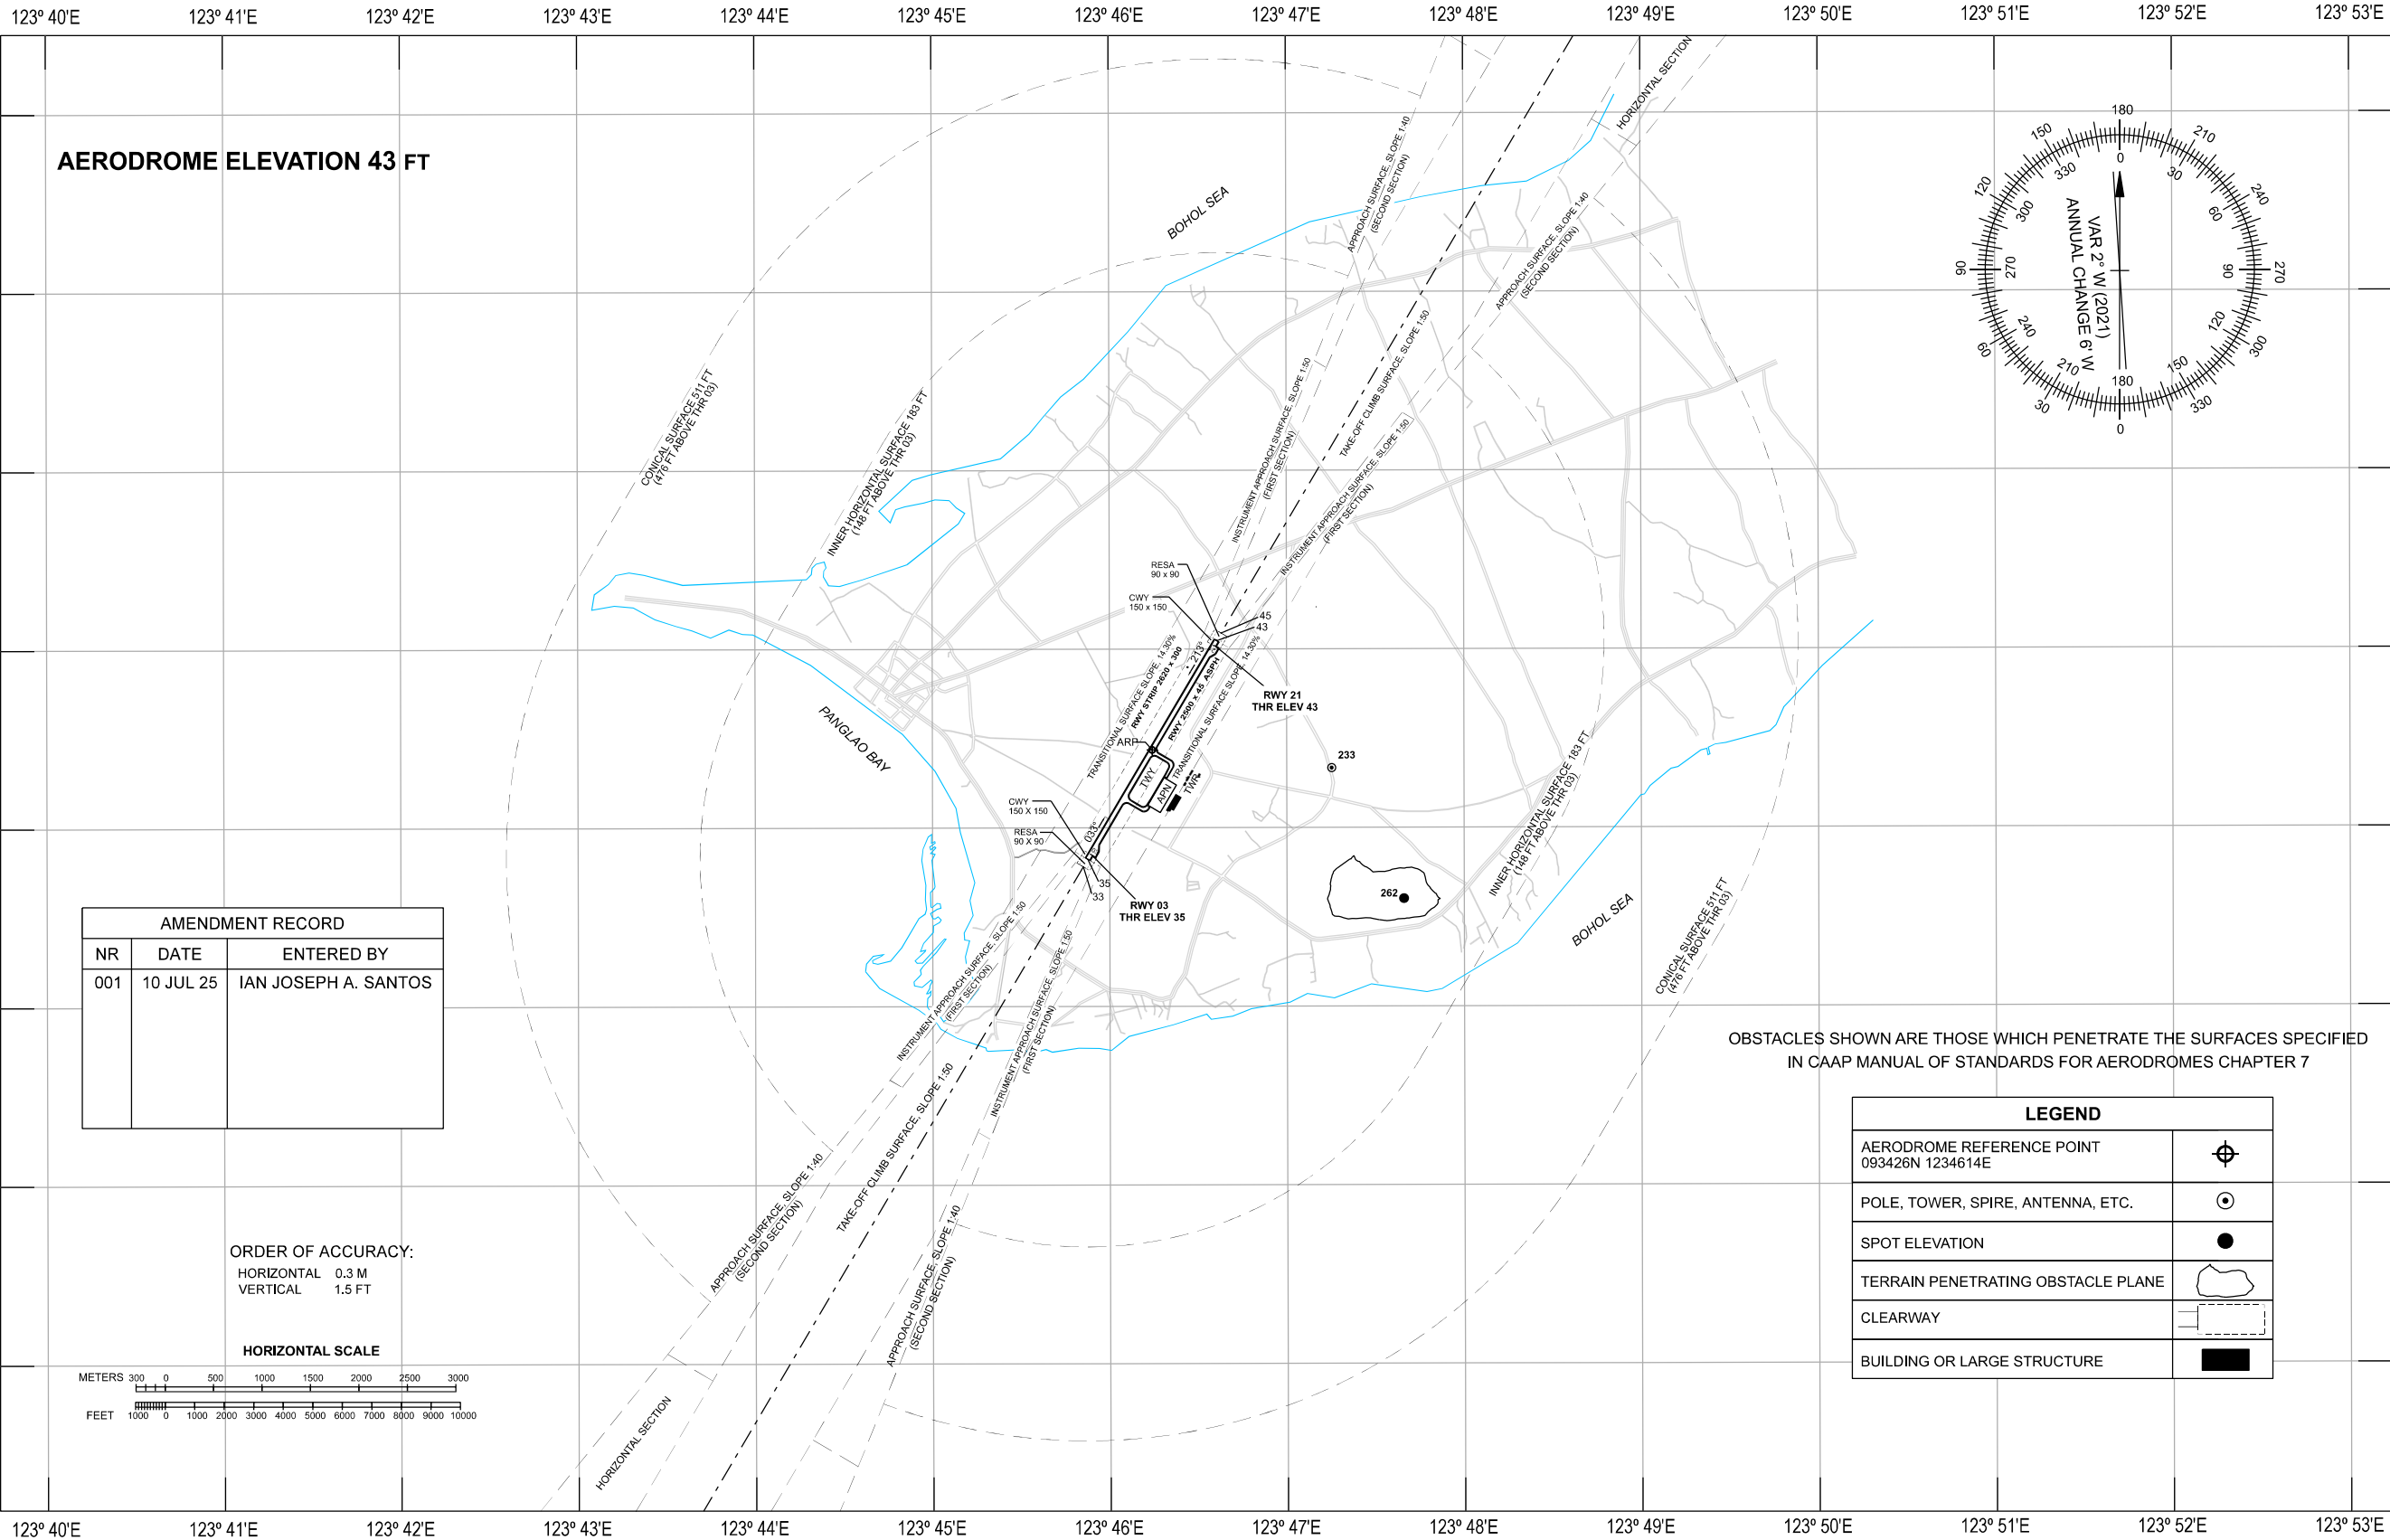


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

TRANSITION
ALTITUDE
11000 FT

TWR - 124.5 / 128.8
CLNC DEL - 125.1
APP - 124.7 / 121.2
(MACTAN)

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)

BOHOL/Bohol-
Panglao Intl (RPSP)
RWY 03
LAMOK2C ZENKY2C

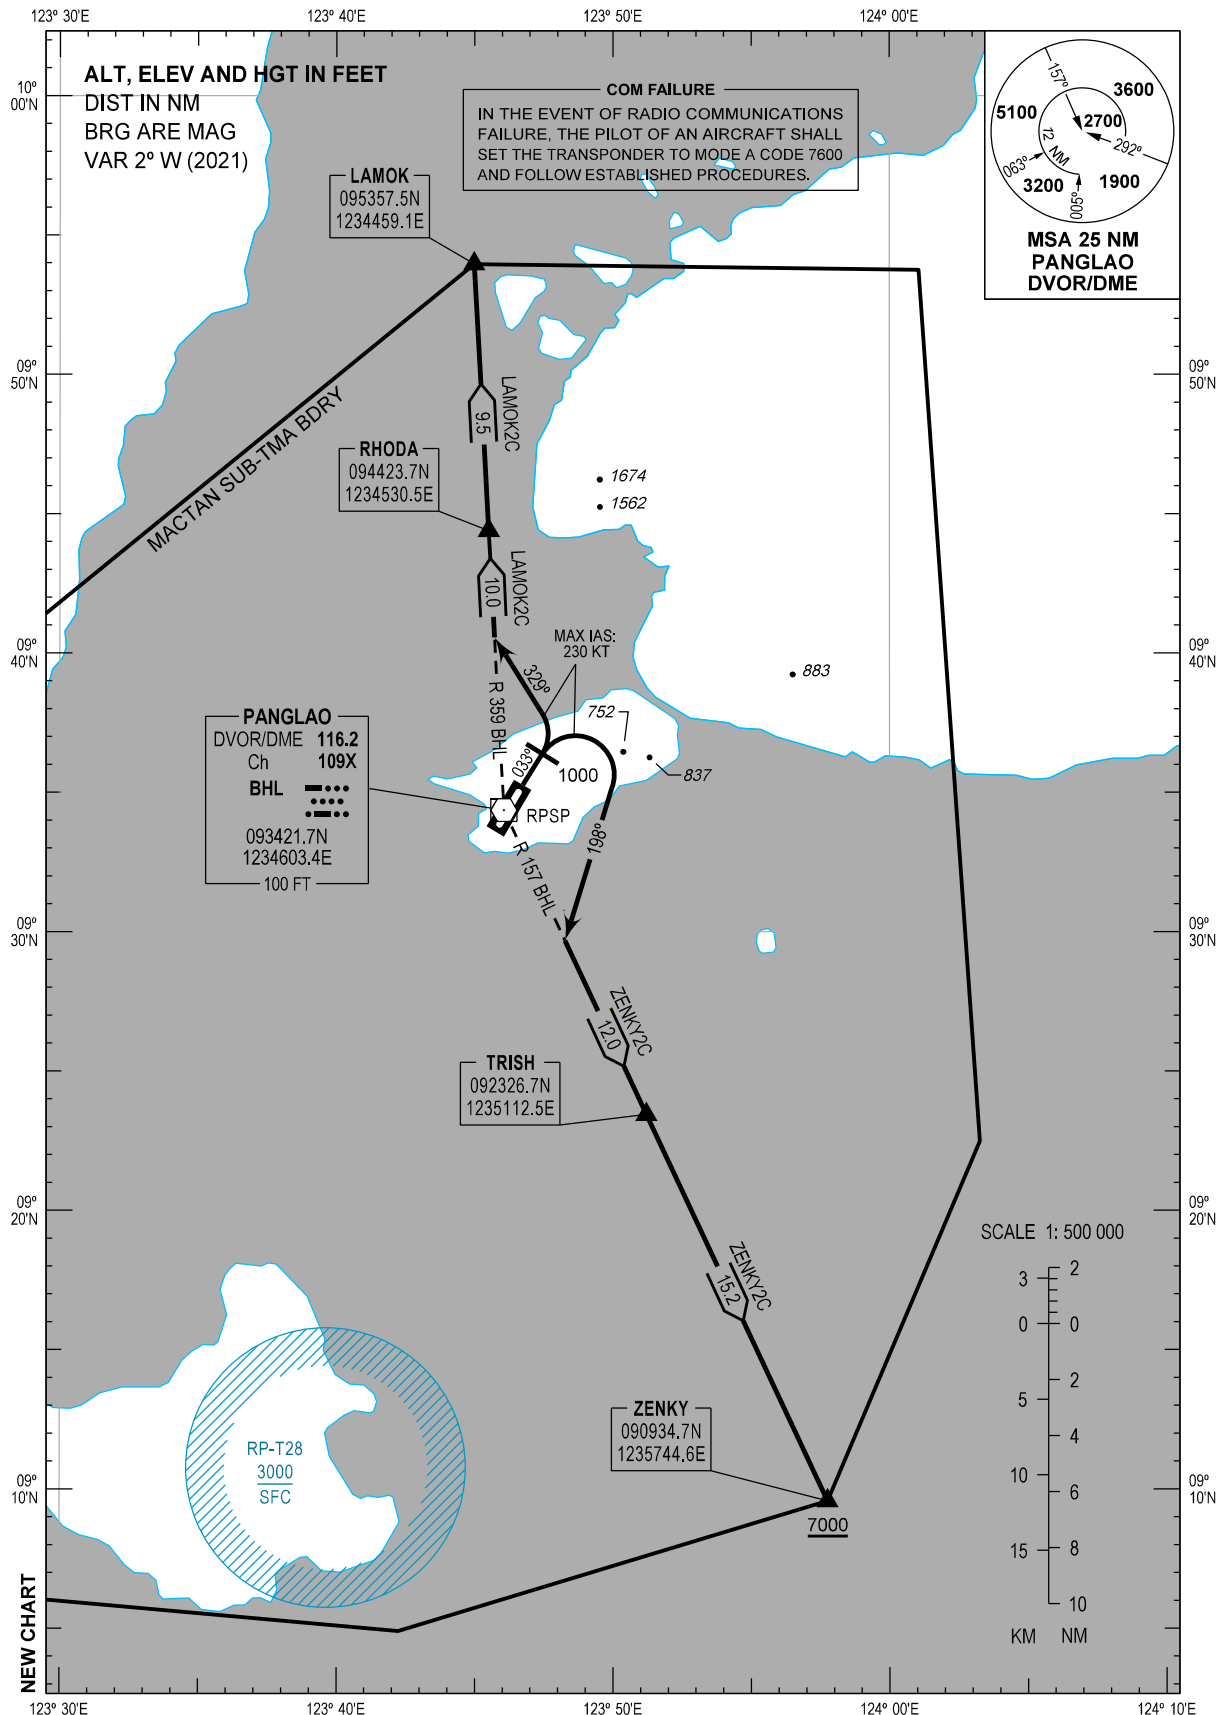

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
LAMOK2C	Straight-out climb at 1000 FT turn left heading 329°M.	Intercept and track out BHL DVOR/ DME Radial 359 to RHODA. Continue climb to LAMOK.	Max IAS 230 KT during initial turn.
ZENKY2C	Straight-out climb at 1000 FT turn right heading 198°M.	Intercept and track out BHL DVOR/ DME Radial 157 to TRISH. Continue climb to cross ZENKY at or above 7000 FT.	


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

TRANSITION
ALTITUDE
11000 FT

TWR - 124.5 / 128.8
CLNC DEL - 125.1
APP - 124.7 / 121.2
(MACTAN)

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)

BOHOL/Bohol-
Panglao Intl (RPSP)
RWY 21
LAMOK2D ZENKY2D

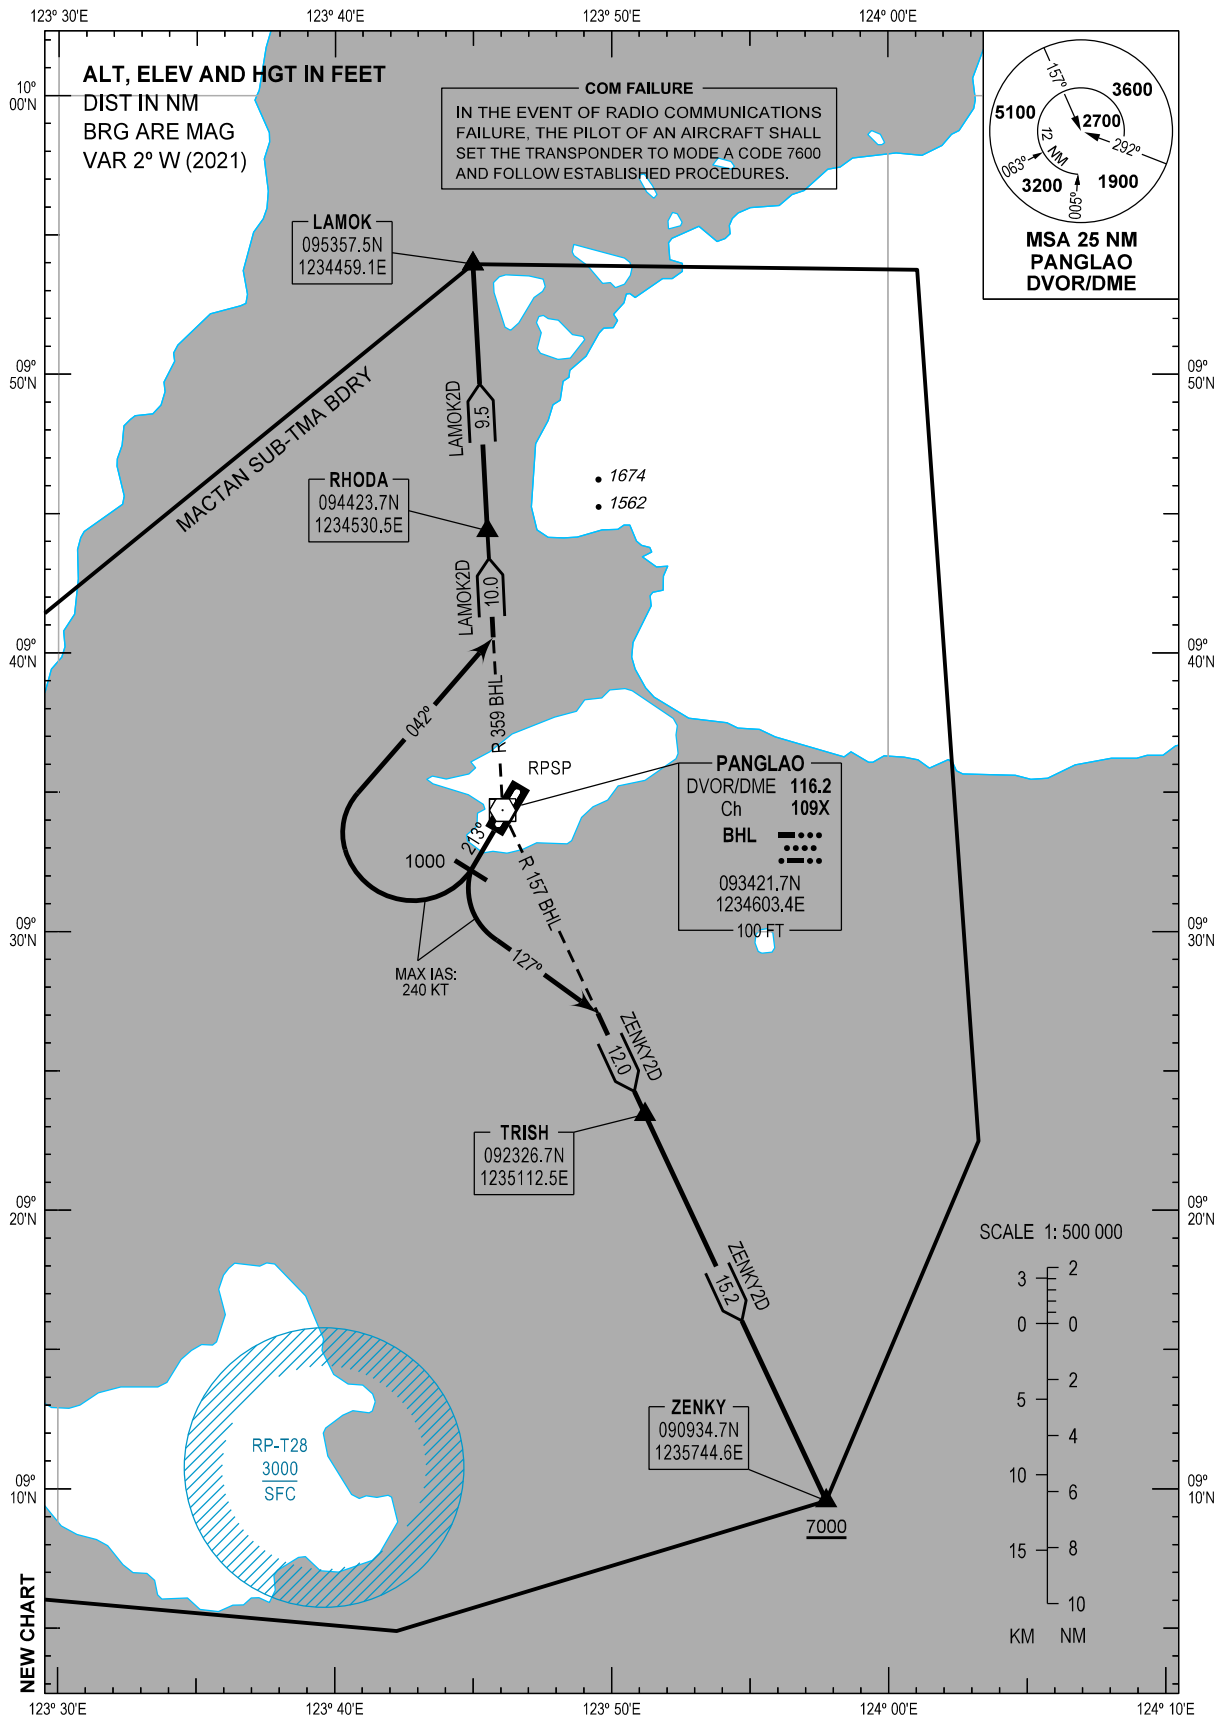

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
LAMOK2D	Straight-out climb at 1000 FT turn right heading 042°M.	Intercept and track out BHL DVOR/ DME Radial 359 to RHODA. Continue climb to LAMOK.	Max IAS 240 KT during initial turn.
ZENKY2D	Straight-out climb at 1000 FT turn left heading 127°M.	Intercept and track out BHL DVOR/ DME Radial 157 to TRISH. Continue climb to cross ZENKY at or above 7000 FT.	


STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO

TRANSITION
ALTITUDE
11000 FT

TWR - 124.5 / 128.8
CLNC DEL - 125.1
APP - 124.7 / 121.2
(MACTAN)

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)

BOHOL/Bohol-
Panglao Intl (RPSP)
RNP SID RWY 03
LAMOK2P ZENKY2P

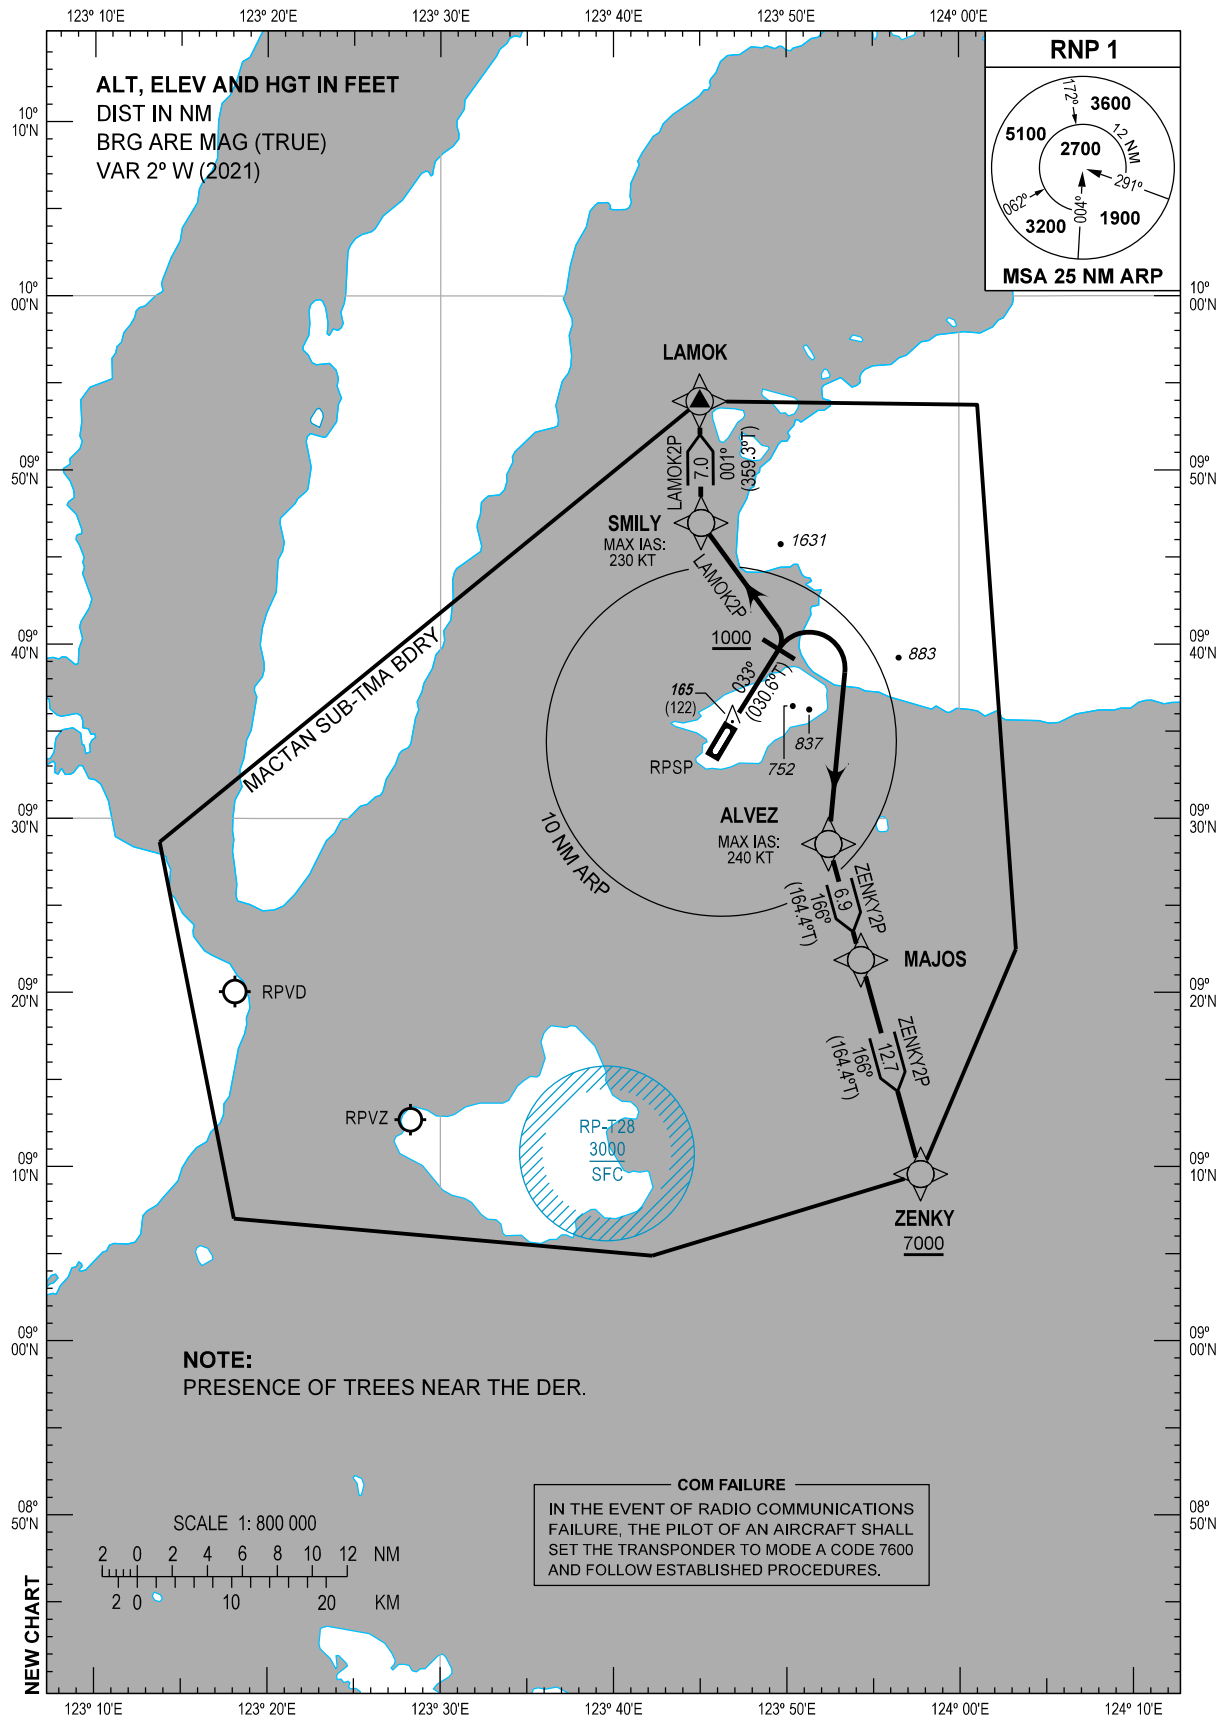

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
LAMOK2P	RWY 03	Climb on course 033°M. At 1000 FT, turn left direct to SMILY, to LAMOK.	Do not exceed 230 KT until SMILY.
ZENKY2P		Climb on course 033°M. At 1000 FT, turn right direct to ALVEZ, to MAJOS, to ZENKY.	1) Do not exceed 240 KT until ALVEZ. 2) ATS gradient of 3.4% so as to cross ZENKY at or above 7000 FT.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ALVEZ	092832.3N	1235226.0E	Fly-by
LAMOK	095357.5N	1234459.1E	Fly-by
MAJOS	092152.1N	1235418.2E	Fly-by
SMILY	094658.3N	1234504.4E	Fly-by
ZENKY	090934.7N	1235744.6E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 03

Table 1: LAMOK2P

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	033 (030.6)	+2	-	-	+1000	-	-	RNP1	RW03
20	DF	SMILY	-	-	-	-	L	-	-230	-	RNP1	RW03
30	TF	LAMOK	-	001 (359.3)	+2	7.0	-	-	-	-	RNP1	RW03

Table 2: ZENKY2P

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	033 (030.6)	+2	-	-	+1000	-	-	RNP1	RW03
20	DF	ALVEZ	-	-	-	-	R	-	-240	-	RNP1	RW03
30	TF	MAJOS	-	166 (164.4)	+2	6.9	-	-	-	-	RNP1	RW03
40	TF	ZENKY	-	166 (164.4)	+2	12.7	-	+7000	-	-	RNP1	RW03

NEW TABLE (DEP RTE DESCRIPTION, WPT LIST AND PROPOSED CODING)


**STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO**

TRANSITION
ALTITUDE
11000 FT

TWR - 124.5 / 128.8
CLNC DEL - 125.1
APP - 124.7 / 121.2
(MACTAN)

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)

**BOHOL/Bohol-
Panglao Intl (RPSP)**
RNP SID RWY 03
ZENKY2B

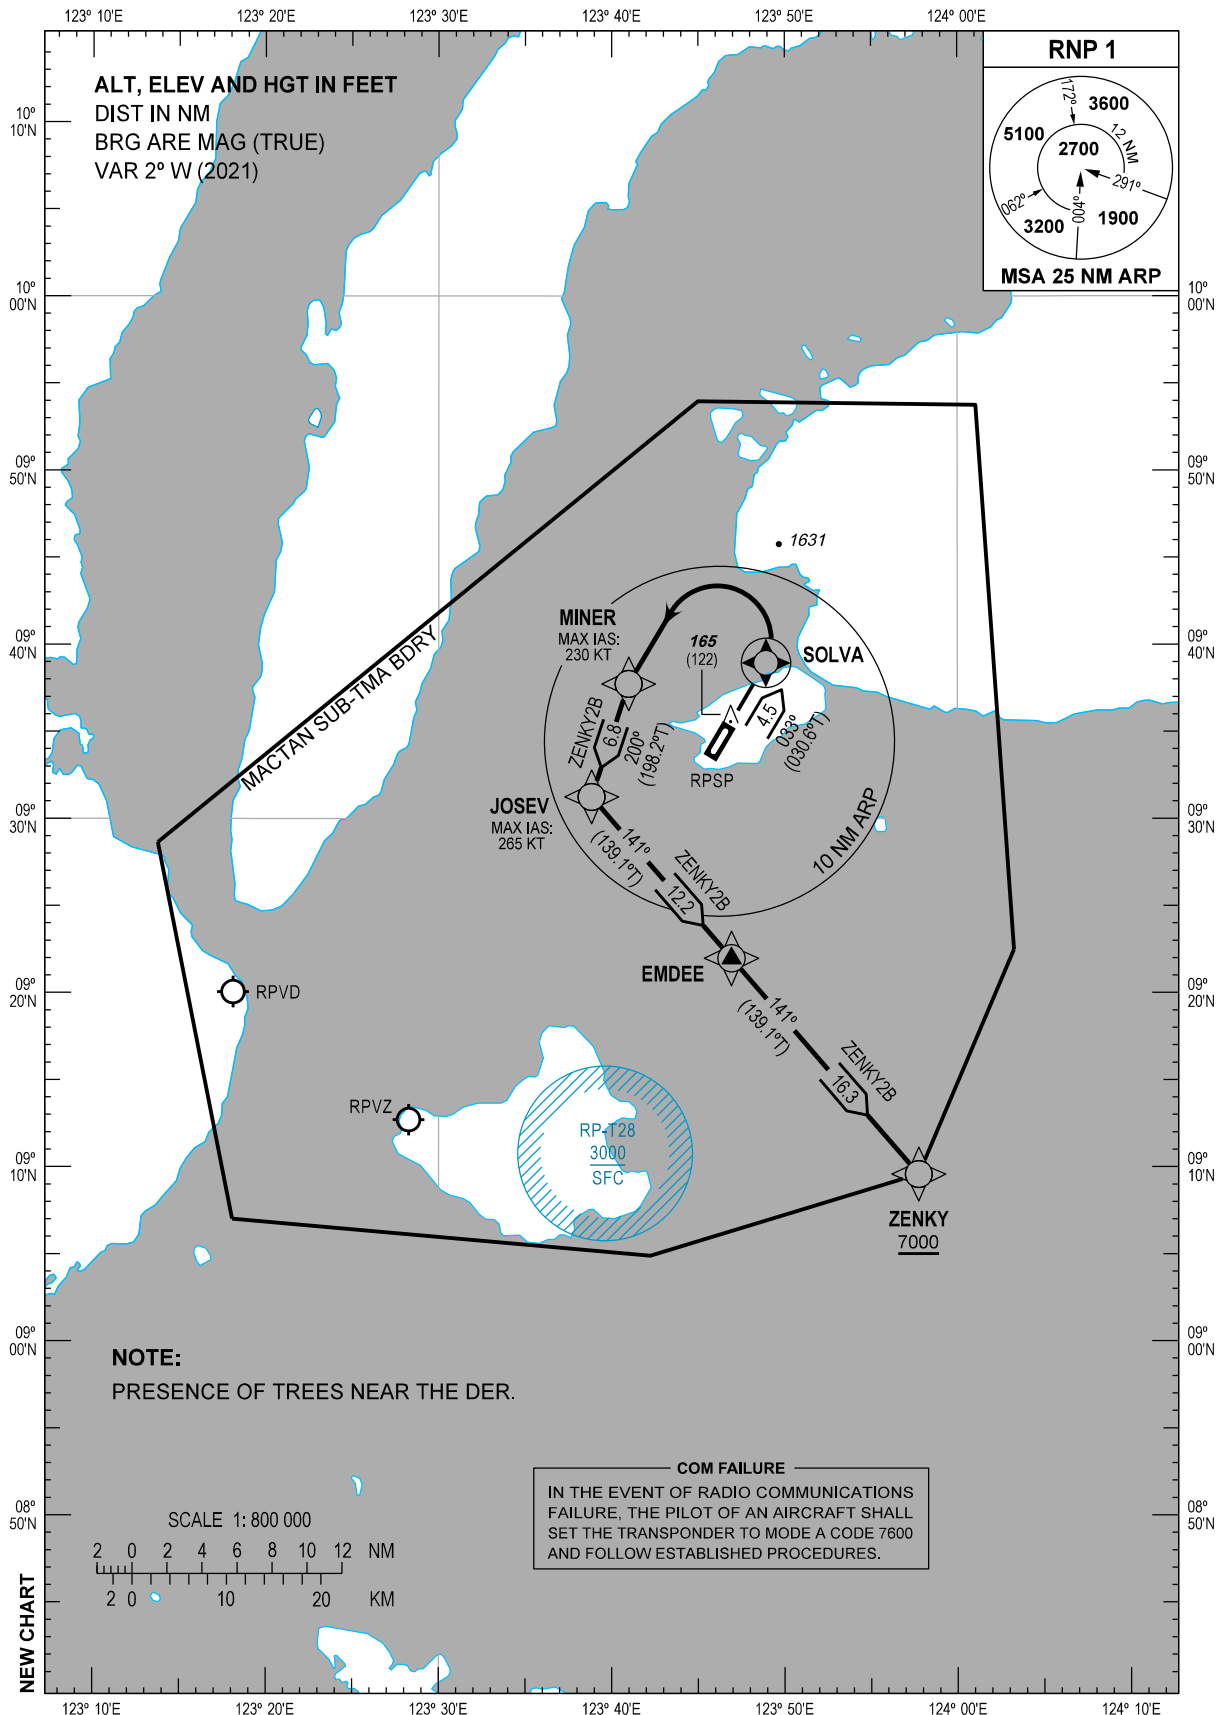

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
ZENKY2B	RWY 03	Climb on course 033°M. At SOLVA, turn left direct to MINER, to JOSEV, to EMDEE, to ZENKY.	Do not exceed 230 KT until MINER then 265 KT to JOSEV.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
EMDEE	092158.4N	1234656.0E	Fly-by
JOSEV	093114.5N	1233850.2E	Fly-by
MINER	093743.9N	1234058.9E	Fly-by
SOLVA	093856.2N	1234855.6E	Flyover
ZENKY	090934.7N	1235744.6E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 03

Table 1: ZENKY2B

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CF	SOLVA	Y	033 (030.6)	+2	4.5	-	-	-	-	RNP1	RW03
20	DF	MINER	-	-	-	-	L	-	-230	-	RNP1	RW03
30	TF	JOSEV	-	200 (198.2)	+2	6.8	-	-	-265	-	RNP1	RW03
40	TF	EMDEE	-	141 (139.1)	+2	12.2	-	-	-	-	RNP1	RW03
50	TF	ZENKY	-	141 (139.1)	+2	16.3	-	+7000	-	-	RNP1	RW03


**STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO**

TRANSITION
ALTITUDE
11000 FT

TWR - 124.5 / 128.8
CLNC DEL - 125.1
APP - 124.7 / 121.2
(MACTAN)

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)

**BOHOL/Bohol-
Panglao Intl (RPSP)**
RNP SID RWY 21
LAMOK2R ZENKY2R

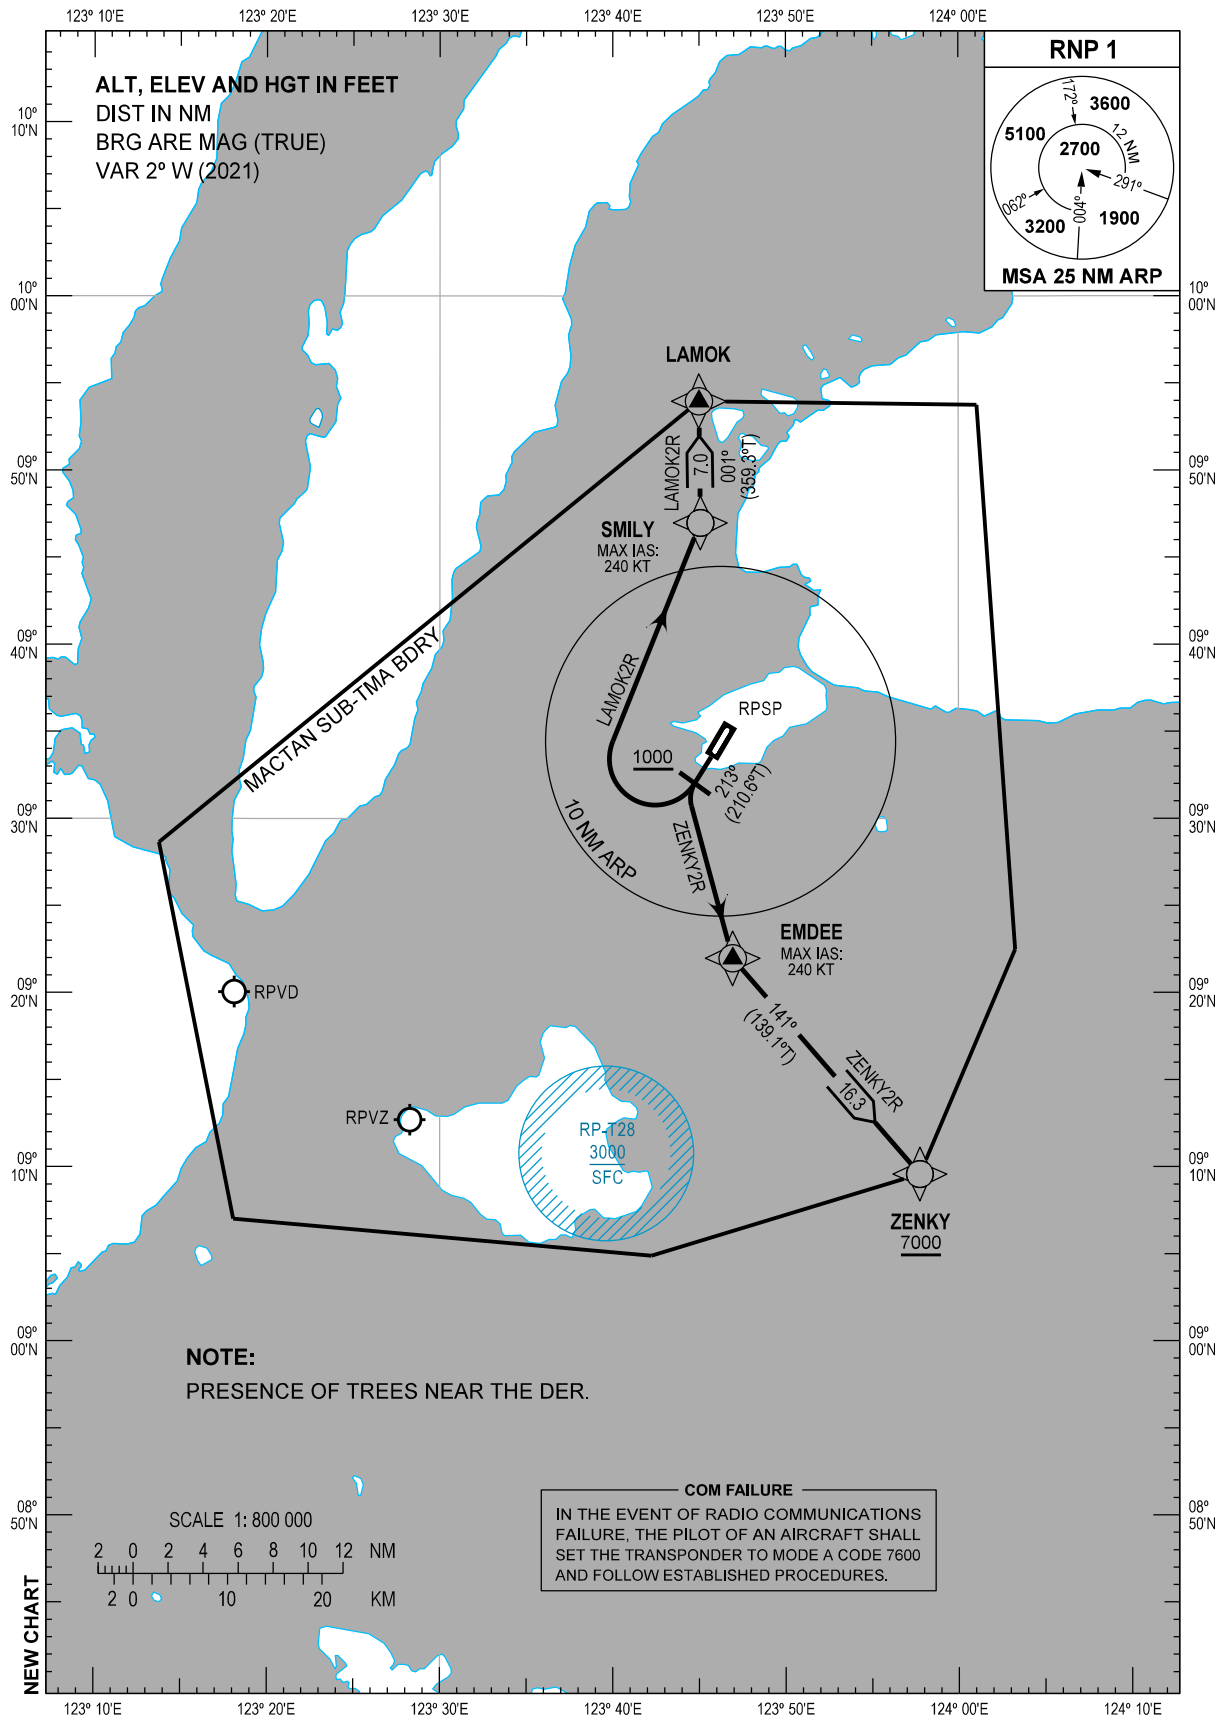

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
LAMOK2R	RWY 21	Climb on course 213°M. At 1000 FT, turn right direct to SMILY, to LAMOK.	Do not exceed 240 KT until SMILY.
ZENKY2R		Climb on course 213°M. At 1000 FT, turn left direct to EMDEE, to ZENKY.	1) Do not exceed 240 KT until EMDEE. 2) ATS Gradient 4.0% so as to cross ZENKY at or above 7000 FT.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
EMDEE	092158.4N	1234656.0E	Fly-by
LAMOK	095357.5N	1234459.1E	Fly-by
SMILY	094658.3N	1234504.4E	Fly-by
ZENKY	090934.7N	1235744.6E	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 21

Table 1: LAMOK2R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	213 (210.6)	+2	-	-	+1000	-	-	RNP1	RW21
20	DF	SMILY	-	-	-	-	R	-	-240	-	RNP1	RW21
30	TF	LAMOK	-	001 (359.3)	+2	7.0	-	-	-	-	RNP1	RW21

Table 2: ZENKY2R


Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	CA	-	-	213 (210.6)	+2	-	-	+1000	-	-	RNP1	RW21
20	DF	EMDEE	-	-	-	-	L	-	-240	-	RNP1	RW21
30	TF	ZENKY	-	141 (139.1)	+2	16.3	-	+7000	-	-	RNP1	RW21

STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO

TRANSITION
ALTITUDE
11000 FT

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)
APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8

BOHOL/Bohol-
Panglao Intl (RPSP)
RWY 03
FORTA1C MCT1 NANAS1

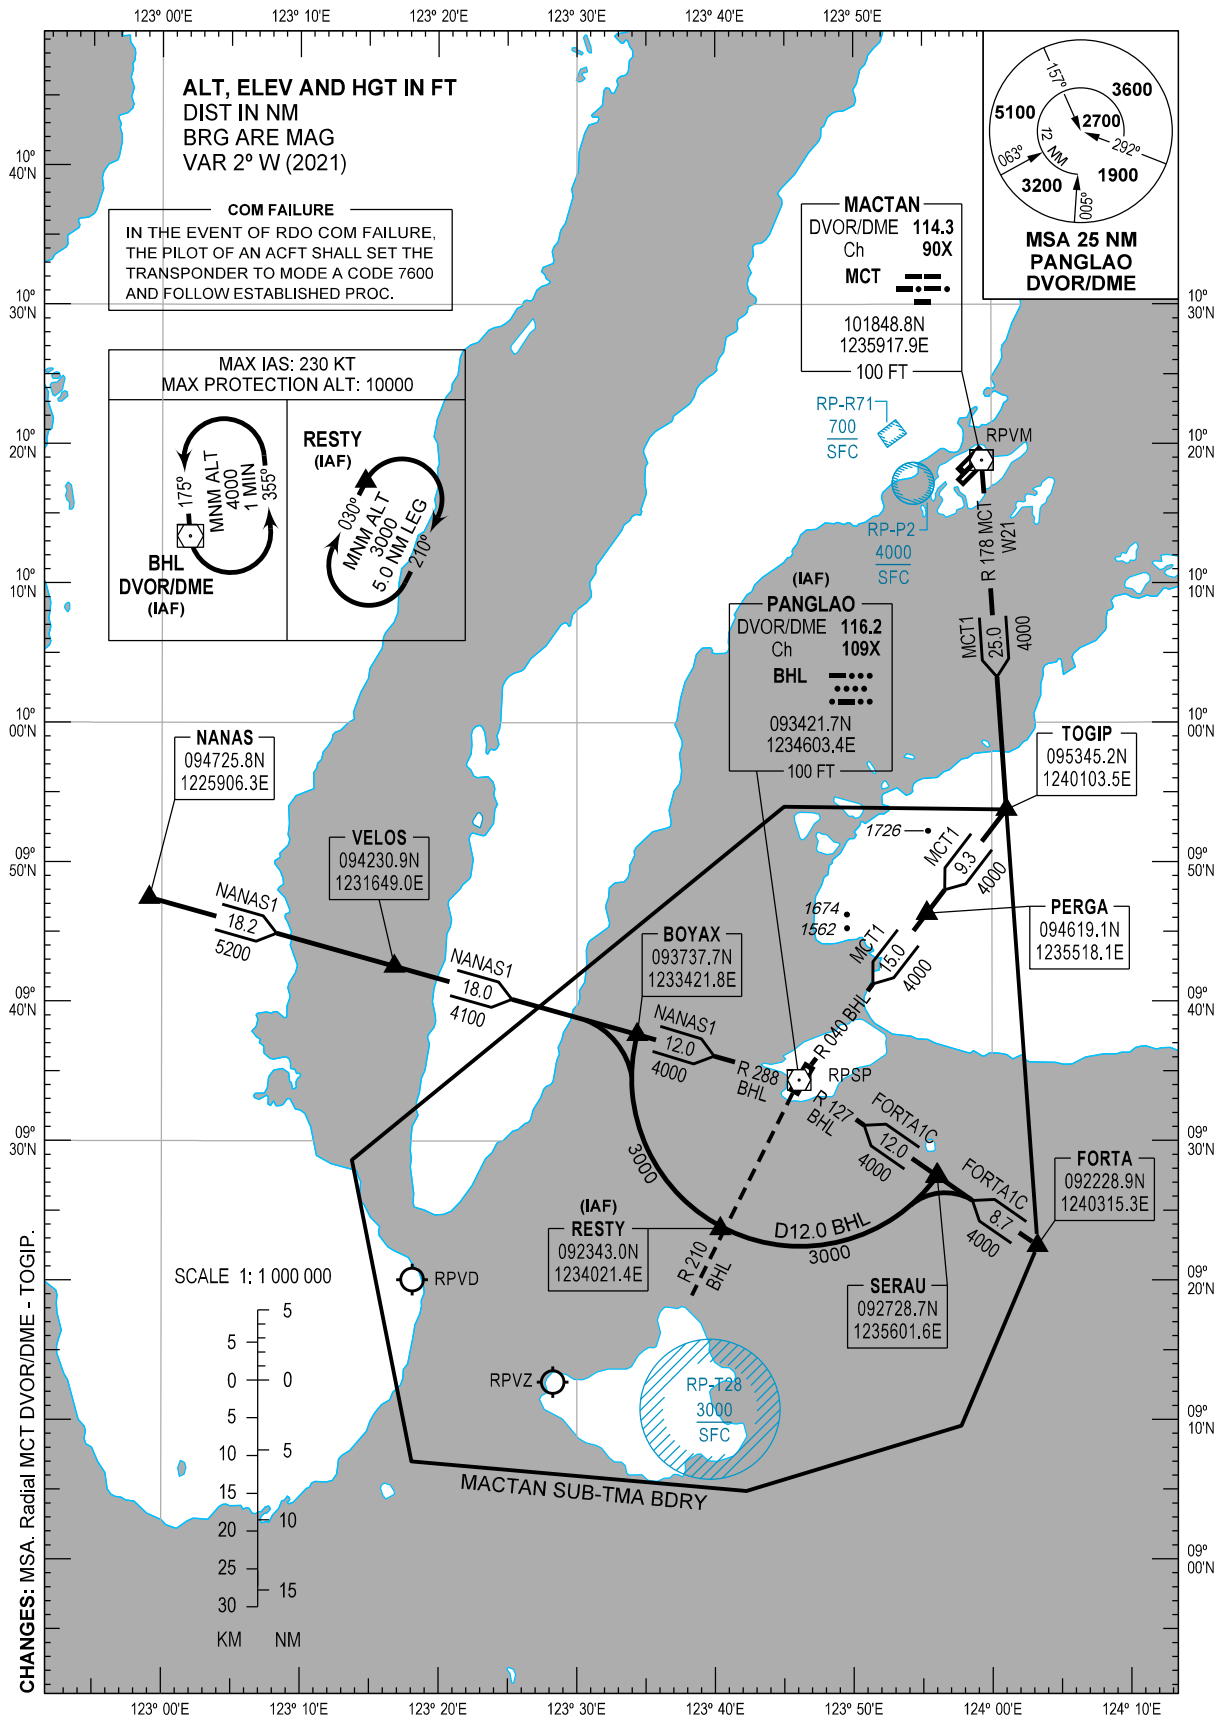

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
FORTA1C	FORTA - SERAU - BHL DVOR/DME	From FORTA on BHL DVOR/DME Radial 127 to SERAU, to BHL DVOR/ DME at or above 4000 FT.	
MCT1	MCT DVOR/DME - TOGIP - PERGA - BHL DVOR/DME	From MCT DVOR/DME to TOGIP on MCT DVOR/DME Radial 178, from TOGIP turn right to PERGA on BHL DVOR/DME Radial 040, to BHL DVOR/DME at or above 4000 FT.	
NANAS1	NANAS - VELOS - BOYAX - BHL DVOR/DME	From NANAS on BHL DVOR/DME Radial 288 to VELOS at or above 5200 FT, to BOYAX at or above 4100 FT, to BHL DVOR/DME at or above 4000 FT.	

CHANGES: RTE Description. MCT1 and MCT1A PROC Description.

STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO


TRANSITION
ALTITUDE
11000 FT

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)
APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8

BOHOL/Bohol-
Panglao Intl (RPSP)

RWY 21

FORTA1D MCT11/1A NANAS1

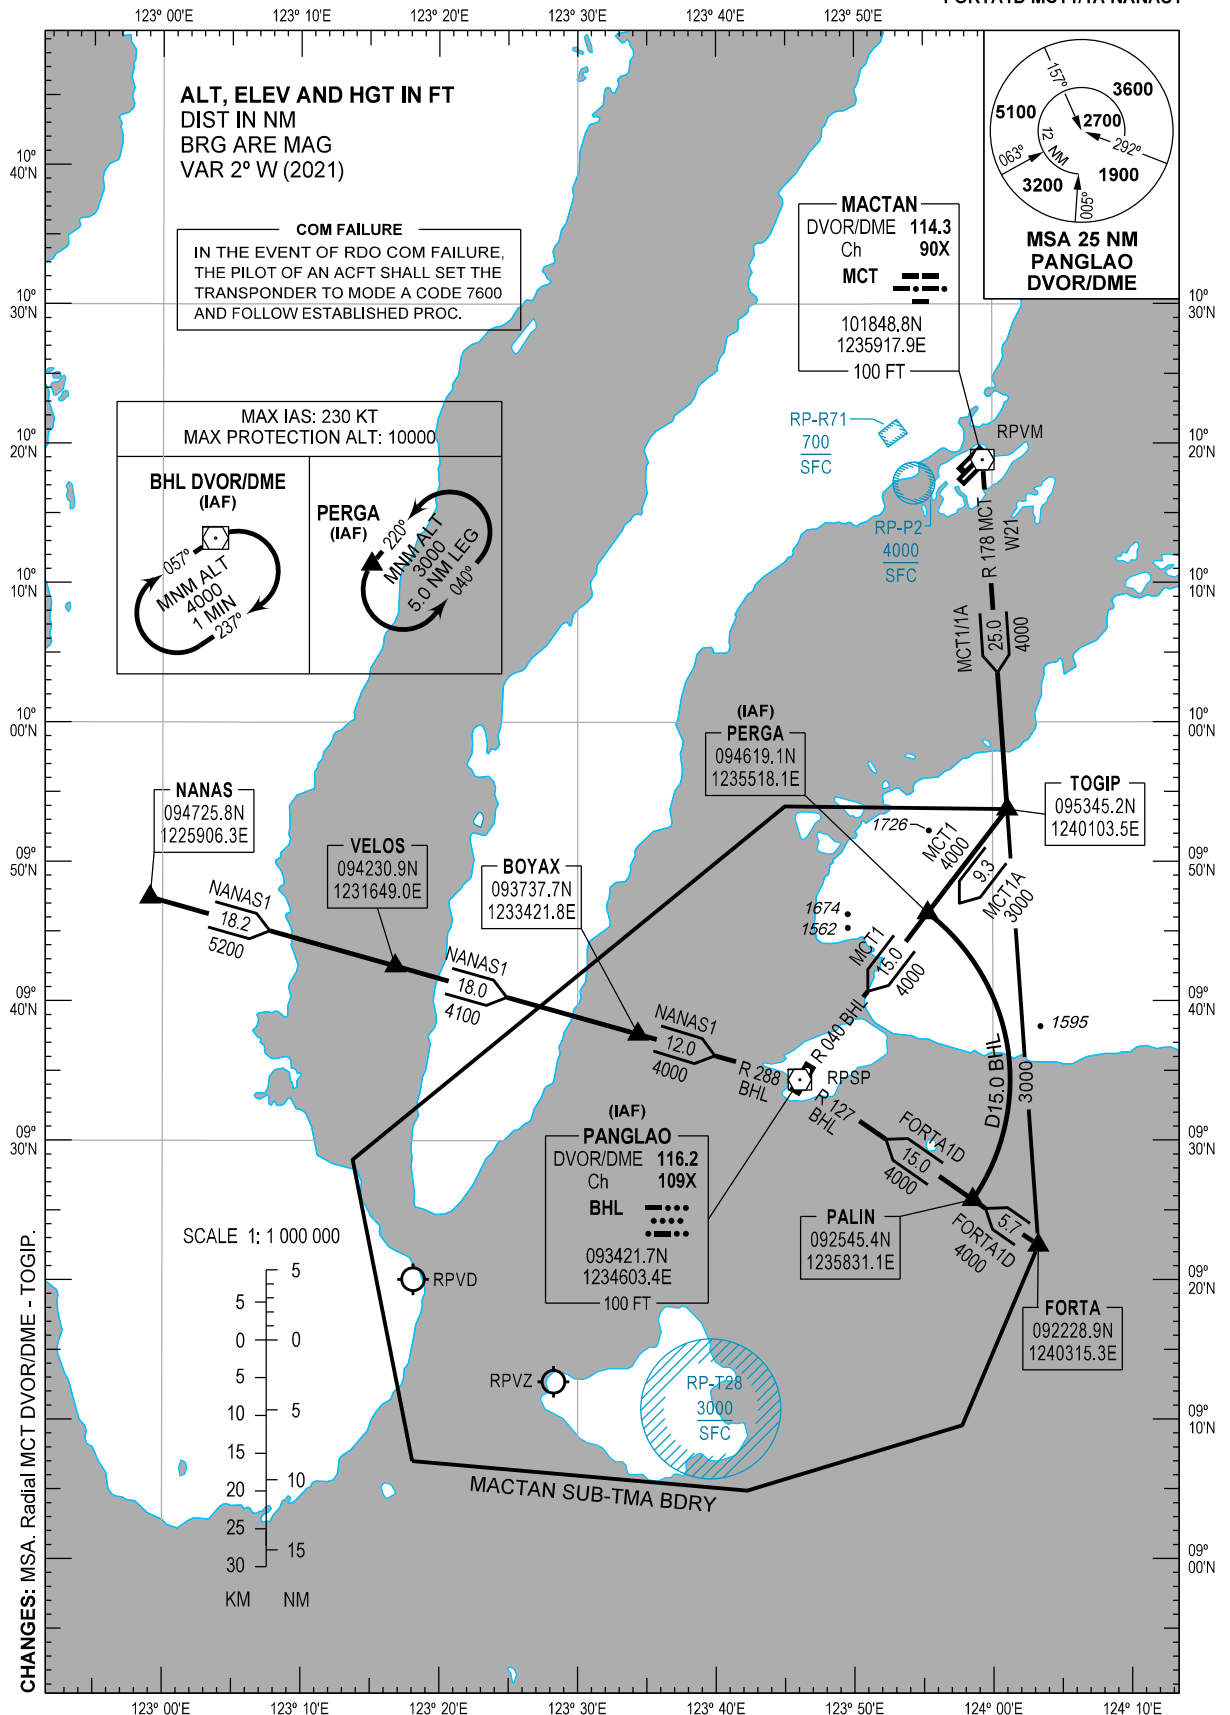

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
FORTA1D	FORTA - PALIN - BHL DVOR/DME	From FORTA on BHL DVOR/DME Radial 127 to PALIN, to BHL DVOR/ DME at or above 4000 FT.	
MCT1	MCT DVOR/DME - TOGIP - PERGA - BHL DVOR/DME	From MCT DVOR/DME to TOGIP on MCT DVOR/DME Radial 178, from TOGIP turn right to PERGA on BHL DVOR/DME Radial 040, to BHL DVOR/DME at or above 4000 FT.	
MCT1A	MCT DVOR/DME - TOGIP - PERGA	From MCT DVOR/DME to TOGIP on MCT DVOR/DME Radial 178, from TOGIP turn right to PERGA on BHL DVOR/DME Radial 040 at or above 3000 FT.	
NANAS1	NANAS - VELOS - BOYAX - BHL DVOR/DME	From NANAS on BHL DVOR/DME Radial 288 to VELOS at or above 5200 FT, to BOYAX at or above 4100 FT, to BHL DVOR/DME at or above 4000 FT.	

CHANGES: RTE Description. MCT1 PROC Description.

**BOHOL/Bohol-
Panglao Intl (RPSP)
RNP STAR RWY 03
BATAY1P FORTA1P
NANAS1P ZENKY1P**



ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
BATAY1P	BATAY - MCT - TOGIP - DAISY - PINAT - KISES	From BATAY to MCT DVOR/DME, to TOGIP, to DAISY, to PINAT at or above 5000 FT, to KISES at or above 4000 FT.	
FORTA1P	FORTA - MAJOS - KISES	From FORTA at or above 9000 FT, to MAJOS, to KISES at or above 4000 FT.	
NANAS1P	NANAS - DEGRA	From NANAS at or above 10000 FT, to DEGRA at or above 5000 FT.	
ZENKY1P	ZENKY - KISES	From ZENKY at or above 9000 FT, to KISES at or above 4000 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BATAY	110819.3N	1235043.1E	Fly-by
DAISY	093807.7N	1235406.5E	Fly-by
DEGRA	092707.7N	1232814.2E	Fly-by
FORTA	092228.9N	1240315.3E	Fly-by
KISES	092115.3N	1234526.1E	Fly-by
MAJOS	092152.1N	1235418.2E	Fly-by
MCT	101848.8N	1235917.9E	Fly-by
NANAS	094725.8N	1225906.3E	Fly-by
PINAT	092918.6N	1234934.4E	Fly-by
TOGIP	095345.2N	1240103.5E	Fly-by
ZENKY	090934.7N	1235744.6E	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 03

Table 1: BATAY1P

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	BATAY	-	-	-	-	-	-	-	-	RNP1	RW03
20	TF	MCT	-	172 (170.3)	+2	50.0	-	-	-	-	RNP1	RW03
30	TF	TOGIP	-	178 (176.0)	+2	25.0	-	-	-	-	RNP1	RW03
40	TF	DAISY	-	206 (203.8)	+2	17.0	-	-	-	-	RNP1	RW03
50	TF	PINAT	-	209 (207.1)	+2	9.9	-	+5000	-	-	RNP1	RW03
60	TF	KISES	-	209 (207.0)	+2	9.0	-	+4000	-250	-	RNP1	RW03

NEW TABLE (ARR RTE DESCRIPTION, WPT LIST AND PROPOSED CODING)

Table 2: FORTA1P

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	FORTA	-	-	-	-	-	+9000	-	-	RNP1	RW03
20	TF	MAJOS	-	268 (266.1)	+2	8.9	-	-	-	-	RNP1	RW03
30	TF	KISES	-	268 (266.0)	+2	8.8	-	+4000	-250	-	RNP1	RW03

Table 3: NANAS1P

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	NANAS	-	-	-	-	-	+10000	-	-	RNP1	RW03
20	TF	DEGRA	-	127 (125.0)	+2	35.2	-	+5000	-250	-	RNP1	RW03

Table 4: ZENKY1P

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	ZENKY	-	-	-	-	-	+9000	-	-	RNP1	RW03
20	TF	KISES	-	316 (313.7)	+2	16.8	-	+4000	-250	-	RNP1	RW03


INTENTIONALLY
LEFT
BLANK

STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO

TRANSITION
ALTITUDE
11000 FT

ACC - 124.9 / 125.7 (SOUTH)
- 132.5 / 125.7 (SOUTHEAST)
- 8942 / 5655 (SEA-2 HF)
- 8903 (CWP HF)
APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8

BOHOL/Bohol-
Panglao Intl (RPSP)
RNP STAR RWY 21
BATAY1R FORTA1R
NANAS1N/1R

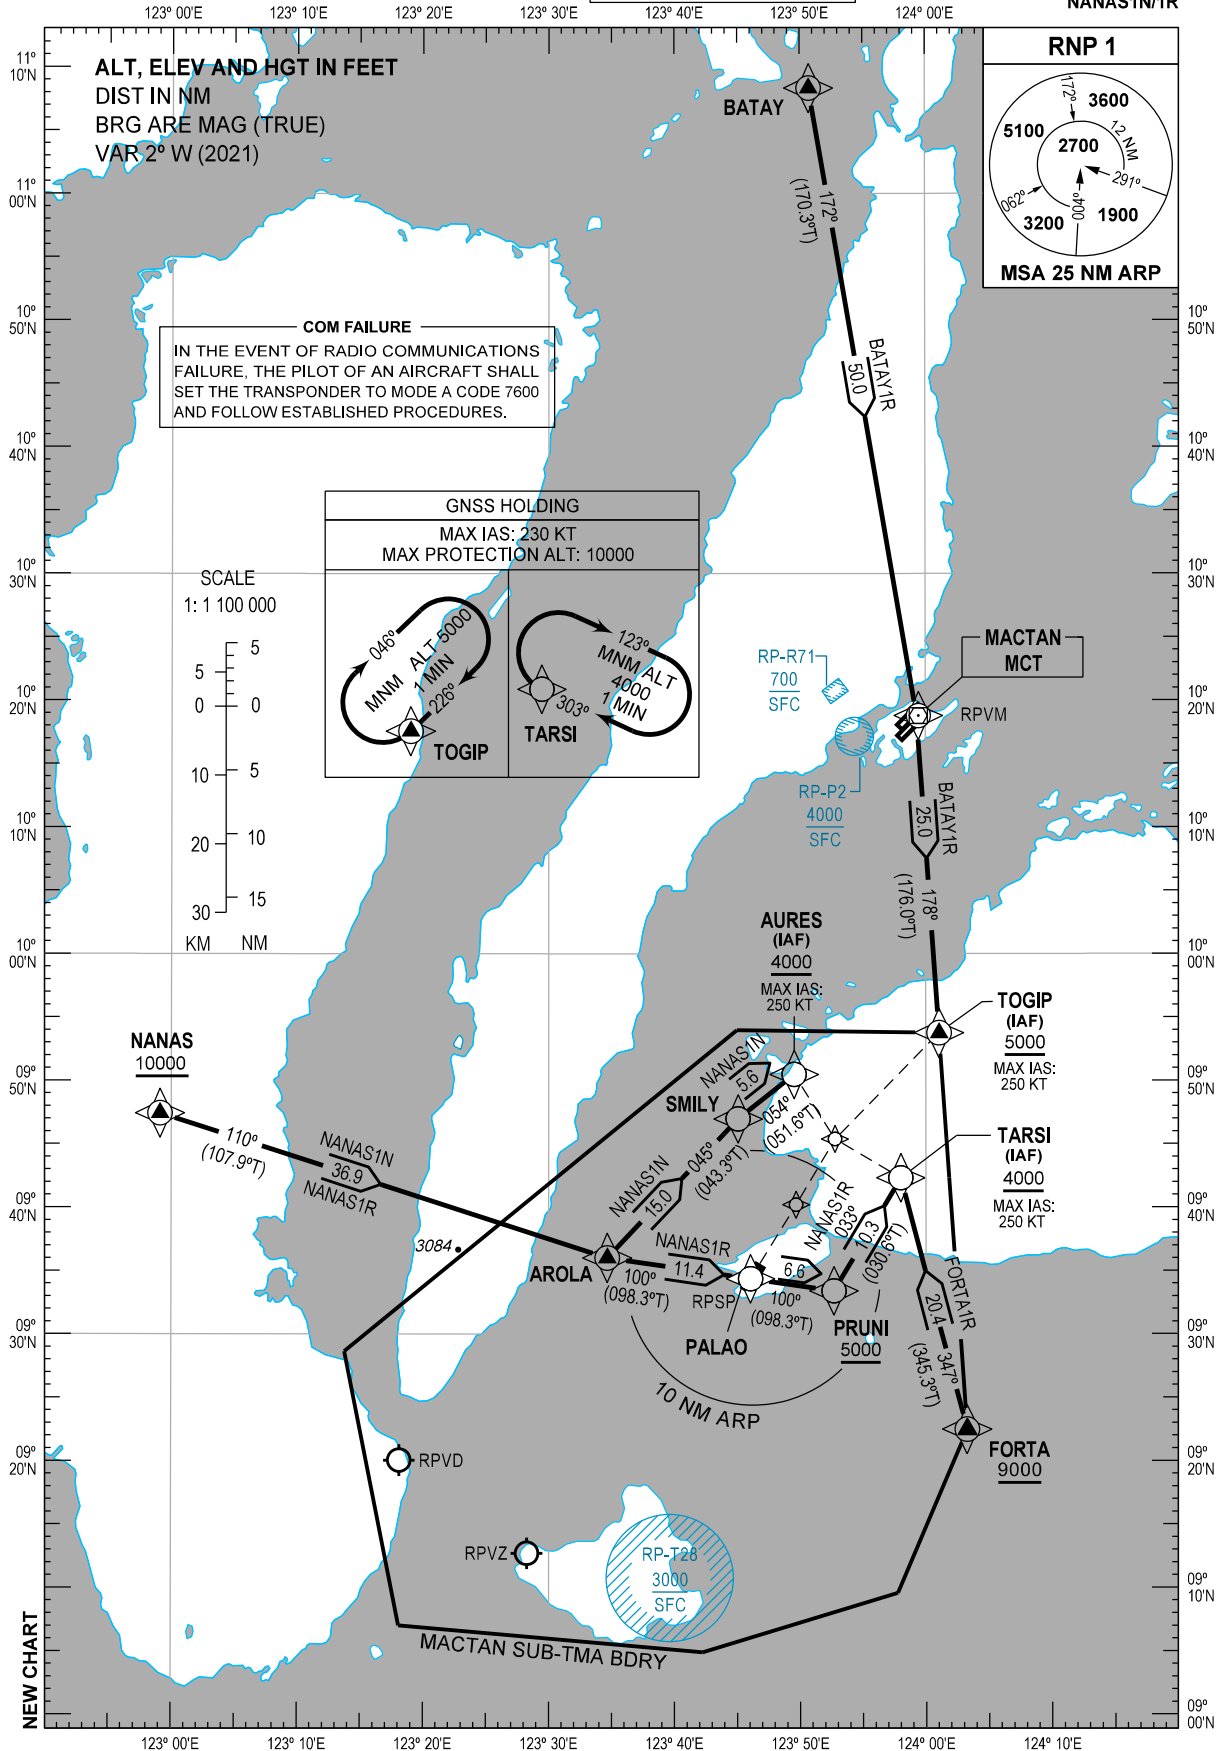

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARKS
BATAY1R	BATAY - MCT - TOGIP	From BATAY, to MCT DVOR/DME, to TOGIP at or above 5000 FT.	
FORTA1R	FORTA - TARSI	From FORTA at or above 9000 FT, to TARSI at or above 4000 FT.	
NANAS1N	NANAS - AROLA - SMILY - AURES	From NANAS at or above 10000 FT, to AROLA, to SMILY, to AURES at or above 4000 FT.	
NANAS1R	NANAS - AROLA - PALAO - PRUNI - TARSI	From NANAS at or above 10000 FT, to AROLA, to PALAO, to PRUNI at or above 5000 FT, to TARSI at or above 4000 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
AROLA	093600.5N	1233440.2E	Fly-by
AURES	095028.9N	1234932.0E	Fly-by
BATAY	110819.3N	1235043.1E	Fly-by
FORTA	092228.9N	1240315.3E	Fly-by
MCT	101848.8N	1235917.9E	Fly-by
NANAS	094725.8N	1225906.3E	Fly-by
PALAO	093421.7N	1234603.4E	Fly-by
PRUNI	093324.0N	1235241.1E	Fly-by
SMILY	094658.3N	1234504.4E	Fly-by
TARSI	094218.9N	1235800.4E	Fly-by
TOGIP	095345.2N	1240103.5E	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 21

Table 1: BATAY1R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	BATAY	-	-	-	-	-	-	-	-	RNP1	RW21
20	TF	MCT	-	172 (170.3)	+2	50.0	-	-	-	-	RNP1	RW21
30	TF	TOGIP	-	178 (176.0)	+2	25.0	-	+5000	-250	-	RNP1	RW21

Table 2: FORTA1R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	FORTA	-	-	-	-	-	+9000	-	-	RNP1	RW21
20	TF	TARSI	-	347 (345.3)	+2	20.4	-	+4000	-250	-	RNP1	RW21

NEW TABLE (ARR RTE DESCRIPTION, WPT LIST AND PROPOSED CODING)

Table 3: NANAS1N

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	NANAS	-	-	-	-	-	+10000	-	-	RNP1	RW21
20	TF	AROLA	-	110 (107.9)	+2	36.9	-	-	-	-	RNP1	RW21
30	TF	SMILY	-	045 (043.3)	+2	15.0	-	-	-	-	RNP1	RW21
40	TF	AURES	-	054 (051.6)	+2	5.6	-	+4000	-250	-	RNP1	RW21


Table 4: NANAS1R

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	NANAS	-	-	-	-	-	+10000	-	-	RNP1	RW21
20	TF	AROLA	-	110 (107.9)	+2	36.9	-	-	-	-	RNP1	RW21
30	TF	PALAO	-	100 (098.3)	+2	11.4	-	-	-	-	RNP1	RW21
40	TF	PRUNI	-	100 (098.3)	+2	6.6	-	+5000	-	-	RNP1	RW21
50	TF	TARSI	-	033 (030.6)	+2	10.3	-	+4000	-250	-	RNP1	RW21

INTENTIONALLY
LEFT
BLANK


APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8
GND - 121.6
ATIS - 126.5

**BOHOL/Bohol-
Panglao Intl (RPSP)
ILS OR LOC RWY 21**

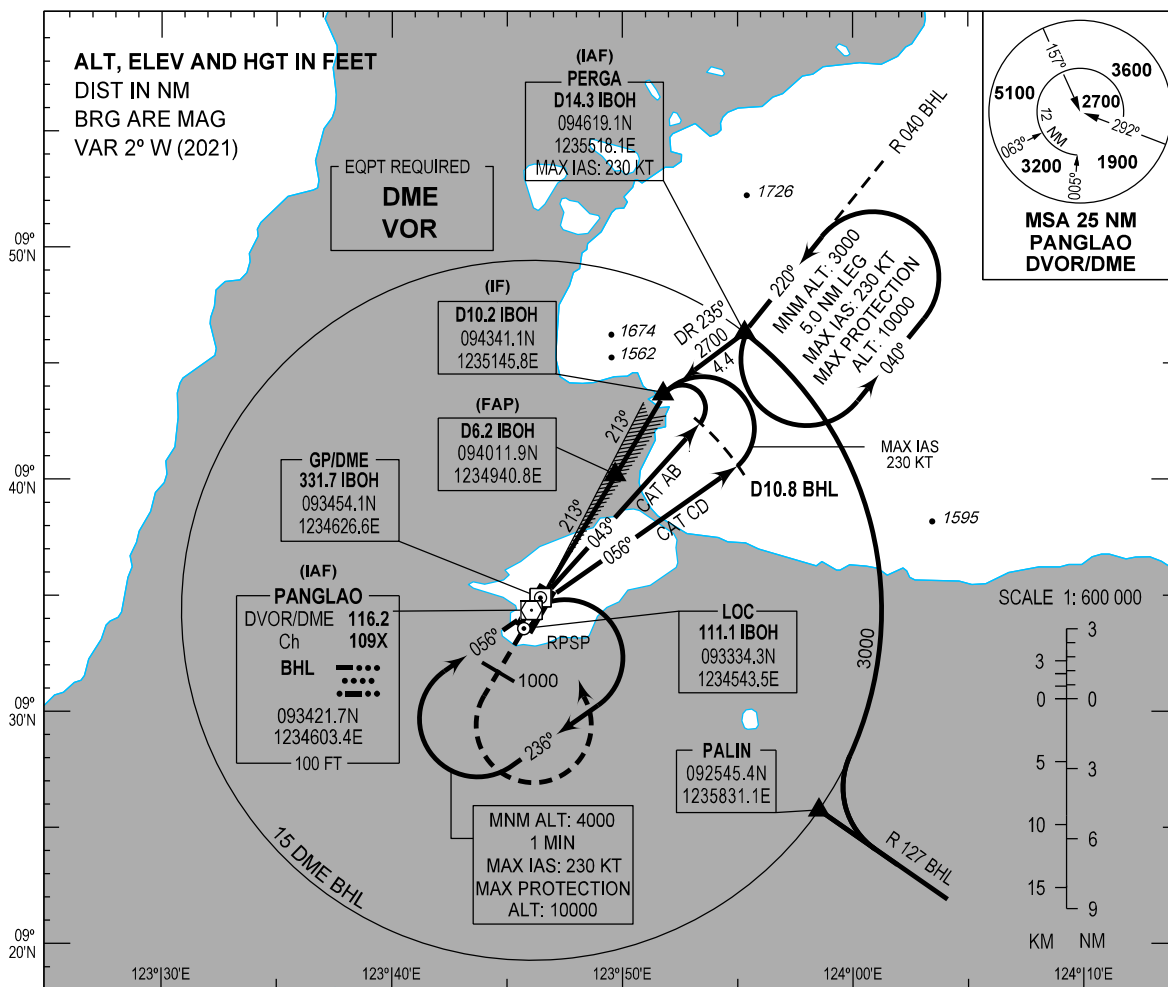

TRANSITION ALT : 11000
TRANSITION LVL : FL130

Climb on runway heading to **1000 FT**, turn left direct to **BHL DVOR/DME** climbing to **4000 FT** and hold or as instructed by ATC.

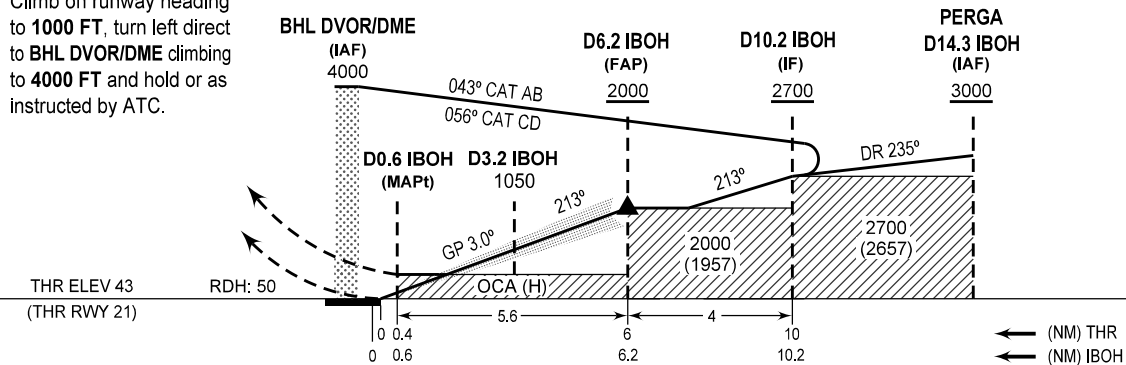


OCA (H)	A		B	C		D
ILS	300 (257)		310 (267)	320 (277)		330 (287)
LOC	420 (377)					
CIRCLING	630 (587)			1200 (1157)		NOT ALLOWED
NM TO IBOH	6.8	5	4	3	2	1.2
ALT (HGT)	2000 (1957)	1690 (1647)	1370 (1327)	1050 (1007)	730 (687)	420 (377)

INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 43 FT
HEIGHTS RELATED TO
THR RWY 03 - ELEV 35 FT

APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8
GND - 121.6
ATIS - 126.5


BOHOL/Bohol-
Panglao Intl (RPSP)
VOR RWY 03

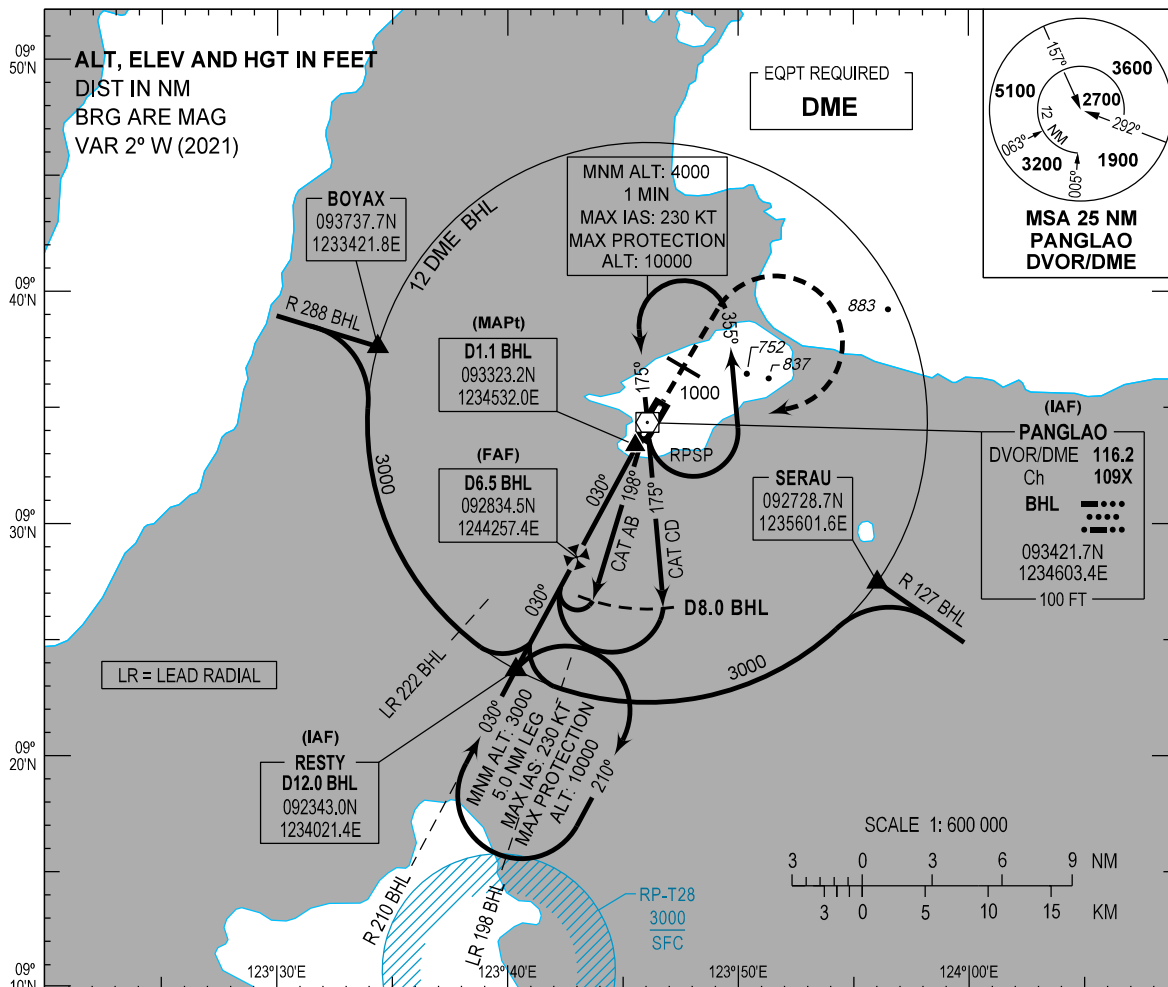

TRANSITION ALT : 11000
TRANSITION LVL : FL130

MISSED APPROACH

Straight-out climb to 1000 FT,
turn right direct to BHL DVOR/
DME climbing to 4000 FT and
hold or as instructed by ATC.

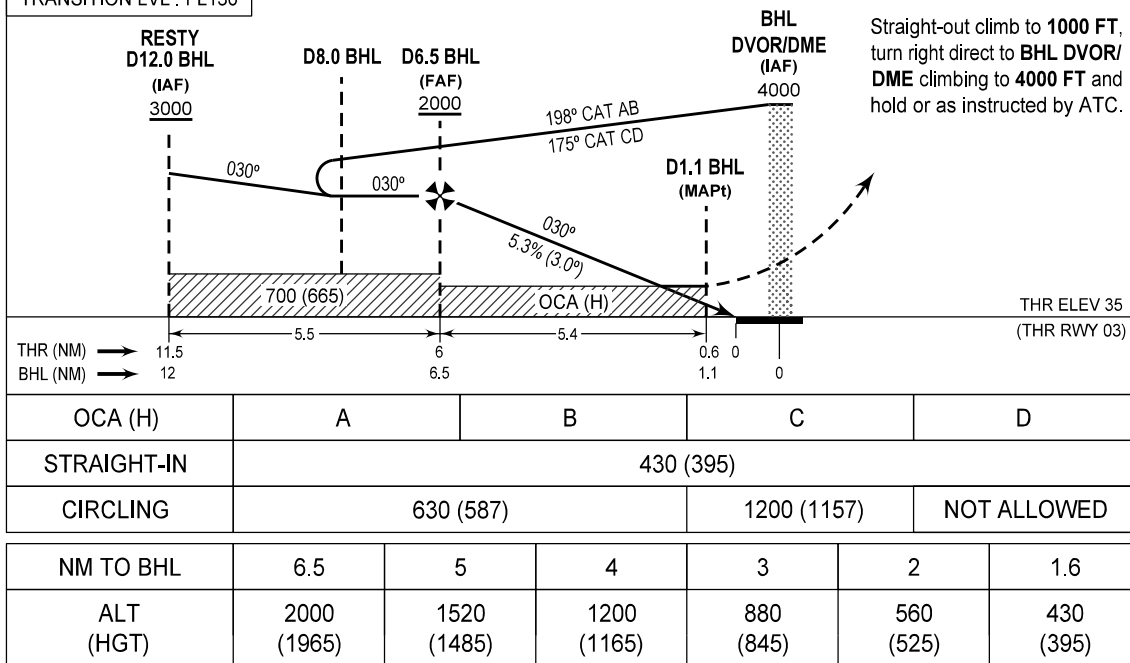


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 43 FT
HEIGHTS RELATED TO
THR RWY 21 - ELEV 43 FT

APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8
GND - 121.6
ATIS - 126.5


**BOHOL/Bohol-
Panglao Intl (RPSP)**
VOR RWY 21

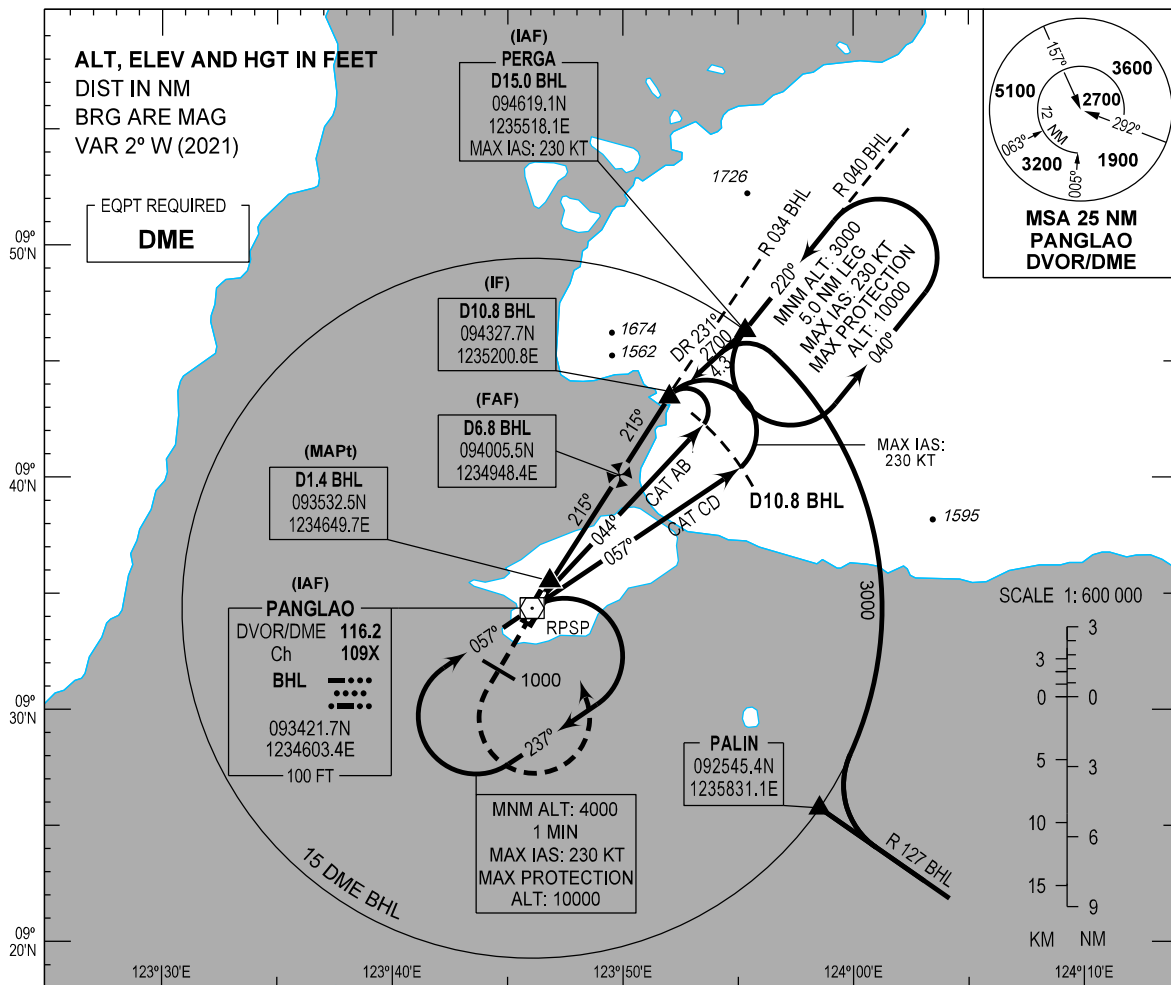

MISSED APPROACH

Straight-out climb to
1000 FT, turn left direct
to **BHL DVOR/DME**
climbing to **4000 FT** and
hold or as instructed by
ATC.

TRANSITION ALT : 11000
TRANSITION LVL : FL130

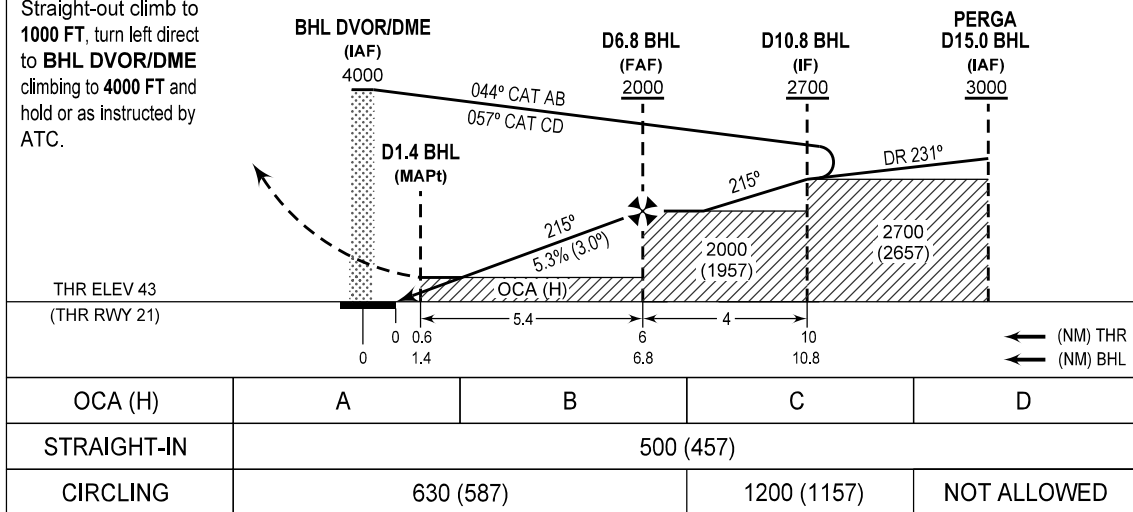

NEW CHART

NM TO BHL	6.8	5	4	3	2.1
ALT (HGT)	2000 (1957)	1430 (1387)	1100 (1057)	790 (747)	500 (457)



INTENTIONALLY
LEFT
BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 43 FT
HEIGHTS RELATED TO
THR RWY 03 - ELEV 35 FT

APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8
GND - 121.6
ATIS - 126.5

**BOHOL/Bohol-
Panglao Intl (RPSP)**
RNP RWY 03

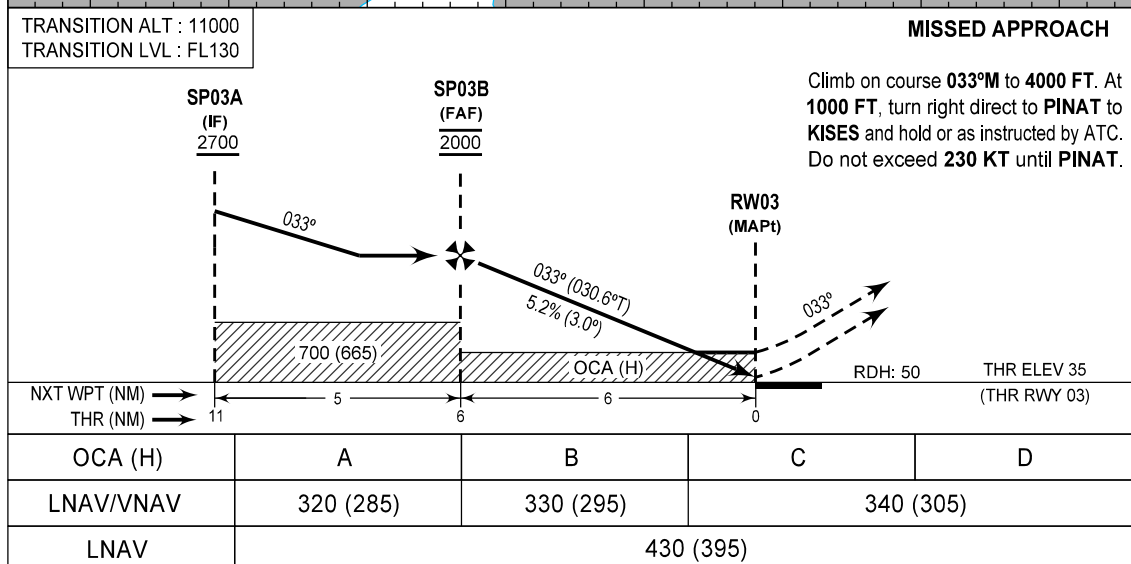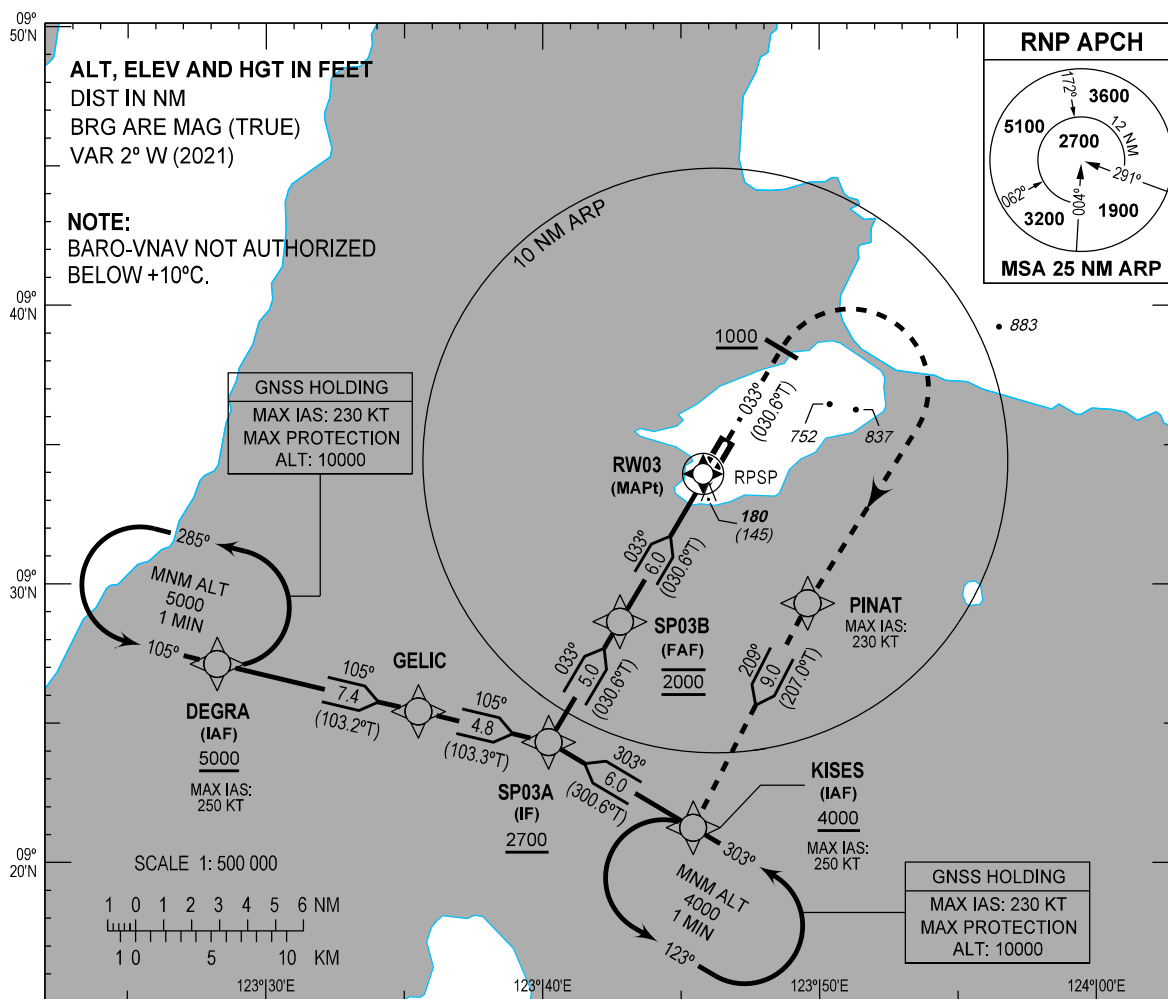

NEW CHART

CIRCLING NOT AUTHORIZED						
NM TO THR	6.02	5	4	3	2	1.1
ALT (HGT)	2000 (1965)	1680 (1645)	1360 (1325)	1040 (1005)	730 (695)	430 (395)

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
DEGRA	092707.7N	1232814.2E	Fly-by
GELIC	092525.7N	1233530.5E	Fly-by
KISES	092115.3N	1234526.1E	Fly-by
PINAT	092918.6N	1234934.4E	Fly-by
RW03	093351.11N	1234553.52E	Flyover
SP03A	092419.6N	1234012.7E	Fly-by
SP03B	092839.0N	1234247.4E	Fly-by

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 03

Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	DEGRA	-	-	-	-	-	+5000	-250	-	RNP APCH	DEGRA
20	TF	GELIC	-	105 (103.2)	+2	7.4	-	-	-	-	RNP APCH	DEGRA
30	TF	SP03A	-	105 (103.3)	+2	4.8	-	+2700	-	-	RNP APCH	DEGRA
10	IF	KISES	-	-	-	-	-	+4000	-250	-	RNP APCH	KISES
20	TF	SP03A	-	303 (300.6)	+2	6.0	-	+2700	-	-	RNP APCH	KISES
10	IF	SP03A	-	-	-	-	-	+2700	-	-	RNP APCH	-
20	TF	SP03B	-	033 (030.6)	+2	5.0	-	@2000	-	-	RNP APCH	-
30	TF	RW03	Y	033 (030.6)	+2	6.0	-	@85	-	-3.0/-	RNP APCH	-
10	CA	-	-	033 (030.6)	+2	-	-	+1000	-	-	RNP APCH	-
20	DF	PINAT	-	-	-	-	R	-	-230	-	RNP APCH	-
30	TF	KISES	-	209 (207.0)	+2	9.0	-	+4000	-250	-	RNP APCH	-


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 43 FT

HEIGHTS RELATED TO
THR RWY 21 - ELEV 43 FT

APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8
GND - 121.6
ATIS - 126.5


**BOHOL/Bohol-
Panglao Intl (RPSP)**
RNP RWY 21

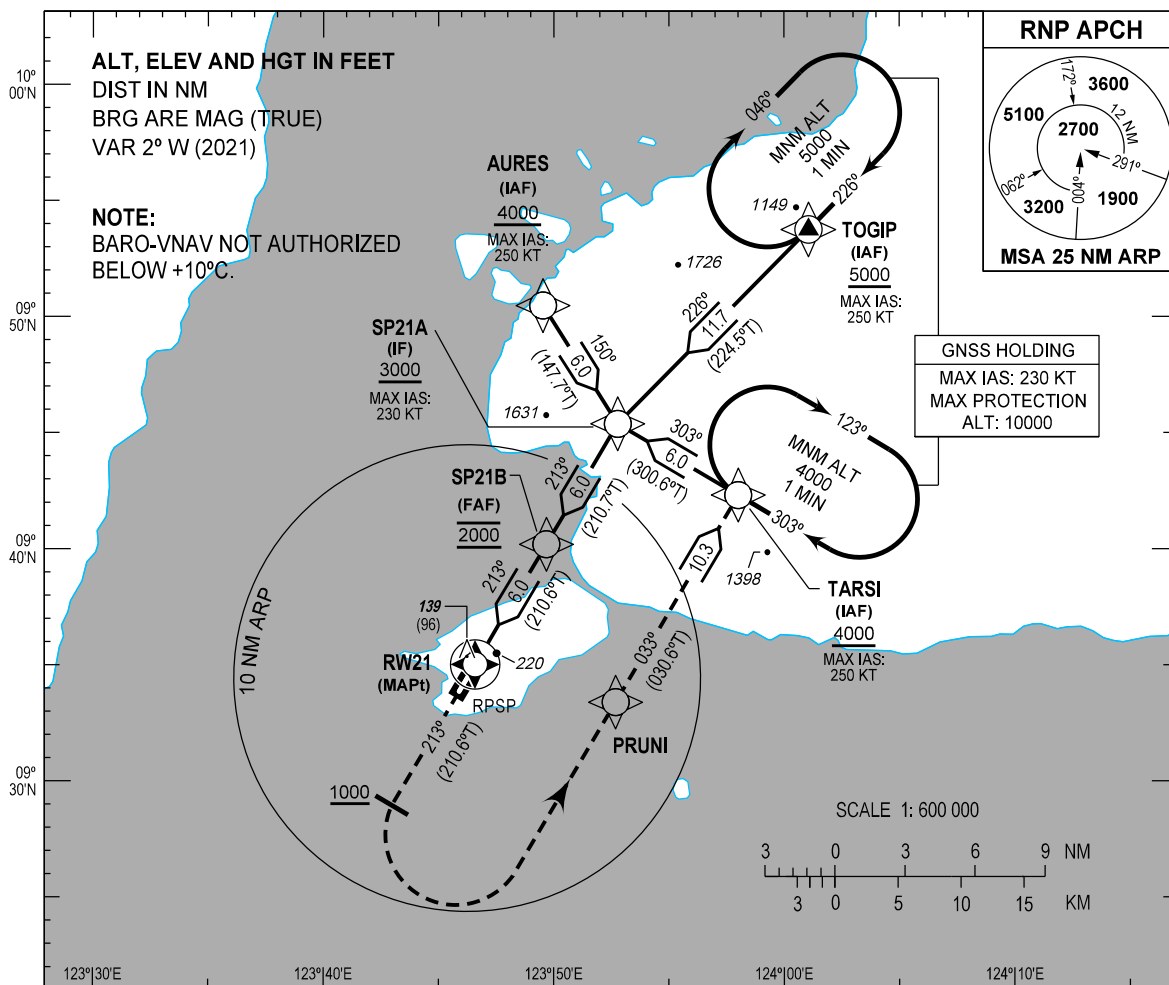

MISSED APPROACH

Climb on course **213°M** to **4000 FT**. At **1000 FT**, turn left direct to **PRUNI** to **TARSI** and hold or as instructed by ATC. Do not turn before the **MAPt**.

TRANSITION ALT : 11000
TRANSITION LVL : FL130

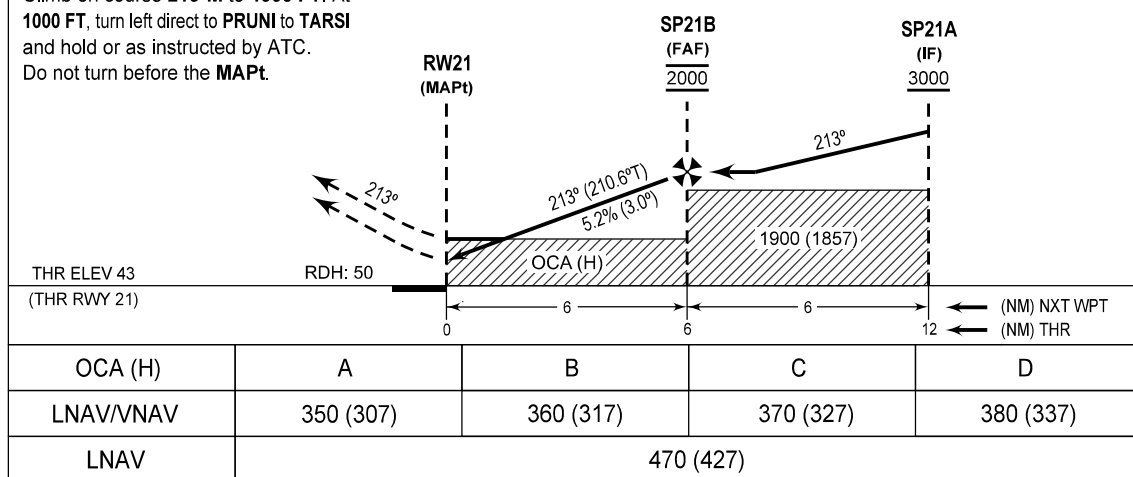

NEW CHART

CIRCLING NOT AUTHORIZED						
NM TO THR	6	5	4	3	2	1.2
ALT (HGT)	2000 (1957)	1690 (1647)	1370 (1327)	1050 (1007)	730 (687)	470 (427)

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
AURES	095028.9N	1234932.0E	Fly-by
PRUNI	093324.0N	1235241.1E	Fly-by
RW21	093501.13N	1234635.30E	Flyover
SP21A	094523.0N	1235246.6E	Fly-by
SP21B	094011.9N	1234940.8E	Fly-by
TARSI	094218.9N	1235800.4E	Fly-by
TOGIP	095345.2N	1240103.5E	Fly-by

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 21


Serial Number	Path Descriptor	Waypoint Identifier	Flyover	Course °M (°T)	Magnetic Variation (°)	Distance (NM)	Turn Direction	Altitude (FT)	Speed limit (KT)	VPA/TCH	Navigation Specification	Transition Identifier
10	IF	TOGIP	-	-	-	-	-	+5000	-250	-	RNP APCH	TOGIP
20	TF	SP21A	-	226 (224.5)	+2	11.7	-	+3000	-230	-	RNP APCH	TOGIP
10	IF	TARSI	-	-	-	-	-	+4000	-250	-	RNP APCH	TARSI
20	TF	SP21A	-	303 (300.6)	+2	6.0	-	+3000	-230	-	RNP APCH	TARSI
10	IF	AURES	-	-	-	-	-	+4000	-250	-	RNP APCH	AURES
20	TF	SP21A	-	150 (147.7)	+2	6.0	-	+3000	-230	-	RNP APCH	AURES
10	IF	SP21A	-	-	-	-	-	+3000	-230	-	RNP APCH	-
20	TF	SP21B	-	213 (210.7)	+2	6.0	-	@2000	-	-	RNP APCH	-
30	TF	RW21	Y	213 (210.6)	+2	6.0	-	@93	-	-3.0/-	RNP APCH	-
10	CA	-	-	213 (210.6)	+2	-	-	+1000	-	-	RNP APCH	-
20	DF	PRUNI	-	-	-	-	L	-	-	-	RNP APCH	-
30	TF	TARSI	-	033 (030.6)	+2	10.3	-	+4000	-250	-	RNP APCH	-

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
43 FT

APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8
GND - 121.6
ATIS - 126.5

BOHOL/Bohol-
Panglao Intl (RPSP)
RWY 03

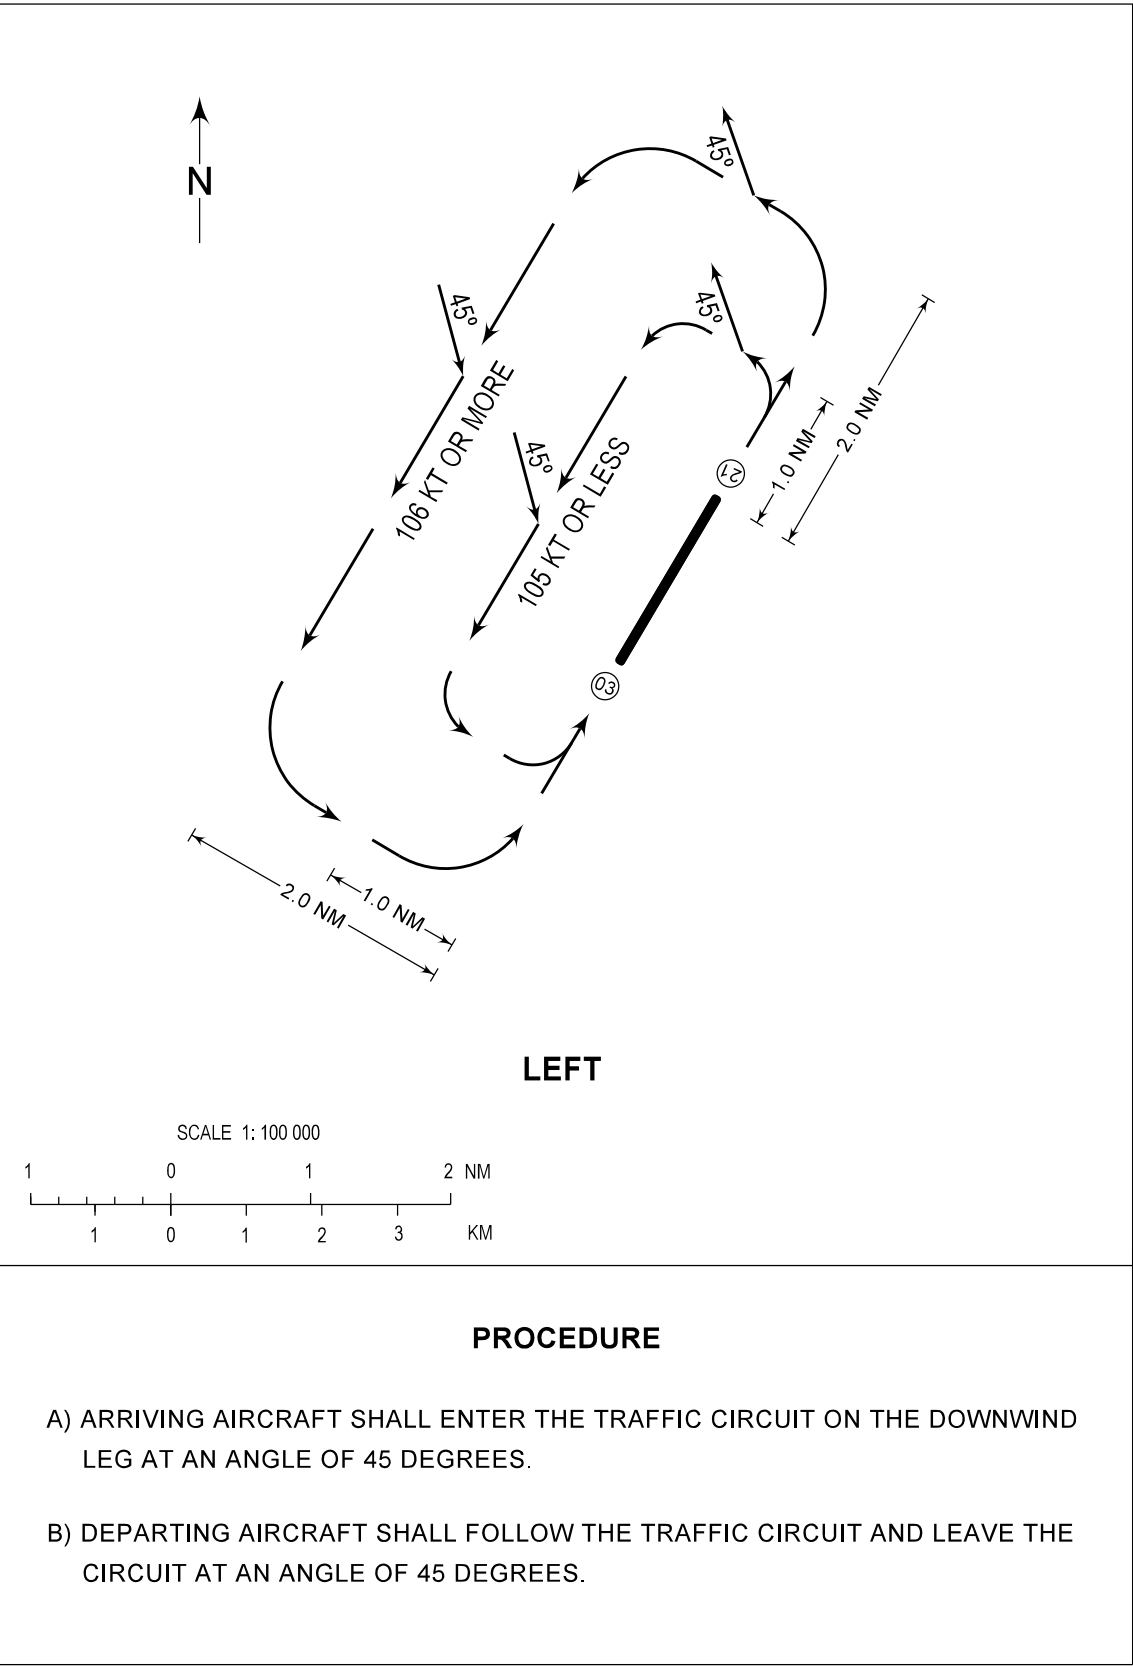

NEW CHART

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
43 FT

APP - 124.7 / 121.2 (MACTAN)
TWR - 124.5 / 128.8
GND - 121.6
ATIS - 126.5

BOHOL/Bohol-
Panglao Intl (RPSP)
RWY 21

