

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.16, AD-2.21, AD-2.23

RPUB AD 2.1 AERODROME LOCATION INDICATOR AND NAME**RPUB - BAGUIO PRINCIPAL AIRPORT (Class 2)****RPUB AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

1	ARP coordinates and site at AD	162230N 1203708E.
2	Direction and distance from (city)	6KM S of Baguio City.
3	Elevation/Reference temperature	1296M (4251FT) AMSL.
4	Geoid undulation at AD ELEV PSN	42M.
5	MAG VAR/Annual Change	2.0°W (2014) / 2.2' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Baguio Airport Loakan, Baguio City 2600 Benguet Phone: (074) 442-0015 / (074) 446-5583
7	Types of traffic permitted (IFR/VFR)	VFR.
8	Remarks	Nil.

RPUB AD 2.3 OPERATIONAL HOURS

1	AD Operator	0000 - 0900.
2	Customs and immigration	Nil.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	2330 - 0730. For extension of SER, one (1) day PN is required.
6	MET Briefing Office	Nil.
7	ATS	2330 - 0730.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	Nil.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2330 - 0730.

RPUB AD 2.5 PASSENGER FACILITIES

1	Hotels	Within the city.
2	Restaurants	Within the city.
3	Transportation	Vehicle for hire.
4	Medical facilities	Within the city.
5	Bank and Post Office	Within the city.
6	Tourist Office	Terminal Bldg. and in the city.
7	Remarks	Nil.

RPUB AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT IV.
2	Rescue equipment	One (1) Fire truck [SIDES (2400 liters)].
3	Capability for removal of disabled aircraft	Nil.
4	Remarks	Nil.

RPUB AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: CONC. Strength: PCN 38.6 R/B/W/T.
2	Taxiway width, surface and strength	Nil.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPUB AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Yellow line marker guide.
2	RWY and TWY markings and LGT	Distance-to-go markers, THR, RWY CL, touchdown and side strip markings.
3	Stop bars and other RWY guard lights	Nil.
4	Other RWY protection measure	Nil.
5	Remarks	Nil.

RPUB AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
09/APCH zone	Terrain 1000FT	Nil	Nil	Nil	Nil

RPUB AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	PAGASA.
2	Hours of service MET Office outside hours	- -
3	Office responsible for TAF preparation Periods of validity	- -
4	Trend forecast Interval of issuance	- -
5	Briefing/consultation provided	Air Traffic Controller's weather observation and hourly weather reports.
6	Flight documentation Language(s) used	- English.
7	Charts and other information available for briefing or consultation	Nil.

8	Supplementary equipment available for providing information	Nil.
9	ATS units provided with information	Manila Radio, Laoag and San Fernando Airport upon request.
10	Additional information (limitation of service, etc.)	Nil.

RPUB AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY (M)	Strength (PCR) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY	Slope of RWY-SWY
1	2	3	4	5	6	7
09	088.38°	1566 X 36	200/R/B/W/U CONC	162229.71N 1203645.64E 145 FT	4198 FT	0.999% uphill towards THR 27
27	268.38°	1566 X 36	200/R/B/W/U CONC	162231.15N 1203738.40E 145 FT	4247 FT	
SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	RESA dimensions (M)	Location/ description of arresting system	OFZ	Remarks
8	9	10	11	12	13	14
Nil	60 X 60	1686 X 60	Nil	Nil	Nil	Nil
Nil	120 X 60	1686 X 60	60 X 60	Nil	Nil	Nil

RPUB AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
09	1566	1626	1566	1566	Nil
27	1566	1686	1566	1566	Nil

RPUB AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
09	Nil	Nil	Nil	Nil
27	Nil	Nil	PAPI 3.0° Left/Right	Nil
RWY Centre Line LGT LEN, spacing, colour, INTST	RWY Edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	Nil	Nil	Nil	Nil
Nil	Nil	Nil	Nil	Nil

RPUB AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Nil.
2	LDI location and LGT Anemometer location and LGT	Nil.
3	TWY edge and centre line lighting	Nil.
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at aerodrome. Switch-over time 6 seconds (DEGS 1) and 4 seconds (DEGS 2).
5	Remarks	Nil.

RPUB AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	BAGUIO AERODROME TRAFFIC ZONE (ATZ): From 162200N 1203709E - 162152N 1203159E then along 5 NM arc centered on 162230N 1203708E (ARP) clockwise to 162209N 1204219E - 162200N 1203709E.
2	Vertical limits	ATZ: SFC up to but excluding 2000 FT AGL.
3	Airspace classification	B.
4	ATS unit call sign Language(s)	Baguio Tower. English.
5	Transition altitude	Nil.
6	Hours of applicability	Nil.
7	Remarks	Nil.

RPUB AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	SATVOICE number	Logon address	Hours of operation	Remarks
1	2	3	4	5	6	7
TWR	Baguio Tower	123.5 MHZ 121.5 MHZ 5062.5 KHZ 3608 KHZ 5447.5 KHZ 3834 KHZ	Nil	Nil	2330 - 0730	PRI FREQ. Distress FREQ. P/P PRI FREQ (Laoag Network). P/P SRY FREQ. P/P PRI FREQ (Manila Network). P/P SRY FREQ. For extension of service, one (1) day prior notice is required.

RPUB AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
NDB	BG	272 KHZ	2330 - 0730	162227.8N 1203700.1E	Nil	Output: 500 watts.

RPUB AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport regulations

- 1.1 Closed to student pilot training except on emergency.

RPUB AD 2.22 FLIGHT PROCEDURES

1. Helicopter Operations

1.1 General

- 1.1.1 The Baguio Heliport at Baguio Airport is located on the western end of RWY09/27 and is 500 feet from Threshold 09.
- 1.1.2 Altitudes referred to in this part are based on current Baguio QNH value.
- 1.1.3 QNH altimeter setting is made available to pilots by Baguio Tower in route approach and landing, and take-off and climb instructions.
- 1.1.4 Unless authorized by Baguio Tower, helicopters shall maintain an altitude of 5000FT within the helicopter traffic circuit (3NM North of field). Descent to altitudes lower than 5000FT shall be made within established routings. Whereas, ascent to altitudes higher than 5000FT shall be made beyond 3NM from the airport.
- 1.1.5 Direction of landing or take-off shall be made on heading of 090° or 270° magnetic, and dependent on wind conditions or runway in use, whichever is applicable.
- 1.1.6 No landing or take-off shall be executed unless cleared by Baguio Tower.

1.2 Take-off and Climb Procedures

- 1.2.1 For take-off on a heading of 090° - make a LEFT TURN after departure, climb to 5000FT then join helicopter traffic circuit before proceeding on course.
- Note: STRAIGHT-OUT departure may be permitted provided clearance has been granted by and two-way radio communications can be maintained with Baguio Tower.
- 1.2.2 For take-off on a heading of 270° - make a RIGHT TURN after departure, climb to 5000FT then join helicopter traffic circuit before proceeding on course.
- Note: LEFT TURN over KENNON ROAD may be permitted provided clearance has been granted by and two-way radio communications can be maintained with Baguio Tower.

1.3 Approach and Landing Procedures

- 1.3.1 When RWY09 is in use - join helicopter traffic circuit at 5000FT then commence descent on base leg to final approach on a heading of 090°.
- Note: LEFT TURN over KENNON ROAD may be permitted provided clearance has been granted by and two-way radio communications can be maintained with Baguio Tower.
- 1.3.2 When RWY27 is in use - join helicopter traffic circuit at 5000FT then commence descent on base leg to final approach on a heading of 270°.
- Note: STRAIGHT-IN approach from the East may be permitted provided clearance has been granted by and two-way radio communications can be maintained with Baguio Tower.

1.4 NORDO Helicopter Procedures

- 1.4.1 Helicopters not equipped with a functioning two-way radio shall follow the following procedures:
- Observe and follow the traffic circuit flow of fixed wing aircraft (see RPUB AD 2-9 to 2-10);
 - Sequence its flight to final approach leg; and

- c. Observe traffic signals from Baguio Tower.

Note: Helicopter on the helicopter traffic circuit does not have priority over aircraft on the fixed wing aircraft traffic circuit in the landing sequence.

1.5 Taxiing Procedures

- 1.5.1 Landing helicopter may touchdown on the helipad and immediately taxi on the ground or taxi hover to the designated parking area.
- 1.5.2 Departing helicopter shall taxi on the ground or taxi hover to the helipad prior to take-off.

1.6 Loading and Unloading

- 1.6.1 Loading and unloading of passengers or cargoes shall be done only at designated parking area(s).

RPUB AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	Page
Traffic Circuit Chart (RWY09)	RPUB AD 2 - 9
Traffic Circuit Chart (RWY27)	RPUB AD 2 - 10

TRAFFIC
CIRCUIT
CHART


AERODROME ELEV
4251 ft

TWR - 123.5

BENGUET/Baguio (RPUB)


RWY 09

ALT, ELEV AND HGT IN FEET
DIST IN NM
BRG ARE MAG
VAR 2.0° W (2014)

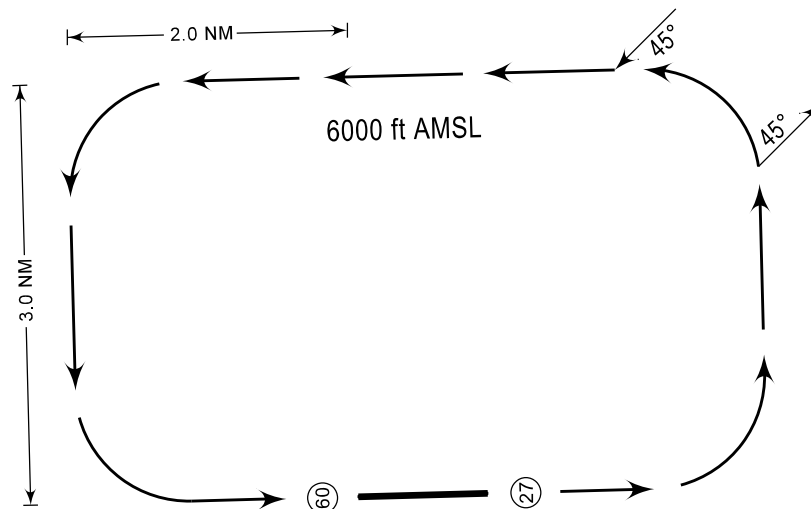

LEFT

SCALE 1:100,000



PROCEDURE

- Arriving aircraft shall enter the traffic circuit on the downwind leg at an angle of 45 degrees.
- Departing aircraft shall follow the traffic circuit and leave the circuit at an angle of 45 degrees.

CHANGE: Data Resolution.

TRAFFIC
CIRCUIT
CHART


AERODROME ELEV
4251 ft

TWR - 123.5

BENGUET/Baguio (RPUB)


RWY 27

ALT, ELEV AND HGT IN FEET
DIST IN NM
BRG ARE MAG
VAR 2.0° W (2014)

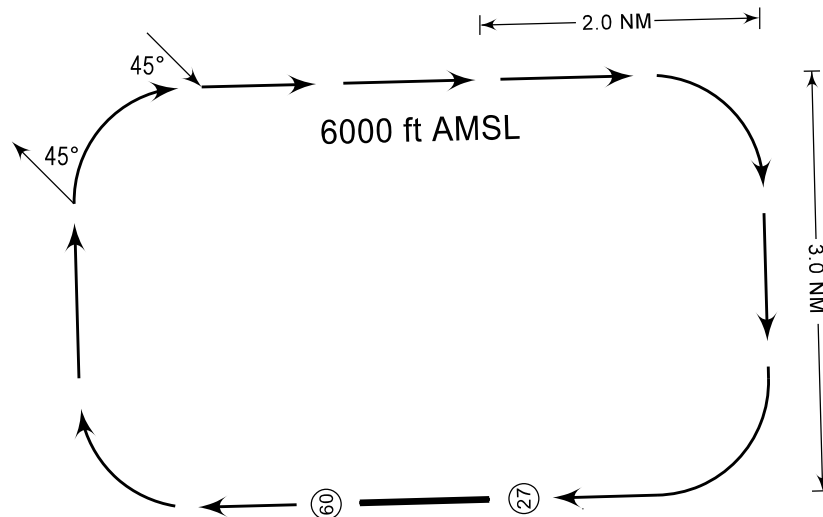

RIGHT

SCALE 1: 100,000



PROCEDURE

- Arriving aircraft shall enter the traffic circuit on the downwind leg at an angle of 45 degrees.
- Departing aircraft shall follow the traffic circuit and leave the circuit at an angle of 45 degrees.

CHANGE: Data Resolution.