

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.16, AD-2.20, AD-2.21, AD-2.23

RPUN AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPUN - NAGA PRINCIPAL AIRPORT (Class 1)

RPUN AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	133505.5793N 1231613.9938E.
2	Direction and distance from (city)	S 62° 07' E, 9KM.
3	Elevation/Reference temperature	53.3915M (175.169FT).
4	Geoid undulation at AD ELEV PSN	Nil.
5	MAG VAR/Annual Change	1.6°W (2014) / 2.7' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Naga Airport, San Jose, Pili 4400 Camarines Sur Tel. No.: (054) 477-7109 AFS: RPUNYYYYX
7	Types of traffic permitted (IFR/VFR)	VFR.
8	Remarks	Request in advance for extended OPS.

RPUN AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900. SAT, SUN + HOL: 0000 - 0400.
2	Customs and immigration	Nil.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	2200 - 1000.
6	MET Briefing Office	Nil.
7	ATS	MON - FRI: 0000 - 0900. SAT, SUN + HOL: 0000 - 0400.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2200 - 0600.

RPUN AD 2.5 PASSENGER FACILITIES

1	Hotels	Near AD and in the city.
2	Restaurants	In the city.
3	Transportation	Taxi, Jeepney and Car for hire from AD.
4	Medical facilities	Hospitals in the city.
5	Bank and Post Office	Office in the city.
6	Tourist Office	Office in the city.
7	Remarks	Nil.

RPUN AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT IV.
2	Rescue equipment	SIDES VM28; Model 1992; 2500 liters water; 300 liters foam.
3	Capability for removal of disabled aircraft	Nil.
4	Remarks	Nil.

RPUN AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: CONC. Strength: PCN 29.6 R/B/W/T.
2	Taxiway width, surface and strength	Nil.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPUN AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Taxiing guidance markings at all intersections with TWY and RWY at holding position. Guide lines at Apron.
2	RWY and TWY markings and LGT	RWY: Designation, THR, TDZ, Center line as appropriate: Marked. TWY: Center line, holding position at all TWY/RWY intersections: Marked.
3	Stop bars	Nil.
4	Remarks	Nil.

RPUN AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
04/APCH	Light Tower 120FT	Nil	Nil	Nil	Nil
04/22 LDG/TKOF	Telecommunication Tower 95.723M/314FT	133331.5341N 1231639.0527E	Nil	Nil	Nil
	Telecommunication Tower 87.632M/288FT	133550.6212N 1231536.6371E	Nil	Nil	Nil
	Telecommunication Tower 84.94M/278FT	133550.6581N 1231526.5615E	Nil	Nil	Nil
	Light Post 78.467M/258FT	133516.5527N 1231549.9796E	Nil	Nil	Nil
	Transmission Line 72.16M/237FT	133418.8186N 1231514.6443E	Nil	Nil	Nil

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
04/22 LDG/TKOF	Transmission Line 72M/236FT	133400.8007N 1231525.2344E	Nil	Nil	Nil
	Transmission Line 72M/236FT	133409.8399N 1231519.9236E	Nil	Nil	Nil

RPUN AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	Naga TWR.
2	Hours of service MET Office outside hours	8 Hours. -
3	Office responsible for TAF preparation Periods of validity	- -
4	Trend forecast Interval of issuance	- -
5	Briefing/consultation provided	Personal consultation, telephone.
6	Flight documentation Language(s) used	Abbreviated plain language text. English.
7	Charts and other information available for briefing or consultation	-
8	Supplementary equipment available for providing information	SSB/Telefax.
9	ATS units provided with information	-
10	Additional information (limitation of service, etc.)	Nil.

RPUN AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
04	044.9° GEO 046.5° MAG	1402M X 30M	PCN 41 R/B/W/U RWY/SWY: ASPH	133449.4224N 1231557.5296E	37.964M/ 124.554FT
22	224.9° GEO 226.5° MAG	1402M X 30M	PCN 41 R/B/W/U RWY: ASPH SWY: MACADAM	133521.7361N 1231630.4579E	53.392M/ 175.169FT
Slope of RWY-SWY	SWY dimensions	CWY dimensions	Strip dimensions	OFZ	Remarks
7	8	9	10	11	12
1.10% downhill towards THR04	45M X 30M	348M X 300M	1441M X 108M	Nil	Nil
1.10% uphill towards THR22	15M X 30M	60M X 300M	1441M X 108M	Nil	Nil

RPUN AD 2.13 DECLARED DISTANCES

RWY Designator	TORA	TODA	ASDA	LDA	Remarks
1	2	3	4	5	6
04	1402M	1750M	1447M	1402M	Nil
22	1402M	1462M	1417M	1402M	Nil

RPUN AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
04	Nil	Green	PAPI Left 3.0°	Nil
22	Nil	Green	PAPI Left 3.0°	Nil
RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	1402M Amber LIH	Red	Nil	Path WID: 0.33°. VIS RG: 5NM. Horizontal OBST CLR: 10° FM RWY CL. VER OBST CLR: 1°.
Nil	1402M Amber LIH	Nil	Nil	Path WID: 0.33°. VIS RG: 4NM. Horizontal OBST CLR: 10° FM RWY CL. VER OBST CLR: 1°.

RPUN AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Location: 133505.5793N 1231613.9938E. Characteristics: ALTN W G - 25 flashes per minute. HR of OPS: When visibility below minima.
2	LDI location and LGT Anemometer location and LGT	LDI: Nil. Anemometer: APRX 50M from CL of RWY.
3	TWY edge and centre line lighting	Edge: TWY. Center line: Nil.
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at AD. Switch-over time 15 seconds.
5	Remarks	Nil.

RPUN AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	NAGA AERODROME TRAFFIC ZONE (ATZ): A circle radius 5NM centered on 133505.5793N 1231613.9938E (ARP).
2	Vertical limits	ATZ: SFC up to but excluding 2000FT.
3	Airspace classification	B.
4	ATS unit call sign Language(s)	Naga Tower. English.
5	Transition altitude	Nil.
6	Remarks	Nil.

RPUN AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
TWR	Naga Tower	122.1MHZ 5447.5KHZ	2200 - 1000	A/G FREQ. P/P PRI FREQ (Manila Network). For extension of SER, one (1) day PN is required.

RPUN AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
DVOR	NGA	114.7MHZ	2200 - 1000	133455.9876N 1231610.3467E	Nil	415M FM start of RWY04 and 130M right of RWY CL. Unusable on R040 and R070 beyond 20NM below FL170. Coverage: DVOR - 100NM DME - 60NM.
DME	NGA	CH94X	2200 - 1000	133455.4635N 1231610.0373E	51.9598M/ 170.4801FT	

RPUN AD 2.22 FLIGHT PROCEDURES

1. General Procedures for VFR Flights

- 1.1 The following air traffic procedures shall apply to all VFR flights when entering, leaving or operating within Naga Aerodrome Traffic Zone.
- All departing VFR flights shall maintain a listening watch on Naga Tower frequency 122.1MHZ until 20NM.
 - All arriving VFR flights shall establish contact and remain on listening watch thereafter with Naga Tower frequency 122.1MHZ approaching 20NM inbound the station.
 - Air traffic control instructions and traffic information shall be complied with and acknowledged.
 - Any deviation from the procedures shall be subject to ATC approval.

2. Arrival and Departure Procedures

2.1 VFR Procedures in RWY04

2.1.1 Departure

- 2.1.1.1 North Bound (Manila): After airborne, turn Left towards SAN MIGUEL BAY. Report abeam NAGA SPORTS COMPLEX. Continue towards CALABANGA. Proceed to destination. Advise switching frequency.
- 2.1.1.2 East Bound: After airborne, turn Left towards CALABANGA. Report abeam NAGA SPORTS COMPLEX. Approaching CALABANGA, turn Right towards GOA. Report abeam TINAMBAC. Proceed to destination. Advise switching frequency.
- 2.1.1.3 South Bound: After airborne, turn Right towards BAAO LAKE. Keep to the East of JUNCTION ROAD and report abeam BAAO LAKE. Continue on a South Southeast direction and report approaching POLANGUI. Proceed to destination. Advise switching frequency.

2.1.2 Arrival

- 2.1.2.1 From Manila (W15): Report approaching BINAHAN PORT. Continue on a Southeast direction and report approaching MILAOR. Report approaching CAMSUR WATERSPORTS COMPLEX. Request to join Left base RWY04 or proceed as instructed by ATC.
- 2.1.2.2 From East (Virac): Report approaching SAGNAY. Continue on a westerly direction and report approaching OCAMPO. Request to join Right downwind RWY04 or proceed as instructed by ATC.
- 2.1.2.3 From South (Masbate, Mactan, Legazpi): Report approaching BATO LAKE. Continue towards West of BAAO LAKE. Continue on a northerly direction and keep to the West of JUNCTION ROAD. Request to join Right base RWY04 or proceed as instructed by ATC.

2.2 VFR Procedures in RWY22

2.2.1 Departure

- 2.2.1.1 North Bound: After airborne, turn Right for a Right downwind departure and fly towards SAN MIGUEL BAY. Report abeam NAGA SPORTS COMPLEX. Continue towards CALABANGA. Proceed to destination. Advise switching frequency.
- 2.2.1.2 East bound: After airborne, turn Right for a Right downwind departure and fly towards CALABANGA. Report abeam NAGA SPORTS COMPLEX. Approaching CALABANGA, turn Right towards GOA. Report abeam TINAMBAC. Proceed to destination. Advise switching frequency.

2.2.1.3 South bound: After airborne, turn Left for a Left downwind departure. Turn Right towards BAAO LAKE. Keep to the East of JUNCTION ROAD and report abeam BAAO LAKE. Continue on a South Southeast direction and report approaching POLANGUI. Proceed to destination. Advise switching frequency.

2.2.2 Arrival

2.2.2.1 From Manila (W15): Report approaching BINAHAN PORT. Continue on a Southeast direction and report approaching MILAOR. Report approaching CAMSUR WATERSPORTS COMPLEX. Request to join Right downwind RWY22 or proceed as instructed by ATC.

2.2.2.2 From the East (Virac): Report approaching SAGNAY. Continue on a Westward direction and report approaching OCAMPO. Request to join Left downwind RWY22 or proceed as instructed by ATC.

2.2.2.3 From South (Masbate, Mactan, Legazpi): Report approaching BATO LAKE. Continue towards West of BAAO LAKE. Continue on a northerly direction and keep to the West of JUNCTION ROAD. Request to join Left downwind RWY22 or proceed as instructed by ATC.

3. Procedures for VFR Transit Flights

3.1 From the West to South / Vice Versa: Report approaching BINAHAN PORT. Continue on a Southeast direction and report approaching MILAOR. Report approaching CAMSUR WATERSPORTS COMPLEX. Request ATC clearance to cross final approach RWY04. Report cleared of final approach RWY04. Keep to the East of JUNCTION ROAD. Continue towards BAAO LAKE. Report approaching POLANGUI. Proceed to destination. Advise switching frequency.

3.2 From the East to North / Vice Versa: Report approaching SAGNAY. Continue on a Westward direction and report approaching OCAMPO. Request ATC clearance to cross final approach RWY22. Report cleared of final approach RWY22. Report abeam NAGA SPORTS COMPLEX. Continue towards CALABANGA. Proceed to destination. Advise switching frequency.

4. List of VFR Reporting Points


DESIGNATOR	DISTANCE FROM RPUN ARP (NM)	COORDINATES
BAAO LAKE	7.6	132758.1000N 1231903.6000E
BATO LAKE	15.6	132010.0000N 1232113.8000E
BINAHAN PORT	25.0	134209.0000N 1225119.0000E
CALABANGA	8.0	134229.9000N 1231252.8000E
CAMSUR WATER SPORTS COMPLEX	1.2	133521.1000N 1231457.0000E
GOA	14.0	134150.3000N 1232856.7000E
JUNCTION ROAD	2.7	133231.3000N 1231659.8000E
MILAOR	5.4	133545.1000N 1231038.8000E
NAGA SPORTS COMPLEX	5.0	133741.0000N 1231147.9000E
OCAMPO	6.3	133332.8000N 1232234.3000E
POLANGUI	21.8	131722.0000N 1232923.6000E
SAGNAY	14.7	133617.3000N 1233118.5000E
SAN MIGUEL BAY	15.0	134945.0000N 1231238.0000E
TINAMBAC	14.2	134901.1000N 1231939.6000E

VFR
AREA
CHART

AD ELEV
175.17 ft

TWR - 122.1
ACC - 125.7 Manila South Sector

CAMARINES SUR/Naga (RPUN)

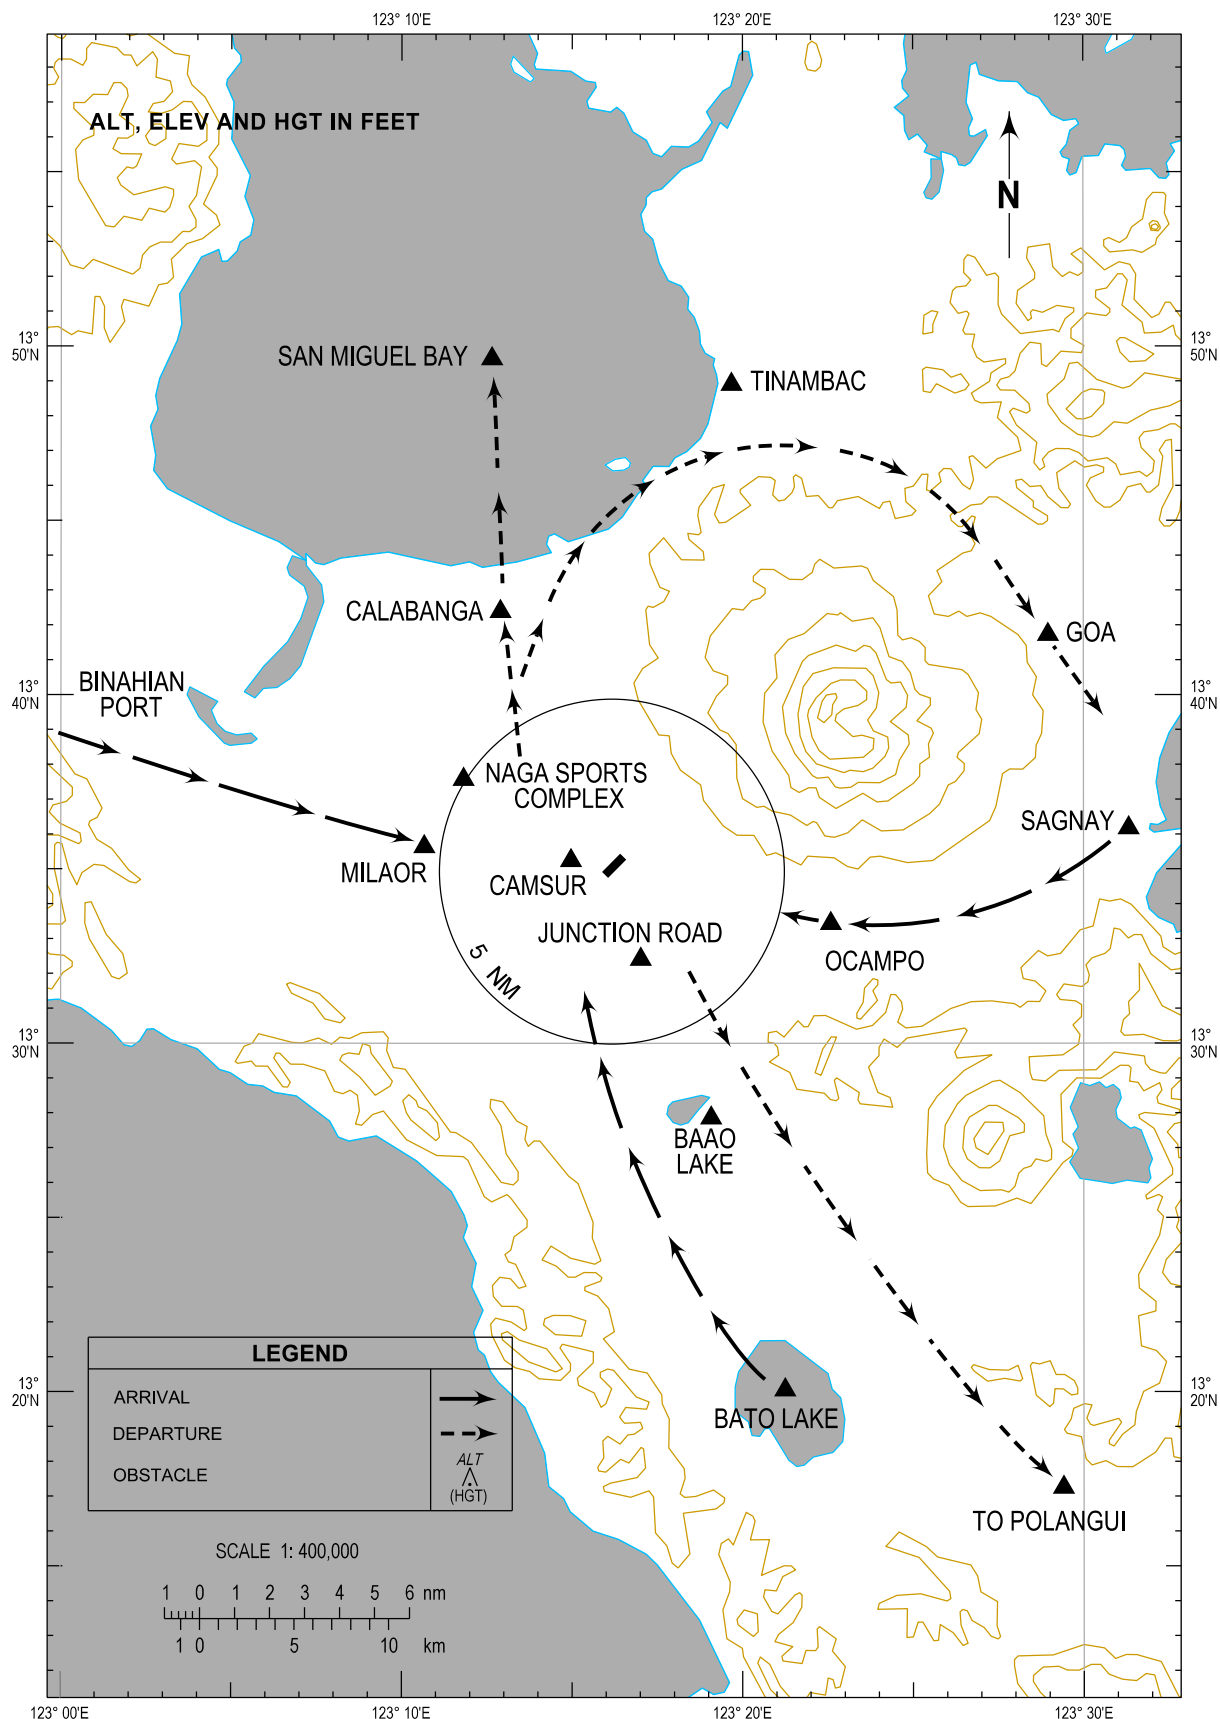

RPUN AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	Page
Traffic Circuit Chart (RWY 04)	RPUN AD CHART 2 - 1
Traffic Circuit Chart (RWY 22)	RPUN AD CHART 2 - 2

INTENTIONALLY
LEFT
BLANK

TRAFFIC
CIRCUIT
CHART


AERODROME ELEV
175 FT

TWR - 122.1

CAMARINES SUR/Naga (RPUN)


RWY 04

ALT, ELEV AND HGT IN FT

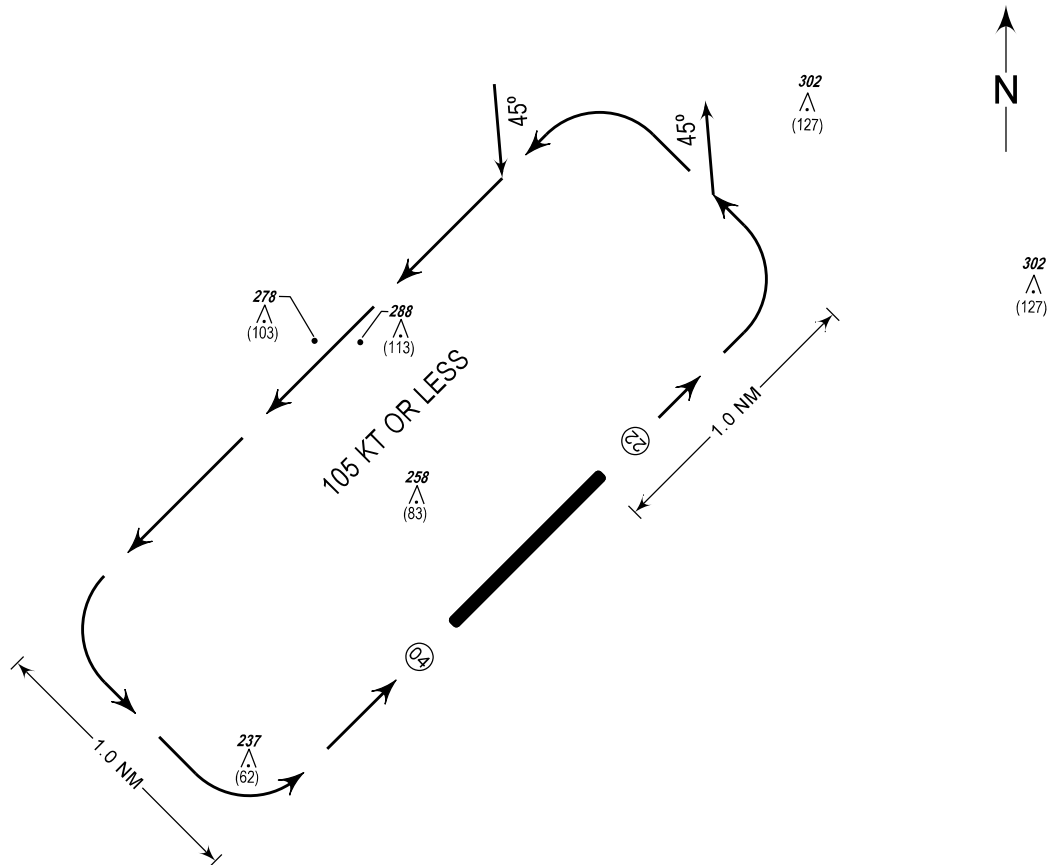

LEFT

SCALE 1: 50 000



PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.


CHANGES: ACFT CAT and VAR Deleted. AD ELEV. Data Resolution. OBST HGT. TFC Pattern Speed. Units of Measurement. Chart Page Format.

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
175 FT

TWR - 122.1

CAMARINES SUR/Naga (RPUN)
RWY 22

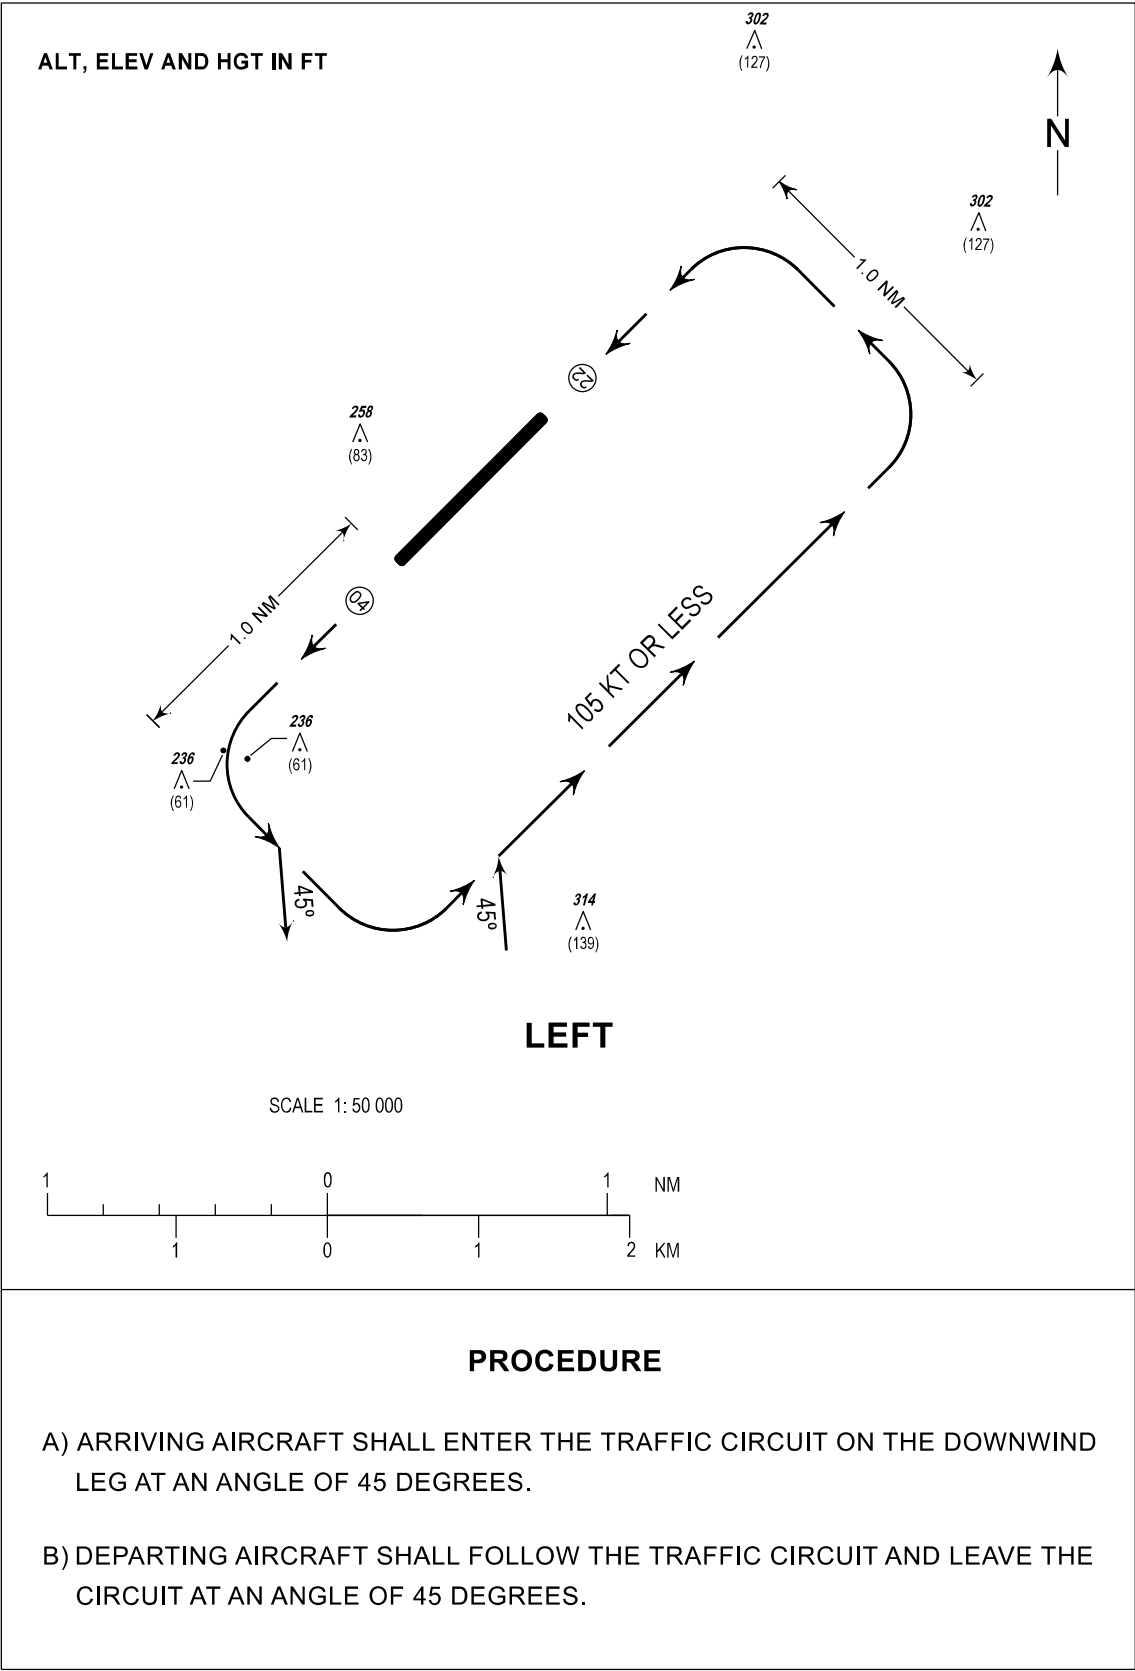

CHANGES: ACFT CAT and VAR Deleted. AD ELEV. Data Resolution. OBST HGT. TFC Pattern Speed. Units of Measurement. Chart Page Format.