

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.11, AD-2.16, AD-2.21, AD-2.22, AD-2.23

RPUS AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPUS - SAN FERNANDO COMMUNITY AIRPORT

RPUS AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	163540.2182N 1201811.2422E.
2	Direction and distance from (city)	3.1KM SW from the city.
3	Elevation/Reference temperature	4.659M (15.285FT).
4	Geoid undulation at AD ELEV PSN	Nil.
5	MAG VAR/Annual Change	2.0° W (2014) / 2.1' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Poro Point Management Corporation Poro Point Freeport Zone San Fernando Airport, Canaoay San Fernando City, La Union 2500 Philippines PHONE: (072) 888-2072.
7	Types of traffic permitted (IFR/VFR)	VFR.
8	Remarks	Nil.

RPUS AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900.
2	Customs and immigration	Service available upon request.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	0000 - 0800. For extension of SER one (1) day PN is required.
6	MET Briefing Office	Nil.
7	ATS	MON - FRI: 0000 - 0900.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: 0000 - 0800. Rescue and fire fighting service: 2200 - 0800.

RPUS AD 2.5 PASSENGER FACILITIES

1	Hotels	Within the city.
2	Restaurants	Within the city.
3	Transportation	Vehicle for hire.
4	Medical facilities	Within the city.
5	Bank and Post Office	Within the city.
6	Tourist Office	Within the city.
7	Remarks	Nil.

RPUS AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT IV.
2	Rescue equipment	Two (2) fire trucks. Ziegler V8 fire truck with water capacity of 9 000 liters and foam capacity of 900 liters. SIDES VMA 28 fire truck with water capacity of 2 500 liters and foam capacity of 300 liters.
3	Capability for removal of disabled aircraft	Nil.
4	Remarks	Nil.

RPUS AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: CONC. Strength: PCN 49 R/B/W/T.
2	Taxiway width, surface and strength	NORTH TWY: Width: 90M max, 18M min. Surface: CONC. Strength: PCN 49 R/B/W/T. SOUTH TWY: Width: 90.92M max, 22.35M min. Surface: CONC. Strength: PCN 49 R/B/W/T.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPUS AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Nil.
2	RWY and TWY markings and LGT	RWY: RWY designation markings, threshold markings, RWY centerline markings, Touchdown zone markings, RWY side stripes, Aiming points, Distance-to-go, Yellow lines to taxiway. TWY: TWY centerline markings.
3	Stop bars	Nil.
4	Remarks	Nil.

RPUS AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
01/19 APCH zone	Trees, antenna, and high tension wire.	Nil	Nil	Nil	Nil

RPUS AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
01	005° 10' GEO 007° 02' MAG	1551M X 45M	PCN 46 R/A/W/T CONC	163515.0899N 1201808.8848E	THR 4.659M/ 15.285FT TDZ 4.659M/ 15.285FT
19	185° 10' GEO 187° 02' MAG	2120M X 45M	PCN 46 R/A/W/T CONC	163605.3515N 1201813.5997E	THR 3.667M/ 12.031FT TDZ 3.823M/ 12.543FT
Slope of RWY-SWY	SWY dimensions	CWY dimensions	Strip dimensions	OFZ	Remarks
7	8	9	10	11	12
0.064% downhill towards THR19.	569M X 45M	60M	Nil	Nil	THR displaced by 569M (hill on both side) R-Hill Height-43M L-Hill Height-24M.
	Nil	60M	Nil	Nil	Nil

RPUS AD 2.13 DECLARED DISTANCES

RWY Designator	TORA	TODA	ASDA	LDA	Remarks
1	2	3	4	5	6
01	2120M	2180M	2120M	1551M	Nil
19	2120M	2180M	2120M	2120M	Nil

RPUS AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
01	Nil	Red and Green	PAPI Pilot side	Nil
19	Nil	Red and green	PAPI Pilot side	Nil
RWY Centre Line LGT Length, spacing, colour, INTST	RWY edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	60M Yellow, Medium intensity	Nil	Nil	Nil
Nil	60M Yellow, Medium intensity	Nil	Nil	Nil

RPUS AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Atop control tower, in operation when required.
2	LDI location and LGT Anemometer location and LGT	LDI: Left side at RWY19, Left side at RWY01. Anemometer: Left side at RWY19.
3	TWY edge and centre line lighting	TWY edge lights installed on whole length of runway available.
4	Secondary power supply/switch-over time	500KVA, with ATS/10 sec.
5	Remarks	Nil.

RPUS AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	SAN FERNANDO AERODROME TRAFFIC ZONE (ATZ): A circle radius 5NM centered on 163540.2182N 1201811.2422E (ARP).
2	Vertical limits	ATZ: SFC up to but excluding 2000FT.
3	Airspace classification	B.
4	ATS unit call sign Languages(s)	San Fernando Tower. English.
5	Transition altitude	Nil.
6	Remarks	Nil.

RPUS AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
TWR	San Fernando Tower	122.1MHZ 5062.5KHZ 3608KHZ	0000 - 0800	PRI freq. P/P PRI freq (Laoag Network). P/P SRY freq. For extension of SER one (1) day PN is required.

RPUS AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
VOR	SAN	114.5MHZ	H24	164342.1485N 1202129.1880E	Nil	R200 8.7NM to San Fernando Airport. Output - 100W.

RPUS AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulation

1.1 Number of aircraft in the traffic pattern limited to two (2) at any given time.

2. Local Flying Restrictions

2.1 RWY 01 non-standard traffic pattern (right hand turn) to standard traffic pattern (left hand turn),
RWY 19 standard traffic pattern (left hand turn) to non-standard traffic pattern (right hand turn).

RPUS AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Traffic Circuit Chart (RWY 01)	RPUS AD CHART 2 - 1
Traffic Circuit Chart (RWY 19)	RPUS AD CHART 2 - 2

TRAFFIC
CIRCUIT
CHART


AERODROME ELEV
15 FT

TWR - 122.1

LA UNION/San Fernando (RPUS)

RWY 01

CHANGES: ACFT, ALT, Units of Measurement and VAR Deleted. Data Resolution. Chart Page Format.

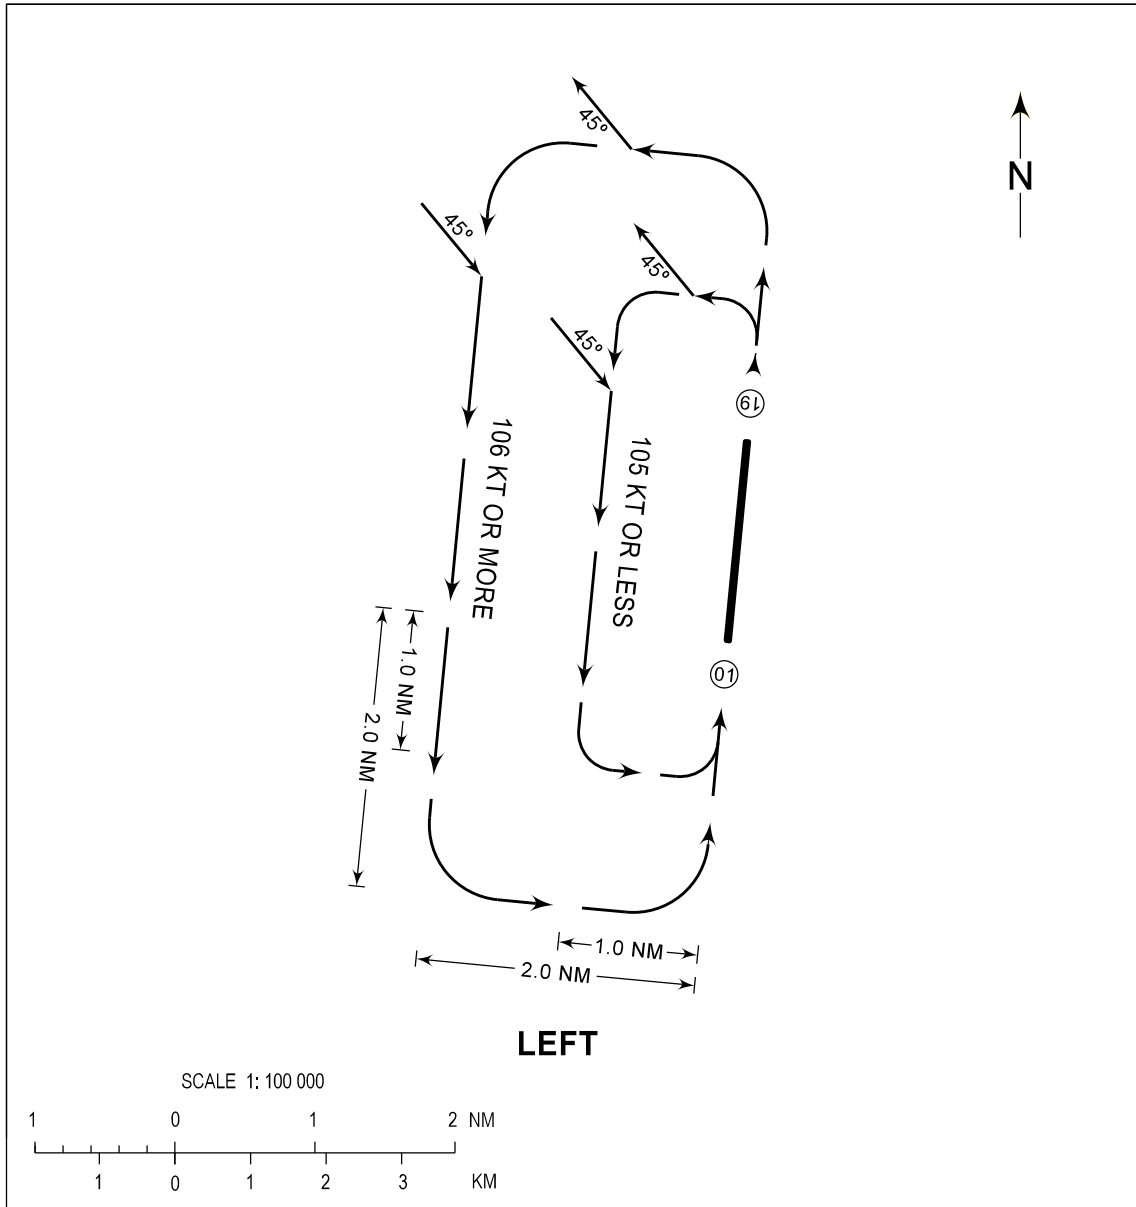

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

TRAFFIC
CIRCUIT
CHART


AERODROME ELEV
15 FT

TWR - 122.1

LA UNION/San Fernando (RPUS)

RWY 19

CHANGES: ACFT, ALT, Units of Measurement and VAR Deleted, Data Resolution, Chart Page Format.

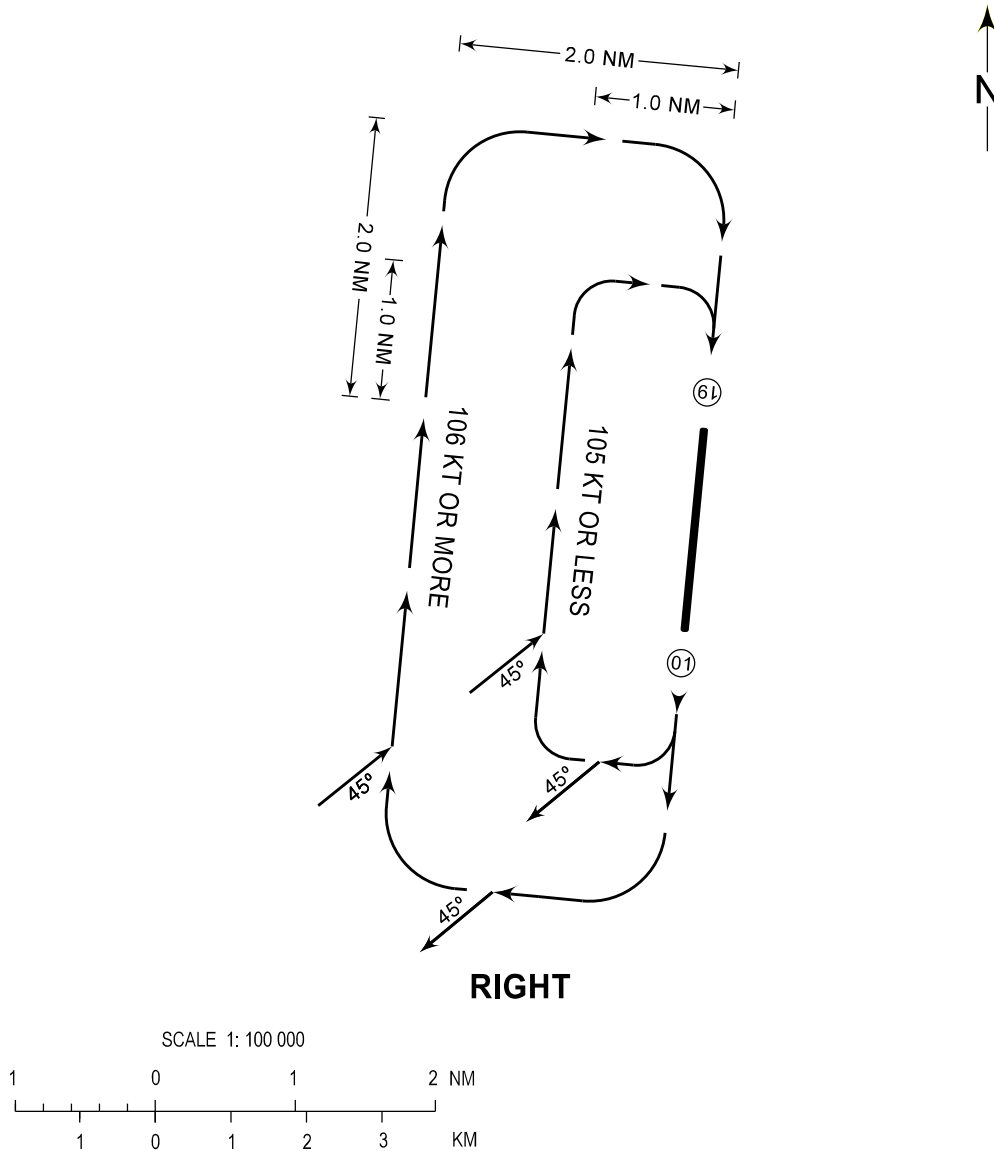

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.