

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.14, AD-2.16, AD-2.19, AD-2.21, AD-2.23

RPUX AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPUX - PLARIDEL COMMUNITY AIRPORT

RPUX AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	145330N 1205111E.
2	Direction and distance from (city)	1KM NW.
3	Elevation/Reference temperature	6M AMSL.
4	Geoid undulation at AD ELEV PSN	Nil.
5	MAG VAR/Annual Change	1.7°W (2014) / 2.3' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Plaridel Airport, Plaridel 3004 Bulacan Province Phone: (044) 795-0637 / (02) 879-9122 to 9125.
7	Types of traffic permitted (IFR/VFR)	VFR.
8	Remarks	Nil.

RPUX AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900.
2	Customs and immigration	Nil.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	2300 - 0900.
6	MET Briefing Office	Nil.
7	ATS	Nil.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2300 - 0900.

RPUX AD 2.5 PASSENGER FACILITIES

1	Hotels	Nil.
2	Restaurants	Limited at the town proper.
3	Transportation	Vehicle for hire.
4	Medical facilities	Within the town proper.
5	Bank and Post Office	Within the town proper.
6	Tourist Office	Provincial and municipal hall.
7	Remarks	Nil.

RPUX AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT IV.
2	Rescue equipment	One (1) Fire truck [SIDES (2400 liters)].
3	Capability for removal of disabled aircraft	Nil.
4	Remarks	Nil.

RPUX AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: CONC. Strength: Nil.
2	Taxiway width, surface and strength	Width: 9M. Surface: ASPH. Strength: Nil.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPUX AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	RWY designation signage, TWY CL.
2	RWY and TWY markings and LGT	RWY: RWY CL. TWY: TWY holding area and CL,
3	Stop bars and RWY guard light	End markers, distance-to-go marker.
4	Other RWY protection measures	Nil.
5	Remarks	Nil.

RPUX AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
17/35	Trees and houses	Nil	Water tank Meralco post Balching plant.	Nil	Exercise caution during landing and takeoff.

RPUX AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	Thru Manila FSS.
2	Hours of service MET Office outside hours	Thru Manila FSS. -
3	Office responsible for TAF preparation Periods of validity	Thru Manila FSS. -
4	Trend forecast Interval of issuance	- -
5	Briefing/consultation provided	Nil.

6	Flight documentation Language(s) used	- English.
7	Charts and other information available for briefing or consultation	Aerodrome of vicinity.
8	Supplementary equipment available for providing information	Nil.
9	ATS units provided with information	Thru Manila FSS.
10	Additional information (limitation of service, etc.)	Nil.

RPUX AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY	Slope of RWY-SWY
1	2	3	4	5	6	7
17	174.00°	900M X 30M	PCN 8 F/C/Y/U ASPH	Nil	Nil	0.055% uphill to the South.
35	354.00°	900M X 30M	PCN 8 F/C/Y/U ASPH	Nil	Nil	
SWY dimensions	CWY dimensions	Strip dimensions	RESA dimensions	Location/ description of arresting system	OFZ	Remarks
8	9	10	11	12	13	14
30M X 30M	30M	Nil	Nil	Nil	Nil	Nil
10M X 30M	10M	Nil	Nil	Nil	Nil	Nil

RPUX AD 2.13 DECLARED DISTANCES

RWY Designator	TORA	TODA	ASDA	LDA	Remarks
1	2	3	4	5	6
17	900M	930M	930M	900M	Nil
35	900M	910M	910M	900M	Nil

RPUX AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Nil.
2	LDI location and LGT Anemometer location and LGT	Nil.
3	TWY edge and centre line lighting	Nil.
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at AD.
5	Remarks	Nil.

RPUX AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	PLARIDEL AERODROME TRAFFIC ZONE (ATZ): A circle radius 5NM centered on 145330N 1205111E (ARP).
2	Vertical limits	ATZ: SFC up to but excluding 2000FT.
3	Airspace classification	B.
4	ATS unit call sign Language(s)	Plaridel Control Tower. English.
5	Transition altitude	Nil.
6	Hours of applicability	Nil.
7	Remarks	VFR, aerodrome traffic are controlled.

RPUX AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	Hours of operation	Remarks
1	2	3	4	5
TWR	Plaridel Control Tower	122.4MHZ 5447.5KHZ 3834KHZ	2300 - 0900	PRI FREQ. P/P PRI FREQ (Manila Network). P/P SRY FREQ.

RPUX AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulations

- 1.1 Aerodrome is designated as flight training aerodrome. Flight training maneuvers must be coordinated with tower.

2. Taxiing - limitations

- 2.1 Taxi from ramp area to holding position due tall trees and hangars obstructing the view of control tower on taxiway and take-off area of RWY35.

3. Special Procedures for the Conduct of Training Flights

- 3.1 This procedure is to provide guidelines for both Air Traffic Control and Pilot Schools to enhance safety of flight operations at Plaridel Community Airport.

3.2 Procedures

3.2.1 Plaridel Community Airport Control Tower

- a. There shall only be a maximum of 4 aircraft in the traffic circuit.
- b. Solo flight must be given priority in the traffic circuit.
- c. Solo flight must accordingly be stipulated in the flight plan.

3.2.2 Pilot Schools

1. The instructor will only release the student for first solo flight after performing satisfactorily the following:
 - a. Go-around procedure;
 - b. Correct bouncy-landing;
 - c. Correct undershot and/or overshoot approaches; and
 - d. Proficient in understanding and assimilating ATC clearances and instructions.
2. Before releasing the student for first solo flight, the instructor must inform Plaridel Tower of his intention and proceed to the Tower for flight supervision purposes.

RPUX AD 2.22 FLIGHT PROCEDURES

Except as otherwise provided or as instructed by ATC, the following procedures shall apply to both fixed and rotary aircraft.

1. Procedure for VFR Flights

1.1 General

- 1.1.1 All aircraft operating within Plaridel Training Area 6 (RP/T-6) shall monitor and maintain a continuous listening watch on 122.4MHZ.
- 1.1.2 All aircraft in flight or on maneuvering areas of the Plaridel Aerodrome Traffic Zone shall be subject to Air Traffic Control.
- 1.1.3 All aircraft operating outside Plaridel Aerodrome Traffic Zone but within 10NM limit of Training Area 6 shall:
 - a. be provided with traffic information as far as practicable under the provisions for Class D of ATS airspace classification;
 - b. advise their position and intention on 122.4MHZ;
 - c. at all times maintain VFR and be responsible to maintain adequate separation from each other.
- 1.1.4 All departing VFR flights shall maintain a continuous listening watch on Plaridel Control Tower frequency 122.4MHZ up to 10NM.
- 1.1.5 All departing flights shall climb to 300FT altitude before executing any turns.
- 1.1.6 All arriving flights shall contact Plaridel Control Tower on frequency 122.4MHZ, at least 15NM before entering Plaridel Training Area 6 (RP/T-6).
- 1.1.7 All aircraft overflying the Plaridel Aerodrome Traffic Zone shall fly at least 2500FT altitude to fly 5NM abeam East or West of Plaridel Aerodrome Traffic Zone (ATZ).
- 1.1.8 The words "suggest" and "advise" shall be used when a course of action is proposed to an aircraft to elevate level of safety outside the Plaridel ATZ.

2. VFR Departure Flights

2.1 Northbound Aircraft

- a. Runway 35 Take-off: After take-off, straight-out departure, climb to and maintain 700FT up to 5NM, report over East of San Simon Tollgate at 1000FT or below before proceeding to destination climbing to proposed VFR level.
- b. Runway 17 Take-off: Make a right downwind departure and maintain downwind heading climbing 700FT up to 5NM traversing East of NLEX, then report over Lourdes at 1000FT or below before proceeding to destination.

2.2 Northwest-bound Aircraft

- a. Runway 35 Take-off: Straight-out departure to at least 2NM before heading Northwest towards Apalit. Report over Apalit at 1000FT or below before proceeding to destination.
- b. Runway 17 Take-off: Make a right downwind departure East of San Simon direct to Apalit. Report over Apalit at 1000FT or below before proceeding to destination.

2.3 Northeast-bound Aircraft

- a. Runway 35 Takeoff: Straight-out departure to at least 2NM before heading NE towards San Rafael. Report over San Rafael at 1000FT or below before proceeding to destination.
- b. Runway 17 Takeoff: Make a left climbing turn direct to San Rafael. Report over San Rafael at 1000FT or below proceeding to destination.

2.4 Southbound Aircraft

- a. Runway 35 Takeoff: Make a left downwind heading at least 2NM, or when traffic permitting, make a right climbing turn direct Bulacan, Bulacan or Bocaue NLEX Toll plaza. Report over Bulacan or Bocaue NLEX toll plaza at 1000FT or below before proceeding to destination.
- b. Runway 17 Takeoff: Straight-out departure to at least 2NM before heading Bulacan, Bulacan or Bocaue NLEX Toll plaza. Report over Bulacan or Bocaue NLEX Toll plaza at 1000FT or below before proceeding to destination.

2.5 Westbound Aircraft

- a. Runway 35 Takeoff: Make a left crosswind departure, maintain crosswind heading at least 2NM before heading towards Hagonoy. Report over Hagonoy at 1000FT or below before proceeding to destination.
- b. Runway 17 Takeoff: Make a straight out departure to at least 2NM before heading towards Hagonoy via Malolos flyover. Report over Hagonoy at 1000FT or below before proceeding to destination.

3. VFR Arrival Flights

3.1 From the North

- a. Runway 35 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound or over Candaba Swamp and report over West of San Simon Tollgate at 1500FT or above. Proceed west of Viaduct maintaining at least 1 000 feet altitude then join left downwind.
- b. Runway 17 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound or over Candaba Swamp and report over West of San Simon Tollgate at 1500FT or above. Maintain southbound heading and report at least 5NM for possible straight-in approach, if disapproved, fly and proceed overhead the airport maintaining at least 1000FT then join upwind.

3.2 From the Northwest

- a. Runway 35 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound or over San Fernando and report over Apalit at 1500FT or above. Proceed west of Viaduct maintaining at least 1000FT to join left downwind.
- b. Runway 17 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound or over San Fernando and report over Apalit at 1500FT or above. Proceed over Viaduct for possible right base entry, if disapproved, proceed overhead the airport maintaining at least 1000FT to join upwind.

3.3 From the Northeast

- a. Runway 35 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound and report over San Rafael at 1500FT or above. Proceed west of Viaduct maintaining at least 1000FT then join left downwind.

- b. Runway 17 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound and report over San Rafael at 1500FT or above then proceed and report over Baliuag for possible straight-in approach, if disapproved, proceed overhead the airport maintaining at least 1000FT then join upwind.

3.4 From the West

- a. Runway 35 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound or over Hagonoy maintaining 1500FT or above then proceed and report over Malolos flyover for possible left base entry, if disapproved. Proceed overhead the airport maintaining 1000FT to join upwind.
- b. Runway 17 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound or over Hagonoy at 1500FT or above then proceed and report over Malolos flyover for a right downwind entry.

3.5 From the South

- a. Runway 35 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound or over Meycauayan Shoreline at 1500FT or above. Proceed over Tabang Toll Plaza for possible straight-in approach, if disapproved, proceed over the airport maintaining 1000FT then join upwind leg.
- b. Runway 17 Landing: Contact Plaridel Tower on 122.4MHZ at least 15NM inbound or over Meycauayan Shoreline at 1500FT or above then proceed over Malolos flyover maintaining 1000FT to join right downwind leg.

4. Communication Failure (NORDO) Procedures

Either Runway 17 or Runway 35 in-use:

All aircraft experiencing NORDO condition within Plaridel ATZ, either inbound or forming part of the traffic pattern, in the absence of instructions from the Control Tower, shall apply the following procedures:

- a. Observe the air traffic flow and sequence itself from other known and observed traffic prior to entering the traffic circuit or pattern of the runway-in-use, or if already forming part of the pattern, shall continue its approach and watch out for the light signals from the control tower. If no signal is received, NORDO aircraft shall continue its approach and fly at an appropriate altitude and rock its wing to call the attention of the Tower and to notify NORDO condition.
- b. If no signal is observed and the intended runway-in-use is CLEAR OF TRAFFIC, NORDO aircraft shall continue its approach and LAND, and after clearing the active runway, continue to observe for light gun signals from the Tower immediately of its condition at the soonest time after landing.

5. Helicopter Operations

5.1 General

5.1.1 Except when clearance is obtained from air traffic control unit, VFR helicopter flights shall not take-off and land at Plaridel Airport or within its Aerodrome Traffic Zone,

- a. When the ceiling is less than 1000FT; or
- b. When the ground visibility is less than 1.5KM (1 Mile).

5.1.2 Departing helicopter shall air-taxi from the designated helipad to the middle of the runway for takeoff.

5.1.3 Arriving helicopter shall land on the runway and air-taxi to the designated helipad.

5.2 Helicopter Routes

Helicopter routes are designated as H1, H2, H3, H4, H5, H6, H7 and H8.

5.2.1 H1:

- a. Northwest bound H1 is from SHELL STATION of North Luzon Expressway (NLEX) at 500 FT flying on the north side of Tabang Spur Road connecting to McArthur Highway direct to SAN SIMON TOLL GATE. Fly on the East side of NLEX.
- b. Southeast bound H1 is from SAN SIMON TOLL GATE at 500 FT flying on the West side of McArthur Highway connecting to Tabang Spur Road direct to SHELL STATION West of NLEX.

5.2.2 H2:

- a. Northbound H2 is from SHELL STATION East side of NLEX and follow the Plaridel Bypass Road direct to SAN RAFAEL at 500 FT.

5.2.3 H3:

- a. Southbound H3 is from the West side of Maharlika Highway at 500 FT direct to BALIUAG. Fly East of Maharlika Highway direct to TABANG TOLL GATE.

5.2.4 H4:

- a. Westbound H4 is from STA RITA TOLL GATE flying at 300 FT on the left side of Sumapa-Ligas Road direct to MALOLOS FLYOVER.

5.2.5 H5:

- a. Northbound H5 is from TABANG INTERCHANGE direct to WALTER MART at 500 FT.

5.2.6 H6:

- a. H6 is from APALIT direct to BALIUAG PURINA at 300 FT.

5.2.7 H7:

- a. H7 is from BALIUAG PURINA direct to ROBINSON at 500 FT.

5.2.8 H8:

- a. H8 is from SHELL STATION East side of NLEX direct to WALTER MART at 500 FT.

5.3 VFR Inbound Routes

5.3.1 From the northwest: Contact Plaridel Tower when over APALIT at 500 FT. Fly H6 and H7. Report over ROBINSON, join the appropriate helicopter pattern or as instructed by the Plaridel Tower.

5.3.2 From the North: Contact Plaridel Tower before entering the ATZ at 500 FT. Fly direct to BALIUAG PURINA. Fly H7. Report over ROBINSON, join the appropriate helicopter pattern or as instructed by the Plaridel Tower.

5.3.3 From the southwest: Contact Plaridel Tower before entering the ATZ at 500 FT. Fly direct to TABANG INTERCHANGE. Fly H5. Report over WALTER MART, join the appropriate helicopter pattern or as instructed by the Plaridel Tower.

5.3.4 From the South: Contact Plaridel Tower when over SHELL STATION of NLEX at 500 FT. Fly H8. Report over WALTER MART, join the appropriate helicopter pattern or as instructed by the Plaridel Tower.

5.4 VFR Outbound Routes

5.4.1 Northwest Bound

- a. RWY 35 departure: Make a left turn towards SAN SIMON TOLL GATE at 500 FT. Proceed to the destination flying on the East side of NLEX.
- b. RWY 17 departure: Make straight out departure and connect to H4 and H1. Proceed to the destination flying on the East side of NLEX.

5.4.2 Northbound

- a. RWY 35 departure: Make a right turn towards H2. Proceed to the destination flying on the East side of Maharlika Highway.
- b. RWY 17 departure: Make a left turn towards H2. Proceed to the destination flying on the East side of Maharlika Highway.

5.4.3 Southwest Bound

- a. RWY 35 departure: Make a left downwind departure towards MALOLOS FLYOVER then proceed to the destination.
- b. RWY 17 departure: Make a right turn towards MALOLOS FLYOVER then proceed to the destination.


5.4.4 Southbound

- a. RWY 35 departure: Make a right turn towards H3. Proceed to the destination flying on the West side of NLEX.
- b. RWY 17 departure: Make a straight out departure towards H1. Proceed to the destination flying on the West side of NLEX.

6. List of Visual Landmarks and Reporting Points

6.1 The following visual reference and reporting points as mentioned in the procedure are identified using local available maps, Google Maps, Open Street Map and Google Earth Satellite images.

VISUAL REPORTING POINT	COORDINATES	DISTANCE FROM ARP (NM)	RELATIVE POSITION FROM ARP	DESCRIPTION
APALIT	145707N 1204535E	6.5	NW	Apalit Public Market
BALIUAG	145744N 1205350E	4.9	NE	Puregold Baliuag
BALIUAG PURINA	145545N 1205224E	2.5	NE	Cargill (Formerly known as Purina) Baliuag
BOCAUE NLEX TOLL GATE	144809N 1205633E	7.4	SE	Bocaue NLEX Toll Gate
MALOLOS FLYOVER	145109N 1204858E	3.2	SW	Malolos Flyover
ROBINSON	145406N 1205157E	1.0	NW	Robinsons Pulilan
SAN RAFAEL	145750N 1205547E	6.2	NE	Angat Bridge Plaridel Bypass Road
SAN SIMON TOLL GATE	145929N 1204456E	8.5	NW	San Simon Toll Gate
SHELL STATION	144950N 1205433E	4.9	SE	Shell Station along NLEX, Balagtas, Bulacan
STA RITA TOLL GATE	145142N 1205129E	1.8	S	Sta Rita Toll Gate, NLEX
TABANG INTERCHANGE	145018N 1205145E	3.2	S	Tabang Interchange NLEX-SCTEX
TABANG TOLL GATE	145015N 1205205E	3.4	SE	Tabang Toll Gate NLEX-SCTEX
WALTER MART	145250N 1205159E	1.0	SE	Walter Mart along Maharlika Highway

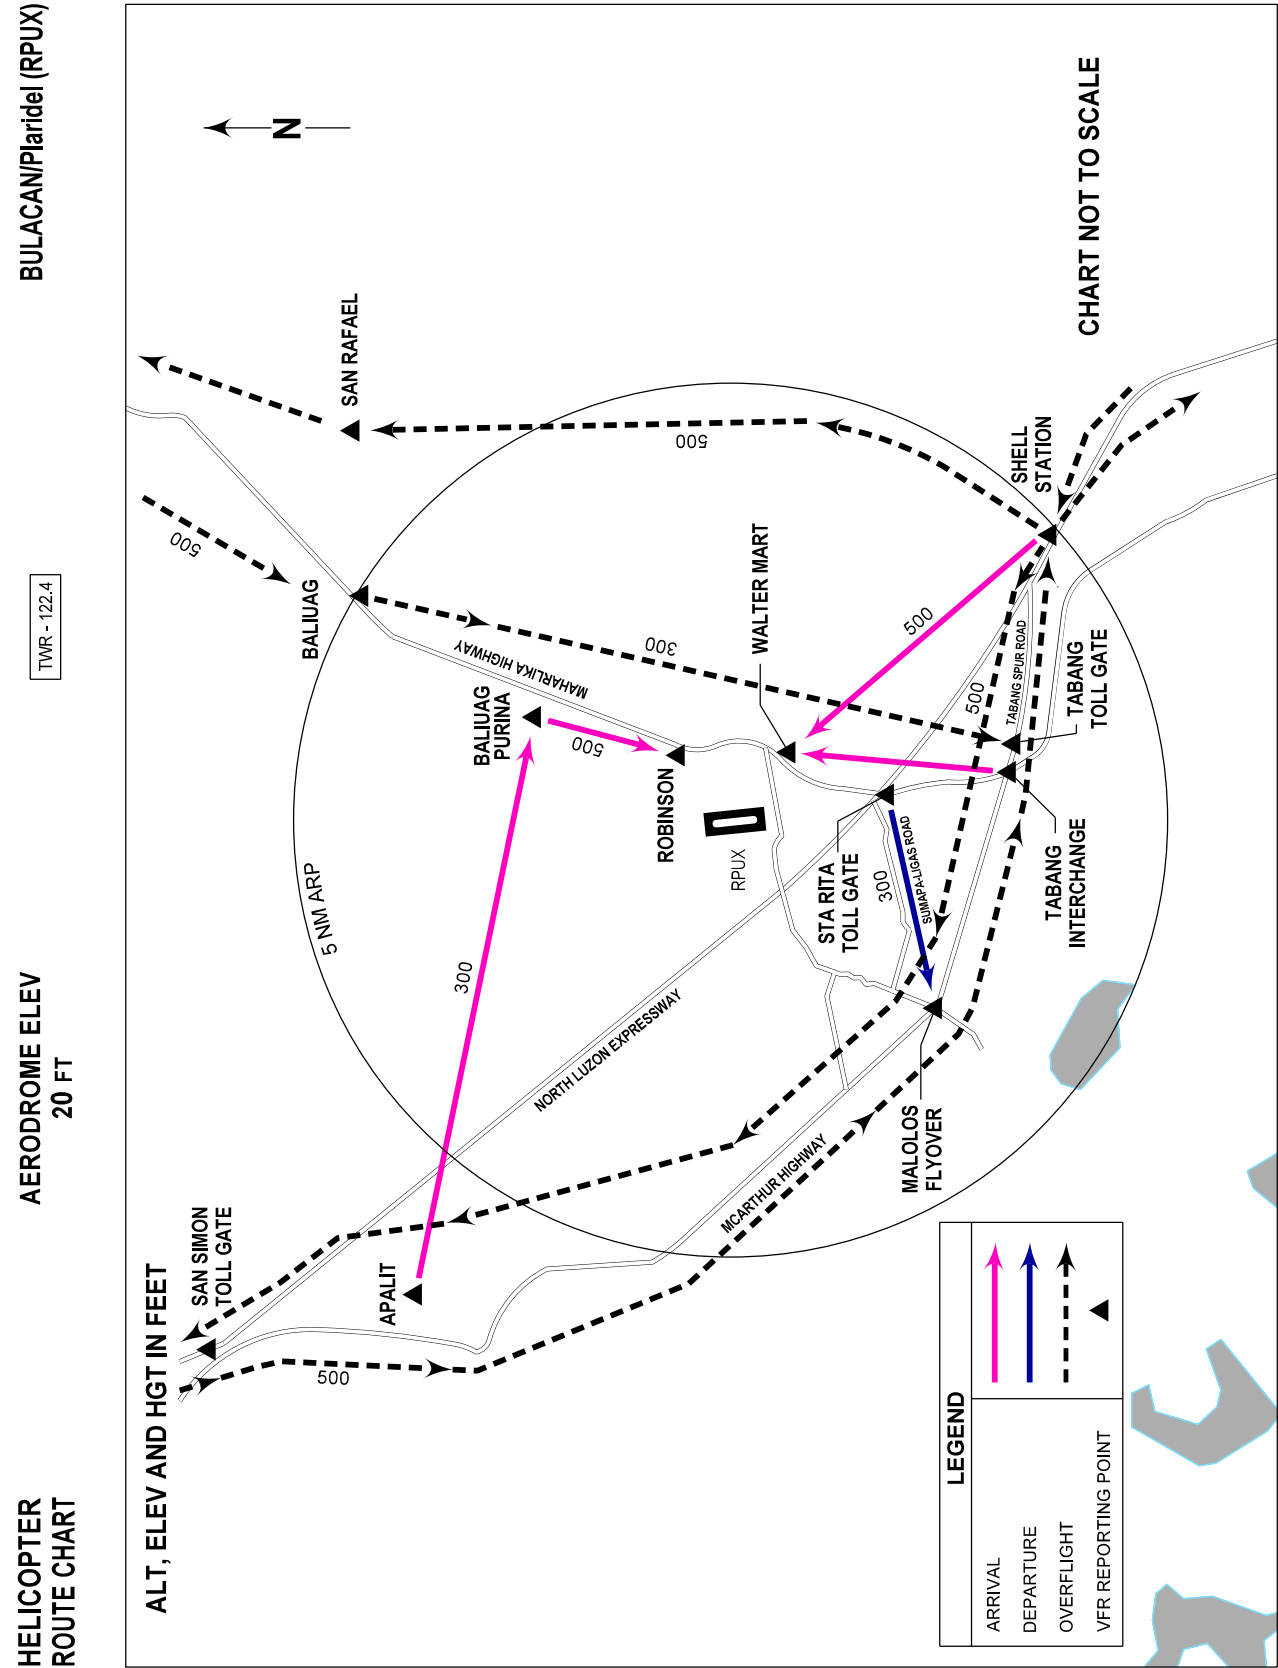

RPUX AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	Page
Traffic Circuit Chart (RWY 17)	RPUX AD CHART 2 - 1
Traffic Circuit Chart (RWY 35)	RPUX AD CHART 2 - 2


INTENTIONALLY
LEFT
BLANK

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
20 FT

TWR - 122.4

BULACAN/Plaridel (RPUX)
RWY 17

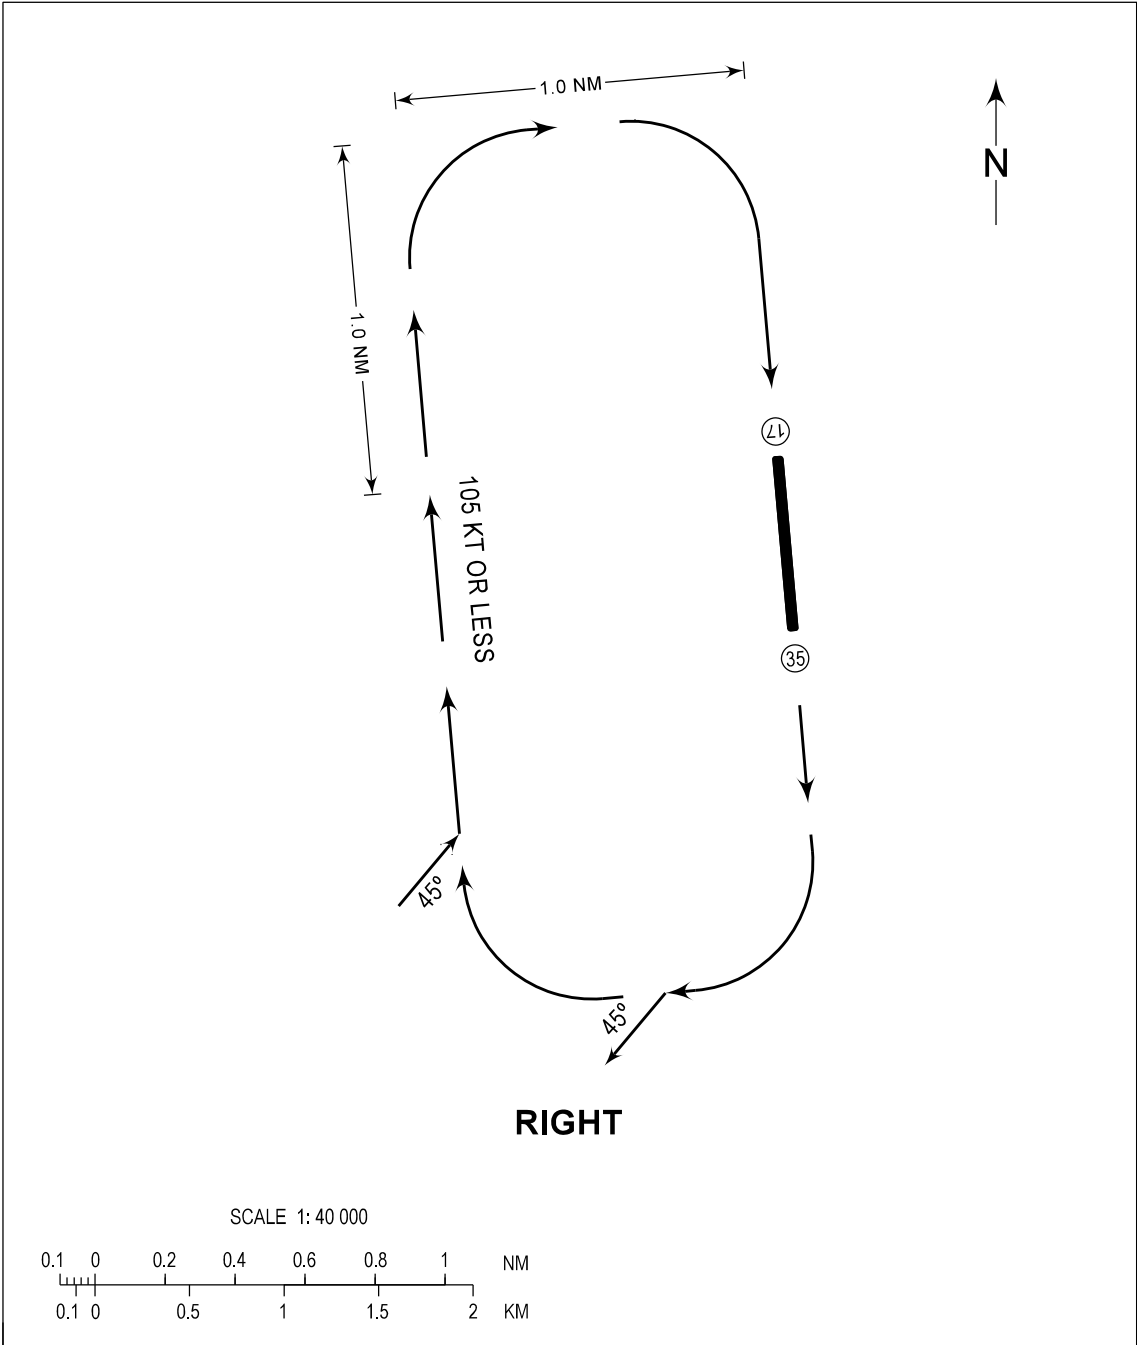

CHANGES: ACFT, ALT, Units of Measurement and VAR Deleted. TFC Pattern Speed. Chart Page Format.

PROCEDURE

- A) ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- B) DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.


TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
20 FT

TWR - 122.4

BULACAN/Plaridel (RPUX)
RWY 35

CHANGES: ACFT, ALT, Units of Measurement and VAR Deleted. TFC Pattern Speed. Chart Page Format.

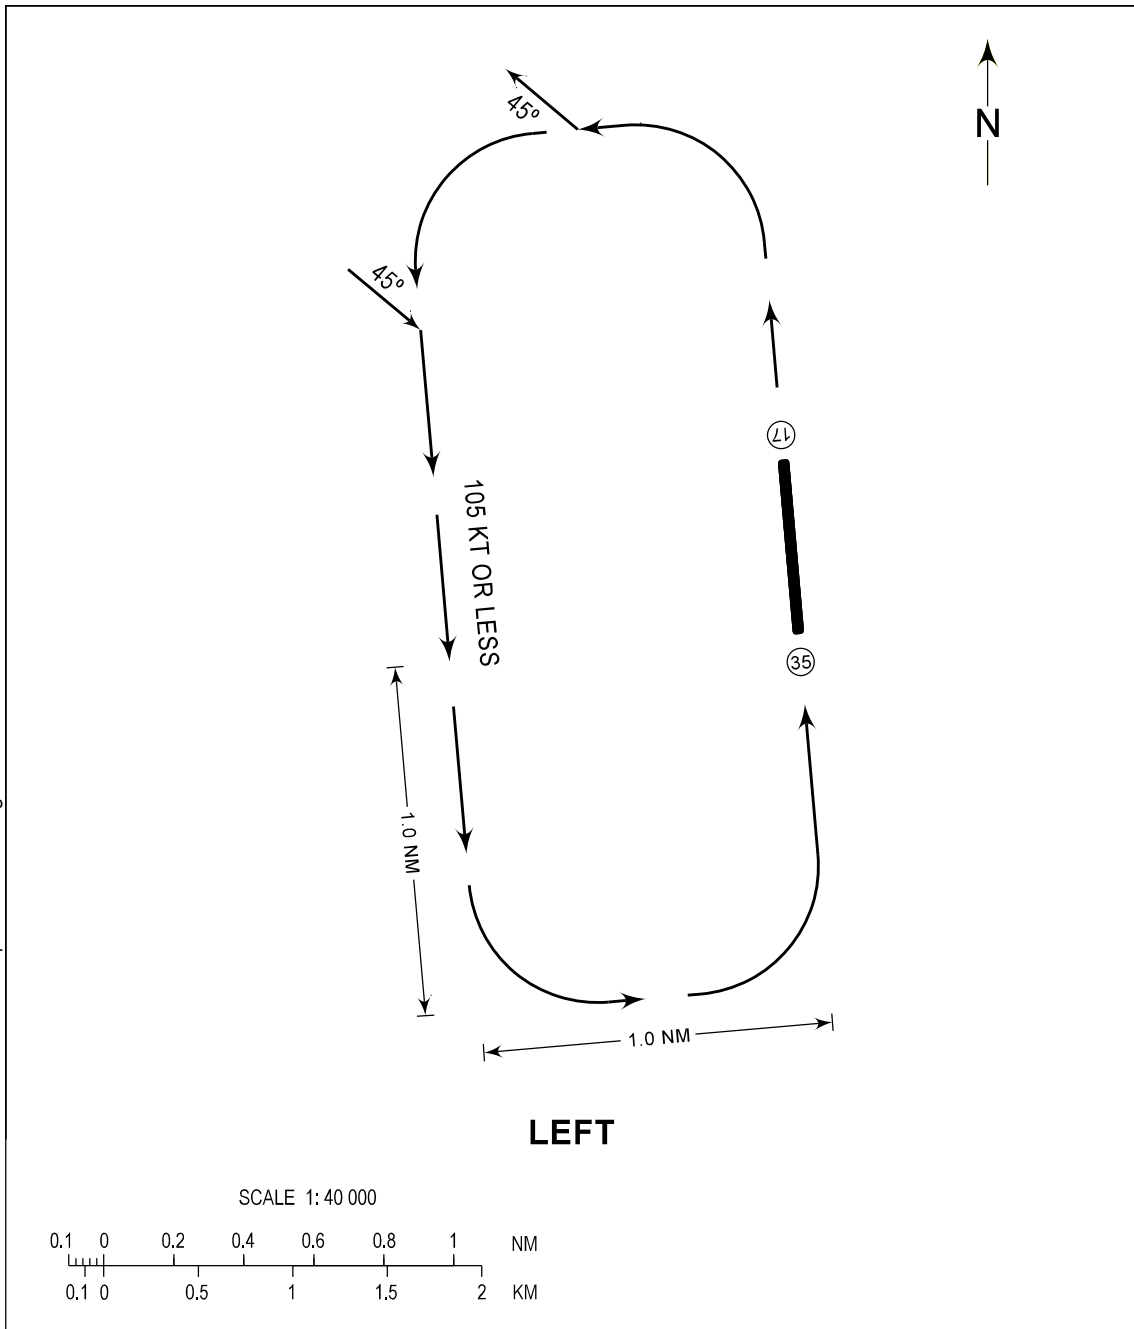

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.