

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.7, AD-2.9, AD-2.11, AD-2.16, AD-2.21, AD-2.23, AD-2.25

RPVK AD 2.1 AERODROME LOCATION INDICATOR AND NAME**RPVK - KALIBO INTERNATIONAL AIRPORT****RPVK AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

1	ARP coordinates and site at AD	114046N 1222231E.
2	Direction and distance from (city)	344° 08' and 3.36 KM from ARP to Kalibo proper.
3	Elevation/Reference temperature	10 M (32 FT).
4	Geoid undulation at AD ELEV PSN	56 M (183 FT).
5	MAG VAR/Annual Change	1.2°W (2014) / 2.5' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Kalibo Airport, Kalibo 5600 Aklan Phone: (63) (036) 268-7251 AFS: RPVKYYYYX
7	Types of traffic permitted (IFR/VFR)	IFR-VFR.
8	Remarks	Nil.

RPVK AD 2.3 OPERATIONAL HOURS

1	AD Operator	0000 - 0900.
2	Customs and immigration	Nil.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	H24.
6	MET Briefing Office	Nil.
7	ATS	0000 - 0900.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: H24.

RPVK AD 2.5 PASSENGER FACILITIES

1	Hotels	Within the town proper.
2	Restaurants	Within the town proper.
3	Transportation	Within the town proper.
4	Medical facilities	Within the town proper.
5	Bank and Post Office	Within the town proper.
6	Tourist Office	Within the town proper.
7	Remarks	Nil.

RPVK AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	CAT VII.
2	Rescue equipment	Three (3) Fire trucks [One (1) SIDES (2400 liters) and two (2) Oshkosh (6000 liters each)].
3	Capability for removal of disabled aircraft	Aircraft recovery equipment for lifting and moving of all aircraft size up to A321 by third party provider. Disabled Aircraft Recovery Plan (DARP) Coordinator: Kalibo International Airport (KIA) Airside Safety Manager Phone: (63) (036) 268-1943 Mobile: +63920-9671085 Third Party Providers: Provincial Disaster Risk Reduction and Management Office (PDRMO) of Aklan Phone: (63) (036) 268-7420 Hotline Number: 168 Mobile: +63999-9246939 Email: pdrmc_aklan@yahoo.com pdrmcaklan@gmail.com
4	Remarks	Nil.

RPVK AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Surface: CONC. Strength: Nil.
2	Taxiway width, surface and strength	Width: 25 M. Surface: CONC. Strength: Nil.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPVK AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
05	MT101 3150 FT	112919.5N 1221210.5E	Nil	Nil	Nil
	VK915 2727 FT	112656.9N 1221342.3E	Nil	Nil	Nil
	VK909 2491 FT	112657.1N 1221342.3E	Nil	Nil	Nil
	MT18 1894 FT	113439.6N 1221345.8E	Nil	Nil	Nil
	VK911 1887 FT	113416.5N 1221400.6E	Nil	Nil	Nil

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
23/APCH zone	MT16 699 FT	113715.7N 1221625.4E	Nil	Nil	Nil
	MDC1 345 FT	113802.1N 1221954.6E	Nil	Nil	Nil
	SUNCEL 179 FT	114019.9N 1222124.3E	Nil	Nil	Nil
	COCO 106 FT	114020.2N 1222211.7E	Nil	Nil	Nil
	COM Antenna 176 FT	114103.6N 1222158.9E	Nil	Nil	Nil
	COM Antenna 164 FT	114054.3N 1222331.5E	Nil	Nil	Nil
23/TKOF	Terrain 2274 FT	114008.9N 1221318.0E	Nil	Nil	Nil
	Terrain 2041 FT	113829.7N 1221248.1E	Nil	Nil	Nil

RPVK AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY (M)	Strength (PCN) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY	Slope of RWY-SWY
1	2	3	4	5	6	7
05	048.86°	2500 X 45	PCN 50 F/B/W/U CONC + ASPH (RWY 05 extension 313 M - CONC; 2187 M - ASPH)	114019.20N 1222200.32E	THR 32 FT	0.167% downhill towards THR 23
23	228.87°	2500 X 45	PCN 50 F/B/W/U CONC + ASPH (RWY 05 extension 313 M - CONC; 2187 M - ASPH)	114112.73N 1222302.50E	THR 18 FT TDZ 19 FT	
SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	RESA dimensions (M)	Location/ description of arresting system	OFZ	Remarks
8	9	10	11	12	13	14
Nil	150 X 100	2730 X 60	Nil	Nil	Nil	Nil
Nil	100 X 100	2730 X 60	Nil	Nil	Nil	Nil

RPVK AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
05	2500	2650	2500	2500	Nil
23	2500	2600	2500	2500	Nil

RPVK AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
05	Nil	THR LGT Green WBAR: 2 RTIL	PAPI 3.1° Left (50.12 FT)	Nil
23	SALS 420 M	THR LGT Green	PAPI 3.0° Left (52.12 FT)	Nil
RWY Centre Line LGT LEN, spacing, colour, INTST	RWY Edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	2380 M, 52.16 M, White/Yellow White/White, LIH	Nil	Nil	RWY THR IDENT LGT (RTIL) DIST FM edge LGT: 12 M. INTST: LIH. PAPI Path WID: 0.33°. VIS RG: 5 NM. DIST FM THR: 305 M.
Nil	2380 M, 52.16 M, Amber LIH	Red	Nil	Nil

RPVK AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Location: 114034.29N 1222237.86E. Characteristics: ALTN White Green - 25 flashes per MIN. HR of OPS: Available upon request during AP HR of OPS.
2	LDI location and LGT Anemometer location and LGT	Nil.
3	TWY edge and centre line lighting	Edge: TWY. Centre line: Nil.
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at AD. Switch-over time 15 SEC.
5	Remarks	Nil.

RPVK AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	KALIBO AERODROME TRAFFIC ZONE (ATZ): A circle radius 5 NM centered on 114046N 1222231E (ARP). KALIBO CONTROL ZONE (CTR): A circle radius 10 NM centered on 114100.8N 1222259.8E (KLO DVOR/DME). KALIBO TERMINAL CONTROL AREAS (TMA): 122153N 1214151E - 122209N 1222435E - 112503N 1230840E - 110944N 1222103E - 114859N 1214200E - 122153N 1214151E.
2	Vertical limits	ATZ: SFC up to but excluding 2000 FT. CTR: SFC up to 1500 FT ALT. TMA: 1500 FT to FL200 (excluding ATS routes at FL130 and above). 1500 FT to <FL130 (ATS routes inside TMA below FL130). FL130 to FL200 (ATS routes inside TMA at FL130 and above).
3	Airspace classification	ATZ - B; CTR - D; TMA - D (excluding ATS routes at FL130 and above; ATS routes inside TMA below FL130) and A (ATS routes inside TMA at FL130 and above).
4	ATS unit call sign Language(s)	ATZ - Kalibo Tower. CTR/TMA - Kalibo Approach. In English.
5	Transition altitude	11000 FT.
6	Hours of applicability	H24.
7	Remarks	Do not enter ATZ on IAS exceeding 200 KT unless authorized by ATC.

RPVK AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	SATVOICE number	Logon address	Hours of operation	Remarks
1	2	3	4	5	6	7
TWR	Kalibo Tower	124.2 MHZ 5205 KHZ 3872.5 KHZ	Nil	Nil	H24	TWR PRI FREQ. P/P PRI FREQ. (Mactan Network). P/P SRY FREQ. For extension of SER, one (1) day prior notice is required.
APP	Kalibo Approach	120.4 MHZ				PRI FREQ.

RPVK AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
DVOR/DME	KLO	113.0 MHZ (CH77X)	H24	114100.8N 1222259.8E	100 FT	Coverage: DVOR/DME - 100 NM. 298 M FM start of RWY 23 and 220 M left of RWY 23 CL.

RPVK AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulation

1.1 General

- 1.1.1 Light Signal - It shall be the responsibility of all airmen, drivers of maintenance vehicles and others concerned intending to use the movement area to know the meaning and to comply with the various light signals directed at them by the Control Tower.
- 1.1.2 Engine Check - Unless otherwise authorized by the Control Tower, aircraft engine check shall be conducted clear of the runway with respect to the wake turbulence effect to aircraft operating on the runway.

1.2 Use of the Designated Areas

- 1.2.1 Except as otherwise provided for in contracts with the CAA of the Philippines (CAAP), the use of the following designated areas shall be limited to the purpose/s stated:
- a. Runways - no landing and take-off shall be made except on those areas designated and marked as runways;
 - b. Taxiways - shall be used only for ground movement of aircraft to, from, or between the loading/unloading ramp/s, apron, parking or when authorized by the Control Tower, for the movement of maintenance personnel or emergency vehicles such as security vehicles, fire trucks or ambulances;
 - c. Ramp and Apron areas - shall be used for loading or unloading of passengers and/or cargo, fueling, pre take-off inspections and/or minor maintenance of aircraft, and for the movement of maintenance personnel and catering vehicles and loading/unloading equipment. It shall be the responsibility of the operator and/or pilot-in-command of an aircraft to avoid collision with other aircraft, equipment, person or other obstruction.
- 1.2.2 No aircraft is allowed to remain overnight (RON) due to ramp congestion. RON will only be allowed upon approval by the Director General.
- 1.2.3 No aircraft is allowed to push back and start whenever an aircraft is landing or taking off RWY 23.
- 1.2.4 Pedestrians shall not be permitted to use any part of the runway as a short cut to gain access to other parts of the airport. Control of pedestrian shall be the responsibility of the security forces.
- 1.2.5 Taxi/s, motorcycle/s, private vehicle/s, etc. shall not enter the movement area.
- 1.2.6 The safe and orderly operation of maintenance vehicles, push carts or other loading/unloading equipment shall be the responsibility of the operator being serviced.

2. Taxiing to and from stands

2.1 Arrival

- 2.1.1 While taxiing, flight crew must contact Kalibo Tower for parking bay assignments.
- 2.1.2 For North Ramp: All aircraft shall taxi-in with power using TWY B and TWY C to their respective bay assignments and must be assisted by wing marshal/walker.
- 2.1.3 For South Ramp: All aircraft shall taxi-in with power using TWY A to their respective bay assignments and must be assisted by wing marshal/walker.

- 2.1.4 All aircraft must follow nose wheel guide markings on RWY 05/23 when making 180° turn after landing roll (except for Q400, ATR72 and smaller aircraft).

2.2 Departure

- 2.2.1 Tower clearance must be obtained prior to maneuvering from parking bays.
- 2.2.2 For the North Ramp: All aircraft shall taxi-out with power and must be assisted by wing marshal/walker.
- 2.2.3 For the South Ramp: All aircraft shall be pushed back towards the designated holding line.
- 2.2.4 All aircraft shall contact Kalibo Tower stating parking bay used before taxiing out or towing out for departure.

Phraseology: "Kalibo Tower (call sign) on parking bay (number), request to taxi to Runway (number)."

3. Parking

3.1 Assignment of Parking Bays

- a. Parking Bays 1, 2 and 3 - limited to A321 and lower category aircraft.
- b. Parking Bay 4 - limited to Q400, ATR72 and smaller aircraft.
- c. Parking Bays 5, 6 and 7 - limited to A320 and lower category aircraft.

Note: A319, A320, A321 and B737 and or same category aircraft shall not cross behind A319, A320, A321 and B737 and or same category aircraft parked on parking bays 5 and 6, respectively.

4. Taxiing Procedures

- 4.1 From Parking bays 1, 2 and 3:
- 4.1.1 Take-off RWY 05/23 - aircraft shall hold on TWY A designated holding line.
- 4.2 From Parking bays 4, 5, 6 and 7:
- 4.2.1 Take-off RWY 05/23 - aircraft shall hold on TWY B or TWY C designated holding line or as instructed by the aerodrome controller.

5. Emergency Procedures

- 5.1 Detailed emergency procedures shall be covered by operational instructions and by appropriate Letter/s of Agreement between the CAAP and other government agencies concerned.
- 5.2 The emergency units [Crash, Fire and Rescue (CFR), Medical, Security] shall be alerted by the aerodrome controller by means of signaling system procedure (developed by units concerned) when any of the following persons, in their judgement, determine that potential or actual emergency exists:
- a. Watch supervisor on duty at the Control Tower;
 - b. Pilot of aircraft concerned who shall notify the Control Tower; and
 - c. Operator of the aircraft or his authorized representative who shall notify the Control Tower.

- 5.3 When information is received that an emergency landing will be made at Kalibo International Airport, the tower shall alert the emergency crews, giving the following information:
- a. The words “EMERGENCY LANDING”;
 - b. Aircraft identification;
 - c. Type of aircraft;
 - d. Runway to be used;
 - e. Estimated time of arrival;
 - f. Nature of emergency; and
 - g. Any other pertinent information.
- 5.4 Upon notice of alert or receipt of actual crash, the aerodrome emergency unit/s shall proceed promptly in accordance with established procedures.
- 5.5 The preceding procedures shall be applicable within Kalibo ATZ only. Relevant traffic information outside of the ATZ shall be issued in the form of advisory. All other procedures not covered herein shall be in accordance with existing Procedure Order, Administrative Order, ATC Operations Manual, and other pertinent/relevant orders.

RPVK AD 2.22 FLIGHT PROCEDURES

1. General

- 1.1 Unless authorized by ATC, no aircraft shall operate within the ATZ, except for the purpose of landing at or departing from Kalibo International Airport.
- 1.2 All VFR aircraft shall maintain continuous listening watch on Kalibo Approach frequency while operating within the Kalibo TMA excluding the ATZ.
- 1.3 No aircraft shall penetrate the ATZ with an indicated airspeed exceeding 200 KT without ATC authorization.
- 1.4 Aircraft operating within Kalibo TMA and ATZ shall be equipped with a functioning two-way radio transceiver to Kalibo Tower and Kalibo Approach frequencies.
- 1.5 Air traffic control instructions and traffic information issued by the Control Tower and Approach shall be acknowledged and complied with.

2. Procedures for VFR Departure Flights

- 2.1 Departing aircraft shall contact the Control Tower for start-up, taxi and take-off clearance or instructions before starting and/or taxiing out of the ramp.
- 2.2 Departing aircraft shall maintain a continuous listening watch on the aerodrome control tower frequency until cleared to change frequency or until outside the ATZ.

3. Procedures for VFR Arrival Flights

- 3.1 Arriving aircraft shall contact the Control Tower and report over the appropriate designated visual reporting point/s for landing instructions and traffic information.
- 3.1.1 Designated Visual Reporting Points

Reporting Points	Coordinates	Distance (NM)	Direction	Description
BALETE	113320N 1222245E	7.4	SE	Balete Town
DUMAGUIT PORT	113544N 1222854E	8.0	SE	Dumaguit Seaport
IBAJAY	114906N 1221004E	14.8	NW	Ibajay River
MAKATO	114239N 1221739E	5.1	NW	Makato Town

RPVK AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Aerodrome Chart - ICAO (to be developed)	RPVK AD 2 - 11
Aircraft Parking/Docking Chart - ICAO (to be developed)	RPVK AD 2 - 12
Aerodrome Ground Movement Chart - ICAO (to be developed)	RPVK AD 2 - 13
Aerodrome Obstacle Chart - ICAO (to be developed)	RPVK AD 2 - 15
Area Chart (Departure, Arrival and Track Routes)	see RPVM Area Chart
Standard Departure Chart - Instrument - ICAO	RPVK AD 2 - 17
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 05)	RPVK AD 2 - 19
Standard Departure Chart - Instrument - ICAO (RNP SID RWY 23)	RPVK AD 2 - 23
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 05)	RPVK AD 2 - 27
Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 23)	RPVK AD 2 - 31
Tracking System within Bacolod/Iloilo, Kalibo and Mactan TMAs	see RPVB Tracking System
ATC Surveillance Minimum Altitude Chart (to be developed)	RPVK AD 2 - 35
Instrument Approach Chart - ICAO (VOR RWY 23)	RPVK AD 2 - 36
Instrument Approach Chart - ICAO (RNP X RWY 05)	RPVK AD 2 - 37
Instrument Approach Chart - ICAO (RNP Y RWY 05)	RPVK AD 2 - 39
Instrument Approach Chart - ICAO (RNP Z RWY 05)	RPVK AD 2 - 41
Instrument Approach Chart - ICAO (RNP RWY 23)	RPVK AD 2 - 43
Traffic Circuit Chart (RWY 05)	RPVK AD 2 - 45
Traffic Circuit Chart (RWY 23)	RPVK AD 2 - 46

Aerodrome Chart - ICAO (to be developed)

Aircraft Parking/Docking Chart - ICAO (to be developed)


Aerodrome Ground Movement Chart - ICAO (to be developed)

INTENTIONALLY
LEFT
BLANK

Aerodrome Obstacle Chart - ICAO (to be developed)

INTENTIONALLY
LEFT
BLANK

AKLAN/Kalibo Intl (RPVK)
RWY 05/23
BUSOG3C/3D CT3A/3B GALIA3G/3H
MINOR3C/3D ROX3A/3B TAPER3A/3B

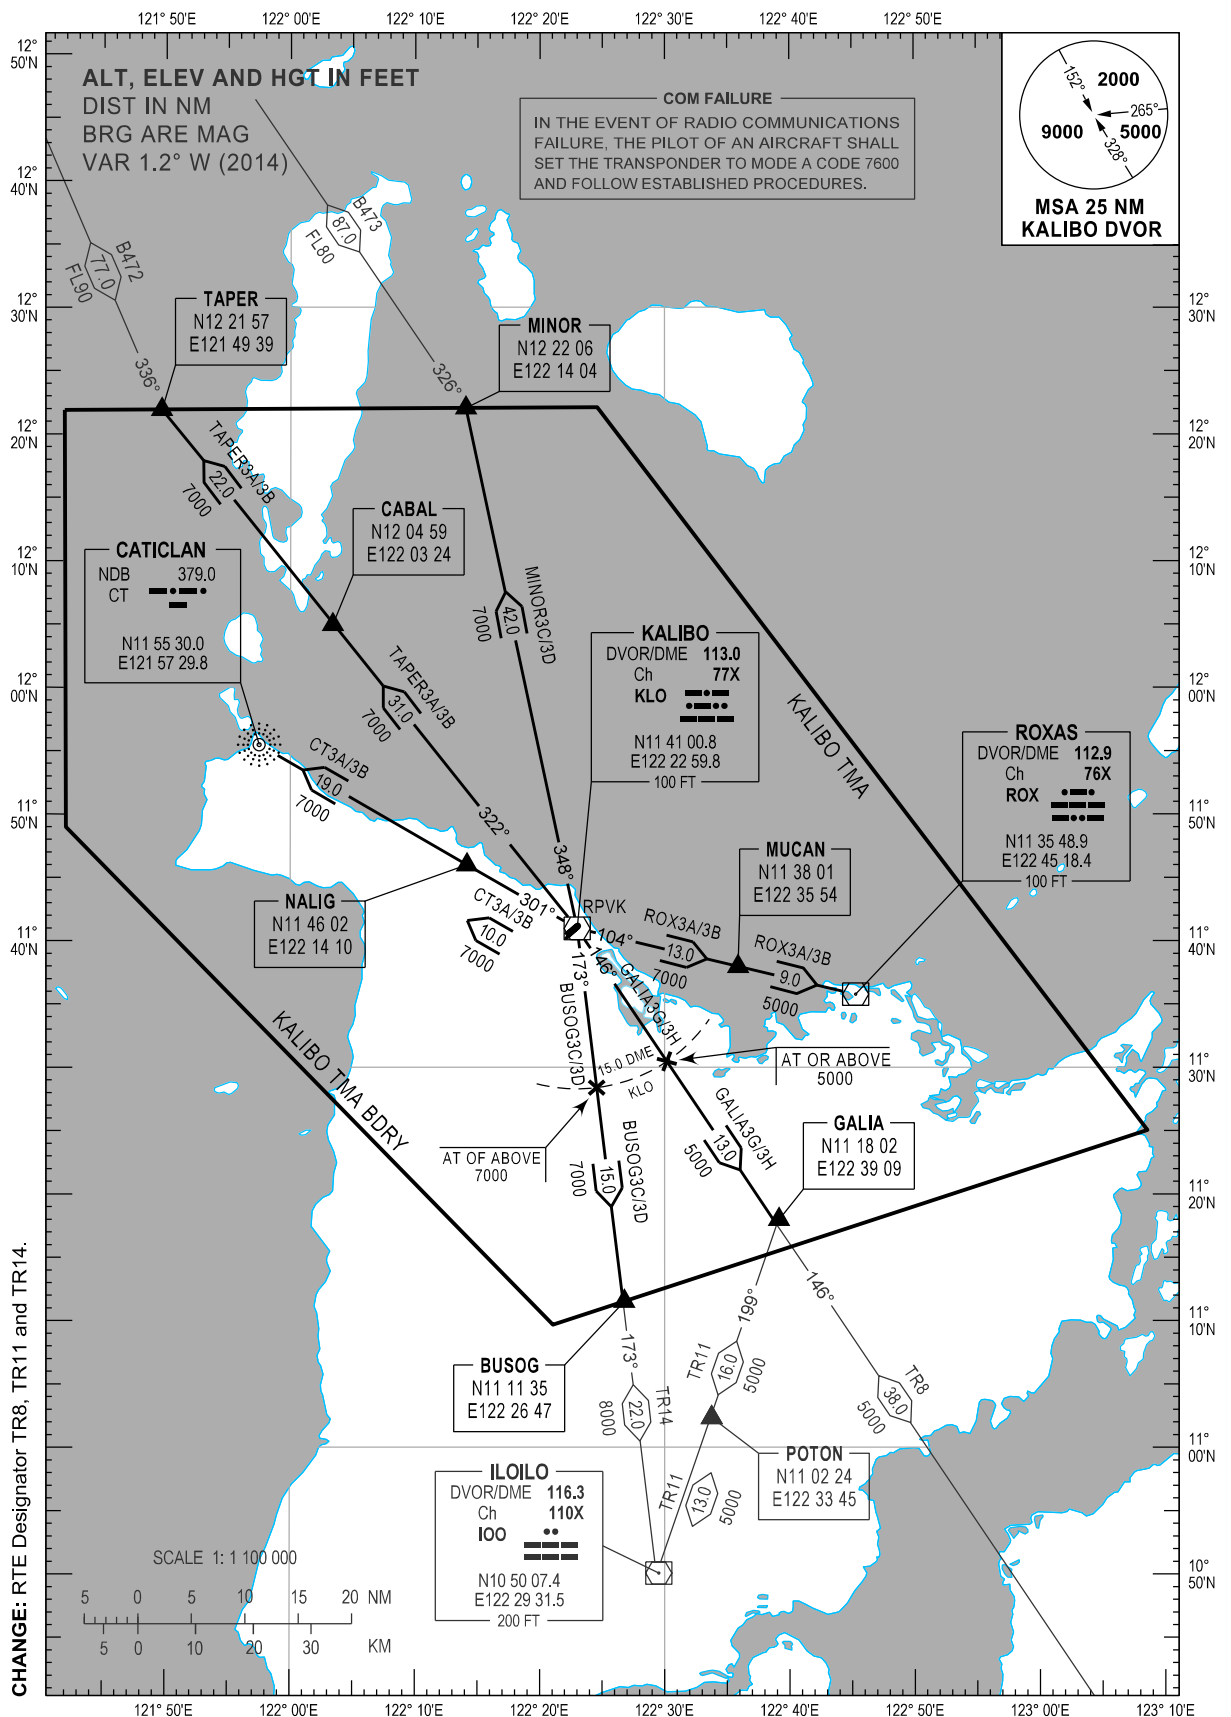

DEPARTURE ROUTE DESCRIPTION


SID	TAKE-OFF	PROCEDURE	REMARKS
BUSOG3C BUSOG3D	RWY 05 - Right turn RWY 23 - Left turn at 1000 FT or at 4.0 NM whichever is earlier	Intercept and track-out on KLO DVOR/DME R173 to cross 15.0 DME at 7000 FT or above. Continue climb to cross BUSOG at 8000 FT or above.	RWY 23: Minimum climb of 280 FT/NM (or 4.6% climb) until 4000 FT. If unable to comply with SID restriction, advise ATC for alternative instructions. VMC climb on course during daytime may be authorized by ATC subject to traffic condition.
CT3A CT3B	RWY 05 - Left turn to intercept KLO R301 RWY 23 - Left turn at 1000 FT or at 4.0 NM whichever is earlier and proceed to Kalibo DVOR	Track-out on KLO DVOR/DME R301 climbing to assigned level so as to cross NALIG at 7000 FT or above.	
GALIA3G GALIA3H	RWY 05 - Right turn RWY 23 - Left turn at 1000 FT or at 4.0 NM whichever is earlier	Intercept and track-out on KLO DVOR/DME R146 to cross 15.0 DME at 5000 FT or above. Continue climb to GALIA.	
MINOR3C MINOR3D	RWY 05 - Left turn within 5.0 NM RWY 23 - Left turn at 1000 FT or at 4.0 NM whichever is earlier	Intercept and track-out on KLO DVOR/DME R348 so as to cross MINOR at FL80 or above.	
ROX3A ROX3B	RWY 05 - Right turn within 5.0 NM RWY 23 - Left turn at 1000 FT or at 4.0 NM whichever is earlier	Intercept and track-out on KLO DVOR/DME R104 climbing to assigned level.	
TAPER3A TAPER3B	RWY 05 - Left turn to intercept KLO R322 RWY 23 - Left turn at 1000 FT or at 4.0 NM whichever is earlier and proceed to Kalibo DVOR	Track-out on KLO DVOR/DME R322 so as to cross CABAL at 7000 FT or above. Continue climb to cross TAPER at FL90 or above.	

**STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO**

TRANSITION
ALTITUDE
11000 FT

APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)
RNP SID RWY 05
BUNGA2P GALIA2P
MINOR2P SAGRA2P

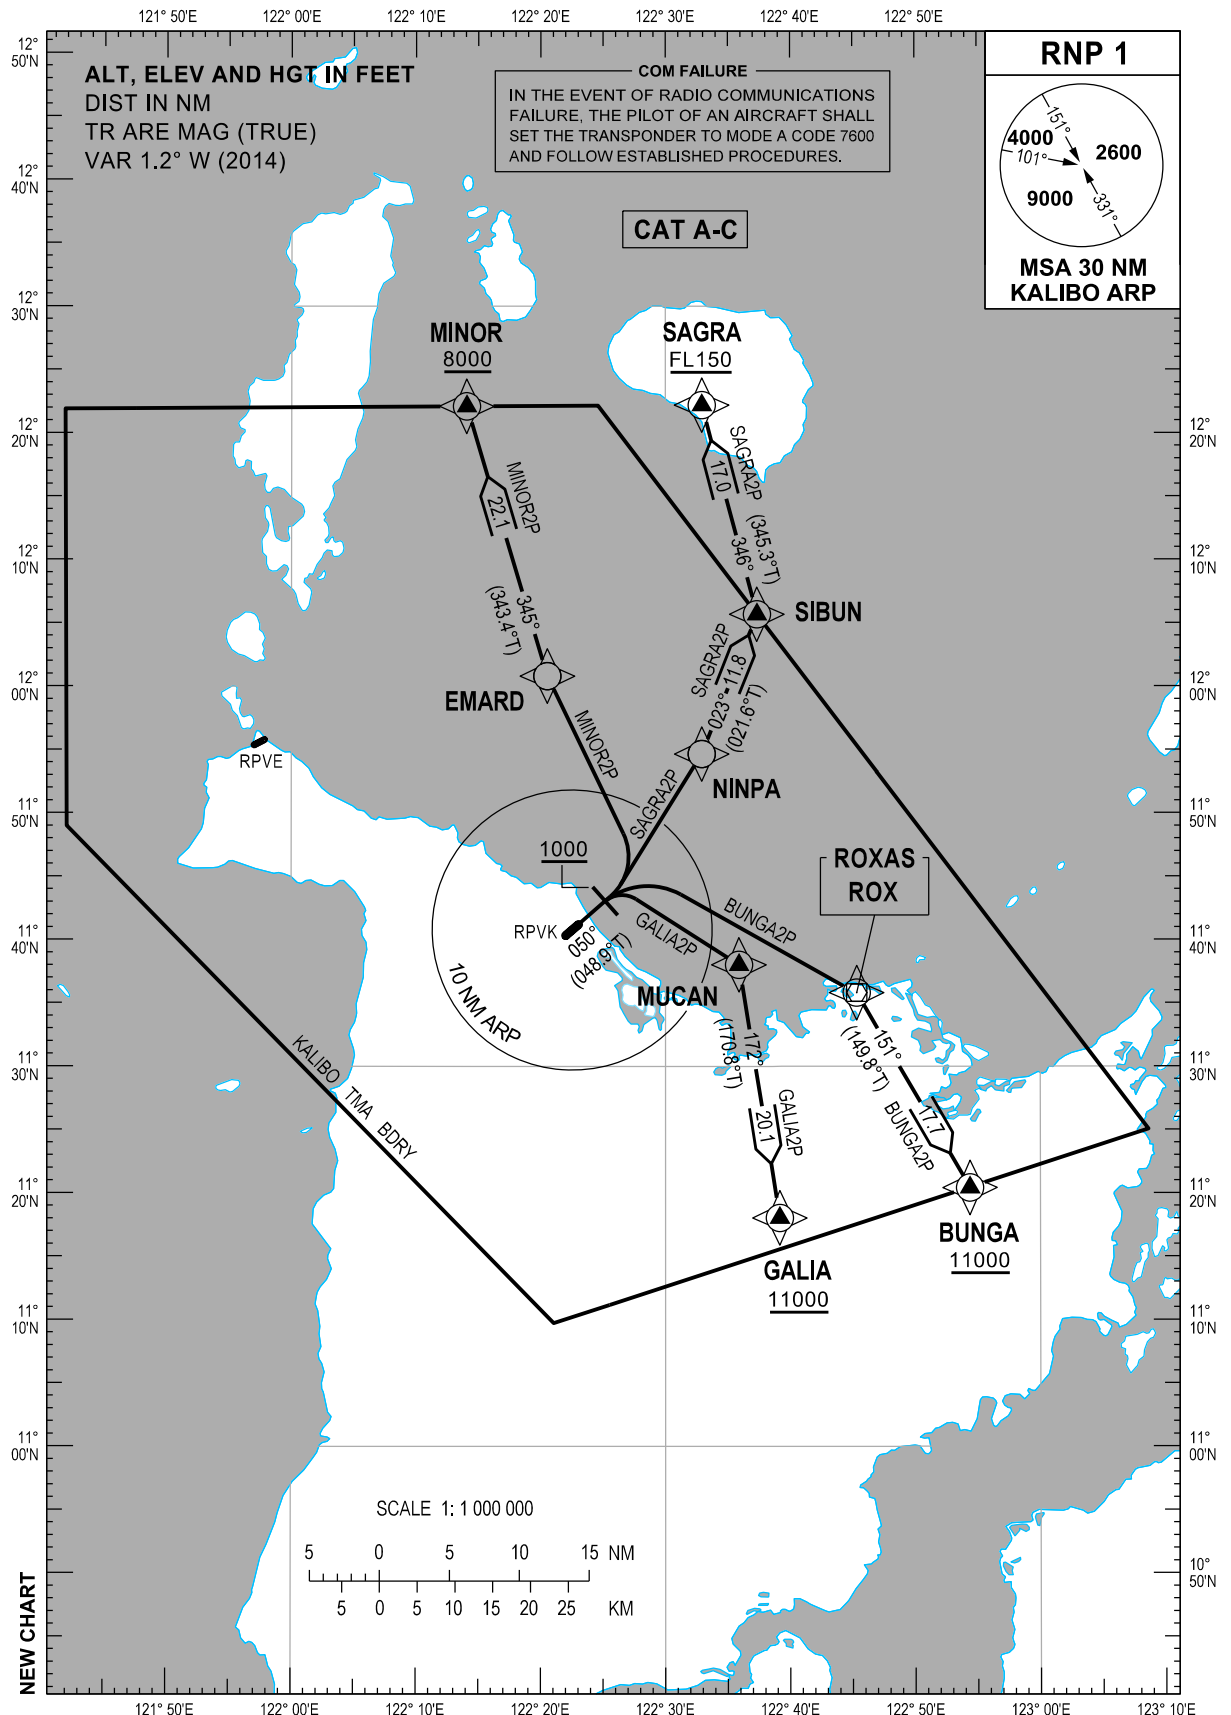

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
BUNGA2P	RWY 05	Climb on course 050°M, at 1000 FT, turn right direct to ROX, to BUNGA.	ATS climb gradient of 4.3% to cross BUNGA at or above 11000 FT.
GALIA2P		Climb on course 050°M, at 1000 FT, turn right direct to MUCAN, to GALIA.	ATS climb gradient of 5.2% to cross GALIA at or above 11000 FT.
MINOR2P		Climb on course 050°M, at 1000 FT, turn left direct to EMARD, to MINOR.	
SAGRA2P		Climb on course 050°M, at 1000 FT, turn left direct to NINPA, to SIBUN, to SAGRA.	ATS climb gradient of 5.4% to cross SAGRA at or above FL150.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BUNGA	N11 20 25	E122 54 23	Fly-by
EMARD	N12 00 49	E122 20 32	Fly-by
GALIA	N11 18 02	E122 39 09	Fly-by
MINOR	N12 22 06	E122 14 04	Fly-by
MUCAN	N11 38 01	E122 35 54	Fly-by
NINPA	N11 54 39	E122 32 55	Fly-by
ROX	N11 35 48.9	E122 45 18.4	Fly-by
SAGRA	N12 22 12	E122 32 56	Fly-by
SIBUN	N12 05 41	E122 37 21	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 05

Table 1: BUNGA 2P

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	050° (048.9°)	-	-	-	+1000	-	-	RNP1	RW05
20	DF	ROX	N	-	-	-	R	-	-	-	RNP1	RW05
30	TF	BUNGA	N	151° (149.8°)	-	17.7	-	+11000	-	-	RNP1	RW05

Table 2: GALIA2P

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	050° (048.9°)	-	-	-	+1000	-	-	RNP1	RW05
20	DF	MUCAN	N	-	-	-	R	-	-	-	RNP1	RW05
30	TF	GALIA	N	172° (170.8°)	-	20.1	-	+11000	-	-	RNP1	RW05

NEW TABLE (DEP RTE DESCRIPTION, WPT LIST AND PROPOSED CODING)

Table 3: MINOR2P

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	050° (048.9°)	-	-	-	+1000	-	-	RNP1	RW05
20	DF	EMARD	N	-	-	-	L	-	-	-	RNP1	RW05
30	TF	MINOR	N	345° (343.4°)	-	22.1	-	+8000	-	-	RNP1	RW05

Table 4: SAGRA2P

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	050° (048.9°)	-	-	-	+1000	-	-	RNP1	RW05
20	DF	NINPA	N	-	-	-	L	-	-	-	RNP1	RW05
30	TF	SIBUN	N	023° (021.6°)	-	11.8	-	-	-	-	RNP1	RW05
40	TF	SAGRA	N	346° (345.3°)	-	17.0	-	+FL150	-	-	RNP1	RW05

NEW TABLE (PROPOSED CODING)


INTENTIONALLY
LEFT
BLANK

**STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO**

TRANSITION
ALTITUDE
11000 FT

APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)
RNP SID RWY 23
BUNGA2R GALIA2R
MINOR2R/4R SAGRA2R/4R

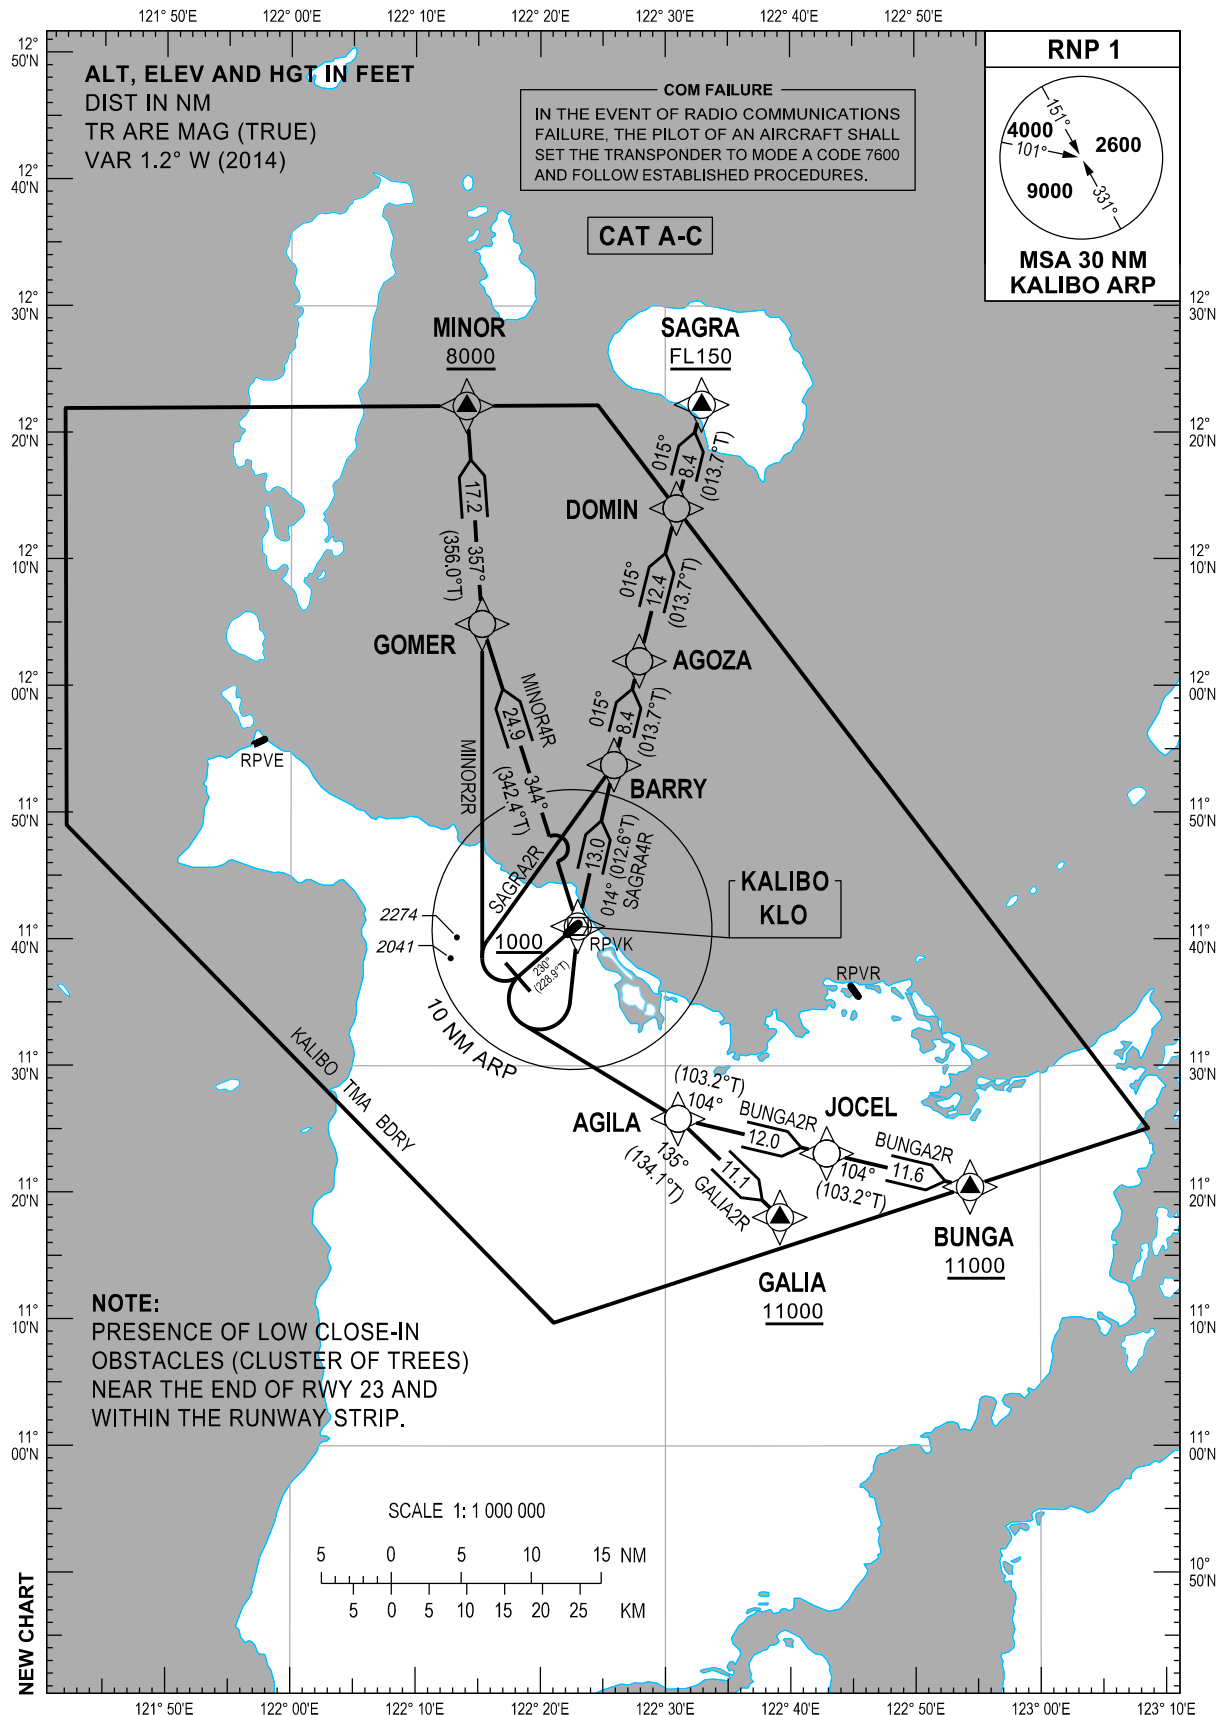

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
BUNGA2R	RWY 23	Climb on course 230°M, at 1000 FT, turn left direct to AGILA, to JOCEL, to BUNGA.	ATS climb gradient of 4.2% to cross BUNGA at or above 11000 FT.
GALIA2R		Climb on course 230°M, at 1000 FT, turn left direct to AGILA, to GALIA.	ATS climb gradient of 5.8% to cross GALIA at or above 11000 FT.
MINOR2R		Climb on course 230°M, at 1000 FT, turn right direct to GOMER, to MINOR.	PDG of 4.9% until passing 2800 FT then 3.3% to MINOR.
MINOR4R		Climb on course 230°M, at 1000 FT, turn left direct to KLO, to GOMER, to MINOR.	
SAGRA2R		Climb on course 230°M, at 1000 FT, turn right direct to BARRY, to AGOZA, to DOMIN, to SAGRA.	PDG of 4.9% until SAGRA to cross SAGRA at or above FL150.
SAGRA4R		Climb on course 230°M, at 1000 FT, turn left direct to KLO, to BARRY, to AGOZA, to DOMIN, to SAGRA.	ATS climb gradient of 4.3% to cross SAGRA at or above FL150.

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
AGILA	N11 25 50	E122 31 01	Fly-by
AGOZA	N12 01 57	E122 27 55	Fly-by
BARRY	N11 53 46	E122 25 53	Fly-by
BUNGA	N11 20 25	E122 54 23	Fly-by
DOMIN	N12 14 01	E122 30 54	Fly-by
GALIA	N11 18 02	E122 39 09	Fly-by
GOMER	N12 04 53	E122 15 19	Fly-by
JOCEL	N11 23 05	E122 42 54	Fly-by
KLO	N11 41 00.9	E122 22 59.8	Fly-by
MINOR	N12 22 06	E122 14 04	Fly-by
SAGRA	N12 22 12	E122 32 56	Fly-by

PROPOSED CODING FOR DEPARTURE RNP SID RWY 23

Table 1: BUNGA2R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	230° (228.9°)	-	-	-	+1000	-	-	RNP1	RW23
20	DF	AGILA	N	-	-	-	L	-	-	-	RNP1	RW23
30	TF	JOCEL	N	104° (103.2°)	-	12.0	-	-	-	-	RNP1	RW23
40	TF	BUNGA	N	104° (103.2°)	-	11.6	-	+11000	-	-	RNP1	RW23

NEW TABLE (DEP RTE DESCRIPTION, WPT LIST AND PROPOSED CODING)

Table 2: GALIA2R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	230° (228.9°)	-	-	-	+1000	-	-	RNP1	RW23
20	DF	AGILA	N	-	-	-	L	-	-	-	RNP1	RW23
30	TF	GALIA	N	135° (134.1°)	-	11.1	-	+11000	-	-	RNP1	RW23

Table 3: MINOR2R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	230° (228.9°)	-	-	-	+1000	-	-	RNP1	RW23
20	DF	GOMER	N	-	-	-	R	-	-	-	RNP1	RW23
30	TF	MINOR	N	357° (356.0°)	-	17.2	-	+8000	-	-	RNP1	RW23

Table 4: MINOR4R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	230° (228.9°)	-	-	-	+1000	-	-	RNP1	RW23
20	DF	KLO	N	-	-	-	L	-	-	-	RNP1	RW23
30	TF	GOMER	N	344° (342.4°)	-	24.9	-	-	-	-	RNP1	RW23
40	TF	MINOR	N	357° (356.0°)	-	17.2	-	+8000	-	-	RNP1	RW23

Table 5: SAGRA2R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	230° (228.9°)	-	-	-	+1000	-	-	RNP1	RW23
20	DF	BARRY	N	-	-	-	R	-	-	-	RNP1	RW23
30	TF	AGOZA	N	015° (013.7°)	-	8.4	-	-	-	-	RNP1	RW23
40	TF	DOMIN	N	015° (013.7°)	-	12.4	-	-	-	-	RNP1	RW23
50	TF	SAGRA	N	015° (013.7°)	-	8.4	-	+FL150	-	-	RNP1	RW23

NEW TABLE (PROPOSED CODING)

Table 6: SAGRA4R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	CA	-	-	230° (228.9°)	-	-	-	+1000	-	-	RNP1	RW23
20	DF	KLO	N	-	-	-	L	-	-	-	RNP1	RW23
30	TF	BARRY	N	014° (012.6°)	-	13.0	-	-	-	-	RNP1	RW23
40	TF	AGOZA	N	015° (013.7°)	-	8.4	-	-	-	-	RNP1	RW23
50	TF	DOMIN	N	015° (013.7°)	-	12.4	-	-	-	-	RNP1	RW23
60	TF	SAGRA	N	015° (013.7°)	-	8.4	-	+FL150	-	-	RNP1	RW23

NEW TABLE (PROPOSED CODING)

STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO


TRANSITION
ALTITUDE
11000 FT

APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)

RNP STAR RWY 05

ATRIA1B BUSOG1A
GALIA1A TAPER1A

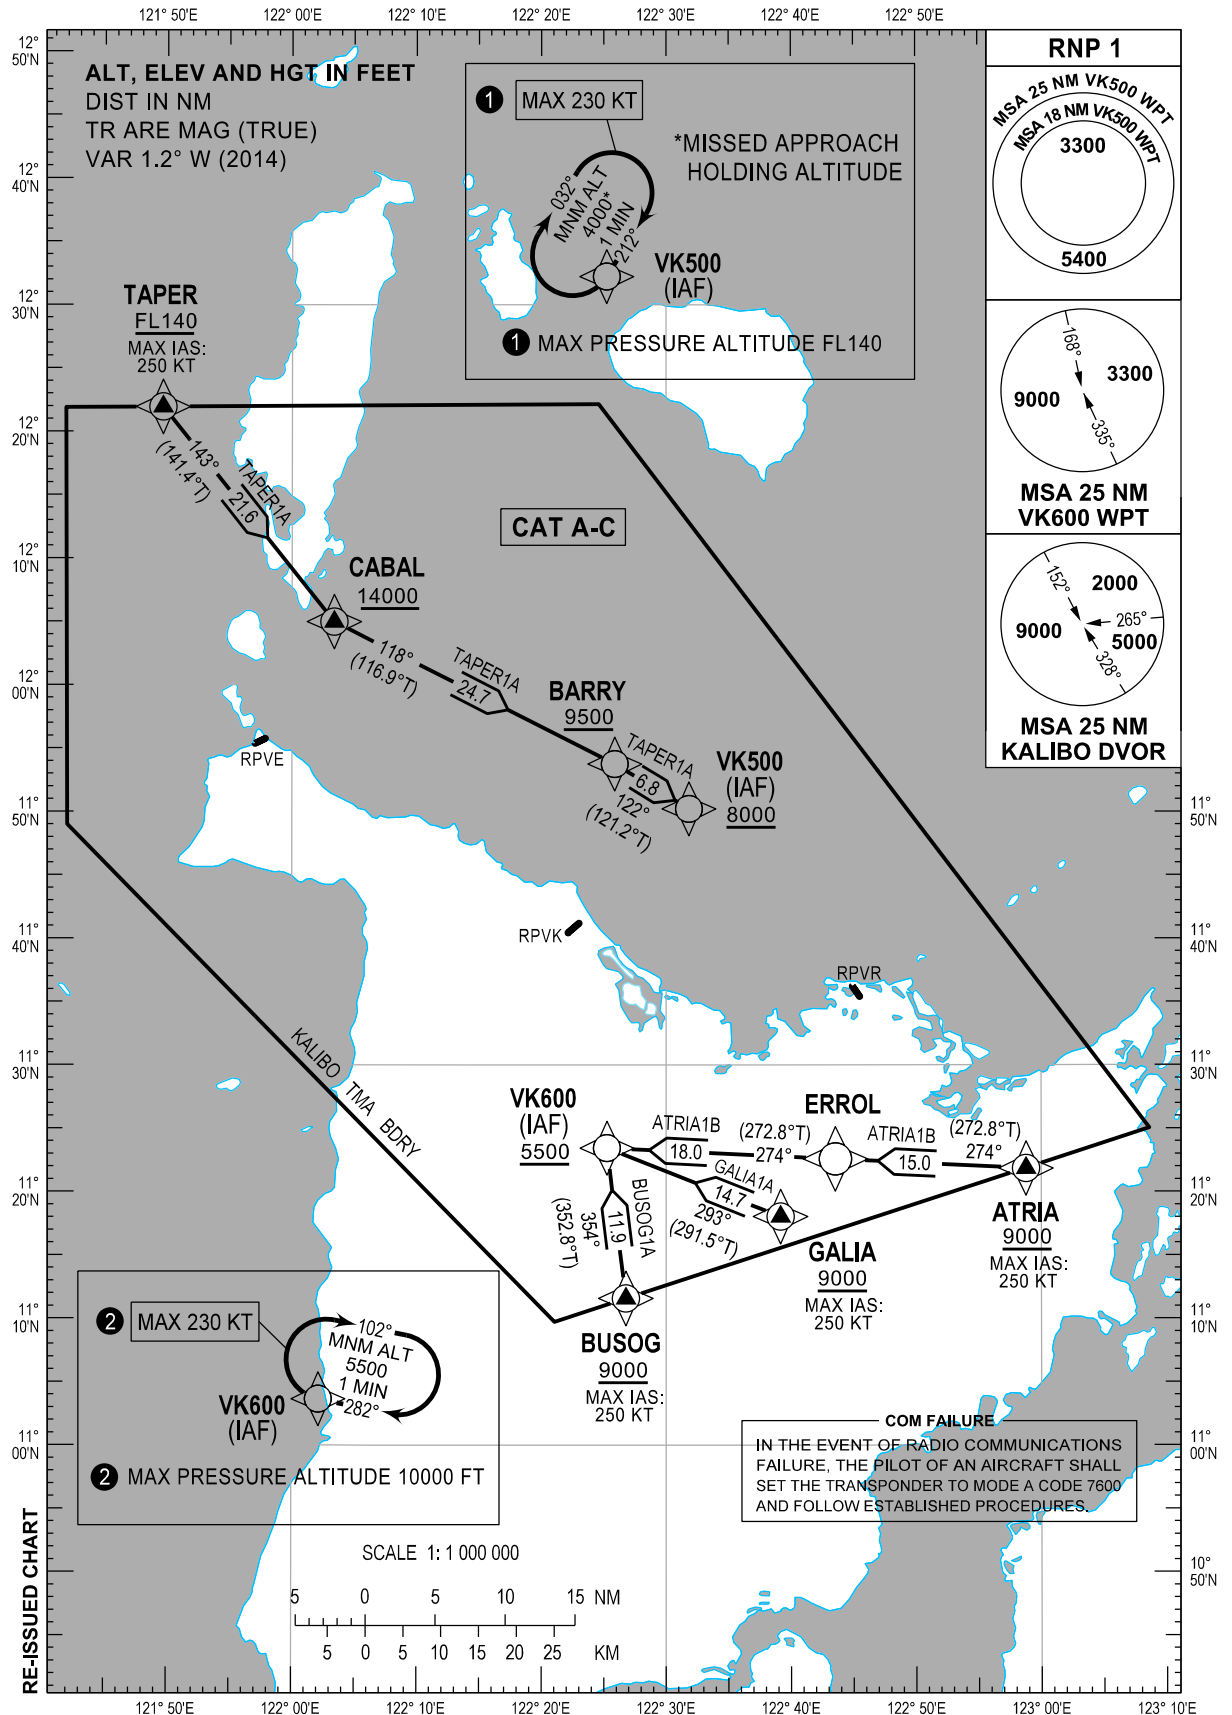

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARK
ATRIA1B	ATRIA - ERROL - VK600	From ATRIA at or above 9000 FT, to ERROL, to VK600 at or above 5500 FT.	
BUSOG1A	BUSOG - VK600	From BUSOG at or above 9000 FT, to VK600 at or above 5500 FT.	
GALIA1A	GALIA - VK600	From GALIA at or above 9000 FT, to VK600 at or above 5500 FT.	
TAPER1A	TAPER - CABAL - BARRY - VK500	From TAPER, to CABAL at or above 14000 FT, to BARRY at or above 9500 FT, to VK500 at or above 8000 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ATRIA	N11 21 51	E122 58 48	Fly-by
BARRY	N11 53 46	E122 25 53	Fly-by
BUSOG	N11 11 35	E122 26 47	Fly-by
CABAL	N12 04 59	E122 03 24	Fly-by
ERROL	N11 22 35	E122 43 32	Fly-by
GALIA	N11 18 02	E122 39 09	Fly-by
TAPER	N12 21 57	E121 49 39	Fly-by
VK500	N11 50 13	E122 31 50	Fly-by
VK600	N11 23 27	E122 25 15	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 05

Table 1: **ATRIA1B**

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	ATRIA	-	-	-	-	-	+9000	250	-	RNP1	RW05
20	TF	ERROL	-	274° (272.8°)	-	15.0	-	-	-	-	RNP1	RW05
30	TF	VK600	-	274° (272.8°)	-	18.0	-	+5500	-	-	RNP1	RW05

Table 2: **BUSOG1A**

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	BUSOG	-	-	-	-	-	+9000	250	-	RNP1	RW05
20	TF	VK600	-	354° (352.8°)	-	11.9	-	+5500	-	-	RNP1	RW05

CHANGE: WPT BUSOG COORD.

Table 3: GALIA1A

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	GALIA	-	-	-	-	-	+9000	250	-	RNP1	RW05
20	TF	VK600	-	293° (291.5°)	-	14.7	-	+5500	-	-	RNP1	RW05

Table 4: TAPER1A

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	TAPER	-	-	-	-	-	+FL140	250	-	RNP1	RW05
20	TF	CABAL	-	143° (141.4°)	-	21.6	-	+14000	-	-	RNP1	RW05
30	TF	BARRY	-	118° (116.9°)	-	24.7	-	+9500	-	-	RNP1	RW05
40	TF	VK500	-	122° (121.2°)	-	6.8	-	+8000	-	-	RNP1	RW05

NEW TABLE (PROPOSED CODING)


INTENTIONALLY
LEFT
BLANK

STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO

TRANSITION
ALTITUDE
11000 FT

APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)
RNP STAR RWY 23
ATRIA1R BUSOG1R
NASAG1R/3R TAPER1R

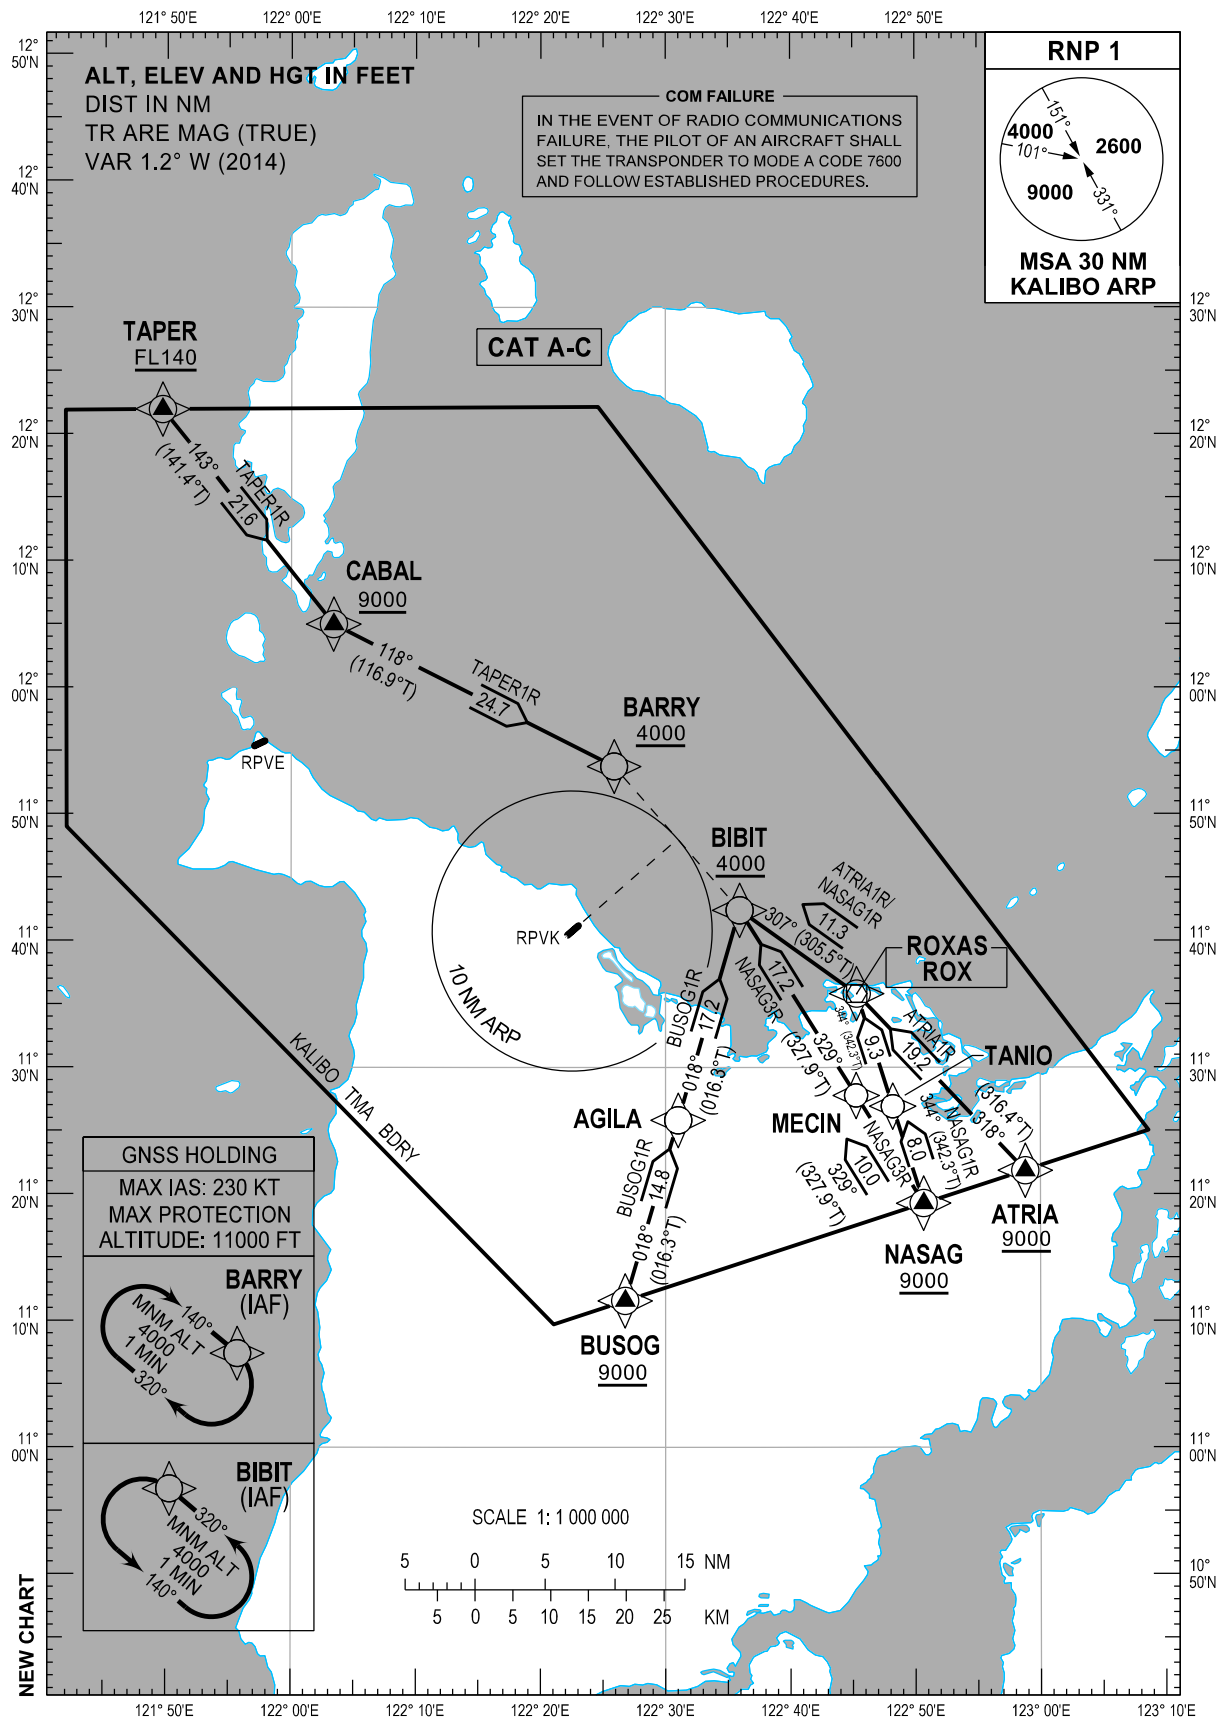

ARRIVAL ROUTE DESCRIPTION

STAR	ROUTE	PROCEDURE	REMARK
ATRIA1R	ATRIA - ROX - BIBIT	From ATRIA at or above 9000 FT, to ROX, to BIBIT at or above 4000 FT.	
BUSOG1R	BUSOG - AGILA - BIBIT	From BUSOG at or above 9000 FT, to AGILA, to BIBIT at or above 4000 FT.	
NASAG1R	NASAG - TANIO - ROX - BIBIT	From NASAG at or above 9000 FT, to TANIO, to ROX, to BIBIT at or above 4000 FT.	
NASAG3R	NASAG - MECIN - BIBIT	From NASAG at or above 9000 FT, to MECIN, to BIBIT at or above 4000 FT.	
TAPER1R	TAPER - CABAL - BARRY	From TAPER at or above FL140, to CABAL at or above 9000 FT, to BARRY at or above 4000 FT.	

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
AGILA	N11 25 50	E122 31 01	Fly-by
ATRIA	N11 21 51	E122 58 48	Fly-by
BARRY	N11 53 46	E122 25 53	Fly-by
BIBIT	N11 42 24	E122 35 56	Fly-by
BUSOG	N11 11 35	E122 26 47	Fly-by
CABAL	N12 04 59	E122 03 24	Fly-by
MECIN	N11 27 47	E122 45 15	Fly-by
NASAG	N11 19 16	E122 50 40	Fly-by
ROX	N11 35 48.9	E122 45 18.4	Fly-by
TANIO	N11 26 56	E122 48 11	Fly-by
TAPER	N12 21 57	E121 49 39	Fly-by

PROPOSED CODING FOR ARRIVAL RNP STAR RWY 23

Table 1: ATRIA1R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	ATRIA	N	-	-	-	-	+9000	-	-	RNP1	RW23
20	TF	ROX	N	318° (316.4°)	-	19.2	-	-	-	-	RNP1	RW23
30	TF	BIBIT	N	307° (305.5°)	-	11.3	-	+4000	-	-	RNP1	RW23

Table 2: BUSOG1R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	BUSOG	N	-	-	-	-	+9000	-	-	RNP1	RW23
20	TF	AGILA	N	018° (016.3°)	-	14.8	-	-	-	-	RNP1	RW23
30	TF	BIBIT	N	018° (016.3°)	-	17.2	-	+4000	-	-	RNP1	RW23

Table 3: NASAG1R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	NASAG	N	-	-	-	-	+9000	-	-	RNP1	RW23
20	TF	TANIO	N	344° (342.3°)	-	8.0	-	-	-	-	RNP1	RW23
30	TF	ROX	N	344° (342.3°)	-	9.3	-	-	-	-	RNP1	RW23
40	TF	BIBIT	N	307° (305.5°)	-	11.3	-	+4000	-	-	RNP1	RW23

Table 4: NASAG3R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	NASAG	N	-	-	-	-	+9000	-	-	RNP1	RW23
20	TF	MECIN	N	329° (327.9°)	-	10.0	-	-	-	-	RNP1	RW23
30	TF	BIBIT	N	329° (327.9°)	-	17.2	-	+4000	-	-	RNP1	RW23

Table 5: TAPER1R

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	TAPER	N	-	-	-	-	+FL140	-	-	RNP1	RW23
20	TF	CABAL	N	143° (141.4°)	-	21.6	-	+9000	-	-	RNP1	RW23
30	TF	BARRY	N	118° (116.9°)	-	24.7	-	+4000	-	-	RNP1	RW23

NEW TABLE (PROPOSED CODING)

INTENTIONALLY
LEFT
BLANK

ATC Surveillance Minimum Altitude Chart (to be developed)

**INSTRUMENT
APPROACH
CHART - ICAO**


AERODROME ELEV 32 FT

HEIGHTS RELATED TO
THR RWY 23 - ELEV 18 FT

APP - 120.4
TWR - 124.2


AKLAN/Kalibo Intl (RPVK)

VOR RWY 23

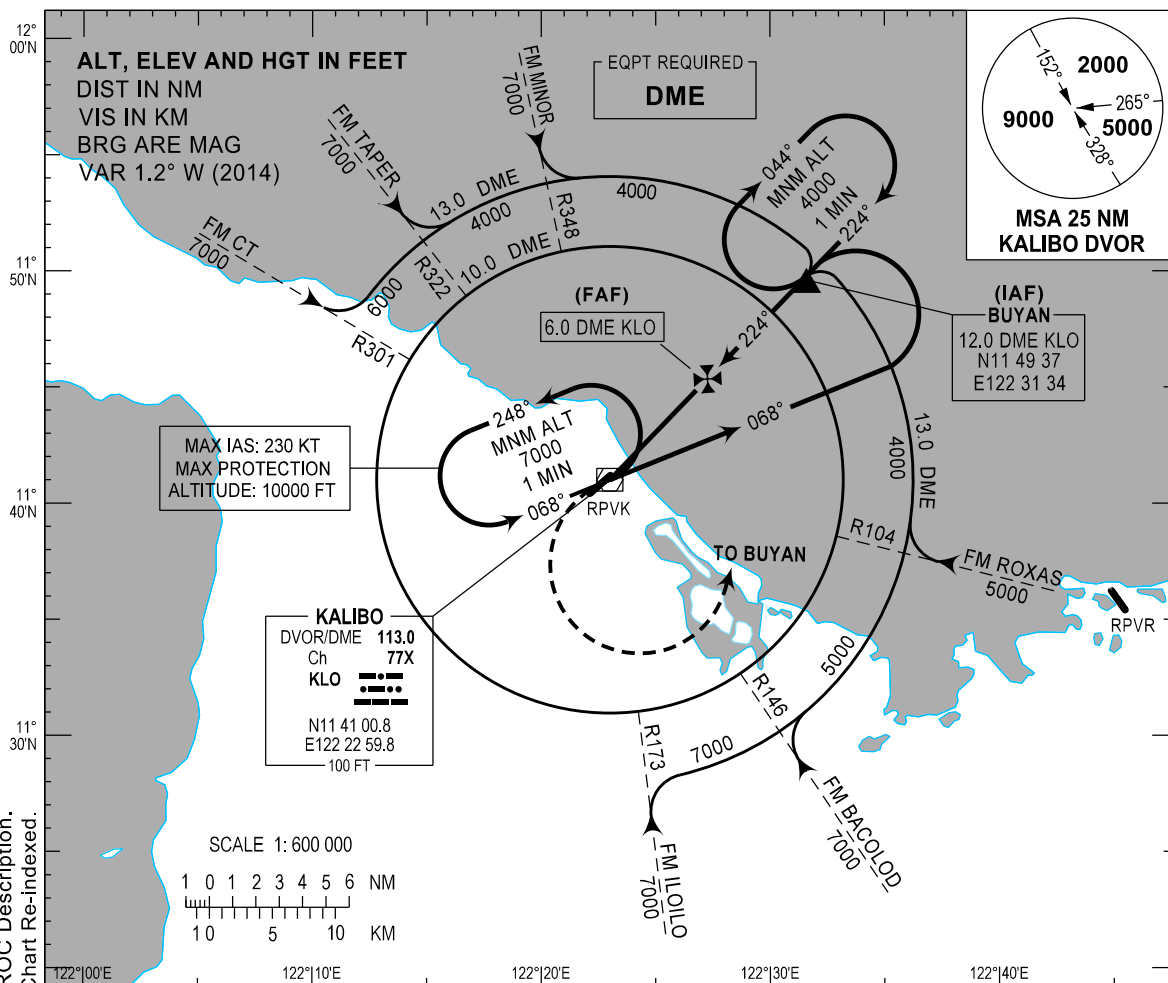

MISSED APPROACH

At **MAPt** make a left climbing turn to **BUYAN** and hold at **4000 FT** or as instructed by ATC. (MAX IAS for Final Missed Approach: **240 KT**)

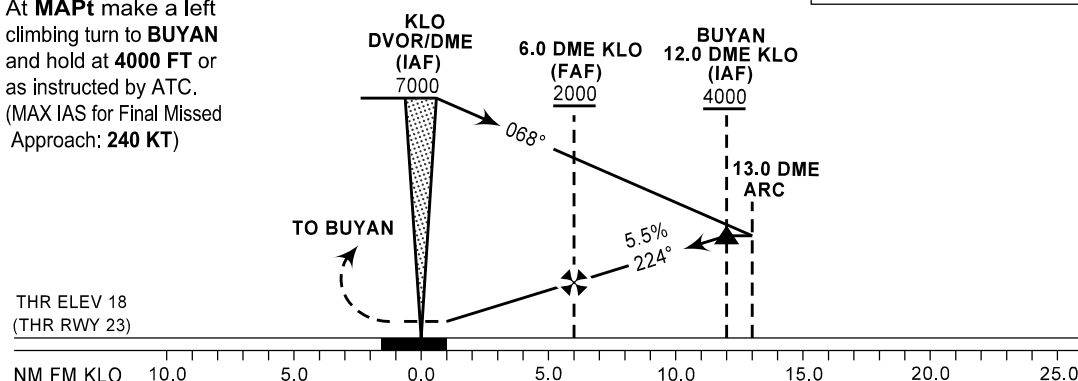

OCA/H		A				B				C			
STRAIGHT-IN		600 (582)											
CIRCLING		1100 (1068)				1100 (1068)				1200 (1168)			

DVOR/DME	1.8	2	3	4	5	6	7	8	9	10	11	12
ALT	600	670	1000	1340	1670	2000	2340	2670	3000	3330	3670	4000
HGT	(582)	(652)	(982)	(1322)	(1652)	(1982)	(2322)	(2652)	(2982)	(3312)	(3652)	(3982)


INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 32 FT
HEIGHTS RELATED TO
THR RWY 05 - ELEV 32 FT

APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)


RNP X RWY 05

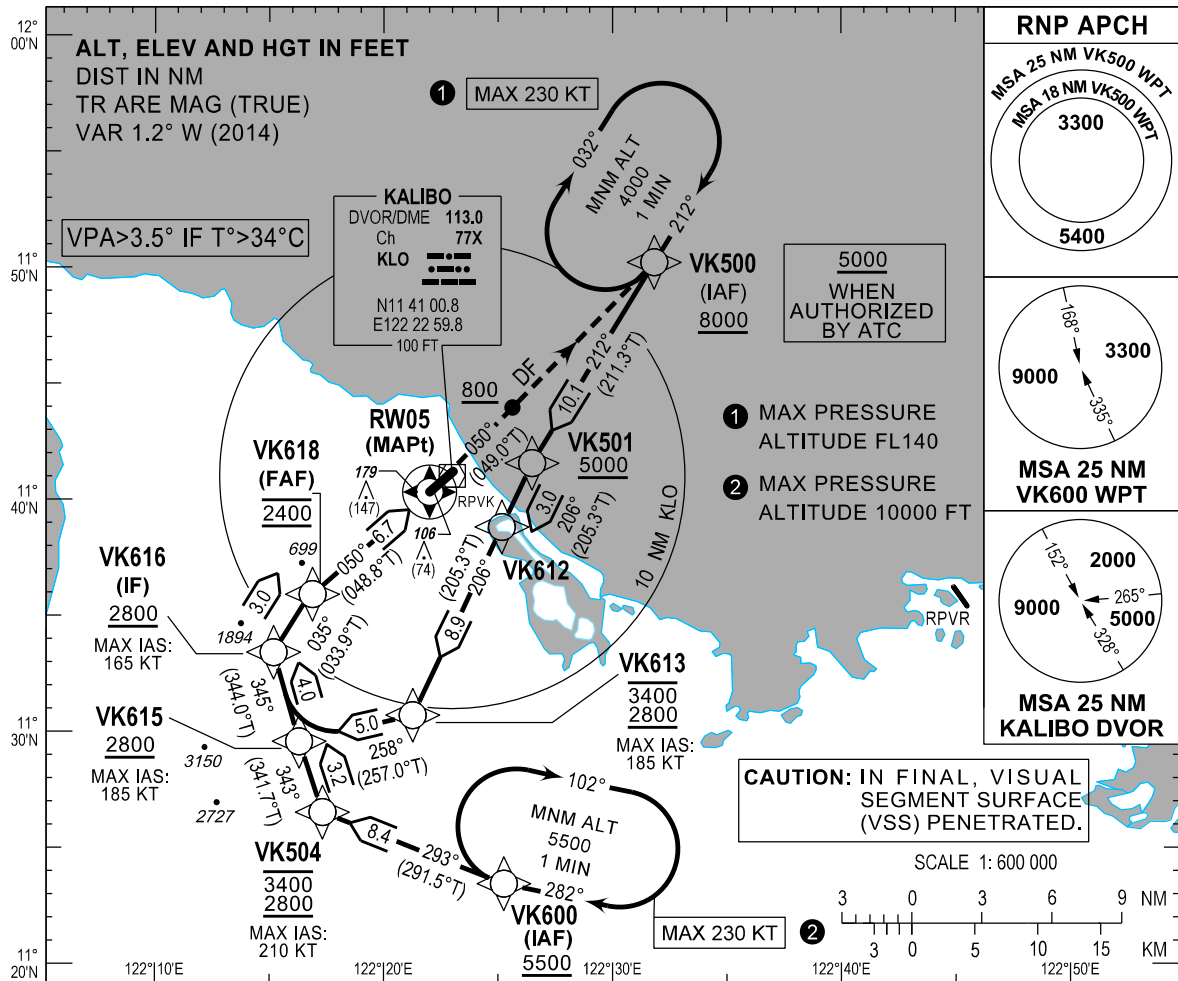

TRANSITION ALT : 11000 FT
TRANSITION LEVEL : FL130

MISSED APPROACH

Climb on course 050° to 4000 FT. At 800 FT, turn left direct to VK500 and hold or follow ATC instruction. Do not turn before MAPt.

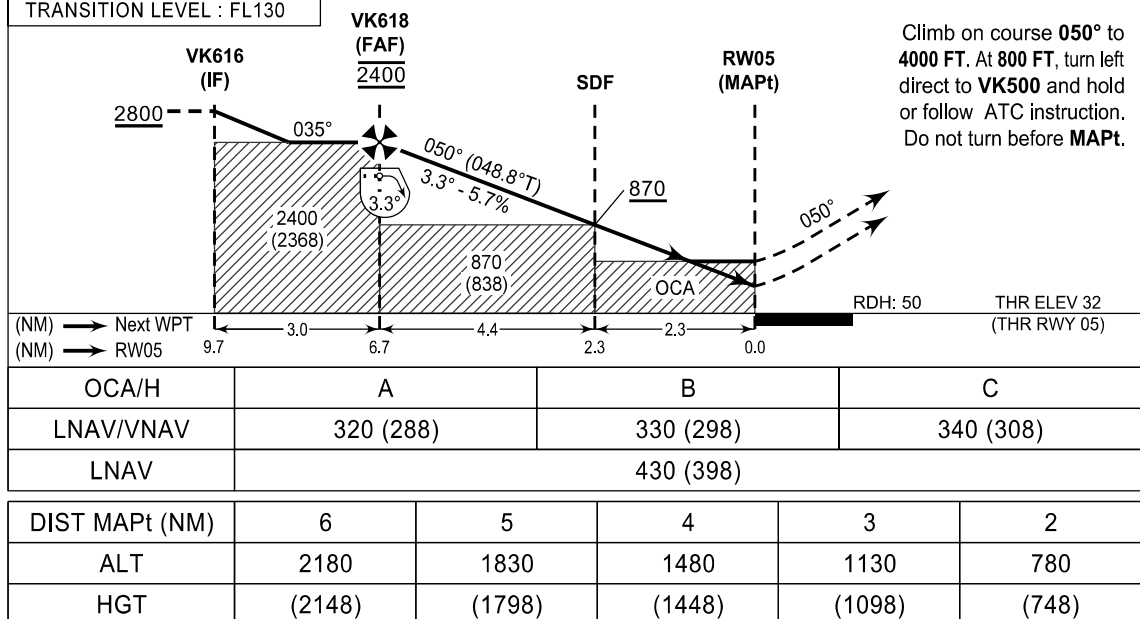

NEW CHART

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
RW05	N11 40 19.20	E122 22 00.32	Flyover
VK500	N11 50 13	E122 31 50	Fly-by
VK501	N11 41 34	E122 26 29	Fly-by
VK504	N11 26 32	E122 17 20	Fly-by
VK600	N11 23 27	E122 25 15	Fly-by
VK612	N11 38 49	E122 25 10	Fly-by
VK613	N11 30 42	E122 21 16	Fly-by
VK615	N11 29 34	E122 16 19	Fly-by
VK616	N11 33 25	E122 15 11	Fly-by
VK618	N11 35 55	E122 16 54	Fly-by

PROPOSED CODING FOR INSTRUMENT APPROACH RNP X RWY 05

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	VK600	N	-	-	-	-	+5500	-	-	RNP APCH	VK600
20	TF	VK504	N	293° (291.5°)	-	8.4	-	B 3400 2800	210	-	RNP APCH	VK600
30	TF	VK615	N	343° (341.7°)	-	3.2	-	+2800	185	-	RNP APCH	VK600
10	IF	VK500	N	-	-	-	-	+8000	-	-	RNP APCH	VK500
20	TF	VK501	N	212° (211.3°)	-	10.1	-	+5000	-	-	RNP APCH	VK500
30	TF	VK612	N	206° (205.3°)	-	3.0	-	-	-	-	RNP APCH	VK500
40	TF	VK613	N	206° (205.3°)	-	8.9	-	B 3400 2800	185	-	RNP APCH	VK500
50	TF	VK615	N	258° (257.0°)	-	5.0	-	+2800	185	-	RNP APCH	VK500
10	IF	VK615	N	-	-	-	-	-	185	-	RNP APCH	-
20	TF	VK616	N	345° (344.0°)	-	4.0	-	+2800	165	-	RNP APCH	-
30	TF	VK618	N	035° (033.9°)	-	3.0	-	@2400	-	-	RNP APCH	-
40	TF	RW05	Y	050° (048.8°)	-	6.7	-	+82	-	-3.28	RNP APCH	-
50	CA	-	N	050° (049.0°)	-	-	-	+800	-	-	RNP APCH	VK500
60	DF	VK500	N	-	-	-	L	-	-	-	RNP APCH	VK500

NEW TABLE (WPT LIST AND PROPOSED CODING)

INSTRUMENT
APPROACH
CHART - ICAO


AERODROME ELEV 32 FT

HEIGHTS RELATED TO
THR RWY 05 - ELEV 32 FT

APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)


RNP Y RWY 05

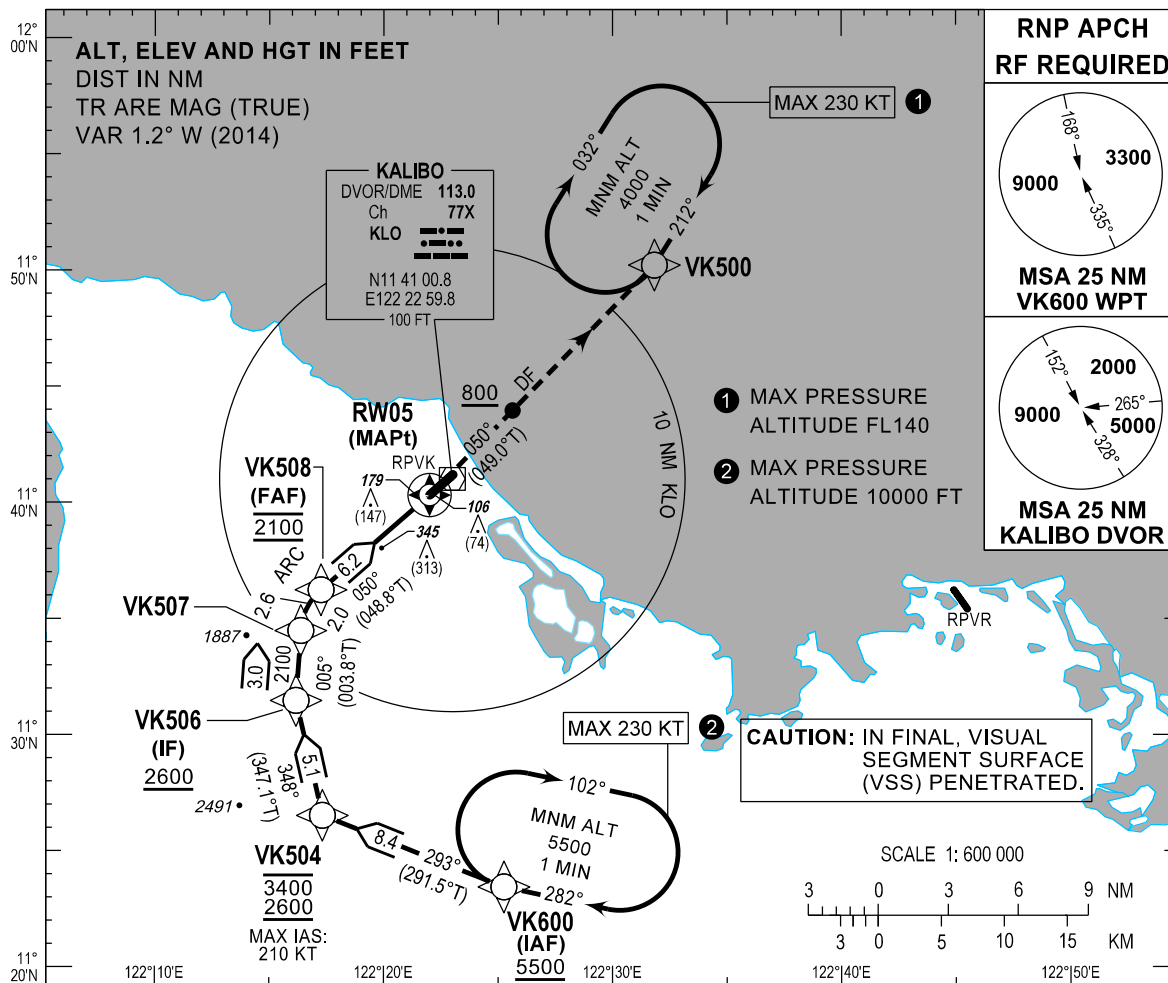

TRANSITION ALT : 11000 FT
TRANSITION LEVEL : FL130

MISSED APPROACH

Climb on course 050° to 4000 FT. At 800 FT, turn left direct to VK500 and hold or follow ATC instruction. Do not turn before MAPt.

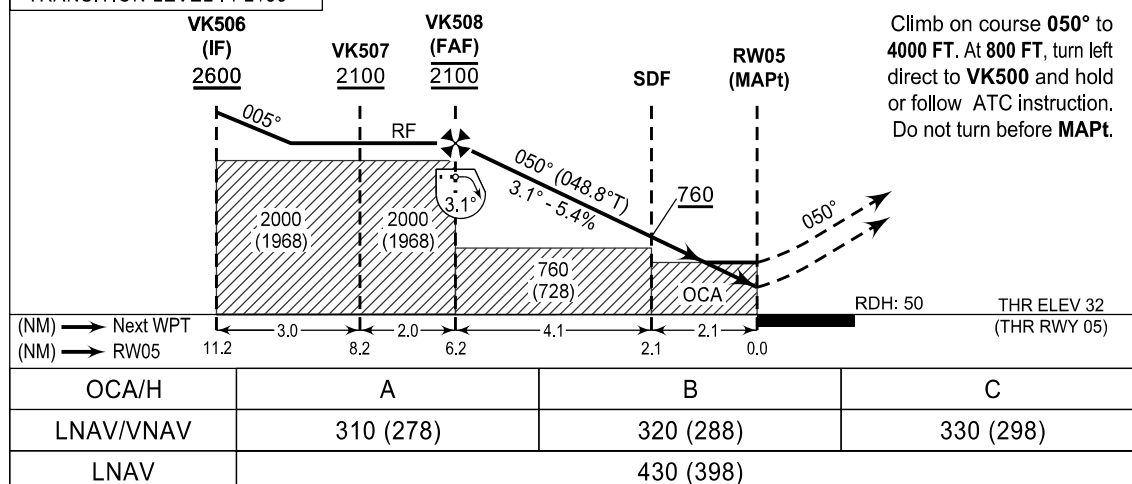

NEW CHART	DIST MAPt (NM)	6	5	4	3	2
	ALT	2050	1720	1390	1070	740
	HGT	(2018)	(1688)	(1358)	(1038)	(708)

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ARCVK	N11 34 18	E122 18 58	-
RW05	N11 40 19.20	E122 22 00.32	Flyover
VK500	N11 50 13	E122 31 50	Fly-by
VK504	N11 26 32	E122 17 20	Fly-by
VK506	N11 31 28	E122 16 11	Fly-by
VK507	N11 34 29	E122 16 23	Fly-by
VK508	N11 36 14	E122 17 16	Fly-by
VK600	N11 23 27	E122 25 15	Fly-by

PROPOSED CODING FOR INSTRUMENT APPROACH RNP Y RWY 05

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID	ARC CTR ID
10	IF	VK600	N	-	-	-	-	+5500	-	-	RNP APCH	-	-
20	TF	VK504	N	293° (291.5°)	-	8.4	-	B 3400 2600	210	-	RNP APCH	-	-
30	TF	VK506	N	348° (347.1°)	-	5.1	-	+2600	-	-	RNP APCH	-	-
40	TF	VK507	N	005° (003.8°)	-	3.0	-	-	-	-	RNP APCH	-	-
50	RF	VK508	N	050° (048.8°)	-	2.0	R	@2100	-	-	RNP APCH	-	ARCVK
60	TF	RW05	Y	050° (048.8°)	-	6.2	-	+82	-	-3.08	RNP APCH	-	-
70	CA	-	N	050° (049.0°)	-	-	-	+800	-	-	RNP APCH	VK500	-
80	DF	VK500	N	-	-	-	L	-	-	-	RNP APCH	VK500	-

NEW TABLE (WPT LIST AND PROPOSED CODING)

INSTRUMENT
APPROACH
CHART - ICAO


AERODROME ELEV 32 FT

HEIGHTS RELATED TO
THR RWY 05 - ELEV 32 FT

APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)


RNP Z RWY 05

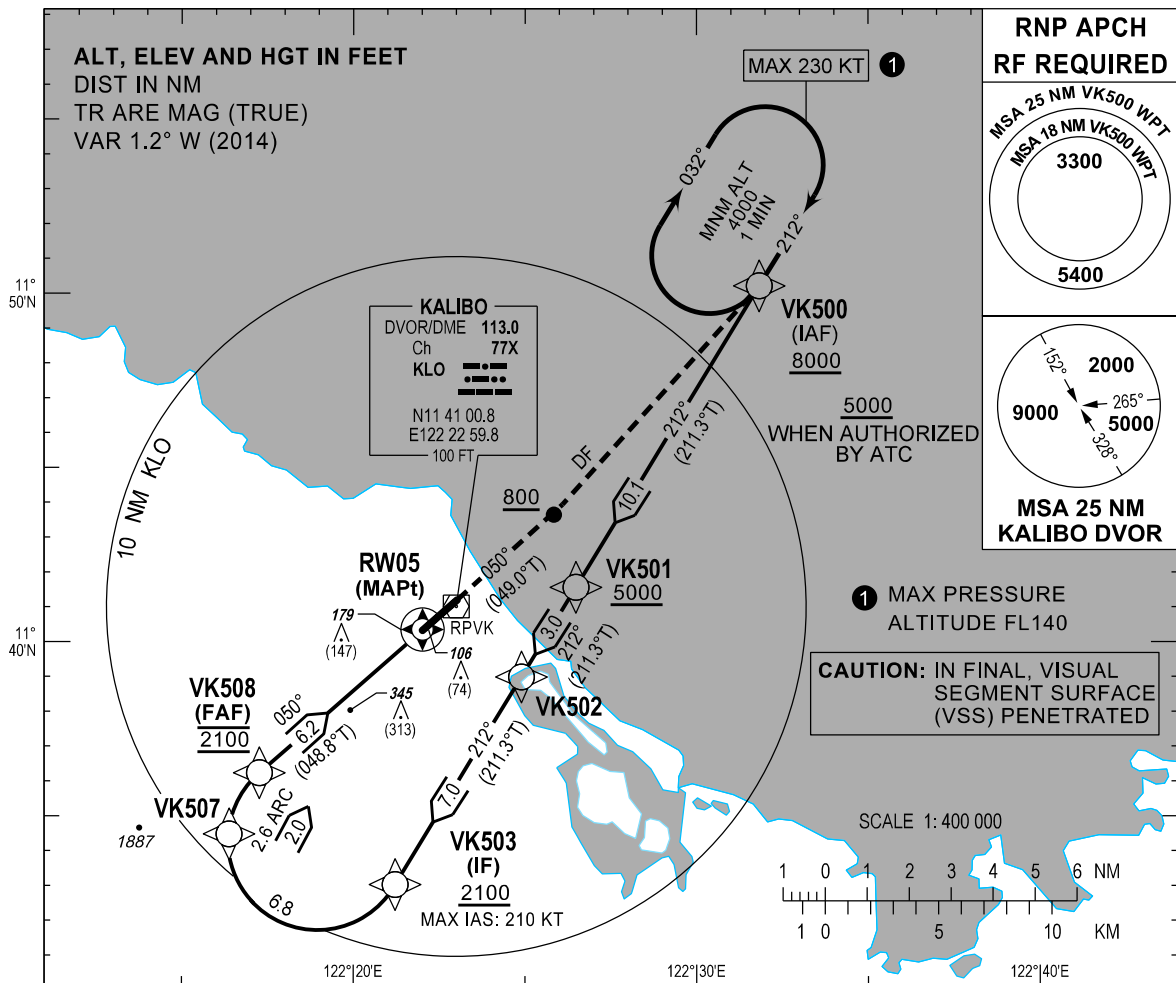

TRANSITION ALT : 11000 FT
TRANSITION LEVEL : FL130

MISSED APPROACH

Climb on course **050°** to **4000 FT**. At **800 FT** turn left direct to **VK500** and hold or follow ATC instruction. Do not turn before **MAPt**.

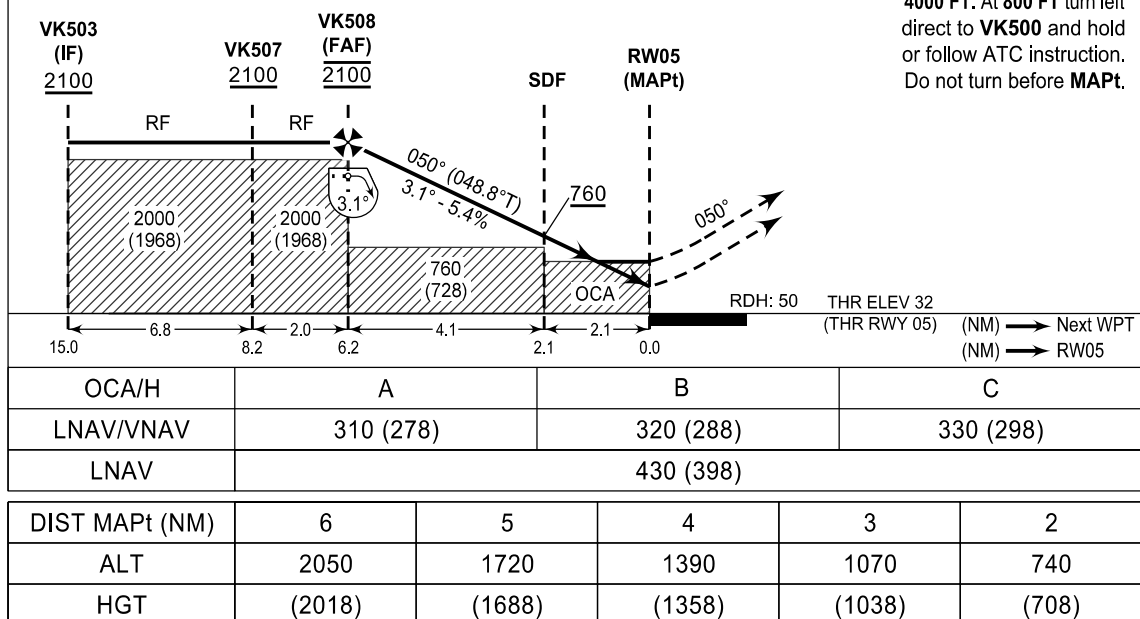

NEW CHART

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
ARCVK	N11 34 18	E122 18 58	-
RW05	N11 40 19.20	E122 22 00.32	Flyover
VK500	N11 50 13	E122 31 50	Fly-by
VK501	N11 41 34	E122 26 29	Fly-by
VK502	N11 38 59	E122 24 54	Fly-by
VK503	N11 32 59	E122 21 12	Fly-by
VK507	N11 34 29	E122 16 23	Fly-by
VK508	N11 36 14	E122 17 16	Fly-by

PROPOSED CODING FOR INSTRUMENT APPROACH RNP Z RWY 05

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID	ARC CTR ID
10	IF	VK500	N	-	-	-	-	+8000	-	-	RNP APCH	-	
20	TF	VK501	N	212° (211.3°)	-	10.1	-	+5000	-	-	RNP APCH	-	
30	TF	VK502	N	212° (211.3°)	-	3.0	-	-	-	-	RNP APCH	-	
40	TF	VK503	N	212° (211.3°)	-	7.0	-	+2100	210	-	RNP APCH	-	
50	RF	VK507	N	005° (003.9°)	-	6.8	R	-	-	-	RNP APCH	-	ARCVK
60	RF	VK508	N	050° (048.8°)	-	2.0	R	@2100	-	-	RNP APCH	-	ARCVK
70	TF	RW05	Y	050° (048.8°)	-	6.2	-	+82	-	-3.08	RNP APCH	-	
80	CA	-	N	050° (049.0°)	-	-	-	+800	-	-	RNP APCH	VK500	
90	DF	VK500	N	-	-	-	L	-	-	-	RNP APCH	VK500	

NEW TABLE (WPT LIST AND PROPOSED CODING)

INSTRUMENT
APPROACH
CHART - ICAO


AERODROME ELEV 32 FT

HEIGHTS RELATED TO
THR RWY 05 - ELEV 18 FT

APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)


RNP RWY 23

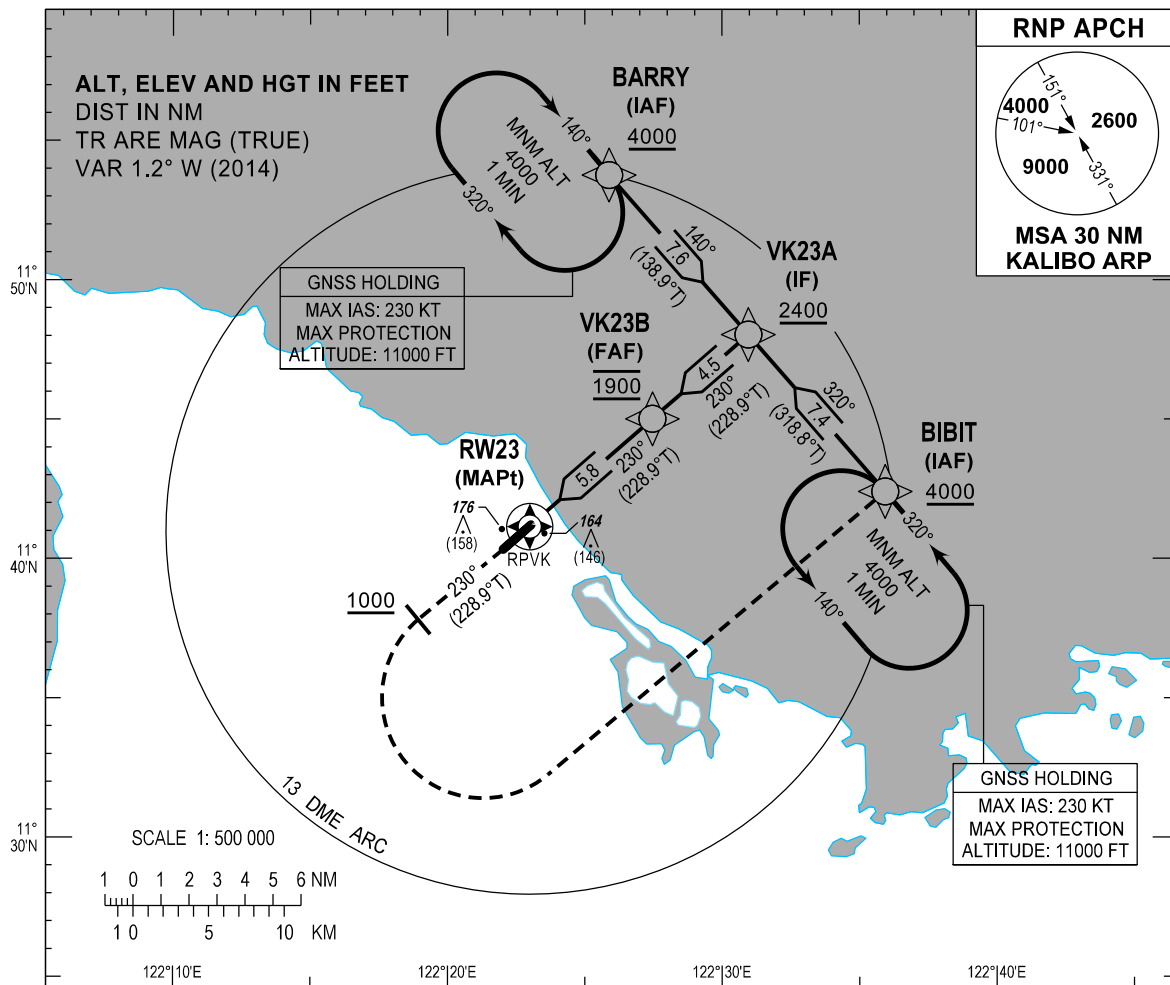

TRANSITION ALT : 11000 FT
TRANSITION LEVEL : FL130

MISSED APPROACH

Climb on course 230°M,
at 1000 FT turn left direct
to BIBIT and hold or as
instructed by the ATC.
Do not turn before the MAPt.

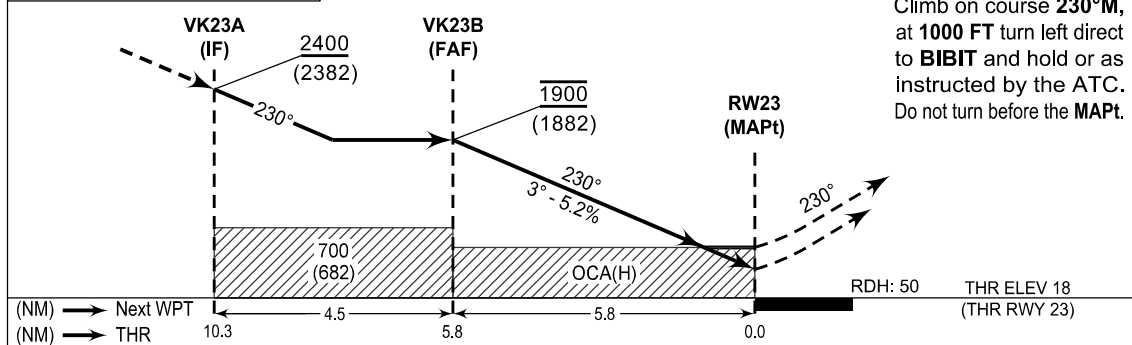

OCA/H	A	B	C
LNAV/VNAV	300 (282)	310 (292)	320 (302)
LNAV	430 (412)		

CIRCLING NOT AUTHORIZED

NEW CHART

NM TO THR	5.8	4	3	2
ALT	1900	1350	1030	710
HGT	(1882)	(1332)	(1012)	(692)

WAYPOINT LIST

Waypoint Name	Latitude	Longitude	Type
BARRY	N11 53 46	E122 25 53	Fly-by
BIBIT	N11 42 24	E122 35 56	Fly-by
VK23A	N11 48 01	E122 30 57	Fly-by
VK23B	N11 45 01	E122 27 28	Fly-by
RW23	N11 41 12.73	E122 23 02.50	Flyover

PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 23

SEQ. NO.	PD	W/P ID	Flyover	Course Track °M (°T)	Magnetic Variation	Distance (NM)	TD	ALT (FT)	Speed (knots)	VPA (°)	Nav. Spec	Transition ID
10	IF	BARRY	N	-	-	-	-	+4000	-	-	RNP APCH	BARRY
20	TF	VK23A	N	140° (138.9°)	-	7.6	-	+2400	-	-	RNP APCH	BARRY
10	IF	BIBIT	N	-	-	-	-	+4000	-	-	RNP APCH	BIBIT
20	TF	VK23A	N	320° (318.8°)	-	7.4	-	+2400	-	-	RNP APCH	BIBIT
10	IF	VK23A	N	-	-	-	-	+2400	-	-	RNP APCH	-
20	TF	VK23B	N	230° (228.9°)	-	4.5	-	@1900	-	-	RNP APCH	-
30	TF	RW23	Y	230° (228.9°)	-	5.8	-	+68	-	-3.0	RNP APCH	-
10	CA	-	N	230° (228.9°)	-	-	-	+1000	-	-	RNP APCH	-
20	DF	BIBIT	N	-	-	-	L	+4000	-	-	RNP APCH	-

NEW TABLE (WPT LIST AND PROPOSED CODING)

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
32 FT


APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)

RWY 05

CHANGES: AD ELEV and Name. APP PRI FREQ. Data Resolution. MAG VAR. Chart Re-indexed.

ALT, ELEV AND HGT IN FEET
DIST IN NM
BRG ARE MAG
VAR 1.2° W (2014)

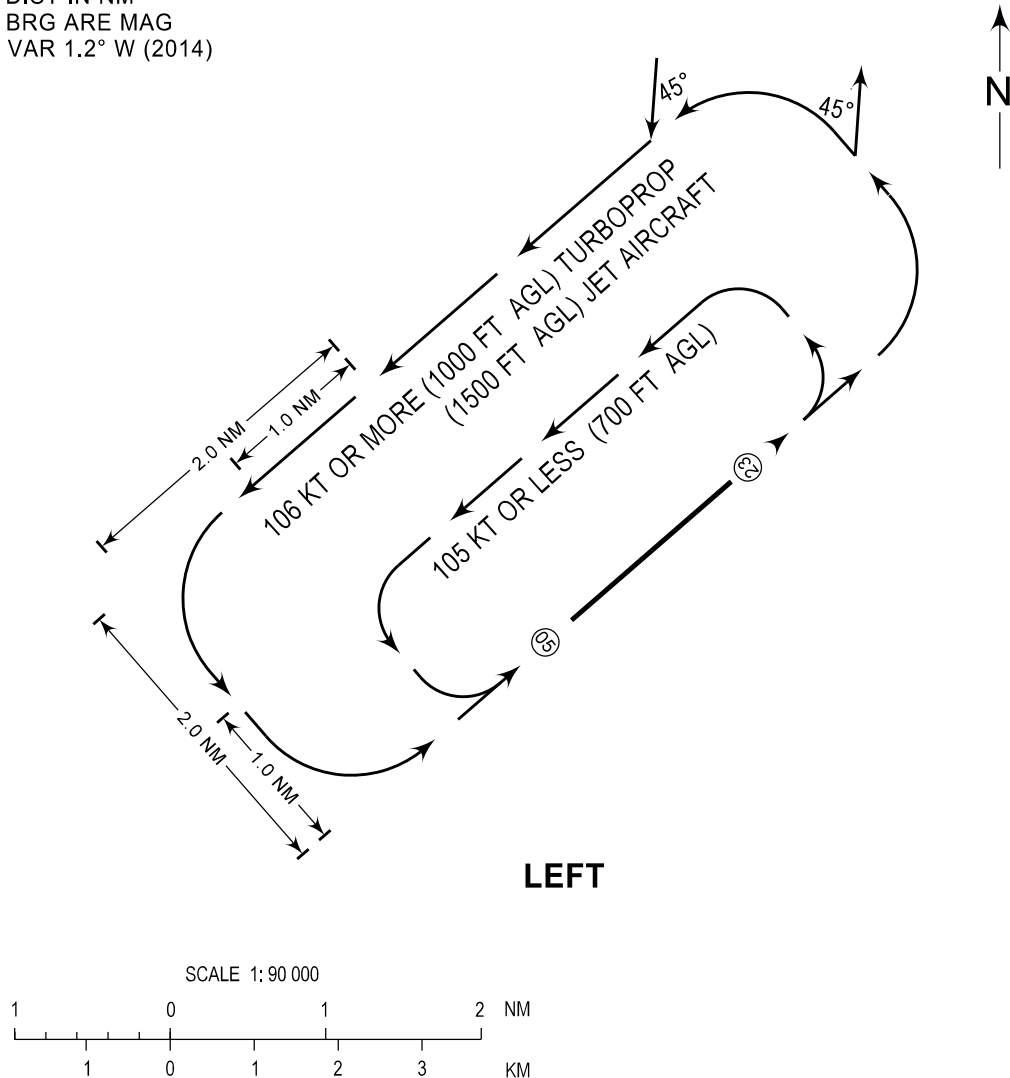

PROCEDURE

- Arriving aircraft shall enter the traffic circuit on the downwind leg at an angle of 45 degrees.
- Departing aircraft shall follow the traffic circuit and leave the circuit at an angle of 45 degrees.

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
32 FT


APP - 120.4
TWR - 124.2

AKLAN/Kalibo Intl (RPVK)

RWY 23

CHANGES: AD ELEV and Name. APP PRI FREQ. Data Resolution. MAG VAR. Chart Re-indexed.

ALT, ELEV AND HGT IN FEET
DIST IN NM
BRG ARE MAG
VAR 1.2° W (2014)

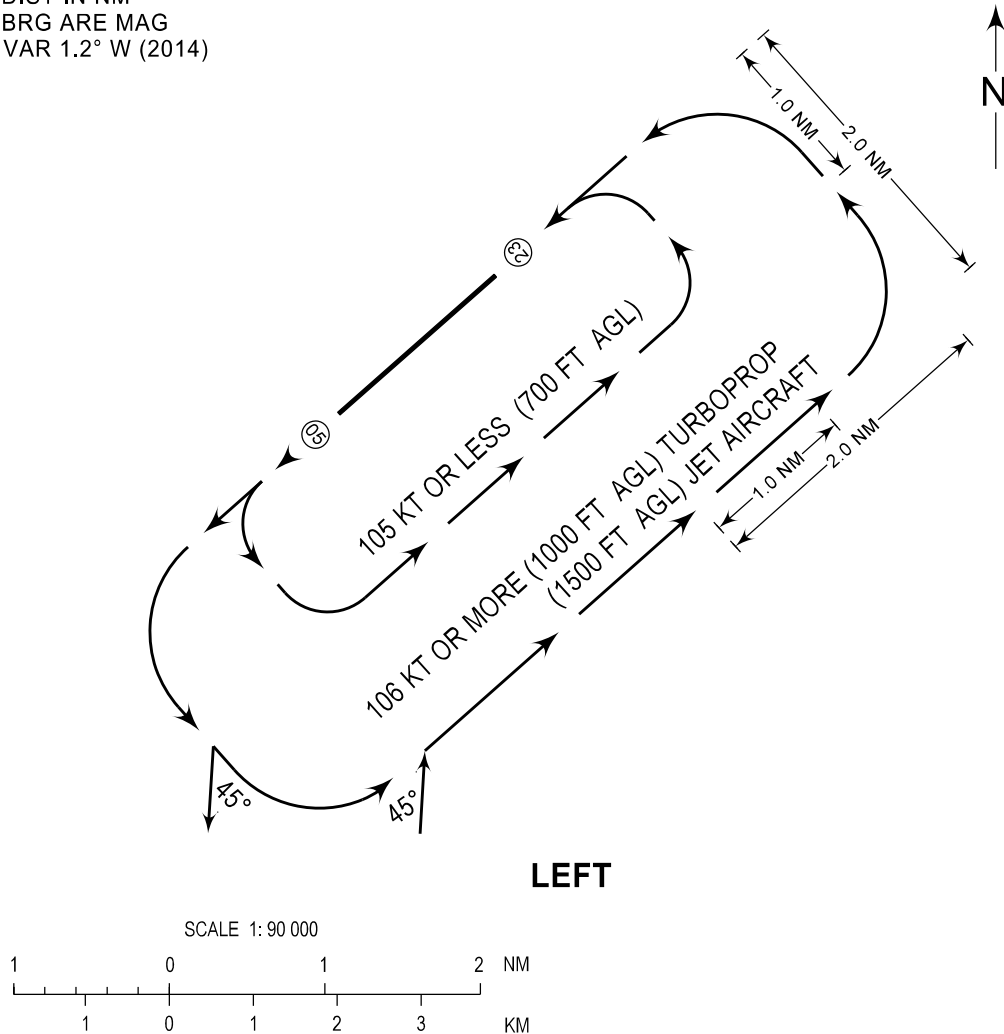

PROCEDURE

- Arriving aircraft shall enter the traffic circuit on the downwind leg at an angle of 45 degrees.
- Departing aircraft shall follow the traffic circuit and leave the circuit at an angle of 45 degrees.