

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.4, AD-2.11, AD-2.14, AD-2.16, AD-2.17, AD-2.18, AD-2.19, AD-2.20, AD-2.21, AD-2.22, AD-2.23, AD-2.25

RPVO AD 2.1 AERODROME LOCATION INDICATOR AND NAME

RPVO - ORMOC PRINCIPAL AIRPORT (Class 2)

RPVO AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

1	ARP coordinates and site at AD	110323N 1243356E.
2	Direction and distance from (city)	8 KM northwest of Poblacion (city proper).
3	Elevation/Reference temperature	83 FT / 33°C.
4	Geoid undulation at AD ELEV PSN	Nil.
5	MAG VAR/Annual Change	2°W (2021)/6.0' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Ormoc Airport, Ormoc City 6541 Leyte Province Phone: (+63) (053) 520-2794 Email: ormoc_airport@caap.gov.ph
7	Types of traffic permitted (IFR/VFR)	VFR.
8	Remarks	Nil.

RPVO AD 2.3 OPERATIONAL HOURS

1	AD Operator	0000 - 0900.
2	Customs and immigration	Nil.
3	Health and sanitation	Nil.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	Nil.
6	MET Briefing Office	Nil.
7	ATS	Nil.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: HJ.

RPVO AD 2.5 PASSENGER FACILITIES

1	Hotels	Within the city.
2	Restaurants	Within the city.
3	Transportation	Vehicle for hire.
4	Medical facilities	Within the city.
5	Bank and Post Office	Within the city.
6	Tourist Office	Within the city.
7	Remarks	Nil.

RPVO AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	Category 3.
2	Rescue equipment	Two (2) fire trucks [Two (2) SIDES (2400 liters each)].
3	Capability for removal of disabled aircraft	Aircraft recovery and removal is generally an aircraft operator's responsibility. However, for the reasons of business continuity and for the minimization of potential operational interruption, Ormoc Airport may intervene at anytime to expedite the removal of a disabled aircraft on or near the aircraft movement area at the owner's or aircraft operator's expense. Refer to Ormoc Airport Disabled Aircraft Removal Plan (DARP). ATR 72 largest aircraft removal by an aircraft owner/operator. DARP Coordinators: Airport Safety Officer Phone: (+63) 931-7427117 (mobile) Crash, Fire and Rescue (CFR) Chief Phone: (+63) 935-5844644 (mobile)
4	Remarks	Foam Meeting Performance: Level B.

RPVO AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	Types of clearing equipment	Power saw and axe.
2	Clearance priorities	1. RWY, 2. TWY, 3. APN, 4. RWY Strip.
3	Remarks	Nil.

RPVO AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Main Apron Surface: CONC. Strength: 1111 KG/0.23 MPa.
2	Taxiway width, surface and strength	TWY North Width: 20 M. Surface: CONC. Strength: 1111 KG/0.23 MPa. TWY South Width: 20 M. Surface: CONC. Strength: 1111 KG/0.23 MPa.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPVO AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Parking stand yellow, TWY edge and center lines yellow.
2	RWY and TWY markings and LGT	RWY 18/36: Designation, THR, center line, touchdown, aiming point, edge line, transverse stripe. TWY: Edge, center line markings.
3	Stop bars and RWY guard lights	Nil.
4	Other RWY protection measures	Nil.
5	Remarks	Nil.

RPVO AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
18/APCH	Transmission Tower 214 FT	110528.0N 1243408.0E	Terrain 495 FT	110348.0N 1243557.0E	Nil
	Transmission Tower 205 FT	110519.0N 1243400.0E			

RPVO AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY (M)	Strength (PCR) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY	Slope of RWY-SWY
1	2	3	4	5	6	7
18	184.00°	2100 X 45	1111 KG/ 0.23 MPa CONC+ASPH	THR COORD 110407.60N 1243359.10E RWY end COORD 110407.60N 1243359.10E	52 FT	Nil
36	004.00°	2100 X 45	1111 KG/ 0.23 MPa CONC+ASPH	THR COORD 110308.20N 1243354.90E RWY end COORD 110259.51N 1243354.17E	28 FT	Nil
SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	RESA dimensions (M)	Location/ description of arresting system	OFZ	Remarks
8	9	10	11	12	13	14
Nil	Nil	2245 X 78	Nil	Nil	Nil	Nil
Nil	Nil	2245 X 78	Nil	Nil	Nil	Nil

RPVO AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
18	2100	2100	2100	2100	Nil
36	2100	2100	2100	1830	THR displaced by 270 M due to communication tower.

RPVO AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Nil.
2	LDI location and LGT Anemometer location and LGT	Nil.
3	TWY edge and centre line lighting	Nil.
4	Secondary power supply/switch-over time	Standby Generator Set, Powercity, 150 kVA. 15 seconds (manual switch).
5	Remarks	Serves Passenger Terminal Building, CFR Building, Administration Building.

RPVO AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	Page
Traffic Circuit Chart (RWY 18)	RPVO AD CHART 2 - 1
Traffic Circuit Chart (RWY 36)	RPVO AD CHART 2 - 2


INTENTIONALLY
LEFT
BLANK

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
83 FT

ORMOC/Ormoc (RPVO)
RWY 18

CHANGES: ACFT CAT, Units of Measurement and VAR Deleted. Data Resolution. OBST HGT. TFC Pattern Speed. Chart Page Format.

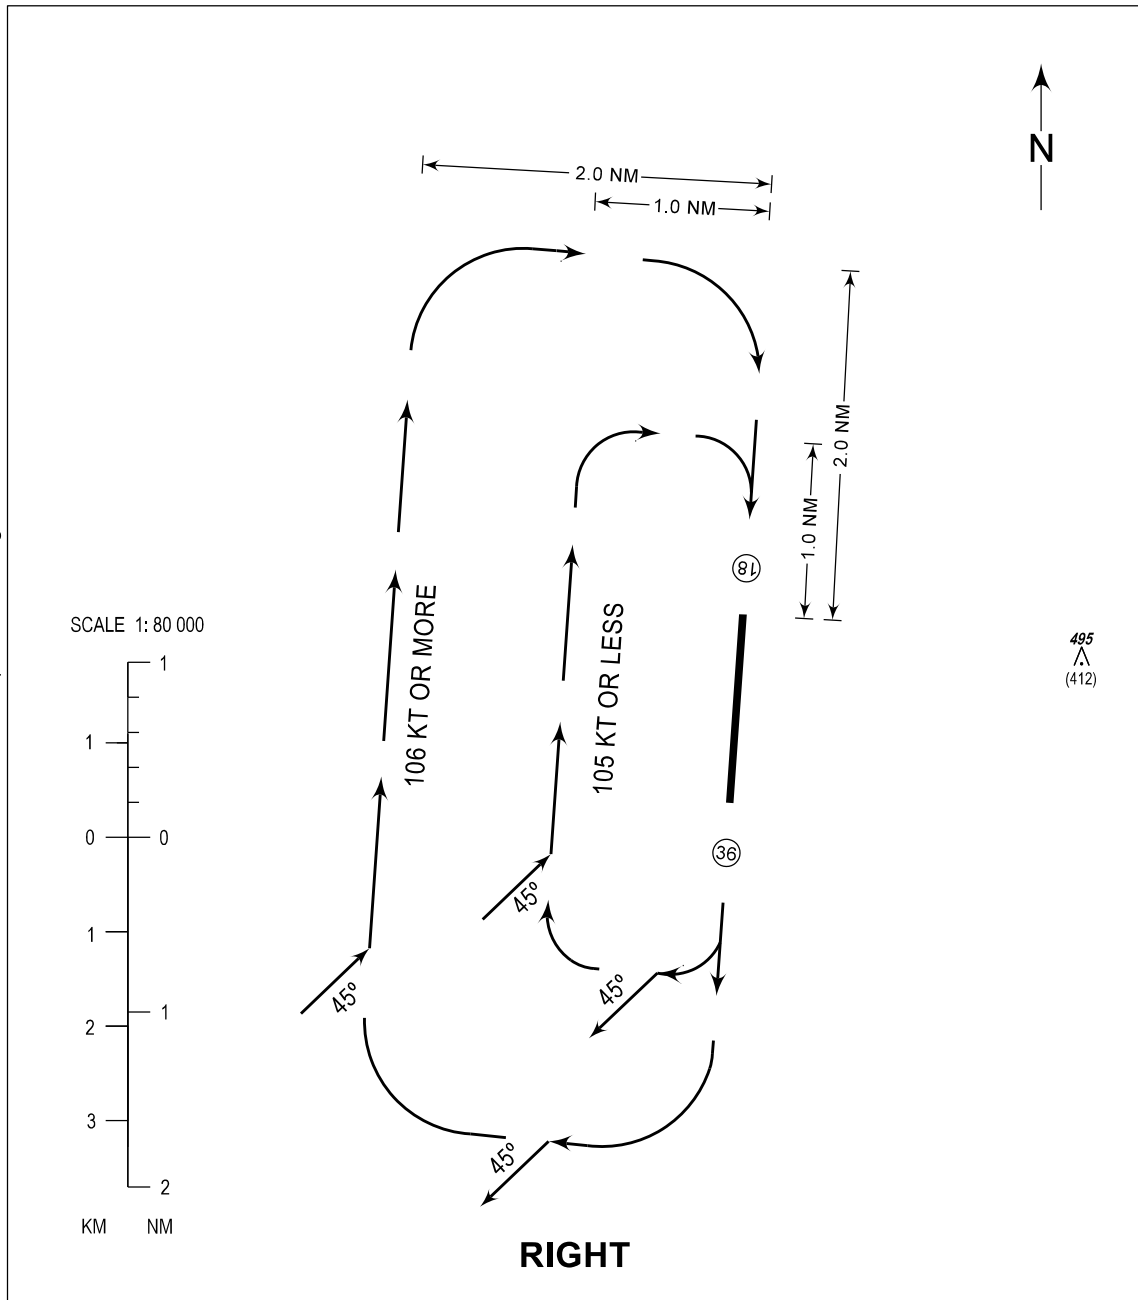

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.


TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
83 FT

ORMOC/Ormoc (RPVO)

RWY 36

CHANGES: ACFT CAT, Units of Measurement and VAR Deleted. Data Resolution. OBST HGT. TFC Pattern Speed. Chart Page Format.

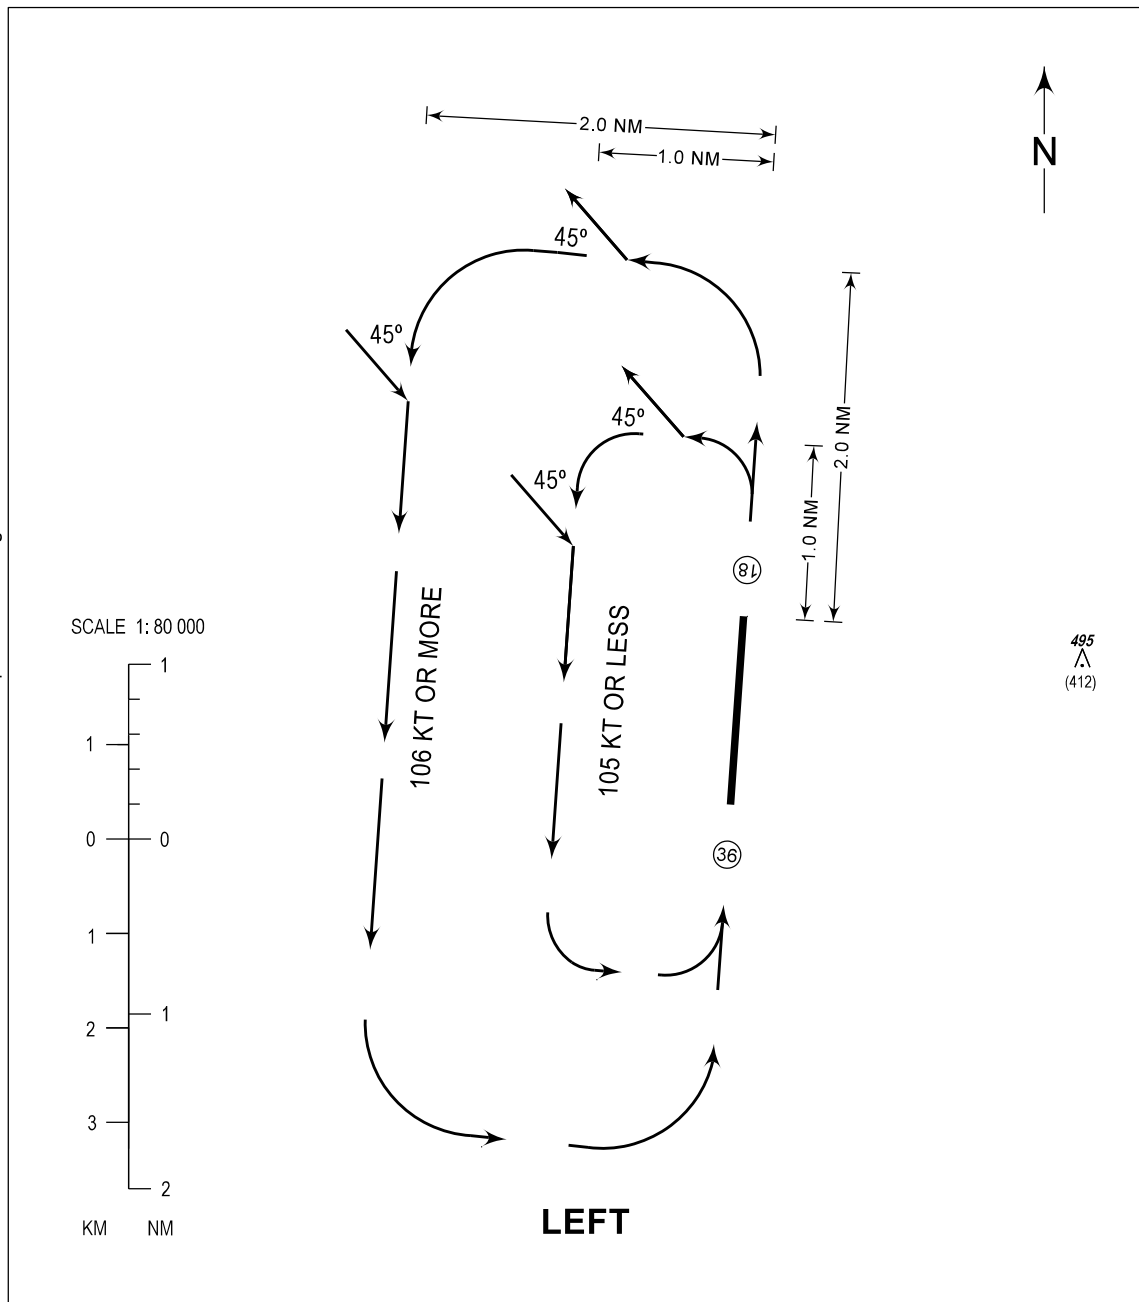

PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.