

## AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.16, AD-2.21, AD-2.22, AD-2.23, AD-2.25

### RPVP AD 2.1 AERODROME LOCATION INDICATOR AND NAME

#### RPVP - PUERTO PRINCESA INTERNATIONAL AIRPORT

### RPVP AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA

|   |                                                      |                                                                                                                                                                                                                                |
|---|------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | ARP coordinates and site at AD                       | 094431N<br>1184535E.                                                                                                                                                                                                           |
| 2 | Direction and distance from (city)                   | 327° 18' and 2.0 KM within city proper.                                                                                                                                                                                        |
| 3 | Elevation/Reference temperature                      | 66 FT.                                                                                                                                                                                                                         |
| 4 | Geoid undulation at AD ELEV PSN                      | 165 FT.                                                                                                                                                                                                                        |
| 5 | MAG VAR/Annual Change                                | 2°W (2021) / 6.0' increasing.                                                                                                                                                                                                  |
| 6 | AD Operator, address, telephone, telefax, telex, AFS | Civil Aviation Authority of the Philippines<br>Puerto Princesa International Airport<br>Barangay San Miguel, Puerto Princesa City,<br>5300 Palawan<br>Phone: (+63) (048) 433-4965<br>Email: puertoprincesa_airport@caap.gov.ph |
| 7 | Types of traffic permitted (IFR/VFR)                 | IFR-VFR.                                                                                                                                                                                                                       |
| 8 | Remarks                                              | Nil.                                                                                                                                                                                                                           |

### RPVP AD 2.3 OPERATIONAL HOURS

|    |                            |                                       |
|----|----------------------------|---------------------------------------|
| 1  | AD Operator                | MON - FRI: 0000 - 0900.               |
| 2  | Customs and immigration    | MON - FRI: 0000 - 0400 / 0500 - 0900. |
| 3  | Health and sanitation      | Nil.                                  |
| 4  | AIS Briefing Office        | Nil.                                  |
| 5  | ATS Reporting Office (ARO) | 2100 - 1300.                          |
| 6  | MET Briefing Office        | Nil.                                  |
| 7  | ATS                        | MON - FRI: 0000 - 0900.               |
| 8  | Fuelling                   | 2100 - 1300.                          |
| 9  | Handling                   | 2100 - 1300.                          |
| 10 | Security                   | H24.                                  |
| 11 | De-icing                   | Nil.                                  |
| 12 | Remarks                    | Airport Operations: 2100 - 1300.      |

### RPVP AD 2.4 HANDLING SERVICES AND FACILITIES

|   |                                         |                                                    |
|---|-----------------------------------------|----------------------------------------------------|
| 1 | Cargo-handling facilities               | Provided by airlines.                              |
| 2 | Fuel/oil types                          | Jet A-1, AVGAS available upon request from Petron. |
| 3 | Fuelling facilities/capacity            | Nil.                                               |
| 4 | De-icing facilities                     | Nil.                                               |
| 5 | Hangar space for visiting aircraft      | Military hangar.                                   |
| 6 | Repair facilities for visiting aircraft | Nil.                                               |
| 7 | Remarks                                 | Nil.                                               |

### RPVP AD 2.5 PASSENGER FACILITIES

|   |                      |                                                                                |
|---|----------------------|--------------------------------------------------------------------------------|
| 1 | Hotels               | Within Puerto Princesa City.                                                   |
| 2 | Restaurants          | At the aerodrome, near the aerodrome and in the city.                          |
| 3 | Transportation       | Taxi, shuttle van, bus, Public Utility Vehicle (PUV), tricycle and motorcycle. |
| 4 | Medical facilities   | Within Puerto Princesa City.                                                   |
| 5 | Bank and Post Office | Within Puerto Princesa City.                                                   |
| 6 | Tourist Office       | Within the aerodrome.                                                          |
| 7 | Remarks              | Nil.                                                                           |

### RPVP AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

|   |                                             |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---|---------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | AD category for fire fighting               | Category 9.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 2 | Rescue equipment                            | Three (3) fire trucks [Two (2) IVECO (13000 liters each) and one (1) IVECO (6000 liters)].                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 3 | Capability for removal of disabled aircraft | <p>Aircraft recovery equipment for lifting and moving all aircraft size up to and including A321 by third party provider.</p> <p>Puerto Princesa International Airport Disabled Aircraft Removal Plan (DARP) Coordinator:</p> <ol style="list-style-type: none"> <li>1. Acting Safety Manager<br/>Phone: (+63) 9167030192 (mobile)</li> <li>2. Acting Fire Marshall<br/>Phone: (+63) 9055001704 (mobile)</li> <li>3. Third Party Provider<br/>Allan Boy Trucking Services Incorporated (ABTSI)<br/>Address: Quezon Street, Barangay Matiyaga,<br/>Puerto Princesa City, Palawan<br/>Phone: (+63) 9175789338 (mobile)</li> </ol> |
| 4 | Remarks                                     | <p>Ten (10) Rescue and fire fighting personnel (minimum) per shift. One (1) Medical personnel (minimum) per shift.</p> <p>Foam Meeting Performance: Level B.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |

### RPVP AD 2.7 SEASONAL AVAILABILITY - CLEARING

|   |                             |                                                                   |
|---|-----------------------------|-------------------------------------------------------------------|
| 1 | Types of clearing equipment | One (1) unit runway sweeper truck.<br>One (1) unit tractor mower. |
| 2 | Clearance priorities        | 1. RWY, 2. TWY, 3. APN, 4. RWY Strip.                             |
| 3 | Remarks                     | Clearing equipment at aerodrome is available throughout the year. |

## RPVP AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

|   |                                             |                                                                                                                                            |
|---|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Apron surface and strength                  | San Miguel Apron<br>Surface: CONC.<br>Strength: 608/R/B/W/U.                                                                               |
| 2 | Taxiway width, surface and strength         | TWY A<br>Width: 30 M.<br>Surface: CONC.<br>Strength: 608/R/B/W/U.<br><br>TWY B<br>Width: 38 M.<br>Surface: CONC.<br>Strength: 608/R/B/W/U. |
| 3 | Altimeter checkpoint location and elevation | Nil.                                                                                                                                       |
| 4 | VOR checkpoints                             | Nil.                                                                                                                                       |
| 5 | INS checkpoints                             | Nil.                                                                                                                                       |
| 6 | Remarks                                     | Nil.                                                                                                                                       |

## RPVP AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

|   |                                                                                                               |                                                                                                                                                                                                                     |
|---|---------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands | Yellow TWY edge markings and center line. TWY edge lights.                                                                                                                                                          |
| 2 | RWY and TWY markings and LGT                                                                                  | RWY: Center line, threshold, touchdown zone, aiming point, RWY side edge, RWY designation, displaced threshold, and chevron markings.<br><br>TWY: TWY edge markings, holding position lines, nose wheel guide line. |
| 3 | Stop bars and RWY guard lights                                                                                | Stop bar: Six (6) stop bars in APN (every parking bay).<br><br>RWY Guard Lights<br>TWY A: One (1) guard light.<br>TWY B: Two (2) guard lights.                                                                      |
| 4 | Other RWY protection measures                                                                                 | Nil.                                                                                                                                                                                                                |
| 5 | Remarks                                                                                                       | Nil.                                                                                                                                                                                                                |

## RPVP AD 2.10 AERODROME OBSTACLES

| In approach/TKOF areas |                                            |             | In circling area and at AD                 |                         | Remarks                          |
|------------------------|--------------------------------------------|-------------|--------------------------------------------|-------------------------|----------------------------------|
| 1                      |                                            |             | 2                                          |                         | 3                                |
| RWY/Area affected      | Obstacle type<br>Elevation<br>Markings/LGT | Coordinates | Obstacle type<br>Elevation<br>Markings/LGT | Coordinates             |                                  |
| a                      | b                                          | c           | a                                          | b                       |                                  |
| Nil                    | Nil                                        | Nil         | Antenna<br>469 FT                          | 094716.0N<br>1184408.6E | 230 FT high within the aerodrome |
|                        |                                            |             | Antenna<br>272 FT                          | 094644.3N<br>1184341.2E |                                  |
|                        |                                            |             | Antenna<br>266 FT                          | 094405.2N<br>1184409.7E |                                  |

| In approach/TKOF areas |                                            |             | In circling area and at AD                 |                         | Remarks |
|------------------------|--------------------------------------------|-------------|--------------------------------------------|-------------------------|---------|
| 1                      |                                            |             | 2                                          |                         | 3       |
| RWY/Area affected      | Obstacle type<br>Elevation<br>Markings/LGT | Coordinates | Obstacle type<br>Elevation<br>Markings/LGT | Coordinates             |         |
| a                      | b                                          | c           | a                                          | b                       |         |
|                        |                                            |             | Antenna<br>250 FT                          | 094606.6N<br>1184443.4E |         |
|                        |                                            |             | Communication<br>Tower<br>249 FT           | 094405.5N<br>1184410.5E |         |
|                        |                                            |             | Antenna<br>239 FT                          | 094614.5N<br>1184510.7E |         |
|                        |                                            |             | Antenna<br>238 FT                          | 094419.7N<br>1184428.4E |         |

#### RPVP AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

|    |                                                                        |                                                                                                                                           |
|----|------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| 1  | Associated MET Office                                                  | Philippine Atmospheric, Geophysical and Astronomical Services Administration (PAGASA).                                                    |
| 2  | Hours of service<br>MET Office outside hours                           | 2100 - 1300.<br>-                                                                                                                         |
| 3  | Office responsible for TAF preparation<br>Periods of validity          | PAGASA.<br>-                                                                                                                              |
| 4  | Trend forecast<br>Interval of issuance                                 | Nil.<br>-                                                                                                                                 |
| 5  | Briefing/consultation provided                                         | Nil.                                                                                                                                      |
| 6  | Flight documentation<br>Language(s) used                               | -<br>English.                                                                                                                             |
| 7  | Charts and other information available for<br>briefing or consultation | Nil.                                                                                                                                      |
| 8  | Supplementary equipment available for<br>providing information         | Meteorological Instrument:<br>RWY 27 - Anemometer, WDI, Barometer, RWY Temperature Indicator and Relative Humidity.<br><br>HR of OPS: H24 |
| 9  | ATS units provided with information                                    | Nil.                                                                                                                                      |
| 10 | Additional information (limitation of service,<br>etc.)                | Barometer installed at the Control Tower.<br>WDI, RWY Temperature Indicator and Relative Humidity co-located with the Anemometer.         |

**RPVP AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS**

| Designations<br>RWY NR   | TRUE BRG                 | Dimensions of<br>RWY<br>(M) | Strength (PCR)<br>and surface of<br>RWY and SWY | THR coordinates<br>RWY end<br>coordinates<br>THR geoid<br>undulation | THR elevation and<br>highest elevation<br>of TDZ of<br>precision<br>APP RWY | Slope of<br>RWY-SWY                    |
|--------------------------|--------------------------|-----------------------------|-------------------------------------------------|----------------------------------------------------------------------|-----------------------------------------------------------------------------|----------------------------------------|
| 1                        | 2                        | 3                           | 4                                               | 5                                                                    | 6                                                                           | 7                                      |
| 09                       | 092.50°                  | 2601 X 45                   | 475/F/B/X/U<br>ASPH                             | 094433.17N<br>1184455.99E<br>166 FT                                  | THR 66 FT                                                                   | 0.50%<br>downhill<br>towards<br>THR 27 |
| 27                       | 272.50°                  | 2601 X 45                   | 475/F/B/X/U<br>ASPH                             | 094429.77N<br>1184614.10E<br>166 FT                                  | THR 24 FT                                                                   |                                        |
| SWY<br>dimensions<br>(M) | CWY<br>dimensions<br>(M) | Strip<br>dimensions<br>(M)  | RESA<br>dimensions<br>(M)                       | Location/<br>description of<br>arresting system                      | OFZ                                                                         | Remarks                                |
| 8                        | 9                        | 10                          | 11                                              | 12                                                                   | 13                                                                          | 14                                     |
| Nil                      | 150 X 300                | 2876 X 298                  | 90 X 90                                         | Nil                                                                  | Nil                                                                         | Nil                                    |
| Nil                      | 150 X 300                | 2876 X 298                  | 90 X 90                                         | Nil                                                                  | Nil                                                                         | Nil                                    |

**RPVP AD 2.13 DECLARED DISTANCES**

| RWY<br>Designator | TORA<br>(M) | TODA<br>(M) | ASDA<br>(M) | LDA<br>(M) | Remarks                    |
|-------------------|-------------|-------------|-------------|------------|----------------------------|
| 1                 | 2           | 3           | 4           | 5          | 6                          |
| 09                | 2601        | 2751        | 2601        | 2383       | THR displaced by<br>218 M. |
| 27                | 2601        | 2751        | 2601        | 2601       | Nil                        |

**RPVP AD 2.14 APPROACH AND RUNWAY LIGHTING**

| RWY Designator | APCH LGT type, LEN,<br>INTST                              | THR LGT colour,<br>WBAR               | VASIS, (MEHT), PAPI                  | TDZ, LGT LEN |
|----------------|-----------------------------------------------------------|---------------------------------------|--------------------------------------|--------------|
| 1              | 2                                                         | 3                                     | 4                                    | 5            |
| 09             | SALS<br>420 M,<br>LIH<br>With Sequenced<br>flashing light | THR LGT<br>Green<br><br>RTIL<br>White | PAPI<br>3.0°,<br>Left,<br>(50.96 FT) | Nil          |
| 27             | PALS<br>720 M,<br>LIH<br>With Sequenced<br>flashing light | THR LGT<br>Green,<br>10               | PAPI<br>3.0°,<br>Left,<br>(52.69 FT) | Nil          |

| RWY Centre Line LGT<br>LEN, spacing,<br>colour, INTST | RWY Edge LGT LEN,<br>spacing, colour,<br>INTST | RWY End LGT colour,<br>WBAR | SWY LGT LEN, colour | Remarks                                                                                                                                                                                                                                                                   |
|-------------------------------------------------------|------------------------------------------------|-----------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 6                                                     | 7                                              | 8                           | 9                   | 10                                                                                                                                                                                                                                                                        |
| Nil                                                   | 2481 M,<br>60 M,<br>White/Yellow,<br>LIH       | Red                         | Nil                 | <p>SALS<br/>Distance of crossbar<br/>from THR: 300 M.</p> <p>RWY THR<br/>Identification Light<br/>(RTIL)<br/>Distance from edge<br/>light: 10 M.<br/>Intensity: LIH.</p> <p>PAPI<br/>Path width: 0.33°.<br/>Visibility range: 5 NM.<br/>Distance from THR:<br/>322 M.</p> |
| Nil                                                   | 2481 M,<br>60 M,<br>White/Yellow,<br>LIH       | Red                         | Nil                 | <p>PALS<br/>Category 1.<br/>Distance of crossbar<br/>from THR: 300 M.</p> <p>PAPI<br/>Path width: 0.5°.<br/>Visibility range: 5 NM.<br/>Distance from THR:<br/>330 M.</p>                                                                                                 |

#### RPVP AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

|   |                                                          |                                                                                                                                                         |
|---|----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | ABN/IBN location, characteristics and hours of operation | Location: 094443.95N 1184507.36E.<br>Characteristics: Alternating white green every 20 - 30 flashes per minute.<br>HR of OPS: During inclement weather. |
| 2 | LDI location and LGT<br>Anemometer location and LGT      | Anemometer<br>RWY 27: 094434.52N 1184600.64E.                                                                                                           |
| 3 | TWY edge and centre line lighting                        | TWY A: Edge light Blue.<br>TWY B: Edge light Blue.                                                                                                      |
| 4 | Secondary power supply/switch-over time                  | Secondary power supply to all lighting at aerodrome.<br>Switch-over time of 15 seconds.                                                                 |
| 5 | Remarks                                                  | Nil.                                                                                                                                                    |

### RPVP AD 2.17 ATS AIRSPACE

|   |                                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---|-----------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | Designation and lateral limits    | <p>PUERTO PRINCESA AERODROME TRAFFIC ZONE (ATZ):<br/>A circle radius 5 NM centered on 094431N 1184535E (ARP).</p> <p>PUERTO PRINCESA CONTROL ZONE (CTR):<br/>A circle radius 10 NM centered on 094423.3N 1184613.5E (PR DVOR/DME).</p> <p>PUERTO PRINCESA TERMINAL CONTROL AREAS (TMA):<br/>095453N 1180626E then along 40 NM arc centered on 094431N 1184535E (ARP) clockwise to 101612N 1191031E to 100817N 1190417E then along 30 NM arc centered on 094431N 1184535E (ARP) clockwise to 095813N 1191240E to 100246N 1192142E then along the 40 NM arc centered on 094431N 1184535E (ARP) clockwise to 090444N 1183954E to 093435N 1184410E then along 10 NM arc centered on 094431N 1184535E (ARP) clockwise to 094707N 1183548E to 095453N 1180626E.</p> |
| 2 | Vertical limits                   | <p>ATZ: SFC up to but excluding 2000 FT.</p> <p>CTR: SFC up to 1500 FT.</p> <p>TMA: 1500 FT to FL200 (excluding ATZ and ATS routes at FL160 and above).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| 3 | Airspace classification           | ATZ - B; CTR - D; TMA - D; ATS routes inside TMA below FL160 - D; ATS routes inside TMA above FL160 - A.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| 4 | ATS unit call sign<br>Language(s) | <p>ATZ - Puerto Princesa Tower.</p> <p>CTR/TMA - Puerto Princesa Approach.</p> <p>English.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| 5 | Transition altitude               | 11000 FT.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| 6 | Hours of applicability            | H24.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| 7 | Remarks                           | Nil.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |

### RPVP AD 2.18 ATS COMMUNICATION FACILITIES

| Service Designation | Call Sign                | Frequency               | SATVOICE number | Logon address | Hours of operation | Remarks                                                                      |
|---------------------|--------------------------|-------------------------|-----------------|---------------|--------------------|------------------------------------------------------------------------------|
| 1                   | 2                        | 3                       | 4               | 5             | 6                  | 7                                                                            |
| TWR                 | Puerto Princesa Tower    | 118.1 MHZ<br>5447.5 KHZ | Nil             | Nil           | 2100 - 1300        | PRI FREQ.<br>P/P PRI FREQ (Manila Network).<br>P/P SRY FREQ.                 |
| APP                 | Puerto Princesa Approach | 3834 KHZ<br>122.0 MHZ   |                 |               |                    | PRI FREQ.<br>For extension of service, one (1) day prior notice is required. |

RPVP AD 2.19 RADIO NAVIGATION AND LANDING AIDS

| Type of aid,<br>MAG VAR,<br>Type of supported<br>OP(for VOR/ILS/MLS,<br>give declination) | ID  | Frequency            | Hours of<br>operation | Position of<br>transmitting<br>antenna<br>coordinates | Elevation of<br>DME<br>transmitting<br>antenna | Remarks                                                                                                                                                                    |
|-------------------------------------------------------------------------------------------|-----|----------------------|-----------------------|-------------------------------------------------------|------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                                                                                         | 2   | 3                    | 4                     | 5                                                     | 6                                              | 7                                                                                                                                                                          |
| DVOR/DME                                                                                  | PR  | 115.9 MHZ/<br>CH106X | H24                   | 094423.3N<br>1184613.5E                               | 100 FT                                         | DVOR Output<br>Power:<br>100 watts.<br>Usable distance:<br>40 NM.<br>Distance from<br>center line:<br>204 M / 668 FT.<br>Distance from<br>THR 27: 204 M /<br>669 FT.       |
| ILS CAT I<br>LOC 27                                                                       | IPR | 110.1 MHZ            | H24                   | 094433.8N<br>1184442.7E                               | Nil                                            | Usable distance:<br>25 NM.<br>Course width:<br>4.06°<br>(Transmitter 1),<br>4.04°<br>(Transmitter 2).                                                                      |
| GP 27                                                                                     |     | 334.4 MHZ            |                       | 094433.8N<br>1184604.4E                               | Nil                                            | Usable distance:<br>12 NM.<br>Glide angle:<br>2.96°<br>(Transmitter 1),<br>2.97°<br>(Transmitter 2).<br>Path width: 0.70°<br>(Transmitter 1),<br>0.72°<br>(Transmitter 2). |
| IDME 27                                                                                   |     | CH38X                |                       | 094433.8N<br>1184604.4E                               | Nil                                            | Usable distance:<br>12 NM.                                                                                                                                                 |



## **RPVP AD 2.20 LOCAL AERODROME REGULATIONS**

### **1. Airport Regulations**

- 1.1 Closed to aircraft without a functioning two-way radio.
- 1.2 No Special VFR Flight is allowed in Puerto Princesa International Airport (PPIA) due to the following reasons:
- a. facility is providing non-Radar (Conventional) type of control service;
  - b. no PAGASA Station as source of MET data in destination aerodrome within the locality;
  - c. close proximity of terrain in PPIA; and
  - d. communication difficulties in some areas due to terrain.

### **2. Parking**

- 2.1 All aircraft must strictly follow the respective aircraft nosewheel stop bars.
- 2.2 All aircraft must strictly follow the nose wheel lead-in lines to and from the ramp to prevent the aircraft main gears from excursion to the taxiway shoulders.
- 2.3 Assignment of Parking Bays

| Bay Number | Coordinates               | Aircraft Type                                 | Restrictions/Remarks                                                                                                |
|------------|---------------------------|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------|
| 1          | 094442.85N<br>1184456.93E | A321, A320, and lower category aircraft       | All aircraft may taxi-in with power to the respective bay assignment and must be assigned by wing marshals/walkers. |
| 2          | 094442.78N<br>1184458.39E | A321, A320, and lower category aircraft       |                                                                                                                     |
| 3          | 094442.72N<br>1184459.86E | A321, A320, and lower category aircraft       |                                                                                                                     |
| 4          | 094442.57N<br>1184502.14E | A330, A321, A320, and lower category aircraft | All A330 flights are required to notify Puerto Princesa Tower at least 24 hours prior.                              |
| 5          | 094442.53N<br>1184504.11E | A321, A320, and lower category aircraft       | All aircraft may taxi-in with power to the respective bay assignment and must be assigned by wing marshals/walkers. |
| 6          | 094442.47N<br>1184505.58E | A321, A320, and lower category aircraft       |                                                                                                                     |

Note: Parking bay number 1 is designated for General Aviation flights.

### **3. Taxiing - limitations**

- 3.1 Arrival
- a. Aircraft may taxi-in either TWY A or TWY B towards their intended parking bay.
  - b. While taxiing, flight crew must contact Puerto Princesa Tower for parking bay assignment.
  - c. All aircraft may taxi-in with power to the respective parking bay assignments and must be assisted by wing marshals/walkers.

- 3.2 Departure
- a. Clearance must be obtained from Puerto Princesa Tower prior commencing pushback of any aircraft including taxiing out with power of aircraft parked on all parking bays.
  - b. All aircraft pushback and tow-out operation shall be with wing walkers.
  - c. All departing large category aircraft such as B737, A320 and bigger shall take TWY A for taxiing out due to Military safety and security concerns near TWY B.


**RPVP AD 2.24 CHARTS RELATED TO AN AERODROME**

| TITLE                                                                                                 | PAGE                 |
|-------------------------------------------------------------------------------------------------------|----------------------|
| Area Chart                                                                                            | RPVP AD CHART 2 - 1  |
| Standard Departure Chart - Instrument - ICAO (RWY 09 - DABOY1, SAIRA1)                                | RPVP AD CHART 2 - 3  |
| Standard Departure Chart - Instrument - ICAO (RWY 09 - MARIN1)                                        | RPVP AD CHART 2 - 5  |
| Standard Departure Chart - Instrument - ICAO (RWY 27 - DABOY3, MARIN3)                                | RPVP AD CHART 2 - 7  |
| Standard Departure Chart - Instrument - ICAO (RWY 27 - SAIRA3)                                        | RPVP AD CHART 2 - 9  |
| Standard Departure Chart - Instrument - ICAO (RNP SID RWY 09)                                         | RPVP AD CHART 2 - 11 |
| Standard Departure Chart - Instrument - ICAO<br>(RNP SID RWY 27 - DABOY1W, MARIN1W, NOMYO1W, SAIRA1W) | RPVP AD CHART 2 - 15 |
| Standard Departure Chart - Instrument - ICAO<br>(RNP SID RWY 27 - DABOY3W, MIKEL1W)                   | RPVP AD CHART 2 - 19 |
| Standard Arrival Chart - Instrument - ICAO (RWY 27)                                                   | RPVP AD CHART 2 - 21 |
| Standard Arrival Chart - Instrument - ICAO (RNP STAR RWY 27)                                          | RPVP AD CHART 2 - 23 |
| Instrument Approach Chart - ICAO (ILS OR LOC RWY 27)                                                  | RPVP AD CHART 2 - 27 |
| Instrument Approach Chart - ICAO (VOR RWY 27)                                                         | RPVP AD CHART 2 - 28 |
| Instrument Approach Chart - ICAO (RNP RWY 27)                                                         | RPVP AD CHART 2 - 29 |
| Instrument Approach Chart (VPT RWY 09)                                                                | RPVP AD CHART 2 - 31 |
| Traffic Circuit Chart (RWY 09)                                                                        | RPVP AD CHART 2 - 32 |
| Traffic Circuit Chart (RWY 27)                                                                        | RPVP AD CHART 2 - 33 |

INTENTIONALLY  
LEFT  
BLANK

AREA CHART

PUERTO PRINCESA TMA

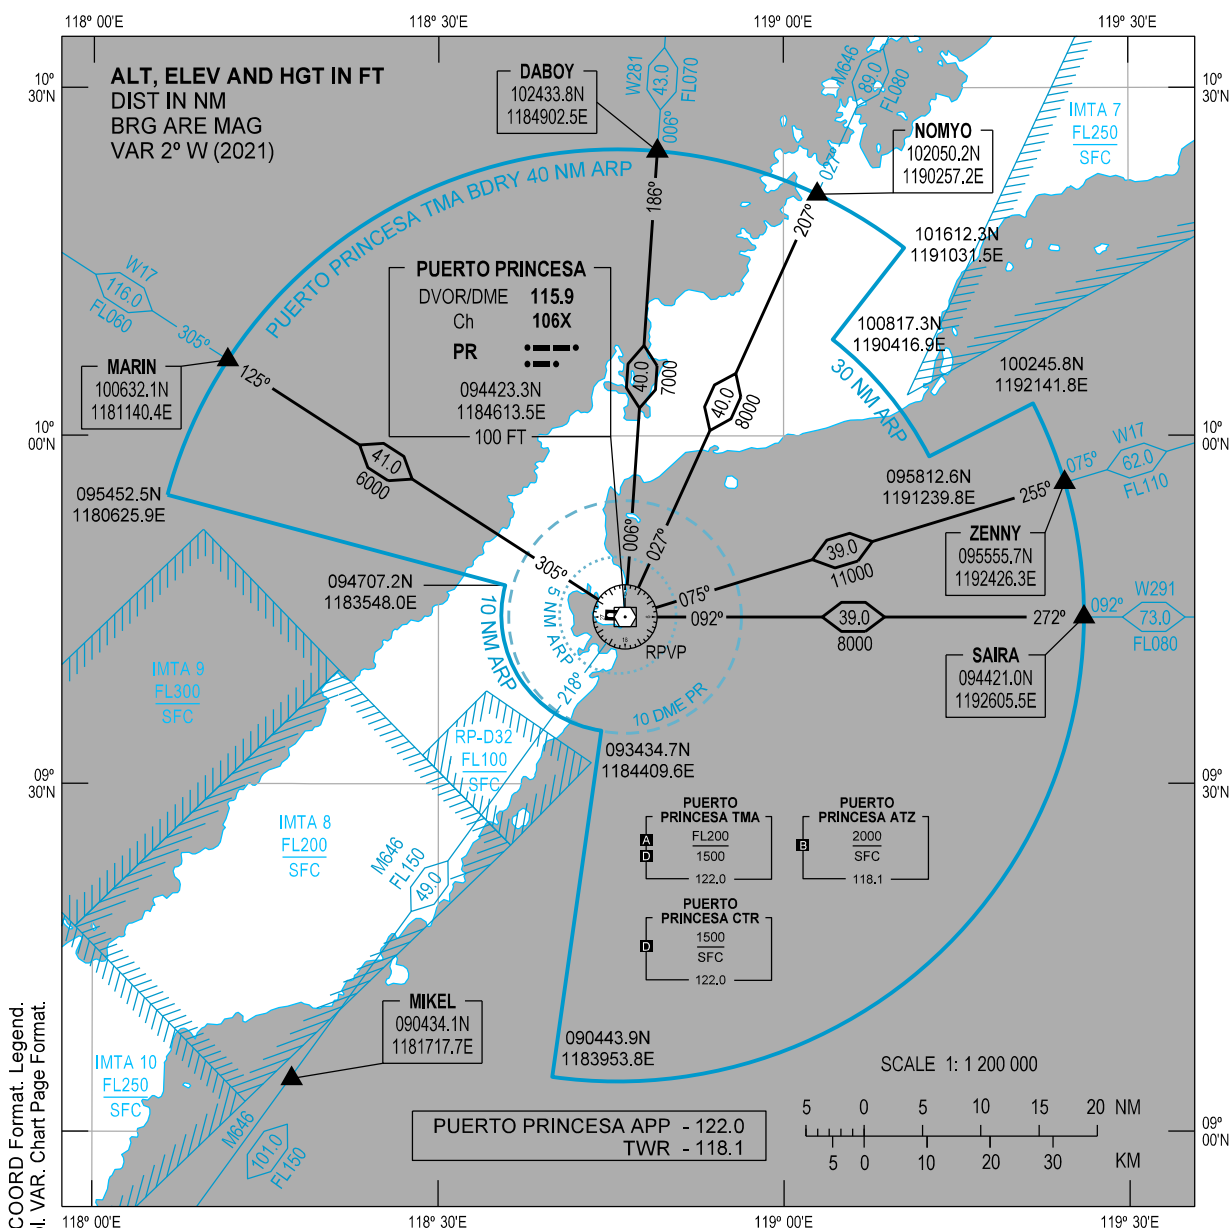

CHANGES: ATS Airspace. Chart IDENT and Title. COORD Format. Legend. PR DVOR/DME ELEV. QDR. RWY Symbol. VAR. Chart Page Format.

| LEGEND                                         |       |      |
|------------------------------------------------|-------|------|
| CTA                                            | (TMA) |      |
|                                                | (AWY) |      |
| ATZ                                            |       |      |
| CRP                                            |       |      |
| DEPARTURE/ARRIVAL ROUTING                      |       |      |
| DIST                                           |       |      |
| MNM FLT ALT                                    |       | 8000 |
| QDR                                            |       | 026° |
| COM FAILURE                                    |       |      |
| - SET TRANSPONDER MODE A CODE 7600             |       |      |
| - FOLLOW COM FAILURE PROC ON RELEVANT SID/STAR |       |      |

| RDO NAVAID                                                           |                      |
|----------------------------------------------------------------------|----------------------|
| NAME                                                                 | PUERTO PRINCESA      |
| NAVAID TYPE AND FREQ                                                 | DVOR/DME 115.9       |
|                                                                      | Ch 106X              |
| IDENT                                                                | PR                   |
| COORD                                                                | 094423.3N 1184613.5E |
| ELEV OF DME ANTENNA                                                  | 100 FT               |
| NOTE:<br>FOR DETAILS OF SID AND STAR PROC, SEE APPROPRIATE AD PAGES. |                      |


INTENTIONALLY  
LEFT  
BLANK

STANDARD DEPARTURE  
CHART - INSTRUMENT  
(SID) - ICAO

TRANSITION  
ALTITUDE  
11000 FT

TWR - 118.1  
APP - 122.0  
ACC - 118.9 (SOUTHWEST)  
- 124.9 / 125.7 (SOUTH)  
- 8942 / 5655 (SEA-2 HF)

PALAWAN/Puerto  
Princesa Intl (RPVP)  
RWY 09  
DABOY1 SAIRA1

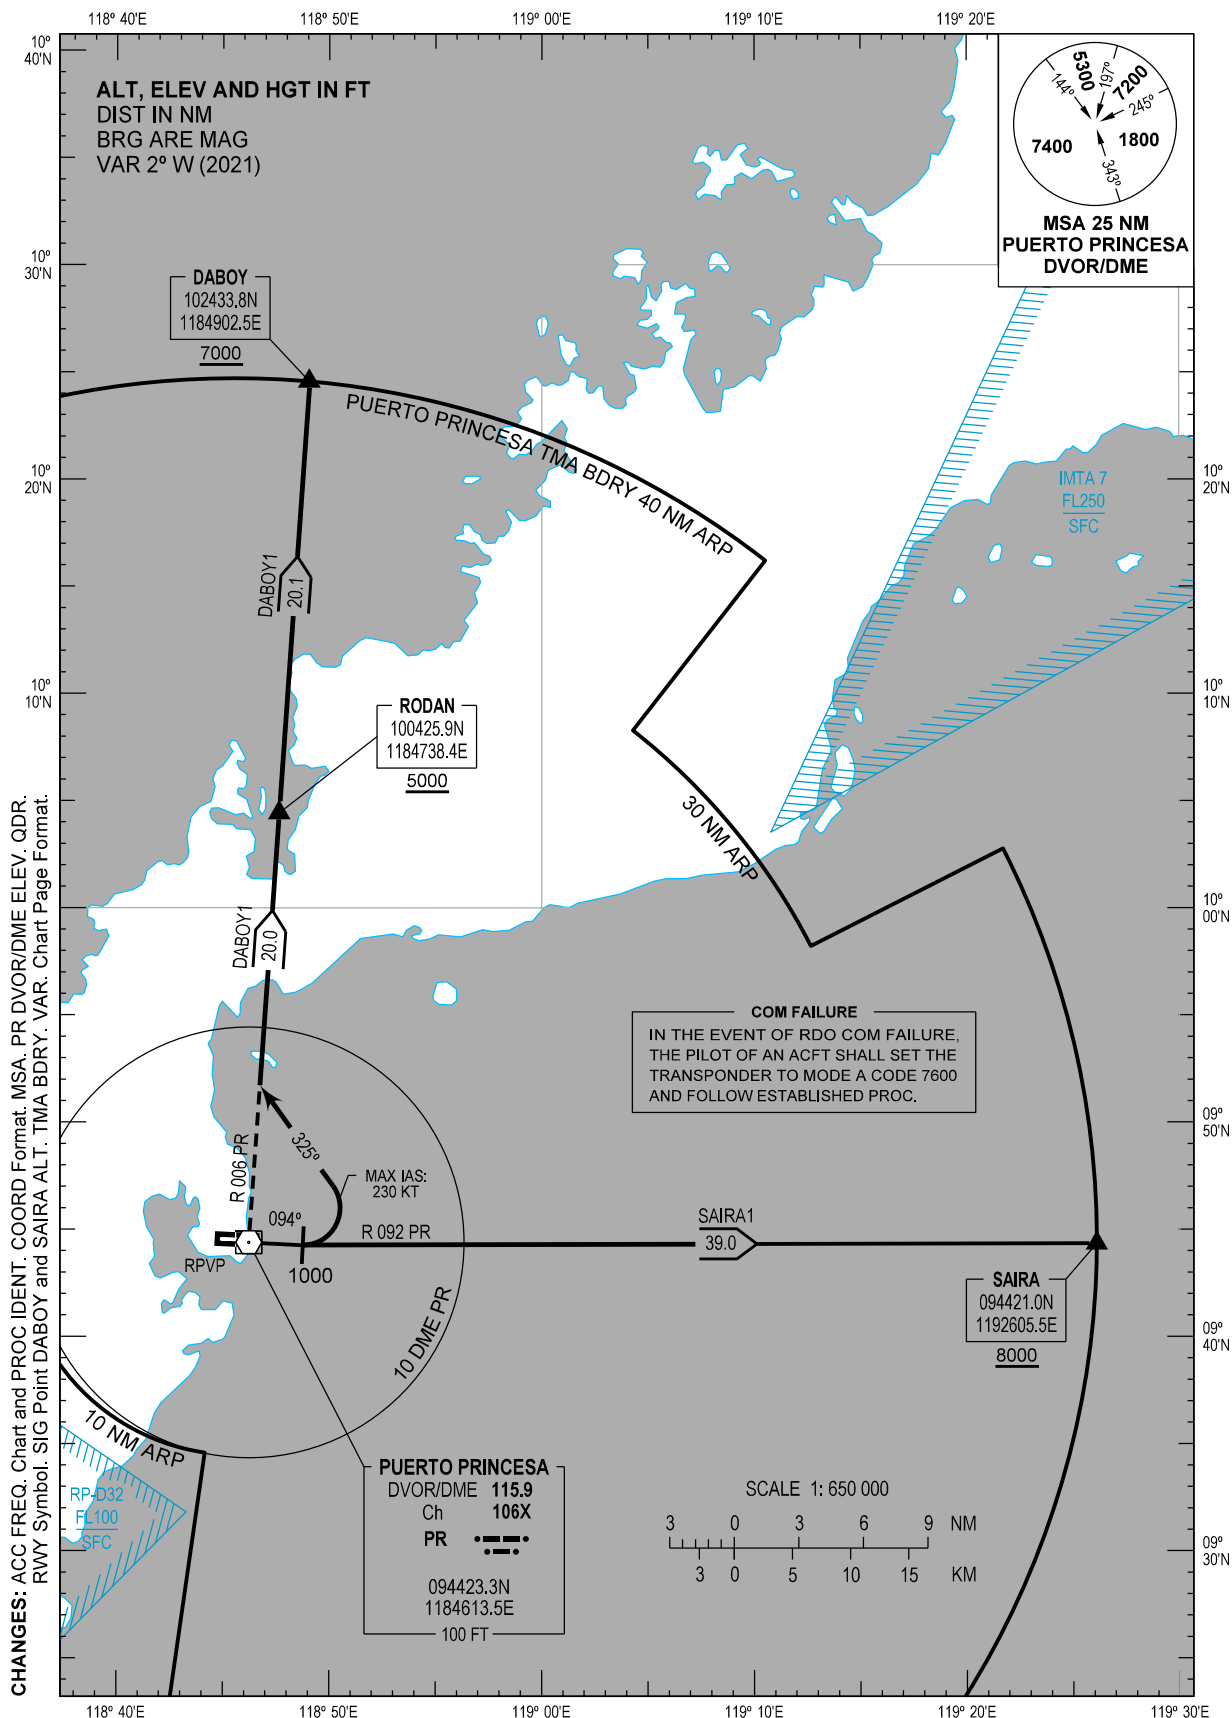

### DEPARTURE ROUTE DESCRIPTION

| SID           | TAKE-OFF                                                              | PROCEDURE                                                                                                                             | REMARKS                                                        |
|---------------|-----------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| <b>DABOY1</b> | RWY 09 - Straight-out climb to 1000 FT, then turn left heading 325°M. | Intercept and track-out PR DVOR/DME Radial 006 to cross RODAN at or above 5000 FT. Continue climb to cross DABOY at or above 7000 FT. | Max IAS 230 KT during initial turn.                            |
| <b>SAIRA1</b> | RWY 09 - Straight-out climb to 1000 FT, then turn left.               | Intercept and track-out PR DVOR/DME Radial 092 to cross SAIRA at or above 8000 FT.                                                    | ATS gradient of 3.4% so as to cross SAIRA at or above 8000 FT. |




STANDARD DEPARTURE  
CHART - INSTRUMENT  
(SID) - ICAO

TRANSITION  
ALTITUDE  
11000 FT

TWR - 118.1  
APP - 122.0  
ACC - 118.9 (SOUTHWEST)  
- 124.9 / 125.7 (SOUTH)  
- 8942 / 5655 (SEA-2 HF)

PALAWAN/Puerto  
Princesa Intl (RPVP)  
RWY 09  
MARIN1

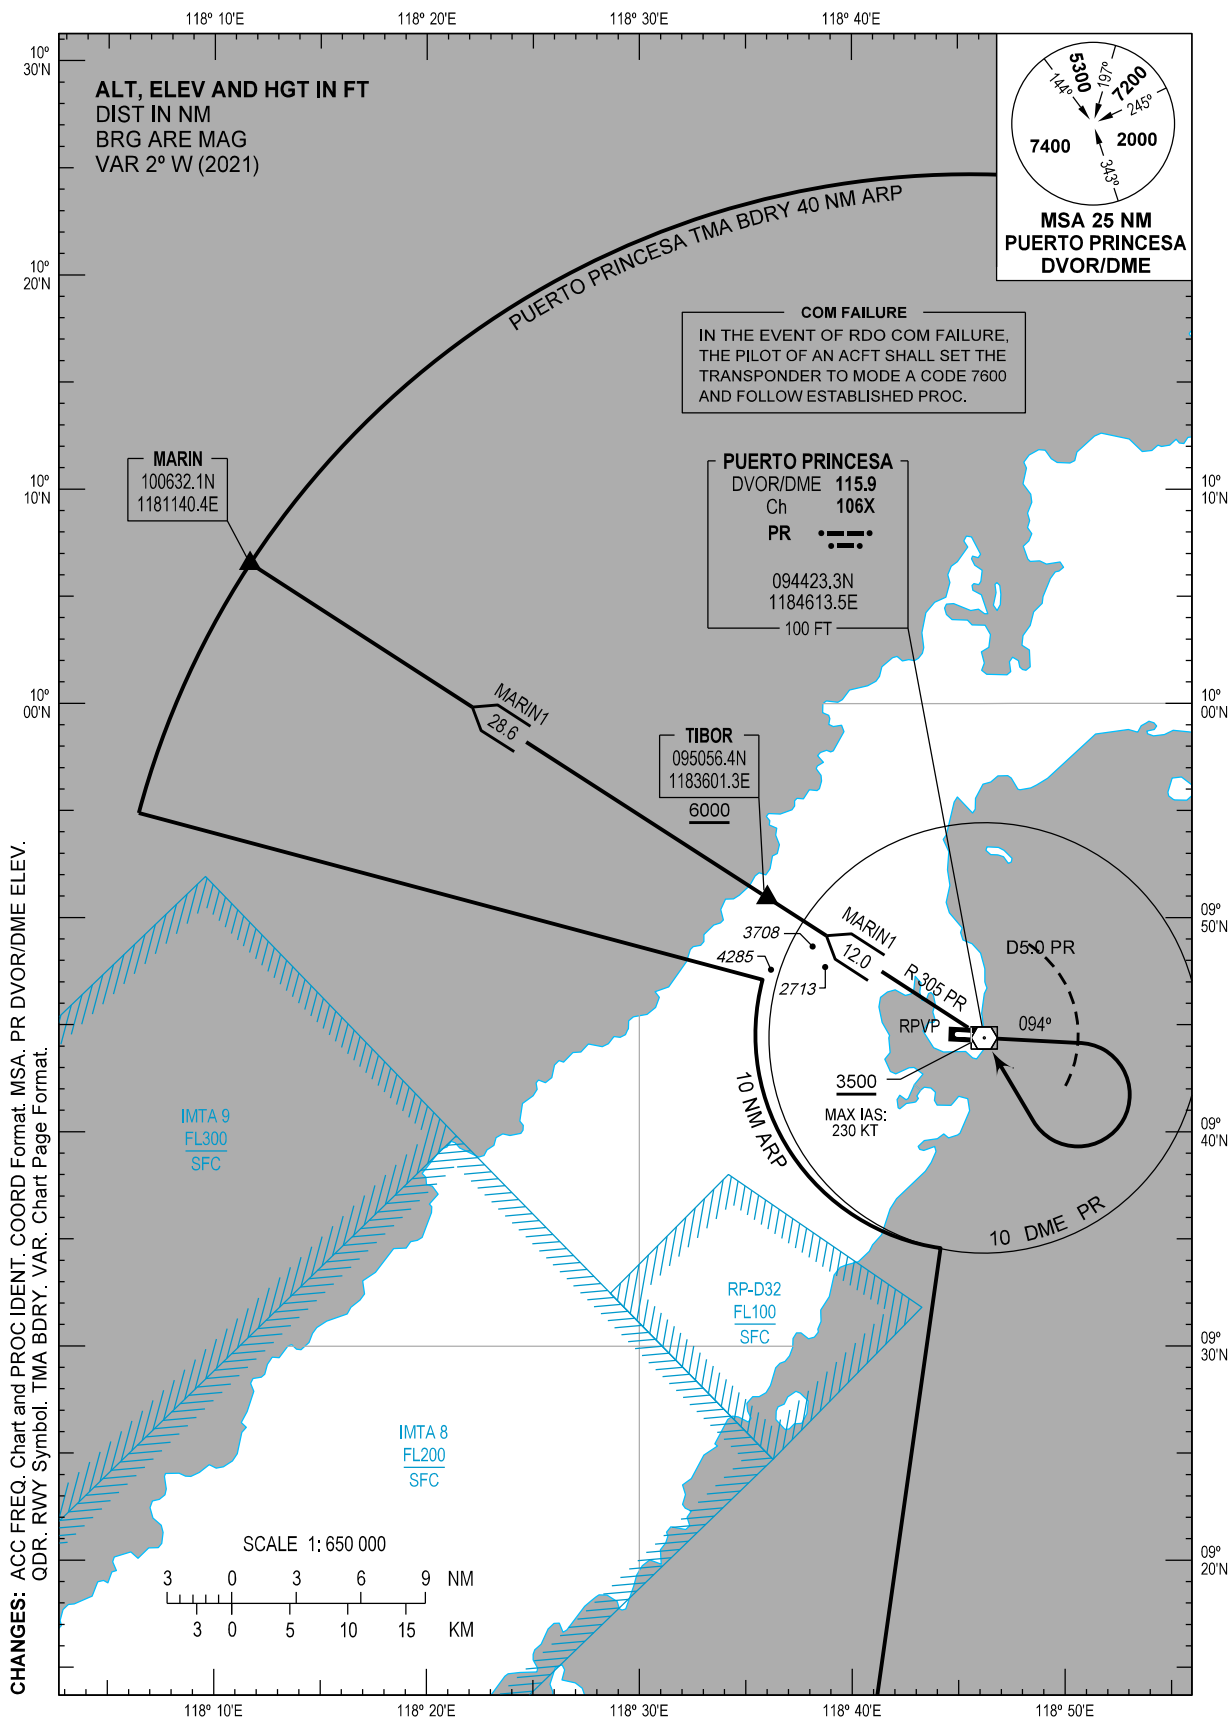

### DEPARTURE ROUTE DESCRIPTION

| SID    | TAKE-OFF                                                                                       | PROCEDURE                                                                                                                                    | REMARKS                           |
|--------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------|
| MARIN1 | RWY 09 - Straight-out departure until D5.0 PR DVOR/DME, then turn right direct to PR DVOR/DME. | Cross PR DVOR/DME at or above 3500 FT. Intercept and track-out PR DVOR/DME Radial 305 to cross TIBOR at or above 6000 FT. Continue to MARIN. | Max IAS 230 KT until PR DVOR/DME. |


STANDARD DEPARTURE  
CHART - INSTRUMENT  
(SID) - ICAO

TRANSITION  
ALTITUDE  
11000 FT

TWR - 118.1  
APP - 122.0  
ACC - 118.9 (SOUTHWEST)  
- 124.9 / 125.7 (SOUTH)  
- 8942 / 5655 (SEA-2 HF)

PALAWAN/Puerto  
Princesa Intl (RPVP)

RWY 27  
DABOY3 MARIN3

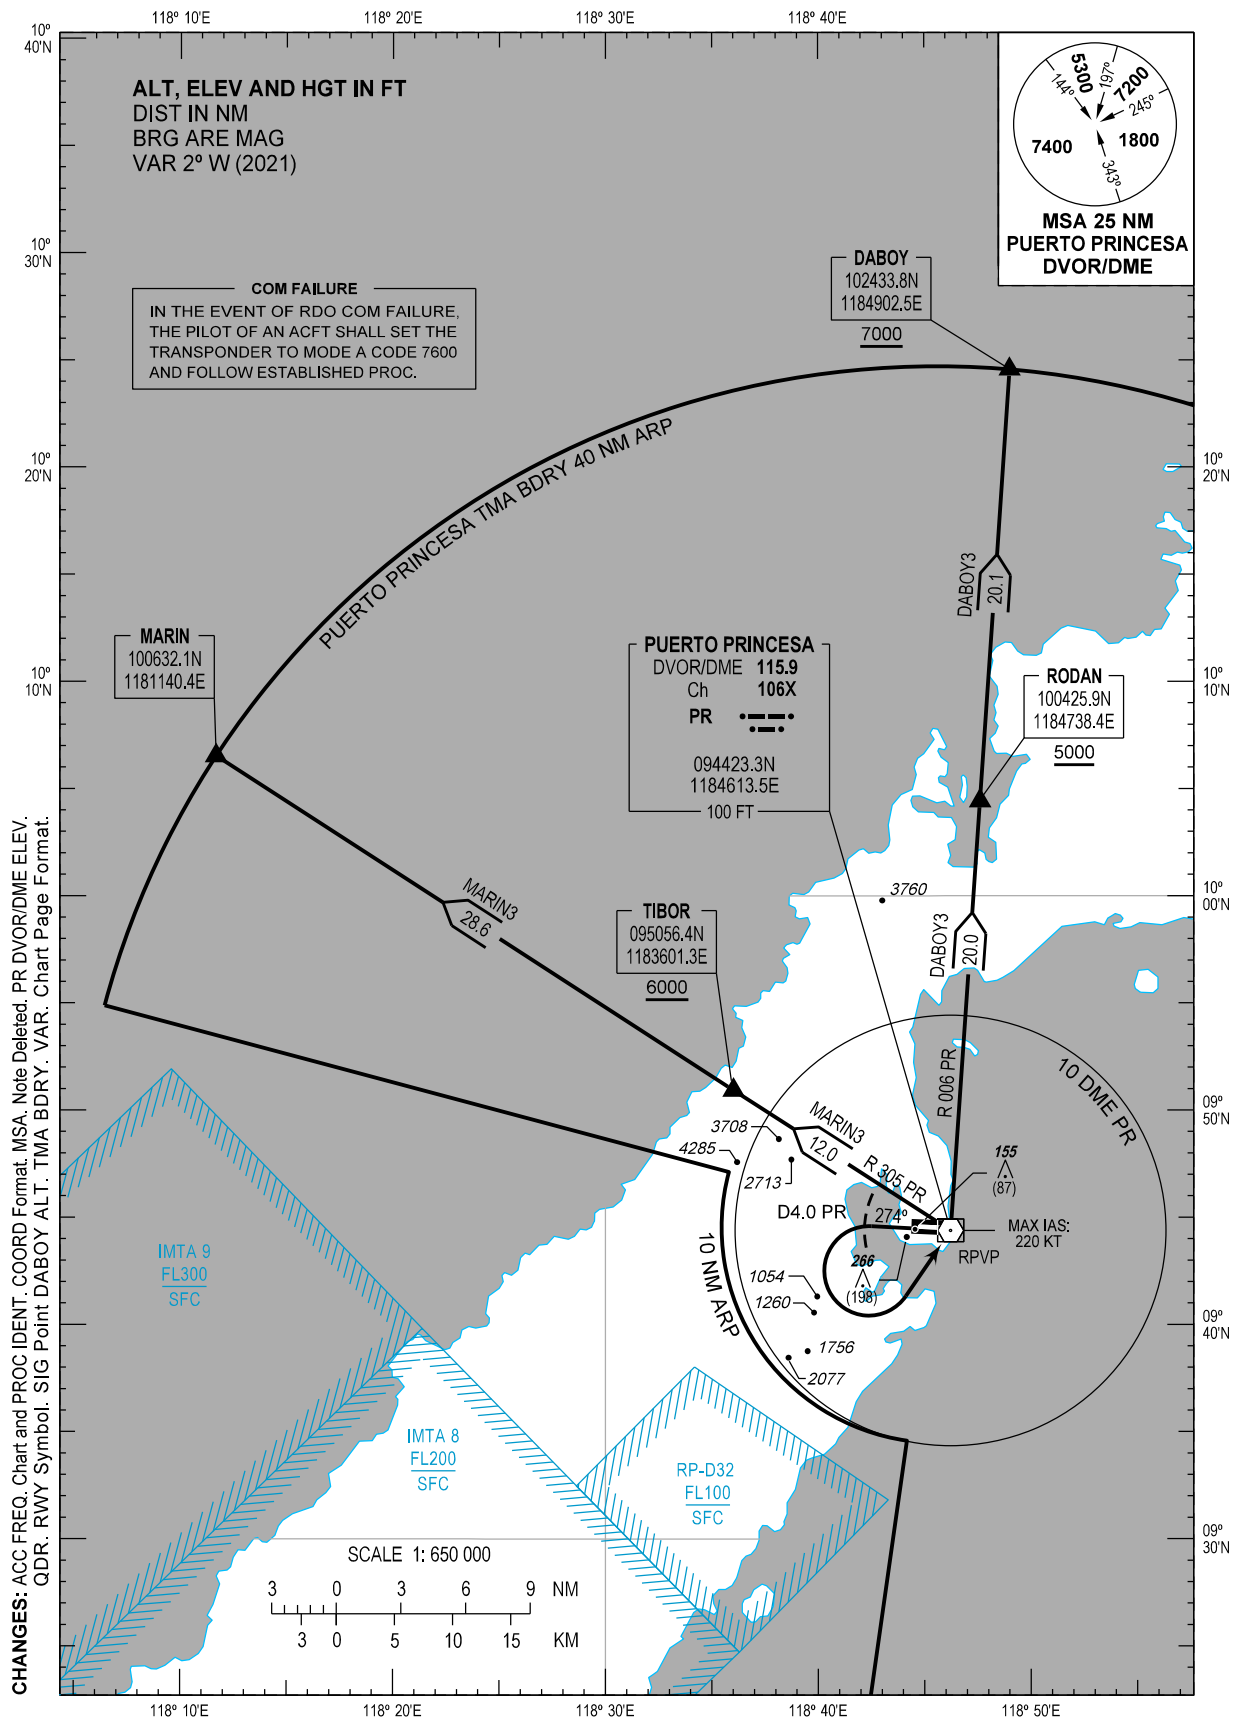

### DEPARTURE ROUTE DESCRIPTION


| SID           | TAKE-OFF                                                                                      | PROCEDURE                                                                                                                             | REMARKS                                                                         |
|---------------|-----------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| <b>DABOY3</b> | RWY 27 - Straight-out departure until D4.0 PR DVOR/DME, then turn left direct to PR DVOR/DME. | Intercept and track-out PR DVOR/DME Radial 006 to cross RODAN at or above 5000 FT. Continue climb to cross DABOY at or above 7000 FT. | 1. PDG of 4.6% until 2600 FT then 3.3%.<br>2. Max IAS 220 KT until PR DVOR/DME. |
| <b>MARIN3</b> | RWY 27 - Straight-out departure until D4.0 PR DVOR/DME, then turn left direct to PR DVOR/DME. | Intercept and track-out PR DVOR/DME Radial 305 to cross TIBOR at or above 6000 FT. Continue climb to MARIN.                           | 1. PDG of 4.9% until 4500 FT then 3.3%.<br>2. Max IAS 220 KT until PR DVOR/DME. |

STANDARD DEPARTURE  
CHART - INSTRUMENT  
(SID) - ICAO

TRANSITION  
ALTITUDE  
11000 FT

TWR - 118.1  
APP - 122.0  
ACC - 118.9 (SOUTHWEST)  
- 124.9 / 125.7 (SOUTH)  
- 8942 / 5655 (SEA-2 HF)

PALAWAN/Puerto  
Princesa Intl (RPVP)  
RWY 27  
SAIRA3

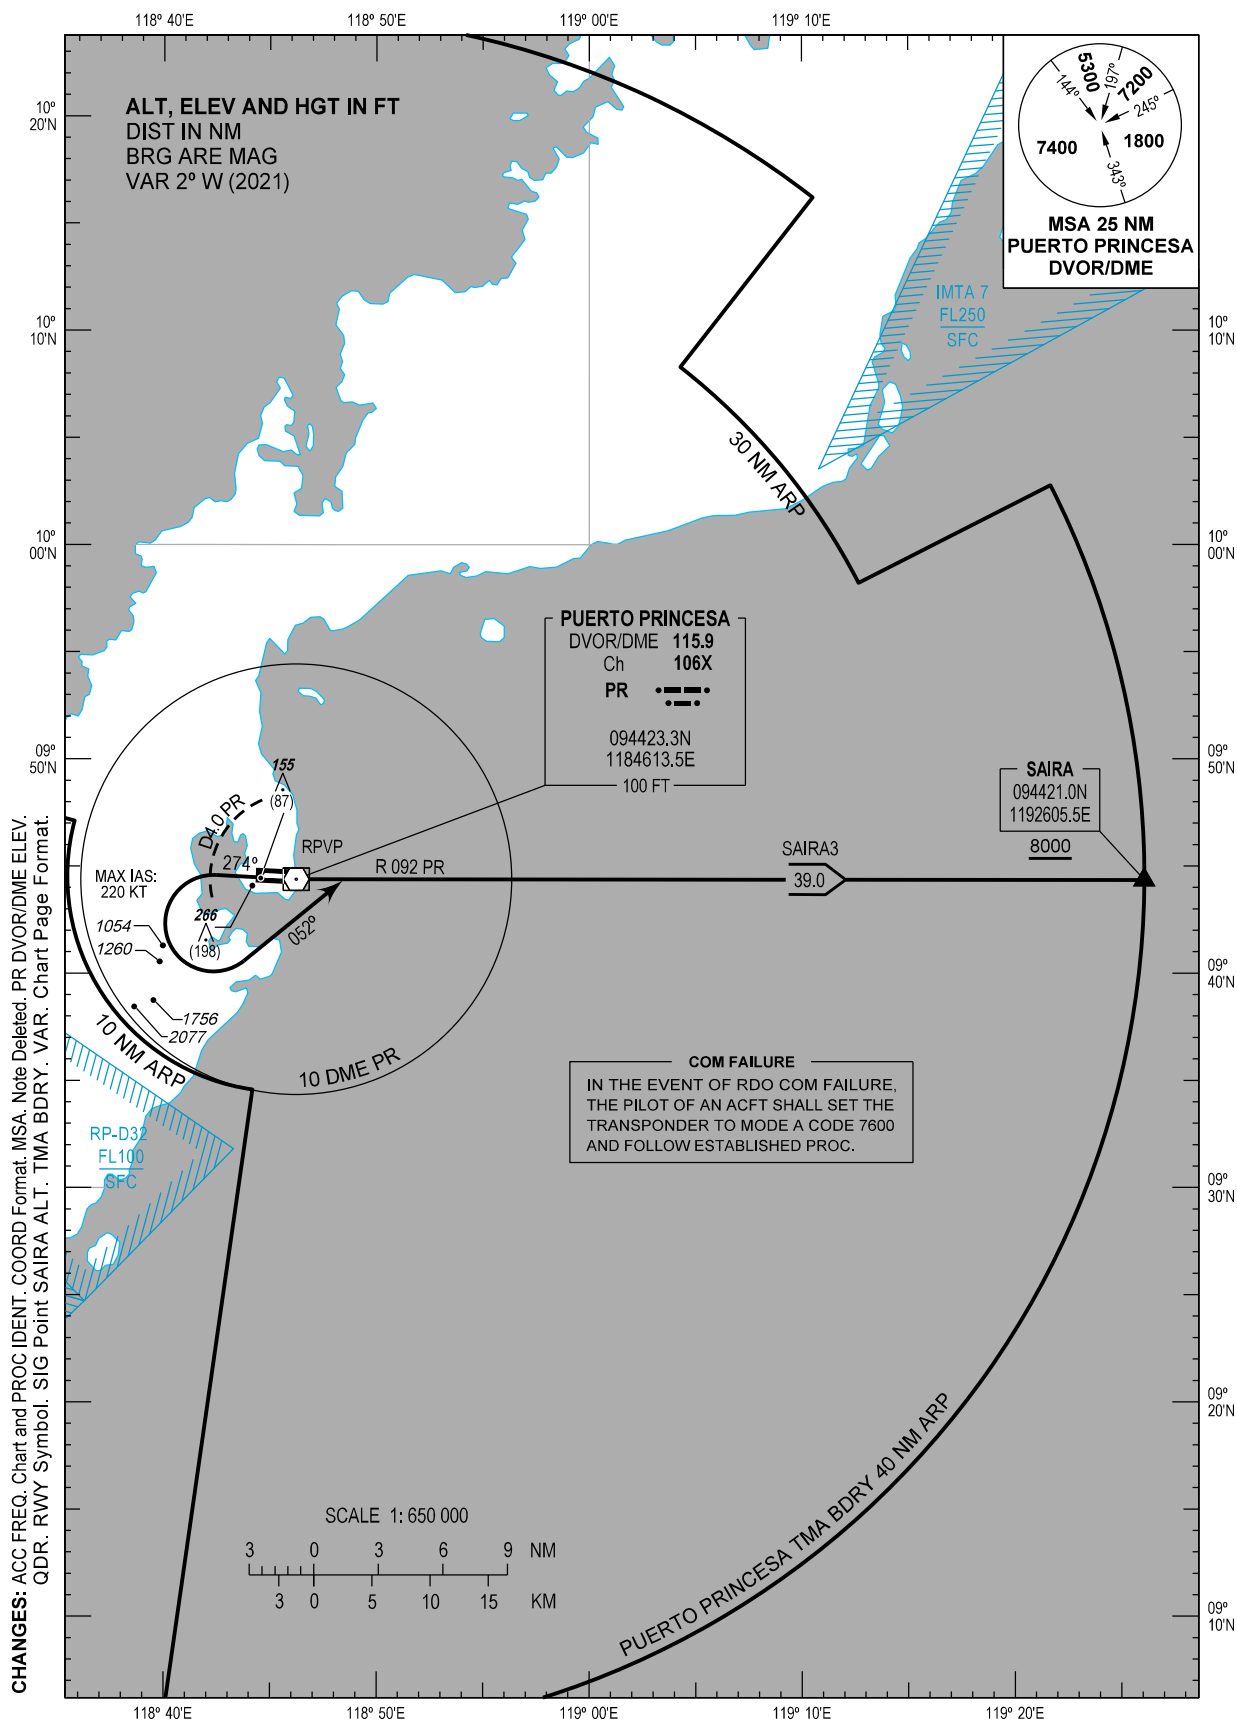

### DEPARTURE ROUTE DESCRIPTION


| SID           | TAKE-OFF                                                                              | PROCEDURE                                                                          | REMARKS                                                                           |
|---------------|---------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>SAIRA3</b> | RWY 27 - Straight-out departure until D4.0 PR DVOR/DME, then turn left heading 052°M. | Intercept and track-out PR DVOR/DME Radial 092 to cross SAIRA at or above 8000 FT. | 1. PDG of 4.6% until 2600 FT then 3.3%.<br>2. Max IAS 220 KT during initial turn. |

STANDARD DEPARTURE  
CHART - INSTRUMENT  
(SID) - ICAO

TRANSITION  
ALTITUDE  
11000 FT

TWR - 118.1  
APP - 122.0  
ACC - 118.9 (SOUTHWEST)  
- 124.9 / 125.7 (SOUTH)  
- 8942 / 5655 (SEA-2 HF)

PALAWAN/Puerto  
Princesa Intl (RPVP)  
RNP SID RWY 09  
DABOY1E MARIN1E  
MIKEL1E NOMYO1E  
SAIRA1E

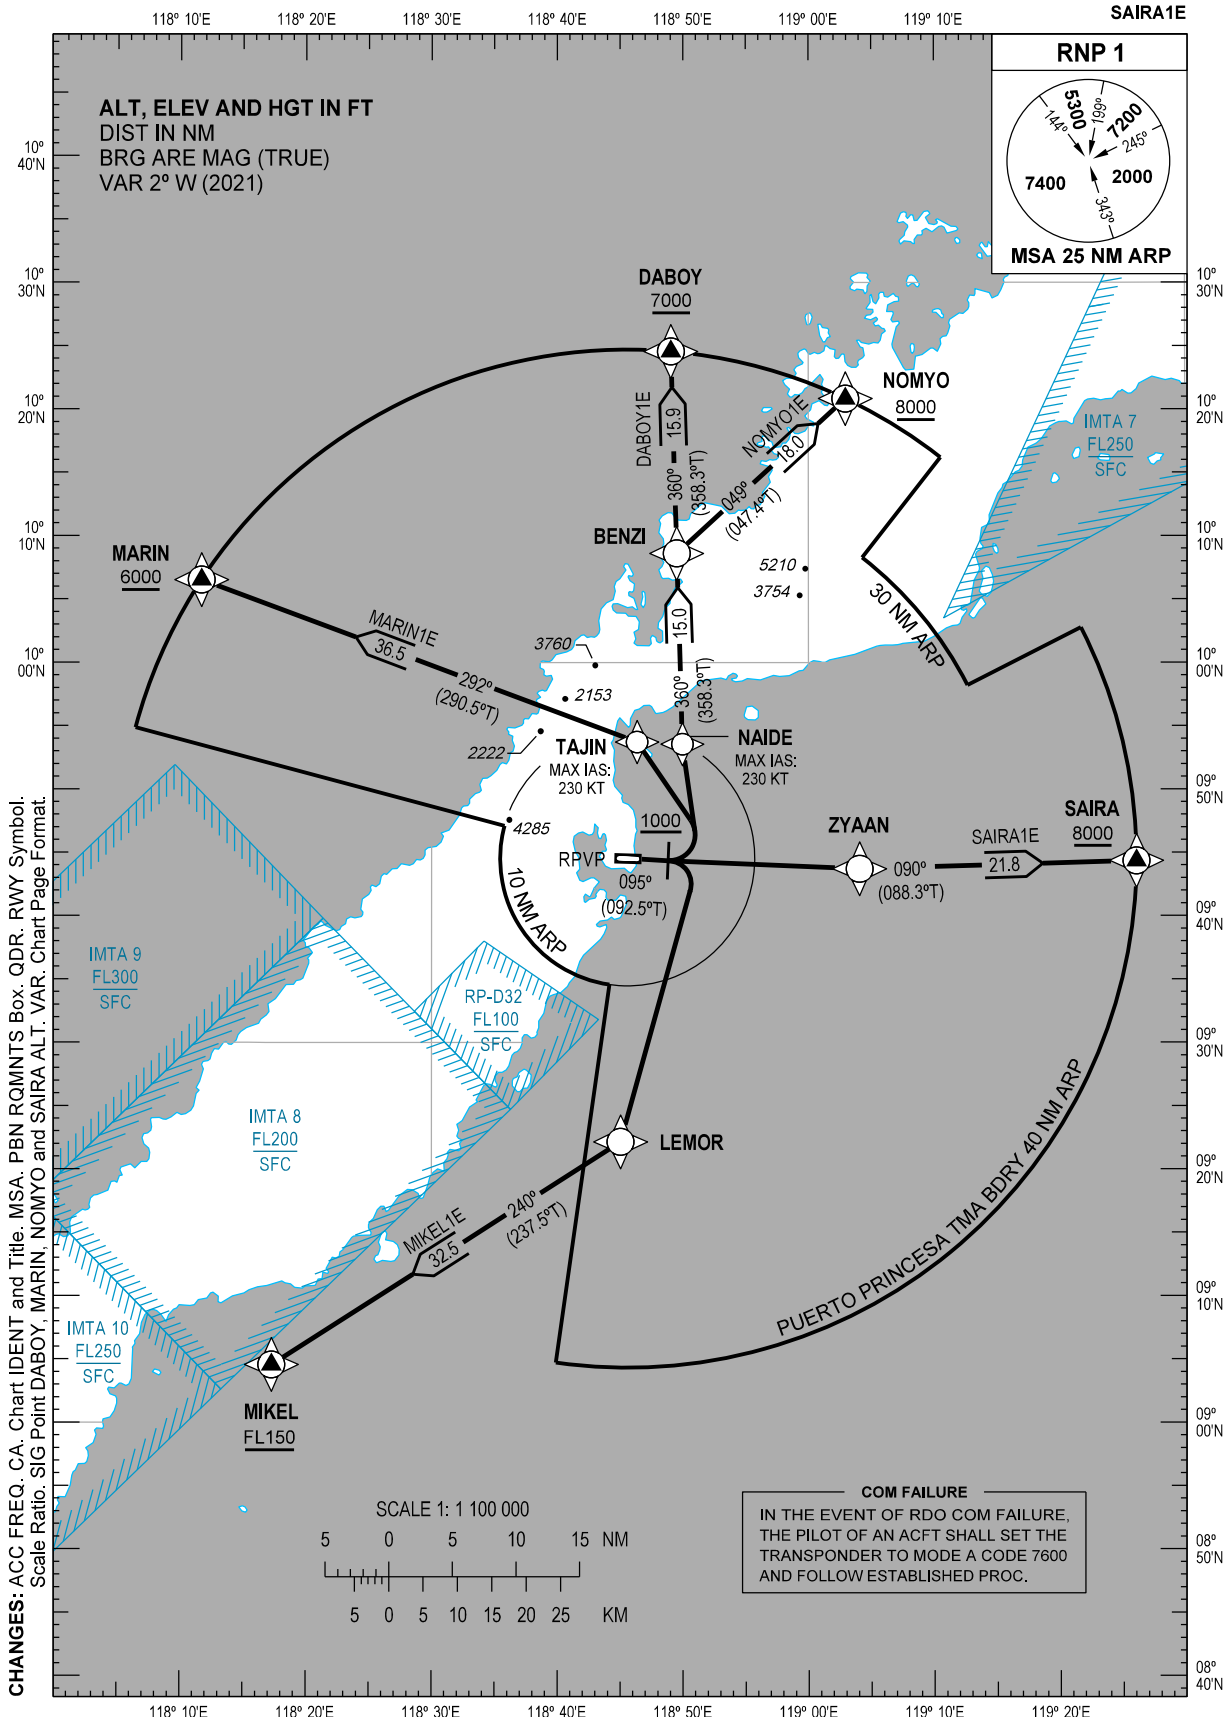

### DEPARTURE ROUTE DESCRIPTION

| SID     | TAKE-OFF | PROCEDURE                                                                                                                                                                       | REMARKS                                                        |
|---------|----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| DABOY1E | RWY 09   | Climb on course 095°M. At 1000 FT, turn left direct to NAIDE, to BENZI, to DABOY.                                                                                               | Do not exceed 230 KT until NAIDE.                              |
| MARIN1E |          | Climb on course 095°M. At 1000 FT, turn left direct to TAJIN, to MARIN.                                                                                                         | Do not exceed 230 KT until TAJIN.                              |
| MIKEL1E |          | Climb on course 095°M. At 1000 FT, turn right direct to LEMOR, to MIKEL.<br><br>(Note: Use of procedure is subject to ATC approval when RP-D32, IMTA 8 and IMTA 10 are active.) | ATS gradient of 4.2% so as to cross MIKEL at or above FL150.   |
| NOMYO1E |          | Climb on course 095°M. At 1000 FT, turn left direct to NAIDE, to BENZI, to NOMYO.<br><br>(Note: Due to one-way traffic flow, use of procedure is subject to ATC approval.)      | Do not exceed 230 KT until NAIDE.                              |
| SAIRA1E |          | Climb on course 095°M. At 1000 FT, fly direct to ZYAAN, to SAIRA.                                                                                                               | ATS gradient of 3.4% so as to cross SAIRA at or above 8000 FT. |

### WAYPOINT LIST

| Waypoint Name | Latitude  | Longitude  | Type   |
|---------------|-----------|------------|--------|
| BENZI         | 100837.2N | 1184931.0E | Fly-by |
| DABOY         | 102433.8N | 1184902.5E | Fly-by |
| LEMOR         | 092209.5N | 1184502.3E | Fly-by |
| MARIN         | 100632.1N | 1181140.4E | Fly-by |
| MIKEL         | 090434.1N | 1181717.7E | Fly-by |
| NAIDE         | 095333.4N | 1184957.9E | Fly-by |
| NOMYO         | 102050.2N | 1190257.2E | Fly-by |
| SAIRA         | 094421.0N | 1192605.5E | Fly-by |
| TAJIN         | 095343.6N | 1184621.4E | Fly-by |
| ZYAAN         | 094342.8N | 1190403.9E | Fly-by |

### PROPOSED CODING FOR DEPARTURE RNP SID RWY 09

Table 1: DABOY1E

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CA              | -                   | -       | 095 (092.5)    | +2                     | -             | -              | +1000         | -                | -       | RNP1                     | RW09                  |
| 20            | DF              | NAIDE               | -       | -              | -                      | -             | L              | -             | -230             | -       | RNP1                     | RW09                  |
| 30            | TF              | BENZI               | -       | 360 (358.3)    | +2                     | 15.0          | -              | -             | -                | -       | RNP1                     | RW09                  |
| 40            | TF              | DABOY               | -       | 360 (358.3)    | +2                     | 15.9          | -              | +7000         | -                | -       | RNP1                     | RW09                  |

**CHANGES:** ALT. COORD Format. Flyover. MAG Course. PROC IDENT. Speed Limit. VAR. Page Format.



**Table 2: MARIN1E**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CA              | -                   | -       | 095 (092.5)    | +2                     | -             | -              | +1000         | -                | -       | RNP1                     | RW09                  |
| 20            | DF              | TAJIN               | -       | -              | -                      | -             | L              | -             | -230             | -       | RNP1                     | RW09                  |
| 30            | TF              | MARIN               | -       | 292 (290.5)    | +2                     | 36.5          | -              | +6000         | -                | -       | RNP1                     | RW09                  |

**Table 3: MIKEL1E**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CA              | -                   | -       | 095 (092.5)    | +2                     | -             | -              | +1000         | -                | -       | RNP1                     | RW09                  |
| 20            | DF              | LEMOR               | -       | -              | -                      | -             | R              | -             | -                | -       | RNP1                     | RW09                  |
| 30            | TF              | MIKEL               | -       | 240 (237.5)    | +2                     | 32.5          | -              | +FL150        | -                | -       | RNP1                     | RW09                  |

**Table 4: NOMYO1E**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CA              | -                   | -       | 095 (092.5)    | +2                     | -             | -              | +1000         | -                | -       | RNP1                     | RW09                  |
| 20            | DF              | NAIDE               | -       | -              | -                      | -             | L              | -             | -230             | -       | RNP1                     | RW09                  |
| 30            | TF              | BENZI               | -       | 360 (358.3)    | +2                     | 15.0          | -              | -             | -                | -       | RNP1                     | RW09                  |
| 40            | TF              | NOMYO               | -       | 049 (047.4)    | +2                     | 18.0          | -              | +8000         | -                | -       | RNP1                     | RW09                  |

**Table 5: SAIRA1E**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CA              | -                   | -       | 095 (092.5)    | +2                     | -             | -              | +1000         | -                | -       | RNP1                     | RW09                  |
| 20            | DF              | ZYAAN               | -       | -              | -                      | -             | -              | -             | -                | -       | RNP1                     | RW09                  |
| 30            | TF              | SAIRA               | -       | 090 (088.3)    | +2                     | 21.8          | -              | +8000         | -                | -       | RNP1                     | RW09                  |

**CHANGES:** ALT. Flyover. MAG Course. Speed Limit. VAR. Page Format.


INTENTIONALLY  
LEFT  
BLANK

STANDARD DEPARTURE  
CHART - INSTRUMENT  
(SID) - ICAO

TRANSITION  
ALTITUDE  
11000 FT

TWR - 118.1  
APP - 122.0  
ACC - 118.9 (SOUTHWEST)  
- 124.9 / 125.7 (SOUTH)  
- 8942 / 5655 (SEA-2 HF)

PALAWAN/Puerto  
Princesa Intl (RPVP)  
RNP SID RWY 27  
DABOY1W MARIN1W  
NOMYO1W SAIRA1W

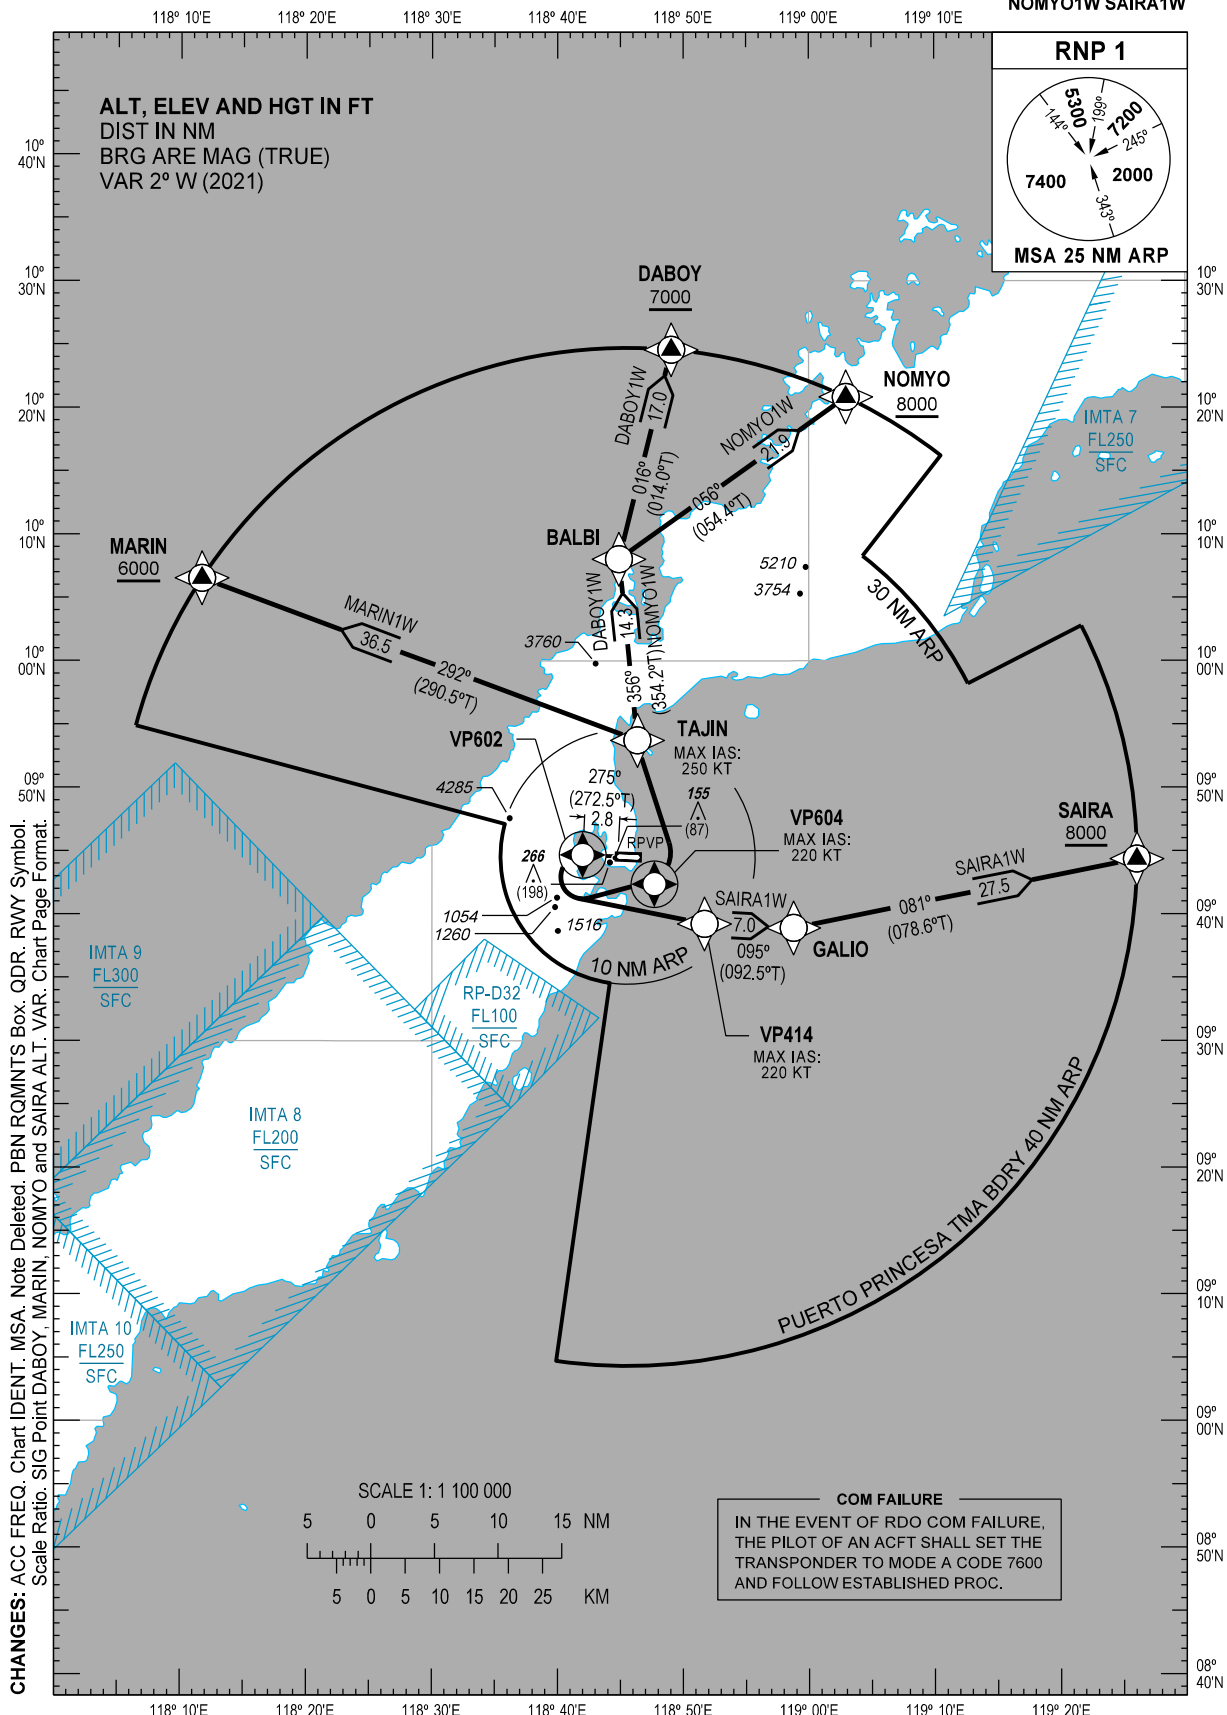

## DEPARTURE ROUTE DESCRIPTION

| SID     | TAKE-OFF | PROCEDURE                                                                                                                                                                                                 | REMARKS                                                                                                           |
|---------|----------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| DABOY1W | RWY 27   | Climb on course 275°M. At <u>VP602</u> , turn left direct to <u>VP604</u> , direct to TAJIN, to BALBI, to DABOY.                                                                                          | 1. PDG of 4.6% until passing 2600 FT, then 3.3%.<br>2. Do not exceed 220 KT until VP604, then 250 KT until TAJIN. |
| MARIN1W |          | Climb on course 275°M. At <u>VP602</u> , turn left direct to <u>VP604</u> , then direct to TAJIN, to MARIN.                                                                                               |                                                                                                                   |
| NOMYO1W |          | Climb on course 275°M. At <u>VP602</u> , turn left direct to <u>VP604</u> , direct to TAJIN, to BALBI, to NOMYO.<br><br>(Note: Due to one-way traffic flow, use of procedure is subject to ATC approval.) |                                                                                                                   |
| SAIRA1W |          | Climb on course 275°M. At <u>VP602</u> , turn left direct to VP414 to GALIO, to SAIRA.                                                                                                                    | 1. PDG of 4.6% until passing 2600 FT then 3.3%.<br>2. Do not exceed 220 KT until VP414.                           |

## WAYPOINT LIST

| Waypoint Name | Latitude  | Longitude  | Type    |
|---------------|-----------|------------|---------|
| BALBI         | 100801.7N | 1184453.1E | Fly-by  |
| DABOY         | 102433.8N | 1184902.5E | Fly-by  |
| GALIO         | 093855.1N | 1185846.9E | Fly-by  |
| MARIN         | 100632.1N | 1181140.4E | Fly-by  |
| NOMYO         | 102050.2N | 1190257.2E | Fly-by  |
| SAIRA         | 094421.0N | 1192605.5E | Fly-by  |
| TAJIN         | 095343.6N | 1184621.4E | Fly-by  |
| VP414         | 093913.8N | 1185141.7E | Fly-by  |
| VP602         | 094440.8N | 1184159.8E | Flyover |
| VP604         | 094237.0N | 1184729.9E | Flyover |

## PROPOSED CODING FOR DEPARTURE RNP SID RWY 27

Table 1: DABOY1W

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CF              | VP602               | Y       | 275 (272.5)    | +2                     | 2.8           | -              | -             | -                | -       | RNP1                     | RW27                  |
| 20            | DF              | VP604               | Y       | -              | -                      | -             | L              | -             | -220             | -       | RNP1                     | RW27                  |
| 30            | DF              | TAJIN               | -       | -              | -                      | -             | L              | -             | -250             | -       | RNP1                     | RW27                  |
| 40            | TF              | BALBI               | -       | 356 (354.2)    | +2                     | 14.3          | -              | -             | -                | -       | RNP1                     | RW27                  |
| 50            | TF              | DABOY               | -       | 016 (014.0)    | +2                     | 17.0          | -              | +7000         | -                | -       | RNP1                     | RW27                  |

CHANGES: ALT. COORD Format. Flyover. MAG Course. PROC IDENT. Page Format.

**Table 2: MARIN1W**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CF              | VP602               | Y       | 275<br>(272.5) | +2                     | 2.8           | -              | -             | -                | -       | RNP1                     | RW27                  |
| 20            | DF              | VP604               | Y       | -              | -                      | -             | L              | -             | -220             | -       | RNP1                     | RW27                  |
| 30            | DF              | TAJIN               | -       | -              | -                      | -             | L              | -             | -250             | -       | RNP1                     | RW27                  |
| 40            | TF              | MARIN               | -       | 292<br>(290.5) | +2                     | 36.5          | -              | +6000         | -                | -       | RNP1                     | RW27                  |

**Table 3: NOMYO1W**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CF              | VP602               | Y       | 275<br>(272.5) | +2                     | 2.8           | -              | -             | -                | -       | RNP1                     | RW27                  |
| 20            | DF              | VP604               | Y       | -              | -                      | -             | L              | -             | -220             | -       | RNP1                     | RW27                  |
| 30            | DF              | TAJIN               | -       | -              | -                      | -             | L              | -             | -250             | -       | RNP1                     | RW27                  |
| 40            | TF              | BALBI               | -       | 356<br>(354.2) | +2                     | 14.3          | -              | -             | -                | -       | RNP1                     | RW27                  |
| 50            | TF              | NOMYO               | -       | 056<br>(054.4) | +2                     | 21.9          | -              | +8000         | -                | -       | RNP1                     | RW27                  |

**Table 4: SAIRA1W**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CF              | VP602               | Y       | 275<br>(272.5) | +2                     | 2.8           | -              | -             | -                | -       | RNP1                     | RW27                  |
| 20            | DF              | VP414               | -       | -              | -                      | -             | L              | -             | -220             | -       | RNP1                     | RW27                  |
| 30            | TF              | GALIO               | -       | 095<br>(092.5) | +2                     | 7.0           | -              | -             | -                | -       | RNP1                     | RW27                  |
| 40            | TF              | SAIRA               | -       | 081<br>(078.6) | +2                     | 27.5          | -              | +8000         | -                | -       | RNP1                     | RW27                  |

**CHANGES:** ALT. Flyover. MAG Course. Speed Limit. VAR. Page Format.


INTENTIONALLY  
LEFT  
BLANK

STANDARD DEPARTURE  
CHART - INSTRUMENT  
(SID) - ICAO

TRANSITION  
ALTITUDE  
11000 FT

TWR - 118.1  
APP - 122.0  
ACC - 118.9 (SOUTHWEST)  
- 124.9 / 125.7 (SOUTH)  
- 8942 / 5655 (SEA-2 HF)

PALAWAN/Puerto  
Princesa Intl (RPVP)  
RNP SID RWY 27  
DABOY3W MIKEL1W

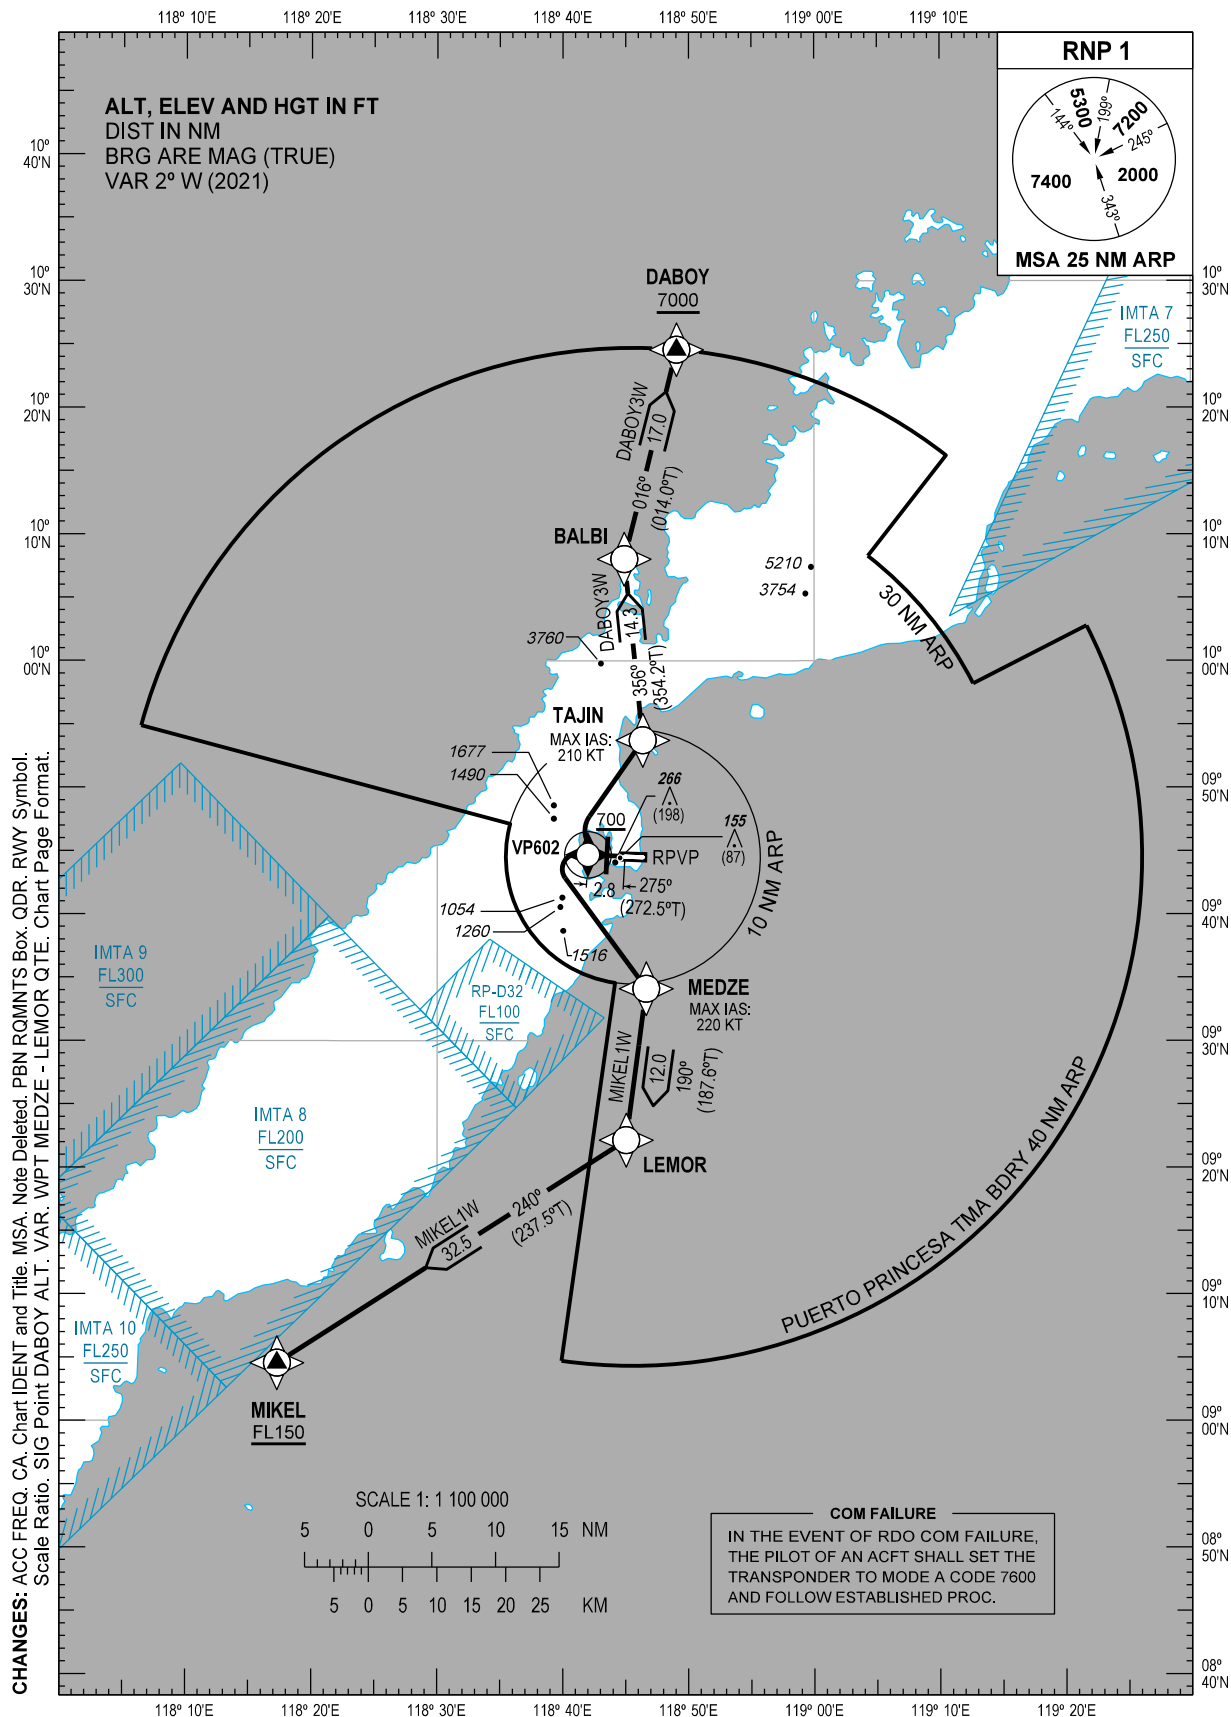

## DEPARTURE ROUTE DESCRIPTION

| SID            | TAKE-OFF | PROCEDURE                                                                                                                                                                              | REMARKS                                                                                                                                                     |
|----------------|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DABOY3W</b> | RWY 27   | Climb on course 275°M. At 700 FT, turn right direct to TAJIN, to BALBI, to DABOY.                                                                                                      | 1. PDG of 5.4% until passing 2100 FT, then 3.3%.<br>2. Do not exceed 210 KT until TAJIN.                                                                    |
| <b>MIKEL1W</b> |          | Climb on course 275°M. At VP602, turn left direct to MEDZE, to LEMOR, to MIKEL.<br><br>(Note: Use of procedure is subject to ATC approval when RP-D32, IMTA 8 and IMTA 10 are active.) | 1. PDG of 4.6% until passing 2600 FT, then 3.3%.<br>2. Do not exceed 220 KT until MEDZE.<br>3. ATS gradient of 4.0% so as to cross MIKEL at or above FL150. |

## WAYPOINT LIST

| Waypoint Name | Latitude  | Longitude  | Type    |
|---------------|-----------|------------|---------|
| BALBI         | 100801.7N | 1184453.1E | Fly-by  |
| DABOY         | 102433.8N | 1184902.5E | Fly-by  |
| LEMOR         | 092209.5N | 1184502.3E | Fly-by  |
| MEDZE         | 093406.5N | 1184638.0E | Fly-by  |
| MIKEL         | 090434.1N | 1181717.7E | Fly-by  |
| TAJIN         | 095343.6N | 1184621.4E | Fly-by  |
| VP602         | 094440.8N | 1184159.8E | Flyover |

## PROPOSED CODING FOR DEPARTURE RNP SID RWY 27

**Table 1: DABOY3W**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CA              | -                   | -       | 275 (272.5)    | +2                     | -             | -              | +700          | -                | -       | RNP1                     | RW27                  |
| 20            | DF              | TAJIN               | -       | -              | -                      | -             | R              | -             | -210             | -       | RNP1                     | RW27                  |
| 30            | TF              | BALBI               | -       | 356 (354.2)    | +2                     | 14.3          | -              | -             | -                | -       | RNP1                     | RW27                  |
| 40            | TF              | DABOY               | -       | 016 (014.0)    | +2                     | 17.0          | -              | +7000         | -                | -       | RNP1                     | RW27                  |

**Table 2: MIKEL1W**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | CF              | VP602               | Y       | 275 (272.5)    | +2                     | 2.8           | -              | -             | -                | -       | RNP1                     | RW27                  |
| 20            | DF              | MEDZE               | -       | -              | -                      | -             | L              | -             | -220             | -       | RNP1                     | RW27                  |
| 30            | TF              | LEMOR               | -       | 190 (187.5)    | +2                     | 12.0          | -              | -             | -                | -       | RNP1                     | RW27                  |
| 40            | TF              | MIKEL               | -       | 240 (237.5)    | +2                     | 32.5          | -              | +FL150        | -                | -       | RNP1                     | RW27                  |

**CHANGES:** ALT. COORD Format. Flyover. MAG Course. PROC IDENT. Speed Limit. VAR. Page Format.



STANDARD ARRIVAL  
CHART - INSTRUMENT  
(STAR) - ICAO


TRANSITION  
ALTITUDE  
11000 FT

ACC - 118.9 (SOUTHWEST)  
- 124.9 / 125.7 (SOUTH)  
- 8942 / 5655 (SEA-2 HF)  
APP - 122.0  
TWR - 118.1

PALAWAN/Puerto  
Princesa Intl (RPVP)

RWY 27

MARIN2 NOMYO2  
ZENNY2 ZENNY2A

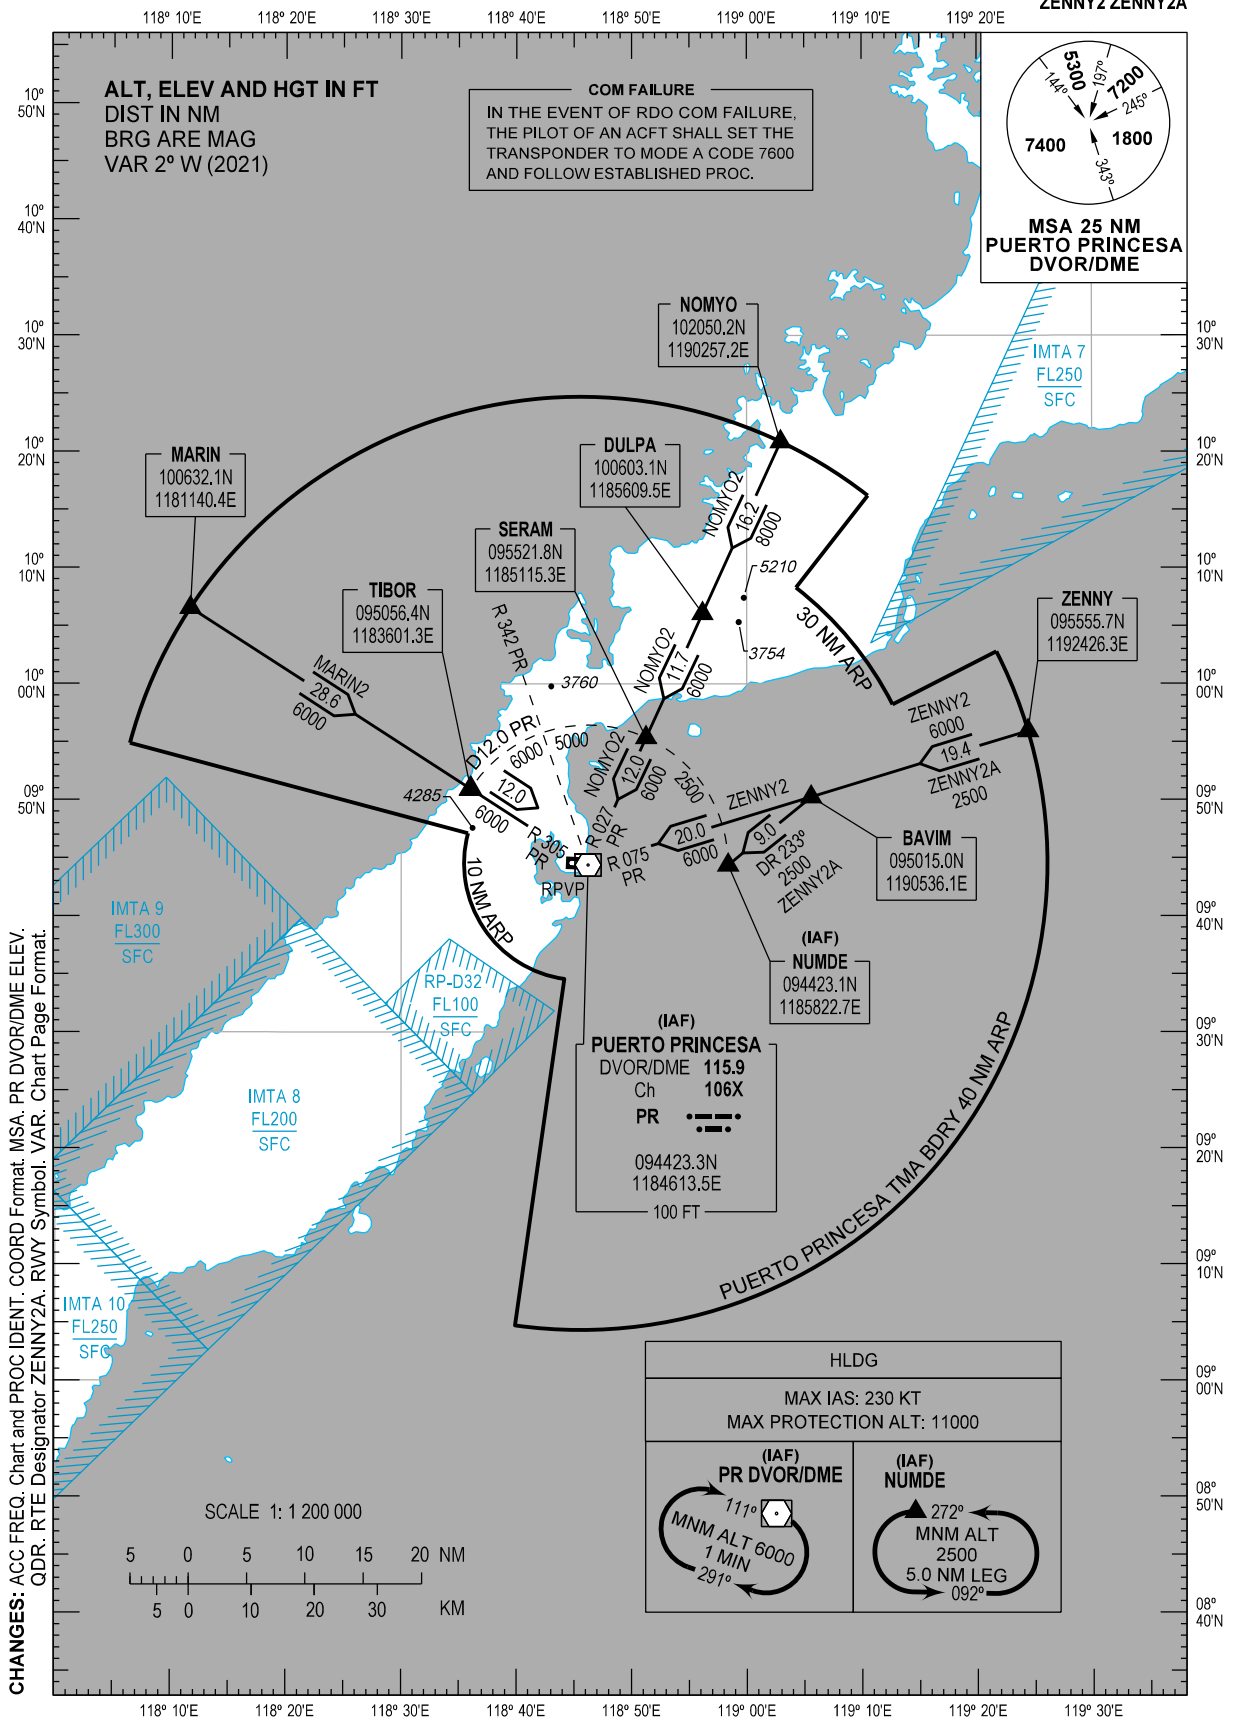

### ARRIVAL ROUTE DESCRIPTION

| STAR    | ROUTE                                  | PROCEDURE                                                                                                                  | REMARKS |
|---------|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------|
| MARIN2  | MARIN - TIBOR -<br>PR DVOR/DME         | From MARIN on PR DVOR/DME<br>Radial 305, to TIBOR at or above<br>6000 FT, to PR DVOR/DME.                                  |         |
| NOMYO2  | NOMYO - DULPA - SERAM -<br>PR DVOR/DME | From NOMYO on PR DVOR/DME<br>Radial 027, to DULPA at or above<br>8000 FT, to SERAM at or above<br>6000 FT, to PR DVOR/DME. |         |
| ZENNY2  | ZENNY - BAVIM -<br>PR DVOR/DME         | From ZENNY on PR DVOR/DME<br>Radial 075, to BAVIM at or above<br>6000 FT, to PR DVOR/DME.                                  |         |
| ZENNY2A | ZENNY - BAVIM - NUMDE                  | From ZENNY on PR DVOR/DME<br>Radial 075, to BAVIM at or above<br>2500 FT, to NUMDE.                                        |         |


CHANGES: RTE and PROC Description. STAR ZENNY 2A Established. Page Format.

STANDARD ARRIVAL  
CHART - INSTRUMENT  
(STAR) - ICAO

TRANSITION  
ALTITUDE  
11000 FT

ACC - 118.9 (SOUTHWEST)  
- 124.9 / 125.7 (SOUTH)  
- 8942 / 5655 (HF)  
APP - 122.0  
TWR - 118.1

PALAWAN/Puerto  
Princesa Intl (RPVP)  
RNP STAR RWY 27  
MARIN2W NOMYO2W  
ZENNY2W

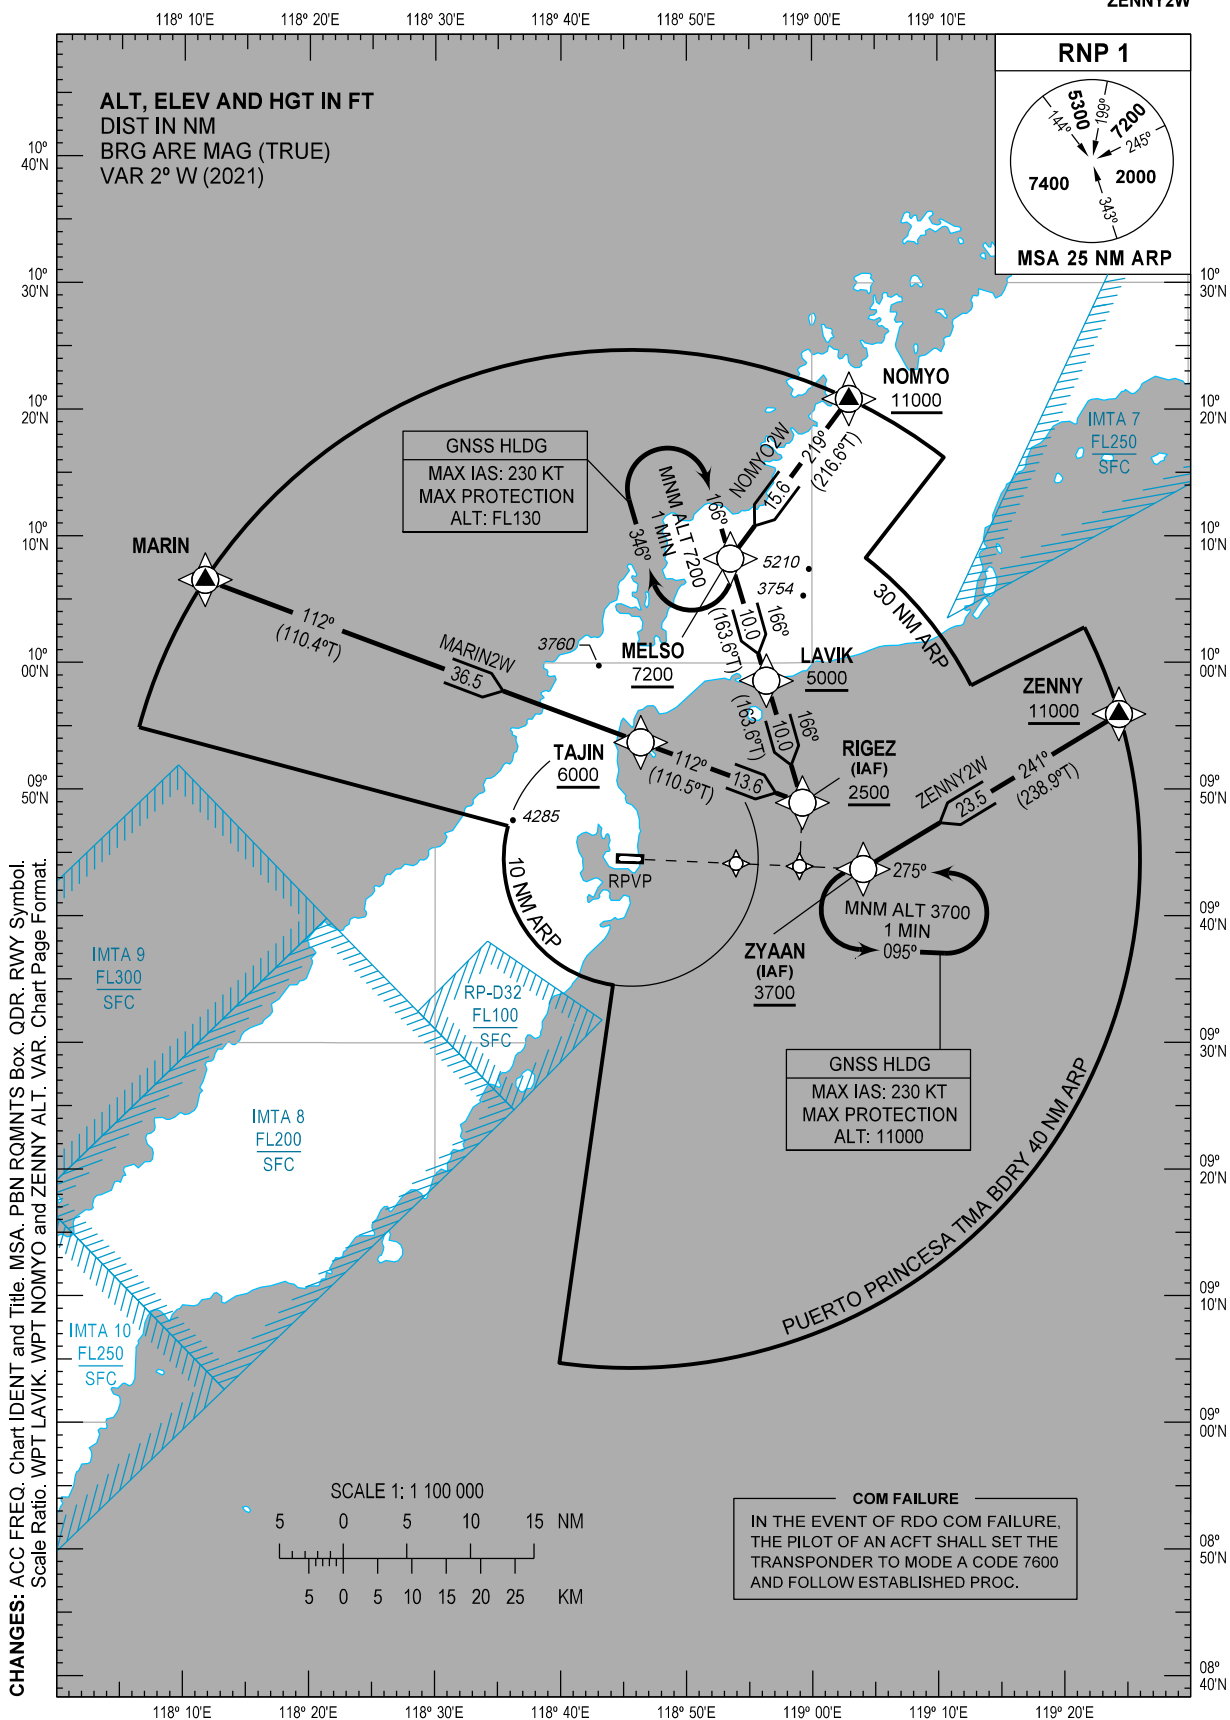

### ARRIVAL ROUTE DESCRIPTION

| STAR    | ROUTE                         | PROCEDURE                                                                                                                  | REMARKS |
|---------|-------------------------------|----------------------------------------------------------------------------------------------------------------------------|---------|
| MARIN2W | MARIN - TAJIN - RIGEZ         | From MARIN to TAJIN at or above 6000 FT, to RIGEZ at or above 2500 FT.                                                     |         |
| NOMYO2W | NOMYO - MELSO - LAVIK - RIGEZ | From NOMYO at or above 11000 FT, to MELSO at or above 7200 FT, to LAVIK at or above 5000 FT, to RIGEZ at or above 2500 FT. |         |
| ZENNY2W | ZENNY - ZYAAN                 | From ZENNY at or above 11000 FT, to ZYAAN at or above 3700 FT.                                                             |         |

### WAYPOINT LIST

| Waypoint Name | Latitude  | Longitude  | Type   |
|---------------|-----------|------------|--------|
| LAVIK         | 095835.6N | 1185621.7E | Fly-by |
| MARIN         | 100632.1N | 1181140.4E | Fly-by |
| MELSO         | 100813.7N | 1185329.8E | Fly-by |
| NOMYO         | 102050.2N | 1190257.2E | Fly-by |
| RIGEZ         | 094857.3N | 1185913.9E | Fly-by |
| TAJIN         | 095343.6N | 1184621.4E | Fly-by |
| ZENNY         | 095555.7N | 1192426.3E | Fly-by |
| ZYAAN         | 094342.8N | 1190403.9E | Fly-by |

### PROPOSED CODING FOR ARRIVAL RNP STAR RWY 27

Table 1: MARIN2W

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | IF              | MARIN               | -       | -              | -                      | -             | -              | -             | -                | -       | RNP1                     | RW27                  |
| 20            | TF              | TAJIN               | -       | 112 (110.4)    | +2                     | 36.5          | -              | +6000         | -                | -       | RNP1                     | RW27                  |
| 30            | TF              | RIGEZ               | -       | 112 (110.5)    | +2                     | 13.6          | -              | +2500         | -                | -       | RNP1                     | RW27                  |

Table 2: NOMYO2W

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | IF              | NOMYO               | -       | -              | -                      | -             | -              | +11000        | -                | -       | RNP1                     | RW27                  |
| 20            | TF              | MELSO               | -       | 219 (216.6)    | +2                     | 15.6          | -              | +7200         | -                | -       | RNP1                     | RW27                  |
| 30            | TF              | LAVIK               | -       | 166 (163.6)    | +2                     | 10.0          | -              | +5000         | -                | -       | RNP1                     | RW27                  |
| 40            | TF              | RIGEZ               | -       | 166 (163.6)    | +2                     | 10.0          | -              | +2500         | -                | -       | RNP1                     | RW27                  |

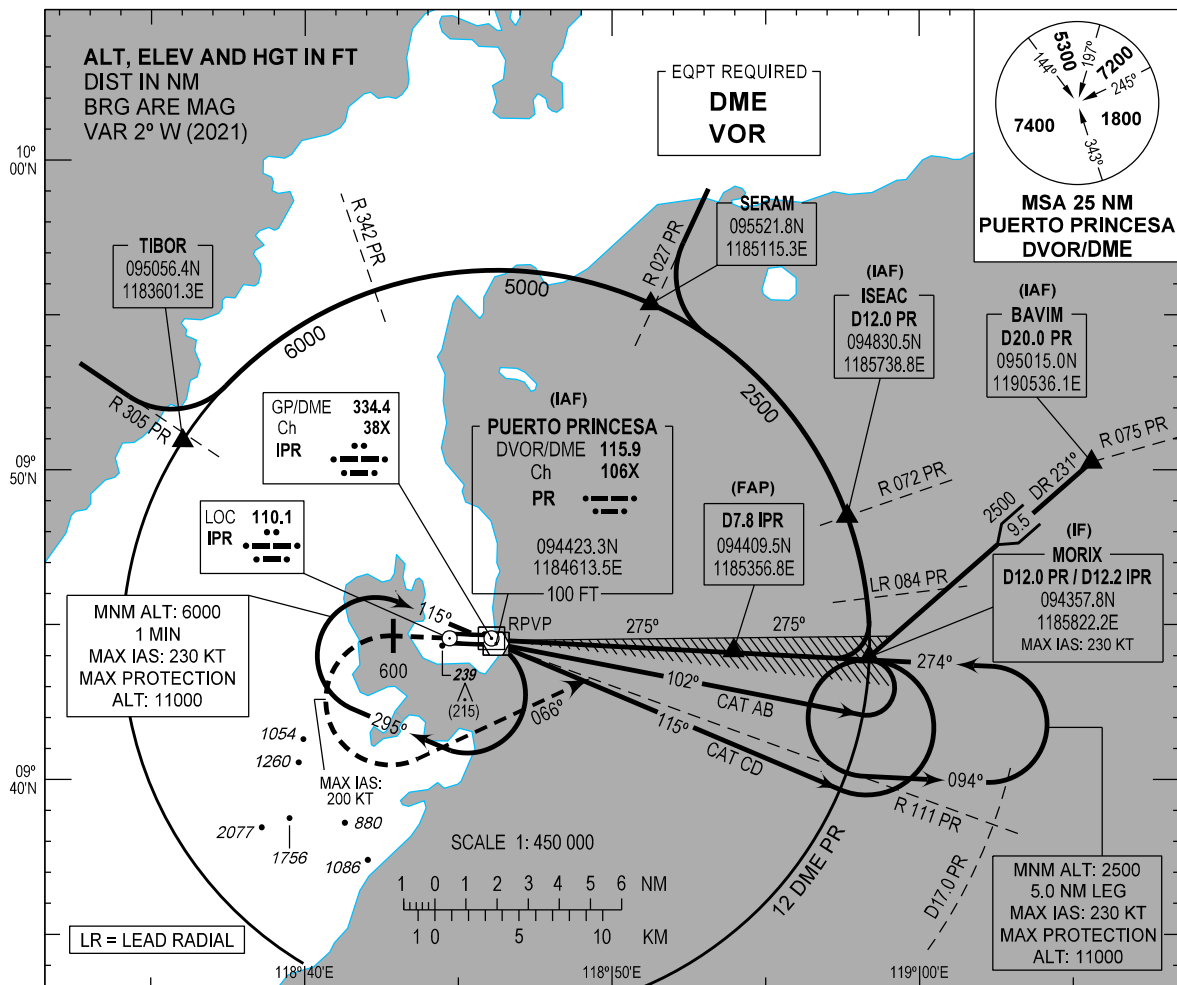
CHANGES: RTE and PROC Description. WPT List. Proposed Coding. Page Format.

**Table 3: ZENNY2W**

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | IF              | ZENNY               | -       | -              | -                      | -             | -              | +11000        | -                | -       | RNP1                     | RW27                  |
| 20            | TF              | ZYAAN               | -       | 241<br>(238.9) | +2                     | 23.5          | -              | +3700         | -                | -       | RNP1                     | RW27                  |

**CHANGES:** ALT. Flyover. MAG Course. VAR. Page Format.

INTENTIONALLY  
LEFT  
BLANK

INSTRUMENT  
APPROACH  
CHART - ICAOAERODROME ELEV 66 FT  
HEIGHTS RELATED TO  
THR RWY 27 - ELEV 24 FTAPP - 122.0  
TWR - 118.1PALAWAN/Puerto  
Princesa Intl (RPVP)  
ILS OR LOC RWY 27

CHANGES: QDR Base Turn CAT CD, HLDG PR and IF-FAP-MAPT-PR DVOR/DME.

## MISSED APPROACH

PR DVOR/DME (IAF) 6000

Climb runway heading to 2500 FT. At 600 FT, turn left heading to 066°M to intercept and track-out PR DVOR/DME Radial 111. At D17.0 PR DVOR/DME, turn left to join the holding at MORIX or as instructed by ATC. MAX IAS 200 KT during initial turn.

- (1) HGT related to AD ELEV  
(2) MAX IAS 185 KT

THR ELEV 24  
(THR RWY 27)

RDH: 50

## PR DVOR/DME

(IAF) 6000

D0.7 IPR (MAPt)

D4.1 IPR 1320

D7.8 IPR (FAP) 2500

MORIX D12.2 IPR (IF)

115° CAT CD

102° CAT AB

GP 3.0°

275°

OCA (H) 420 (396)

700 (676)

7.6 4.4 12

0.5 3.4 3.9 3.7 7.6 4.4 12

0.7 4.1 7.8 12.2

← THR (NM)

← IPR (NM)


|                         |                                   |                |                |                |                          |              |              |
|-------------------------|-----------------------------------|----------------|----------------|----------------|--------------------------|--------------|--------------|
| OCA (H)                 | MISSED APCH<br>CLIMB GRADIENT (%) | A              | B              | C              | D                        |              |              |
| ILS                     | 2.50                              | 250 (226)      | 260 (236)      | 380 (356)      |                          |              |              |
|                         | 3.00                              | 230 (206)      |                |                |                          |              |              |
| LOC                     | 420 (396)                         |                |                |                |                          |              |              |
| CIRCLING <sup>(1)</sup> | 570 (504)                         |                |                | 870 (804)      | 920 (854) <sup>(2)</sup> |              |              |
| NM TO THR               | 7.6                               | 6              | 5              | 4              | 3                        | 2            | 1.1          |
| ALT<br>(HGT)            | 2500<br>(2476)                    | 1990<br>(1966) | 1670<br>(1646) | 1350<br>(1326) | 1030<br>(1006)           | 710<br>(686) | 420<br>(396) |

INSTRUMENT  
APPROACH  
CHART - ICAO

AERODROME ELEV 66 FT  
HEIGHTS RELATED TO  
THR RWY 27 - ELEV 24 FT

APP - 122.0  
TWR - 118.1

PALAWAN/Puerto  
Princesa Intl (RPVP)  
VOR RWY 27

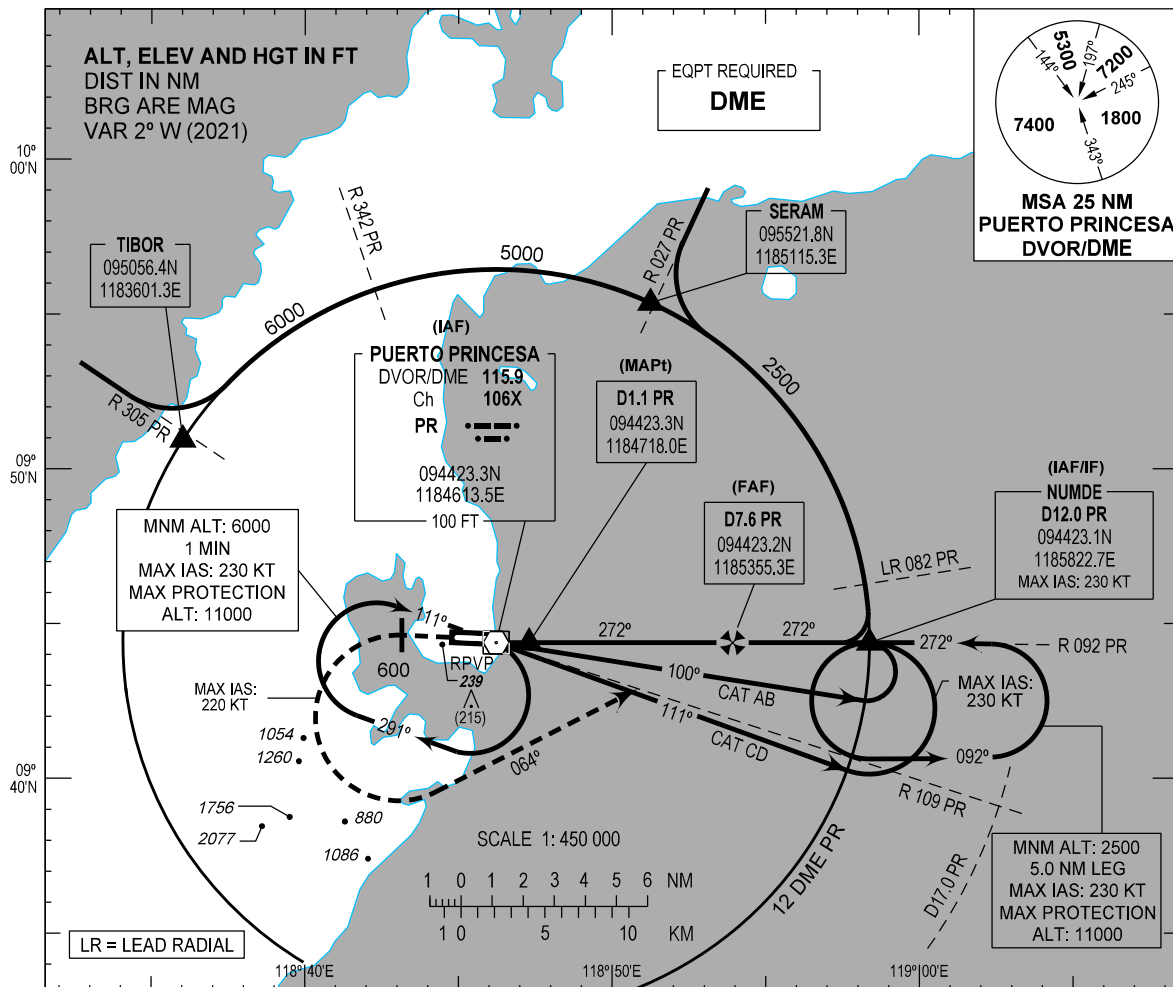

**MISSED APPROACH**


**PR DVOR/DME**

TRANSITION ALT : 11000  
TRANSITION LVL : FL130

Straight-out climb to **2500 FT.** At **600 FT**, turn left heading **064°M** to intercept and track-out **PR DVOR/DME Radial 109**. At **D17.0 PR DVOR/DME**, turn left to join the holding at **NUMDE** or as instructed by ATC. MAX IAS **220 KT** during initial turn.

- (1) HGT related to AD ELEV  
(2) MAX IAS 185 KT

THR ELEV 24  
(THR RWY 27)

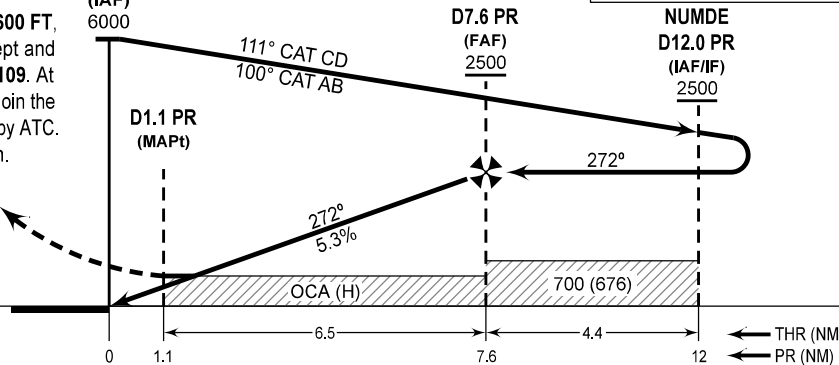

CHANGE: ACFT CAT Base Turn Arrows.

| OCA (H)                 | A           | B           | C           | D                        |
|-------------------------|-------------|-------------|-------------|--------------------------|
| STRAIGHT-IN             | 420 (396)   |             |             |                          |
| CIRCLING <sup>(1)</sup> | 570 (504)   |             | 870 (804)   | 920 (854) <sup>(2)</sup> |
| NM TO THR               | 7.6         | 6           | 5           | 4                        |
| ALT (HGT)               | 2500 (2476) | 1990 (1966) | 1670 (1646) | 1350 (1326)              |
|                         |             |             |             | 1030 (1006)              |
|                         |             |             |             | 710 (686)                |
|                         |             |             |             | 420 (396)                |




INSTRUMENT  
APPROACH  
CHART - ICAO

AERODROME ELEV 66 FT

HEIGHTS RELATED TO  
THR RWY 27 - ELEV 24 FTAPP - 122.0  
TWR - 118.1PALAWAN/Puerto  
Princesa Intl (RPVP)


RNP RWY 27

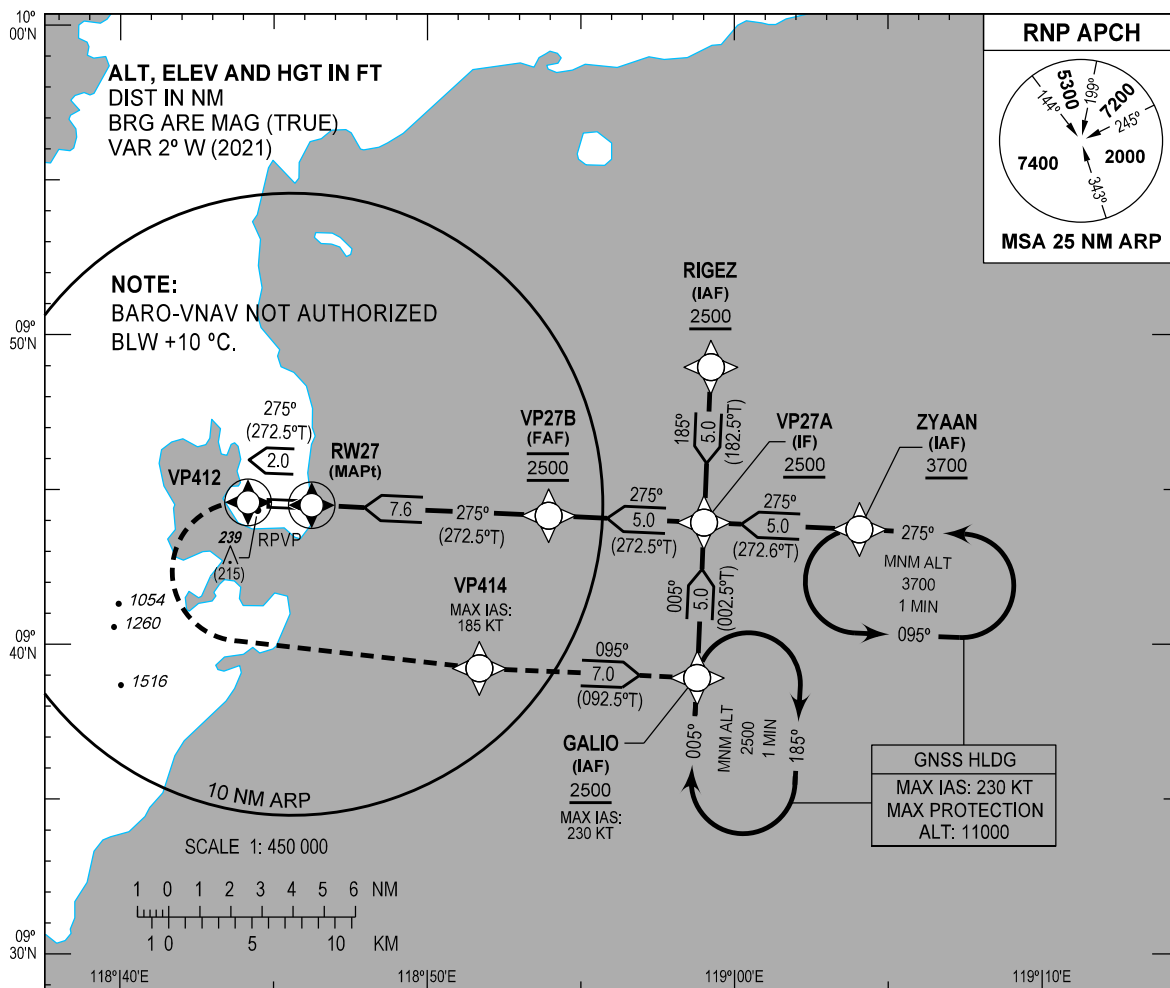

## MISSED APPROACH

Climb on course 275°M to 2500 FT.  
At **VP412** turn left direct to **VP414** to  
**GALIO** and hold or as instructed by  
ATC. Do not exceed 185 KT until  
**VP414**, then 230 KT until **GALIO**.

- (1) HGT related to AD ELEV  
(2) MAX IAS 185 KT

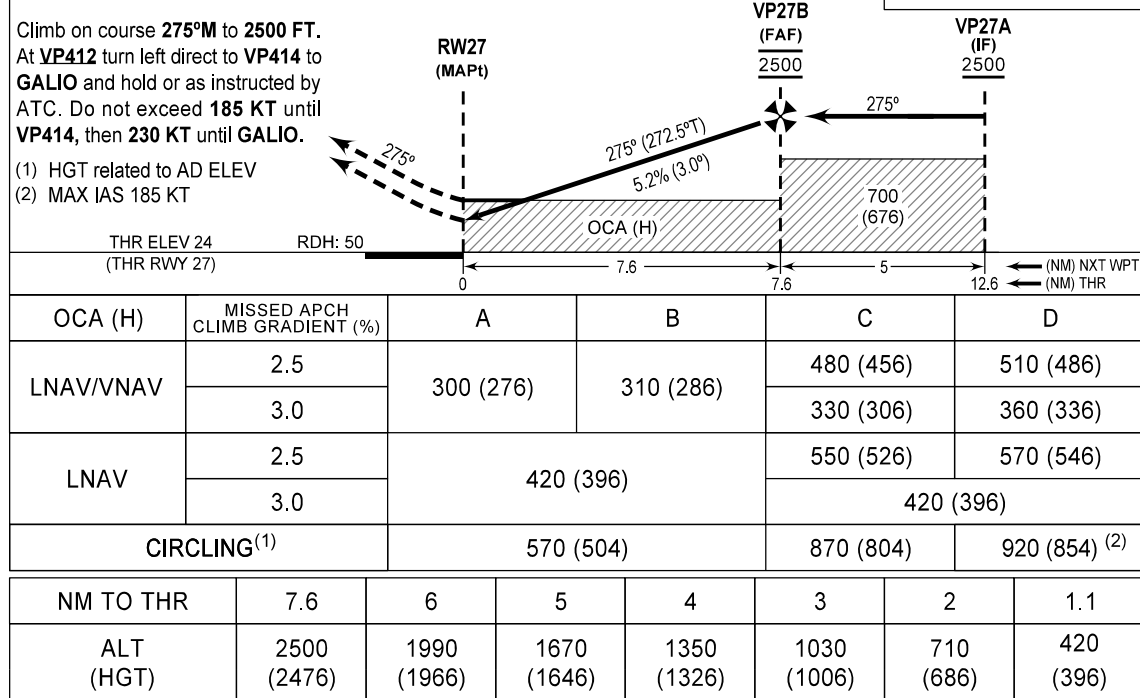

### WAYPOINT LIST

| Waypoint Name | Latitude   | Longitude   | Type    |
|---------------|------------|-------------|---------|
| GALIO         | 093855.1N  | 1185846.9E  | Fly-by  |
| RIGEZ         | 094857.3N  | 1185913.9E  | Fly-by  |
| RW27          | 094429.77N | 1184614.10E | Flyover |
| VP27A         | 094356.2N  | 1185900.4E  | Fly-by  |
| VP27B         | 094409.6N  | 1185356.9E  | Fly-by  |
| VP412         | 094435.2N  | 1184409.9E  | Flyover |
| VP414         | 093913.8N  | 1185141.7E  | Fly-by  |
| ZYAAN         | 094342.8N  | 1190403.9E  | Fly-by  |

### PROPOSED CODING FOR INSTRUMENT APPROACH RNP RWY 27

| Serial Number | Path Descriptor | Waypoint Identifier | Flyover | Course °M (°T) | Magnetic Variation (°) | Distance (NM) | Turn Direction | Altitude (FT) | Speed limit (KT) | VPA/TCH | Navigation Specification | Transition Identifier |
|---------------|-----------------|---------------------|---------|----------------|------------------------|---------------|----------------|---------------|------------------|---------|--------------------------|-----------------------|
| 10            | IF              | RIGEZ               | -       | -              | -                      | -             | -              | +2500         | -                | -       | RNP APCH                 | RIGEZ                 |
| 20            | TF              | VP27A               | -       | 185 (182.5)    | +2                     | 5.0           | -              | +2500         | -                | -       | RNP APCH                 | RIGEZ                 |
| 10            | IF              | ZYAAN               | -       | -              | -                      | -             | -              | +3700         | -                | -       | RNP APCH                 | ZYAAN                 |
| 20            | TF              | VP27A               | -       | 275 (272.6)    | +2                     | 5.0           | -              | +2500         | -                | -       | RNP APCH                 | ZYAAN                 |
| 10            | IF              | GALIO               | -       | -              | -                      | -             | -              | +2500         | -230             | -       | RNP APCH                 | GALIO                 |
| 20            | TF              | VP27A               | -       | 005 (002.5)    | +2                     | 5.0           | -              | +2500         | -                | -       | RNP APCH                 | GALIO                 |
| 10            | IF              | VP27A               | -       | -              | -                      | -             | -              | +2500         | -                | -       | RNP APCH                 | -                     |
| 20            | TF              | VP27B               | -       | 275 (272.5)    | +2                     | 5.0           | -              | @2500         | -                | -       | RNP APCH                 | -                     |
| 30            | TF              | RW27                | Y       | 275 (272.5)    | +2                     | 7.6           | -              | @74           | -                | -3.0/-  | RNP APCH                 | -                     |
| 10            | CF              | VP412               | Y       | 275 (272.5)    | +2                     | 2.0           | -              | -             | -                | -       | RNP APCH                 | -                     |
| 20            | DF              | VP414               | -       | -              | -                      | -             | L              | -             | -185             | -       | RNP APCH                 | -                     |
| 30            | TF              | GALIO               | -       | 095 (092.5)    | +2                     | 7.0           | -              | +2500         | -230             | -       | RNP APCH                 | -                     |

INSTRUMENT  
APPROACH  
CHART

AERODROME ELEV 66 FT


HEIGHTS RELATED TO  
AERODROME ELEV

APP - 122.0  
TWR - 118.1

PALAWAN/Puerto  
Princesa Intl (RPVP)

VPT RWY 09

VISUAL MANEUVERING WITH  
PRESCRIBED TRACKS

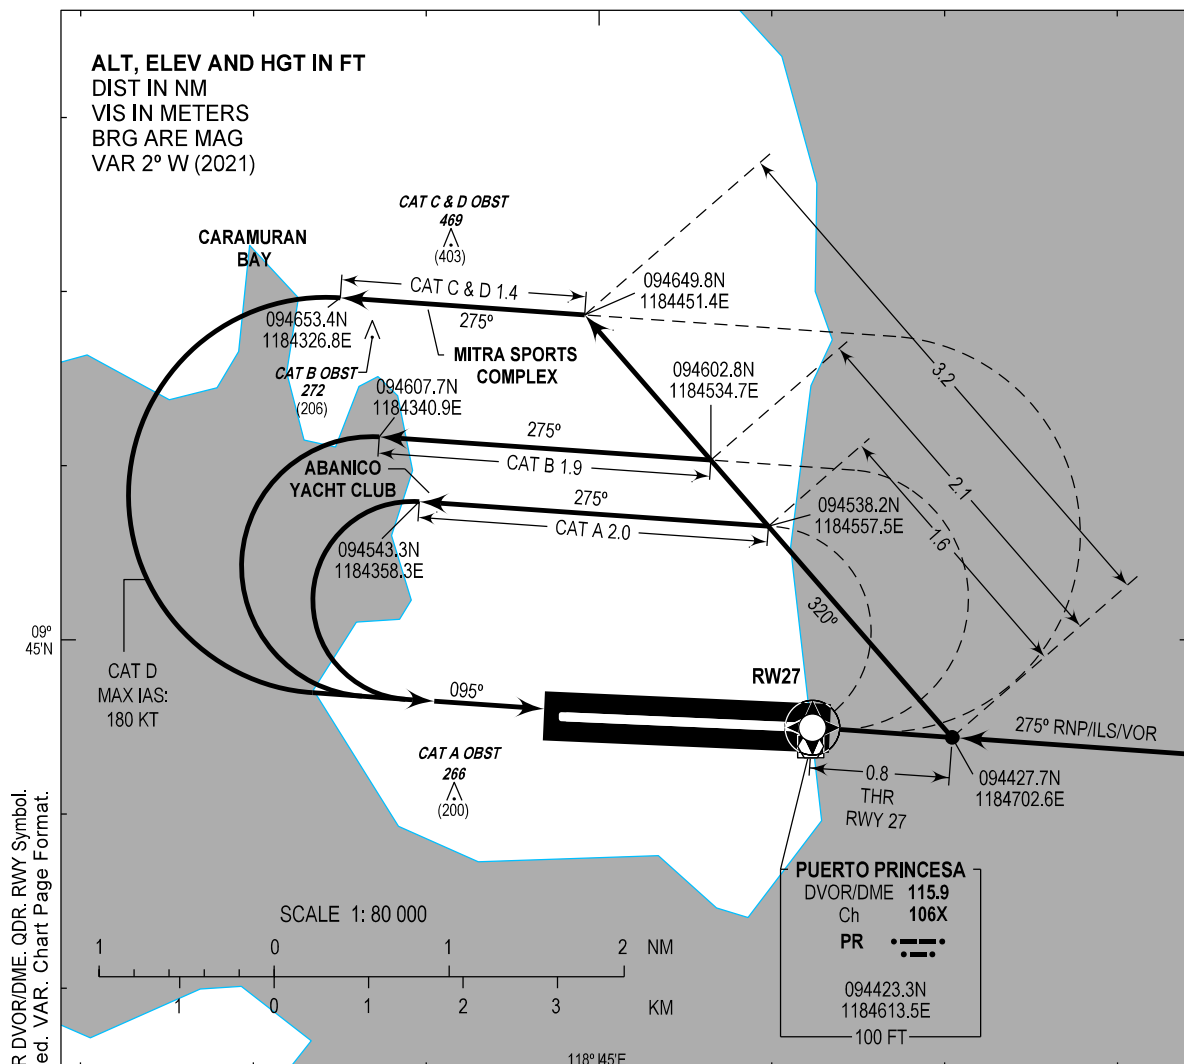

CHANGES: APCH Type, COORD, OBST HGT, PR DVOR/DME, QDR, RWY Symbol, True North Arrow Symbol Deleted. VAR. Chart Page Format.

MISSED APPROACH

AT RWY END, TURN LEFT TO JOIN LEFT DOWNWIND RWY 09 OR AS INSTRUCTED BY ATC.

| CAT                   | A         | B    | C         | D    |
|-----------------------|-----------|------|-----------|------|
| OCA (H)               | 570 (504) |      | 870 (804) |      |
| VIS                   | 1900      | 2800 | 3700      | 4600 |
| CAT D MAX IAS: 180 KT |           |      |           |      |

TRAFFIC  
CIRCUIT  
CHART


AERODROME ELEV  
66 FT

APP - 122.0  
TWR - 118.1

PALAWAN/Puerto Princesa Intl (RPVP)

RWY 09

CHANGES: ACFT, ALT, Units of Measurement and VAR Deleted. AD ELEV. Data Resolution. Chart Page Format.

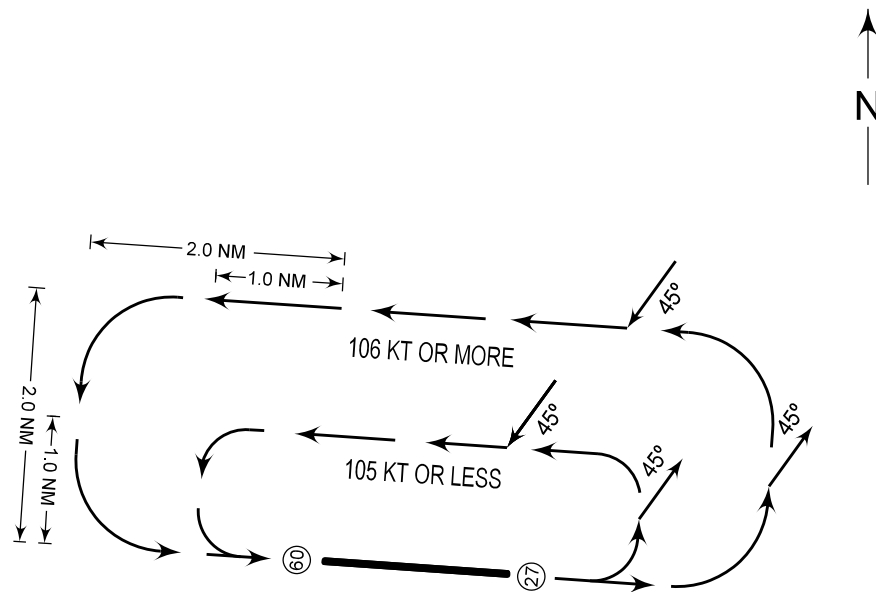

### PROCEDURE

- ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.

TRAFFIC  
CIRCUIT  
CHART


AERODROME ELEV  
66 FT

APP - 122.0  
TWR - 118.1


PALAWAN/Puerto Princesa Intl (RPVP)

RWY 27

CHANGES: ACFT, ALT, Units of Measurement and VAR Deleted. AD ELEV. Data Resolution. Chart Page Format.

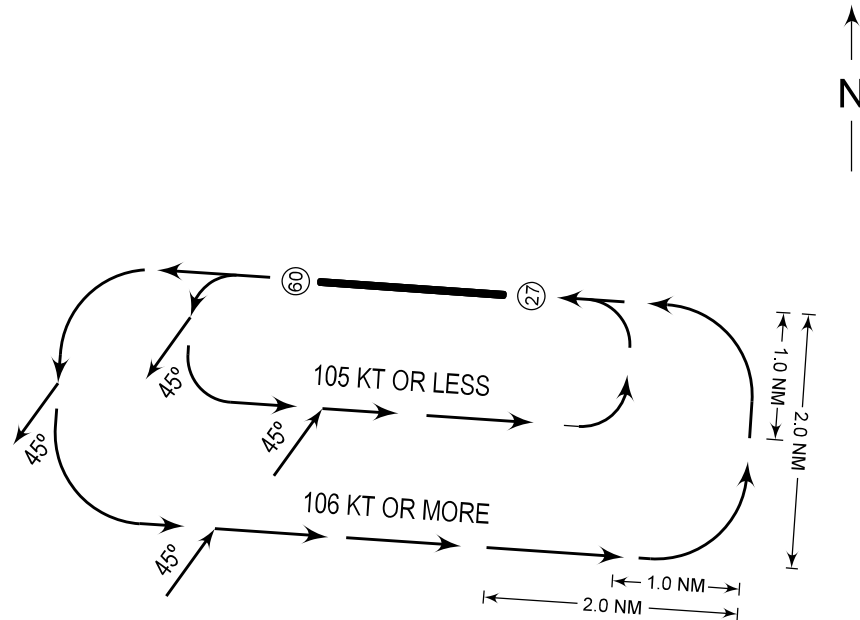

LEFT

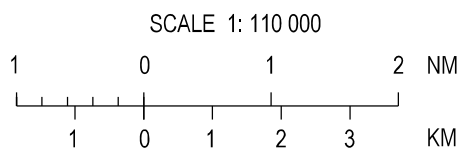

PROCEDURE

- A) ARRIVING AIRCRAFT SHALL ENTER THE TRAFFIC CIRCUIT ON THE DOWNWIND LEG AT AN ANGLE OF 45 DEGREES.
- B) DEPARTING AIRCRAFT SHALL FOLLOW THE TRAFFIC CIRCUIT AND LEAVE THE CIRCUIT AT AN ANGLE OF 45 DEGREES.