

AD 2 AERODROMES

Note: The following sections in this chapter are intentionally left blank: AD-2.16, AD-2.21, AD-2.25

RPVR AD 2.1 AERODROME LOCATION INDICATOR AND NAME**RPVR - ROXAS PRINCIPAL AIRPORT (Class 1)****RPVR AD 2.2 AERODROME GEOGRAPHICAL AND ADMINISTRATIVE DATA**

1	ARP coordinates and site at AD	113551N 1224511E.
2	Direction and distance from (city)	00° 26' / 1.531 KM from Roxas proper.
3	Elevation/Reference temperature	9 FT.
4	Geoid undulation at AD ELEV PSN	Nil.
5	MAG VAR/Annual Change	2°W (2021) / 6.0' increasing.
6	AD Operator, address, telephone, telefax, telex, AFS	Civil Aviation Authority of the Philippines Roxas Airport, Roxas City 5800 Capiz Phone: (+63) (036) 621-2249 Email: roxas_airport@caap.gov.ph
7	Types of traffic permitted (IFR/VFR)	IFR-VFR.
8	Remarks	Nil.

RPVR AD 2.3 OPERATIONAL HOURS

1	AD Operator	MON - FRI: 0000 - 0900.
2	Customs and immigration	Nil.
3	Health and sanitation	Upon request.
4	AIS Briefing Office	Nil.
5	ATS Reporting Office (ARO)	2200 - 1000.
6	MET Briefing Office	HJ.
7	ATS	2200 - 1000.
8	Fuelling	Nil.
9	Handling	Nil.
10	Security	H24.
11	De-icing	Nil.
12	Remarks	Airport Operations: 2200 - 1000.

RPVR AD 2.4 HANDLING SERVICES AND FACILITIES

1	Cargo-handling facilities	Forklift with rated capacity of 3000 KG maximum, tow tug, conveyor belt, lower deck loader are available provided by Cebu Pacific Air. Tow tug and conveyor belts by Philippine Airlines and Air Asia.
2	Fuel/oil types	Nil.
3	Fuelling facilities/capacity	Nil.
4	De-icing facilities	Nil.
5	Hangar space for visiting aircraft	Nil.
6	Repair facilities for visiting aircraft	Nil.
7	Remarks	Nil.

RPVR AD 2.5 PASSENGER FACILITIES

1	Hotels	Within the city proper.
2	Restaurants	Within the city proper.
3	Transportation	Public Transportation: bus, tricycle, and vehicle for hire.
4	Medical facilities	Within the city proper.
5	Bank and Post Office	Within the city proper.
6	Tourist Office	Tourist desk at the Arrival area.
7	Remarks	Nil.

RPVR AD 2.6 RESCUE AND FIRE FIGHTING SERVICES

1	AD category for fire fighting	Category 6.
2	Rescue equipment	Two (2) fire trucks [One (1) SIDES (2500 liters) and one (1) Oshkosh (6000 liters)].
3	Capability for removal of disabled aircraft	With Disabled Aircraft Removal Plan (DARP), aircraft recovery and removal is generally aircraft operator's responsibility consistent with the Aircraft Accident Investigation and Inquiry Board (AAIIB) requirements. It is the responsibility of the Aerodrome Operator to coordinate with the Aircraft Recovery Operations and ensure that the disabled aircraft is removed in a timely and efficient manner. The Airport or its duly designated representatives accept no responsibility for any loss or damage of any kind resulting from this action and the aircraft operator will be held responsible for all the cost and losses incurred (including consequential losses). Removal of large aircraft such as A320 and aircraft of the same size will greatly depend on partner Mutual Aid Agencies such as Provincial Engineering Office (PEO), Department of Public Works and Highways (DPWH), and private heavy equipment operators under Memorandum of Understanding (MOU) and Comprehensive Aerodrome Safety Ordinance of Roxas Airport, Sangguniang Panlalawigan Ordinance Number 228. Aerodrome Coordinator: Aerodrome Rescue and Fire Fighting (ARFF) Shift Supervisor / Incident Management Team (IMT) Operation Section Chief Phone: (+63) (036) 522-4274 / 621-2249
4	Remarks	SIDES: 300 liters of foam capacity. Oshkosh: 840 liters of foam capacity. Ten (10) to eleven (11) personnel per shift. Foam Meeting Performance: Level B.

RPVR AD 2.7 SEASONAL AVAILABILITY - CLEARING

1	Types of clearing equipment	Pick-up vehicle, grass cutters, tractor mower, chainsaw, and power saw.
2	Clearance priorities	1. RWY, 2. TWY, 3. APN, 4. RWY Strip.
3	Remark	Available at ARFF Station and Maintenance Unit.

RPVR AD 2.8 APRONS, TAXIWAYS AND CHECK LOCATIONS/POSITIONS DATA

1	Apron surface and strength	Main Apron Surface: CONC. Strength: 470/R/B/W/U.
2	Taxiway width, surface and strength	North TWY Width: 25 M. Surface: CONC. Strength: 470/R/B/X/U. South TWY Width: 25 M. Surface: CONC. Strength: 470/R/B/X/U.
3	Altimeter checkpoint location and elevation	Nil.
4	VOR checkpoints	Nil.
5	INS checkpoints	Nil.
6	Remarks	Nil.

RPVR AD 2.9 SURFACE MOVEMENT GUIDANCE AND CONTROL SYSTEM AND MARKINGS

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Two (2) parking stands for General Aviation, two (2) parking stands with aircraft envelope for A320 and yellow TWY guide lines/nose wheel guide line and edge.
2	RWY and TWY markings and LGT	RWY 14/32: Number designation, THR, displaced THR, RWY and TWY center line, touchdown zone, edge line, aiming point. Light: White RWY edge light, green THR lights, red RWY end lights and blue TWY edge lights.
3	Stop bars and RWY guard lights	Nil.
4	Other RWY protection measures	Holding Position Marking at North TWY and South TWY.
5	Remarks	Equipment storage, service vehicle lane, pedestrian, APN edge.

RPVR AD 2.10 AERODROME OBSTACLES

In approach/TKOF areas			In circling area and at AD		Remarks
1			2		3
RWY/Area affected	Obstacle type Elevation Markings/LGT	Coordinates	Obstacle type Elevation Markings/LGT	Coordinates	
a	b	c	a	b	
14/APCH	Mountain 100 FT	113658.3N 1224431.9E	Nil	Nil	Nil
32/APCH	Terrain 1086 FT	113143.4N 1224402.6E			
	Antenna 483 FT	113337.4N 1224540.7E			

RPVR AD 2.11 METEOROLOGICAL INFORMATION PROVIDED

1	Associated MET Office	Philippine Atmospheric, Geophysical and Astronomical Services Administration (PAGASA).
2	Hours of service MET Office outside hours	H24. -
3	Office responsible for TAF preparation Periods of validity	- -
4	Trend forecast Interval of issuance	- -
5	Briefing/consultation provided	METAR.
6	Flight documentation Language(s) used	- -
7	Charts and other information available for briefing or consultation	Nil.
8	Supplementary equipment available for providing information	RWY 14/32 - WDI, RWY Temperature and WSPD Indicator.
9	ATS units provided with information	Roxas Tower.
10	Additional information (limitation of service, etc.)	Nil.

RPVR AD 2.12 RUNWAY PHYSICAL CHARACTERISTICS

Designations RWY NR	TRUE BRG	Dimensions of RWY (M)	Strength (PCR) and surface of RWY and SWY	THR coordinates RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY	Slope of RWY-SWY
1	2	3	4	5	6	7
14	145.00°	1893 X 45	470/R/B/X/U CONC+ASPH	113614.37N 1224454.14E	THR 11 FT TDZ 9 FT	Nil
32	325.00°	1893 X 45	470/R/B/X/U CONC+ASPH	113528.35N 1224527.11E	THR 11 FT TDZ 9 FT	Nil
SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	RESA dimensions (M)	Location/ description of arresting system	OFZ	Remarks
8	9	10	11	12	13	14
Nil	27 X 124	1938 X 95	Nil	Nil	Nil	Nil
10 X 45	16 X 95	1938 X 95	Nil	Nil	Nil	Nil

RPVR AD 2.13 DECLARED DISTANCES

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
14	1893	1920	1893	1789	Displaced by 104 M.
32	1893	1909	1903	1830	Displaced by 63 M.

RPVR AD 2.14 APPROACH AND RUNWAY LIGHTING

RWY Designator	APCH LGT type, LEN, INTST	THR LGT colour, WBAR	VASIS, (MEHT), PAPI	TDZ, LGT LEN
1	2	3	4	5
14	Nil	THR LGT Green, 8 RTIL Flashing white light	PAPI 3.0°, Left, (48.12 FT)	Nil
32	Nil	THR LGT Green, 8 RTIL Flashing white light	PAPI 3.1°, Left, (49.82 FT)	Nil
RWY Centre Line LGT LEN, spacing, colour, INTST	RWY Edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	1773 M, 60 M, White/Yellow White/White, LIH	Red, 6	Nil	RWY THR Identification Light (RTIL) Distance from edge light: 14.7 M. Interval: 60 - 120 per minute. Left RTIL of RWY 14 is visible only within 7° from RWY Center line due to obstruction (structures and vegetation). Intensity: LIH. PAPI Path width: 0.33°. Visibility range: 5 NM. Distance from THR: 300 M. Horizontal Angular Clearance: Obstruction within 5° of left sector of final APCH.

RWY Centre Line LGT LEN, spacing, colour, INTST	RWY Edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
6	7	8	9	10
Nil	1773 M, 60 M, White/Yellow White/White, LIH	Red, 6	Nil	RTIL Distance from edge light: 14.7 M. Interval: 60 - 120 per minute. Right RTIL of RWY 32 is visible only within 3 NM due to obstruction (perimeter fence and vegetation). Intensity: LIH. PAPI Path width: 0.33°. Visibility range: 5 NM. Distance from THR: 300 M. Horizontal Angular Clearance: Clear.

RPVR AD 2.15 OTHER LIGHTING, SECONDARY POWER SUPPLY

1	ABN/IBN location, characteristics and hours of operation	Location: 113602.36N 1224459.73E. Characteristics: Alternating flashing white green every 24 - 30 flashes per minute. HR of OPS: During inclement weather.
2	LDI location and LGT Anemometer location and LGT	Nil.
3	TWY edge and centre line lighting	Edge: Blue; Number of lights: 29. Center line: Nil.
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at aerodrome. Switch-over time of 15 seconds.
5	Remarks	Nil.

RPVR AD 2.17 ATS AIRSPACE

1	Designation and lateral limits	ROXAS AERODROME TRAFFIC ZONE (ATZ): A circle radius 5 NM centered on 113551N 1224511E (ARP). ROXAS CONTROL ZONE (CTR): A circle radius 10 NM centered on 113548.9N 1224518.4E (ROX DVOR/DME). KALIBO TERMINAL CONTROL AREAS (TMA): 122153N 1214151E - 122209N 1222435E - 112503N 1230840E - 110944N 1222103E - 114859N 1214200E - 122153N 1214151E.
2	Vertical limits	ATZ: SFC up to but excluding 2000 FT. CTR: SFC up to 1500 FT. TMA: 1500 FT to FL200 (excluding ATZ and ATS routes at FL160 and above).
3	Airspace classification	ATZ - B; CTR - D; TMA - D; ATS routes inside TMA below FL160 - D; ATS routes inside TMA above FL160 - A.
4	ATS unit call sign Language(s)	ATZ - Roxas Tower. CTR/TMA - Kalibo Approach. English.

5	Transition altitude	11000 FT.
6	Hours of applicability	Nil.
7	Remarks	Nil.

RPVR AD 2.18 ATS COMMUNICATION FACILITIES

Service Designation	Call Sign	Frequency	SATVOICE number	Logon address	Hours of operation	Remarks
1	2	3	4	5	6	7
TWR	Roxas Tower	118.5 MHZ 5205 KHZ 3872 KHZ	Nil	Nil	2200 - 1000	PRI FREQ. P/P PRI FREQ (Mactan Network). P/P SRY FREQ. For extension of service, one (1) day prior notice is required.

RPVR AD 2.19 RADIO NAVIGATION AND LANDING AIDS

Type of aid, MAG VAR, Type of supported OP(for VOR/ILS/MLS, give declination)	ID	Frequency	Hours of operation	Position of transmitting antenna coordinates	Elevation of DME transmitting antenna	Remarks
1	2	3	4	5	6	7
DVOR/DME	ROX	112.9 MHZ/ CH76X	2200 - 1100	113548.9N 1224518.4E	44.314 FT	Coverage: DVOR/DME - 100 NM.

RPVR AD 2.20 LOCAL AERODROME REGULATIONS

1. Airport Regulations

1.1 General

1.1.1 Light Signals - it shall be the responsibility of all airmen, drivers of maintenance vehicles and other concerned intending to use the movement area to know the meaning of and comply with the various light signals directed at them by the Control Tower.

1.1.2 Engine Checks - unless otherwise authorized by the Control Tower, aircraft engine check shall be conducted clear of the runway with respect to the wake turbulence of the aircraft operating in the runway.

1.2 Use of Designated areas

1.2.1 Except as otherwise provided for in contracts with CAA of the Philippines (CAAP), the use of the following designated areas shall be limited to the purpose/s stated:

- a. Runways - no landing and take-off shall be made except on those areas designated and marked as runways;
- b. Taxiways - shall be used only for ground movement of aircraft to, from, or between the loading/unloading ramp/s, apron, parking or when authorized by the Control Tower, for the movement of maintenance personnel or emergency vehicles such as security vehicles, fire trucks or ambulances; and
- c. Ramp and apron areas - shall be used only for loading or unloading of passenger and/or cargo, refueling, pre-take-off inspections and/or minor maintenance of aircraft, and for the movement of maintenance personnel and catering vehicles and loading/unloading equipment. It shall be the responsibility of the operator and/or pilot-in-command of an aircraft to avoid collision with other aircraft, equipment, persons or other obstructions in parking area.

1.2.2 Unless authorized by the Control Tower, no aircraft shall be taxied or towed and no vehicle shall be driven on the maneuvering area.

1.2.3 Pedestrians shall not be permitted to use any part of the runway as a shortcut to gain access to other parts of the airport. Control of pedestrians shall be the responsibility of the security force.

1.2.4 Taxi/s, motorcycle/s, private vehicle/s, etc. shall not enter the movement area.

1.2.5 The safe and orderly operations of maintenance vehicles, push carts or other loading/unloading equipment shall be the responsibility of the operator being serviced.

2. Taxiing Procedures

2.1 Aircraft, if required, shall hold at the designated Taxiway Holding Position Markings located both at North TWY and South TWY.

3. Emergency Procedures

3.1 Detailed emergency procedures shall be covered by operational instructions and by appropriate Letter/s of Agreement between the CAAP and other government agencies concerned.

3.2 The emergency units (Crash, Fire and Rescue [CFR], Medical and Security) shall be alerted by the Control Tower by means of signaling system procedure (developed by units concerned) when any of the following persons, in their judgment, determine that potential or actual emergency exists:

- a. watch supervisor on duty at the Control Tower;
- b. pilot of aircraft concerned who shall notify the Control Tower; and

- c. operator of the aircraft or his authorized representative who shall notify the Control Tower.
- 3.3 When information is received that an emergency landing will be made at Roxas Principal Airport, the tower shall alert the emergency crews, giving the following information:
 - a. the words "EMERGENCY LANDING";
 - b. aircraft identification;
 - c. type of aircraft;
 - d. runway to be used;
 - e. estimated time of arrival;
 - f. nature of emergency; and
 - g. any other pertinent information.
- 3.4 Upon notice of alert or receipt of actual crash, the aerodrome emergency unit/s shall proceed promptly in accordance with established procedure.
- 3.5 The preceding procedures shall be applicable within Roxas ATZ only. Relevant traffic information outside of the ATZ shall be issued in the form of advisory. All other procedures not covered herein shall be in accordance with existing Procedure Order, Administrative Order, ATC Operations Manual and other pertinent/relevant orders.

RPVR AD 2.22 FLIGHT PROCEDURES

1. General Procedures for VFR Flights

- 1.1 The following air traffic procedures shall apply to all VFR flights when entering, leaving, operating or transiting the vicinity of Roxas ATZ.
- 1.1.1 All departing VFR flights shall maintain a listening watch on Roxas Tower frequency 118.5 MHZ until twenty (20) NM.
- 1.1.2 All arriving VFR flights shall establish contact and remain on listening watch with Roxas Tower frequency 118.5 MHZ approaching twenty (20) NM inbound the station.
- 1.1.3 ATC instructions shall be acknowledged and complied with.
- 1.1.4 IFR flights shall have priority over VFR flights.
- 1.1.5 Any deviation from the procedures shall be subject to ATC approval.

2. Arrival and Departure Procedures

2.1 VFR Procedures RWY 14

2.1.1 Departure

- a. Southeast Bound: After airborne, fly towards NHA. Continue towards abeam East of PONTEVEDRA. Keep flying towards HIPONA or proceed as instructed by ATC. Advise switching frequency.
- b. South Bound: After airborne, turn right and fly southward towards LOCTUGAN. Continue flying PANIT-AN. Keep flying southwestward towards DUMARAO. Switch to Iloilo Tower frequency on 123.4 MHZ or 118.2 MHZ or proceed as instructed by ATC. Advise switching frequency.
- c. West Bound: After airborne, make a left downwind departure. Request to cross final approach RWY 14 towards CULASI. Fly over water towards MABAAY ISLAND. Continue to fly over water and proceed towards abeam North of DUMAGUIT PORT. Switch to Kalibo Tower frequency on 124.2 MHZ or proceed as instructed by ATC. Advise switching frequency.

2.1.2 Arrival

- a. From the Southeast: Report approaching BALASAN. Keep flying on a northwesterly direction towards PILAR. Continue towards JAMUL-AWON. Request clearance to join left downwind RWY 14 or proceed as instructed by ATC.
- b. From the South: Report approaching MAAYON. Continue flying northward towards abeam West of PONTEVEDRA. Request to cross final approach RWY 32 towards NHA. Request clearance to join left downwind RWY 14 or proceed as instructed by ATC.
- c. From the Southwest: Report approaching DUMALAG. Continue flying on a northeasterly direction towards DAO. Proceed towards LOCTUGAN. Request to cross final approach RWY 32 to join left downwind RWY 14 or proceed as instructed by ATC.
- d. From the West: Report approaching abeam South of DUMAGUIT PORT. Fly eastward towards BASIAO. Continue towards TALON. Request clearance to cross midfield to join left downwind RWY 14 or proceed as instructed by ATC.

2.2 VFR Procedures RWY 32

2.2.1 Departure

- a. Southeast Bound: After airborne, make a right downwind departure and fly towards abeam NHA. Continue towards abeam East of PONTEVEDRA. Proceed towards HIPONA or proceed as instructed by ATC. Advise switching frequency.
- b. South Bound: After airborne, make a right downwind departure. Request clearance to cross final approach RWY 32 and fly southward towards LOCTUGAN. Continue towards PANIT-AN. Proceed towards DUMARAO. Switch to Iloilo Tower frequency on 123.4 MHZ or 118.2 MHZ or proceed as instructed by ATC. Advise switching frequency.
- c. West Bound: After airborne, turn left towards CULASI. Fly over water towards MABAAY ISLAND. Proceed towards abeam North of DUMAGUIT PORT. Switch to Kalibo Tower frequency on 124.2 MHZ or proceed as instructed by ATC. Advise switching frequency.

2.2.2 Arrival

- a. From the Southeast: Report approaching BALASAN. Continue flying on a northwesterly direction towards PILAR. Proceed towards JAMUL-AWON. Request clearance to join right downwind RWY 32 or proceed as instructed by ATC.
- b. From the South: Report approaching MAAYON. Continue northward towards abeam West of PONTEVEDRA. Request to cross final approach RWY 32 towards NHA. Request clearance to join right downwind RWY 32 or proceed as instructed by ATC.
- c. From the Southwest: Report approaching DUMALAG. Continue on a northeasterly direction towards DAO. Proceed towards LOCTUGAN. Request clearance to cross final approach RWY 32 to join right downwind RWY 32 or proceed as instructed by ATC.
- d. From the West: Report approaching abeam South of DUMAGUIT PORT. Fly eastward towards BASIAO. Continue towards TALON. Request clearance to cross midfield to join right downwind RWY 32 or proceed as instructed by ATC.

3. Helicopter Operations

3.1 VFR helicopter flights shall be treated as fixed-wing aircraft and will follow the same established VFR routes and procedures for Roxas Principal Airport.

3.2 Except when clearance is obtained from Roxas Tower, VFR helicopter flights shall not take-off or land at the Roxas Principal Airport or enter its ATZ when the:

- a. ceiling is less than 150 M (500 FT); and
- b. ground visibility is less than 1.5 KM (1 mile).

3.3 Helicopters operating VFR may be allowed outside controlled airspace with flight visibility below 1.5 KM (1 mile) provided that:

- a. the helicopter is clear of clouds and ground or water is in sight at all times; and
- b. the helicopter shall be maneuvered at a speed that will give adequate opportunity to observe other traffic or any obstruction to avoid collision.

4. List of Visual Landmarks and Reporting Points

4.1 The following visual reference and reporting points as mentioned in the procedure are identified using local available maps, Google Maps and Google Earth Satellite images


VISUAL REPORTING POINT	COORDINATES	DISTANCE FROM ARP (NM)	RELATIVE POSITION FROM ARP	DESCRIPTION
BALASAN	112819N 1230517E	21.1	SE	Balasan Municipality
BASIAO	113251N 1223811E	7.5	SW	Basiao Fishport
CULASI	113630N 1224220E	2.8	W	Culasi Lighthouse
DAO	112332N 1224113E	12.9	SW	Dao Bridge
DUMAGUIT PORT	113544N 1222854E	16.0	W	Dumaguait Seaport
DUMALAG	111816N 1223713E	19.1	SW	Dumalag Bridge
DUMARAO	111544N 1224115E	20.4	S	Dumarao Church
HIPONA	112500N 1225254E	13.2	SE	Hipona Elementary School
JAMUL-AWON	113158N 1225100E	6.9	SE	Jamul-awon Community by the River Mouth
LOCTUGAN	113047N 1224558E	5.1	S	Loctugan Road Intersection
MAAYON	112230N 1224939E	14.0	SE	Maayon Diversion Dam
MABAAY ISLAND	113442N 1223750E	7.3	W	Mabaay Island
NHA	113310N 1224704E	3.3	SE	Housing Resettlement at Panay Municipality
PANIT-AN	112749N 1224612E	8.1	S	Panit-an Bridge
PILAR	112911N 1225948E	15.8	SE	Pilar Community
PONTEVEDRA	112857N 1224955E	8.3	SE	Pontevedra Bridge
TALON	113355N 1224043E	4.7	SW	Talon Beach Resort

VFR
AREA
CHART

AERODROME ELEV
9 FT

APP - 120.4 (KALIBO)
TWR - 118.5

ROXAS/Roxas (RPVR)

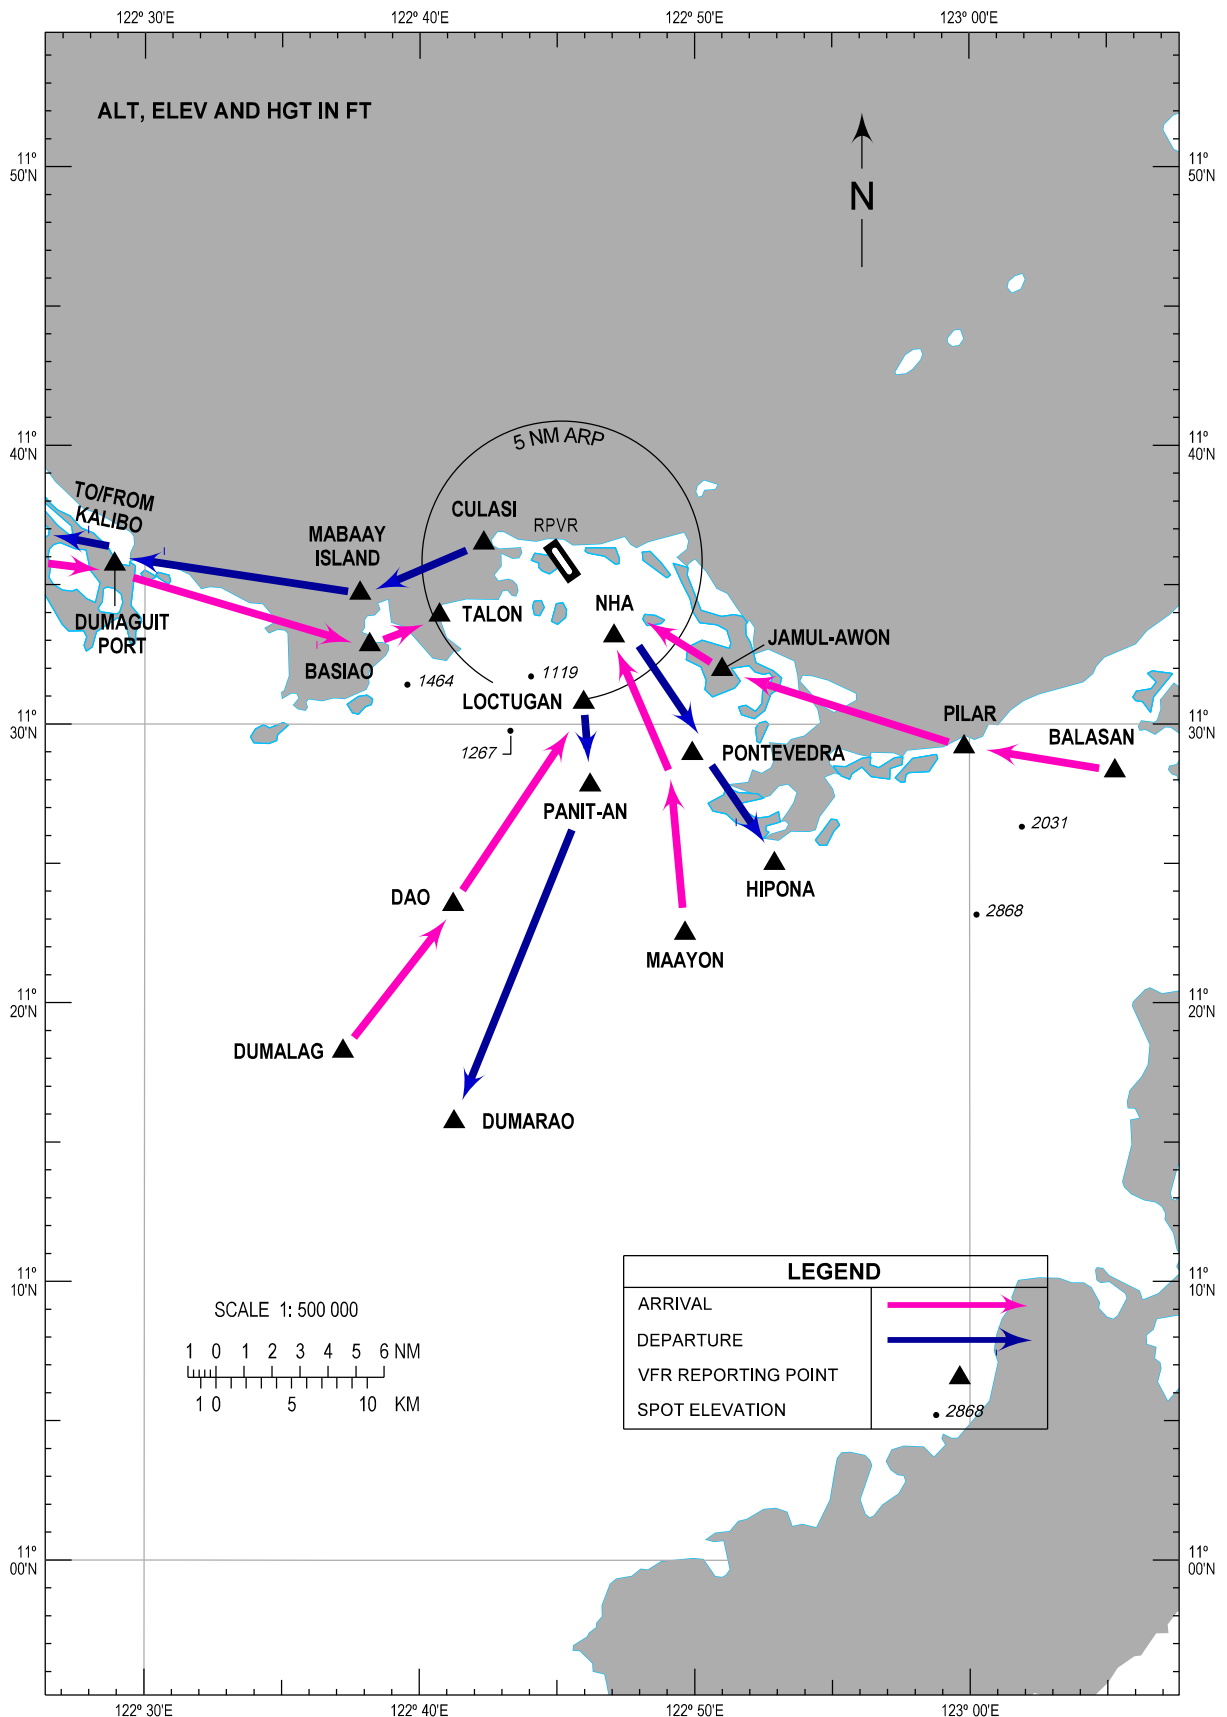

RPVR AD 2.23 ADDITIONAL INFORMATION

1. Bird Concentration in the Vicinity of the Airport

1.1 General Information

1.1.1 Bird activity in the vicinity of the airport is influenced by the airport's proximity to coastal areas, agricultural lands, and fish ponds. These surrounding habitats provide feeding and resting grounds for a variety of resident and migratory bird species, resulting in moderate to high bird concentration during specific times of the year.

1.2 Location and Habitat Characteristics

1.2.1 Proximity to Coastal Wetlands: Airport is located approximately 300 M from the coast, attract numbers of shorebirds and waterbirds.

1.2.2 Agricultural influence: Rice fields and open farmlands surrounding the airport serve as feeding areas for egrets, herons, and other ground-foraging birds.

1.2.3 Nearby water sources: Fish ponds within 3 KM of the runway contribute to the attraction of wading birds, ducks, and migratory species.

1.3 Bird Activity Patterns

1.3.1 Peak Activity Times: Bird activity is highest during early morning (2200 - 2359) and late afternoon (0800 - 0900).

1.3.2 Seasonal Variation: High Concentration on October to March (migratory season, especially for shorebirds, ducks, and egrets).

1.4 Common Species Observed

1.4.1 Total of 36 different bird species were recorded with a total of 2,185 bird headcounts in an average of 3 hours per site daily. Among the 2,185 birds counted, there are 9 species of waterbirds that were counted such as, heron and egrets, ducks, rails, gallinules, coots, shorebirds-waders, and terns. In addition, 11 wetlands-dependent birds were also counted such as stilts, shrikes, doves, swallows, fantails, swiftlets, starling, grassbirds, bulbul, and kingfishers.

1.5 Mitigation and Monitoring

1.5.1 Regular wildlife hazard monitoring is conducted by the airport's designated team.

1.5.2 Bird scaring techniques include pyrotechnics and patrols.

1.5.3 Airfield grass cutting maintenance activity is conducted every 2300 - 0200 and 0500 - 0700 (Monday to Friday) are implemented to reduce habitat attractiveness. Pilots are advised to exercise caution when passing RWY 14/32 and North/South TWY during activity due presence of men and equipment.

1.5.4 Coordination with Local Government Units (LGUs) to monitor nearby fish ponds and residential areas.

1.6 Operational Implications

1.6.1 Pilots are advised to exercise caution during landing and take-off on RWY 14/32 due to presence of birds in the vicinity, with extra vigilance required during the migratory season (October to March) when bird activity is at its peak.

1.6.2 In the event of significant bird activity, ATC may implement temporary departure or arrival delays.

RPVR AD 2.24 CHARTS RELATED TO AN AERODROME

TITLE	PAGE
Standard Departure Chart - Instrument - ICAO	RPVR AD CHART 2 - 1
Tracking System within Bacolod/Iloilo, Kalibo and Mactan TMAs	see RPVB Tracking System
Instrument Approach Chart - ICAO (VOR RWY 14)	RPVR AD CHART 2 - 3
Instrument Approach Chart - ICAO (VOR RWY 32)	RPVR AD CHART 2 - 4
Traffic Circuit Chart (RWY 14)	RPVR AD CHART 2 - 5
Traffic Circuit Chart (RWY 32)	RPVR AD CHART 2 - 6

INTENTIONALLY
LEFT
BLANK

STANDARD DEPARTURE
CHART - INSTRUMENT
(SID) - ICAO


TRANSITION
ALTITUDE
11000 FT

TWR - 118.5
APP - 120.4 (KALIBO)
ACC - 125.7 / 128.7 (CENTRAL SOUTH)
- 124.9 / 125.7 (SOUTH)
- 8942 / 5655 (SEA-2 HF)

ROXAS/Roxas (RPVR)

RWY 14/32

ATRIA3A/3B BUNGA3A/3B GALIA3E/3F
KLO3A/3B MINOR3A/3B NASAG3C/3D
SIBUN3A/3B

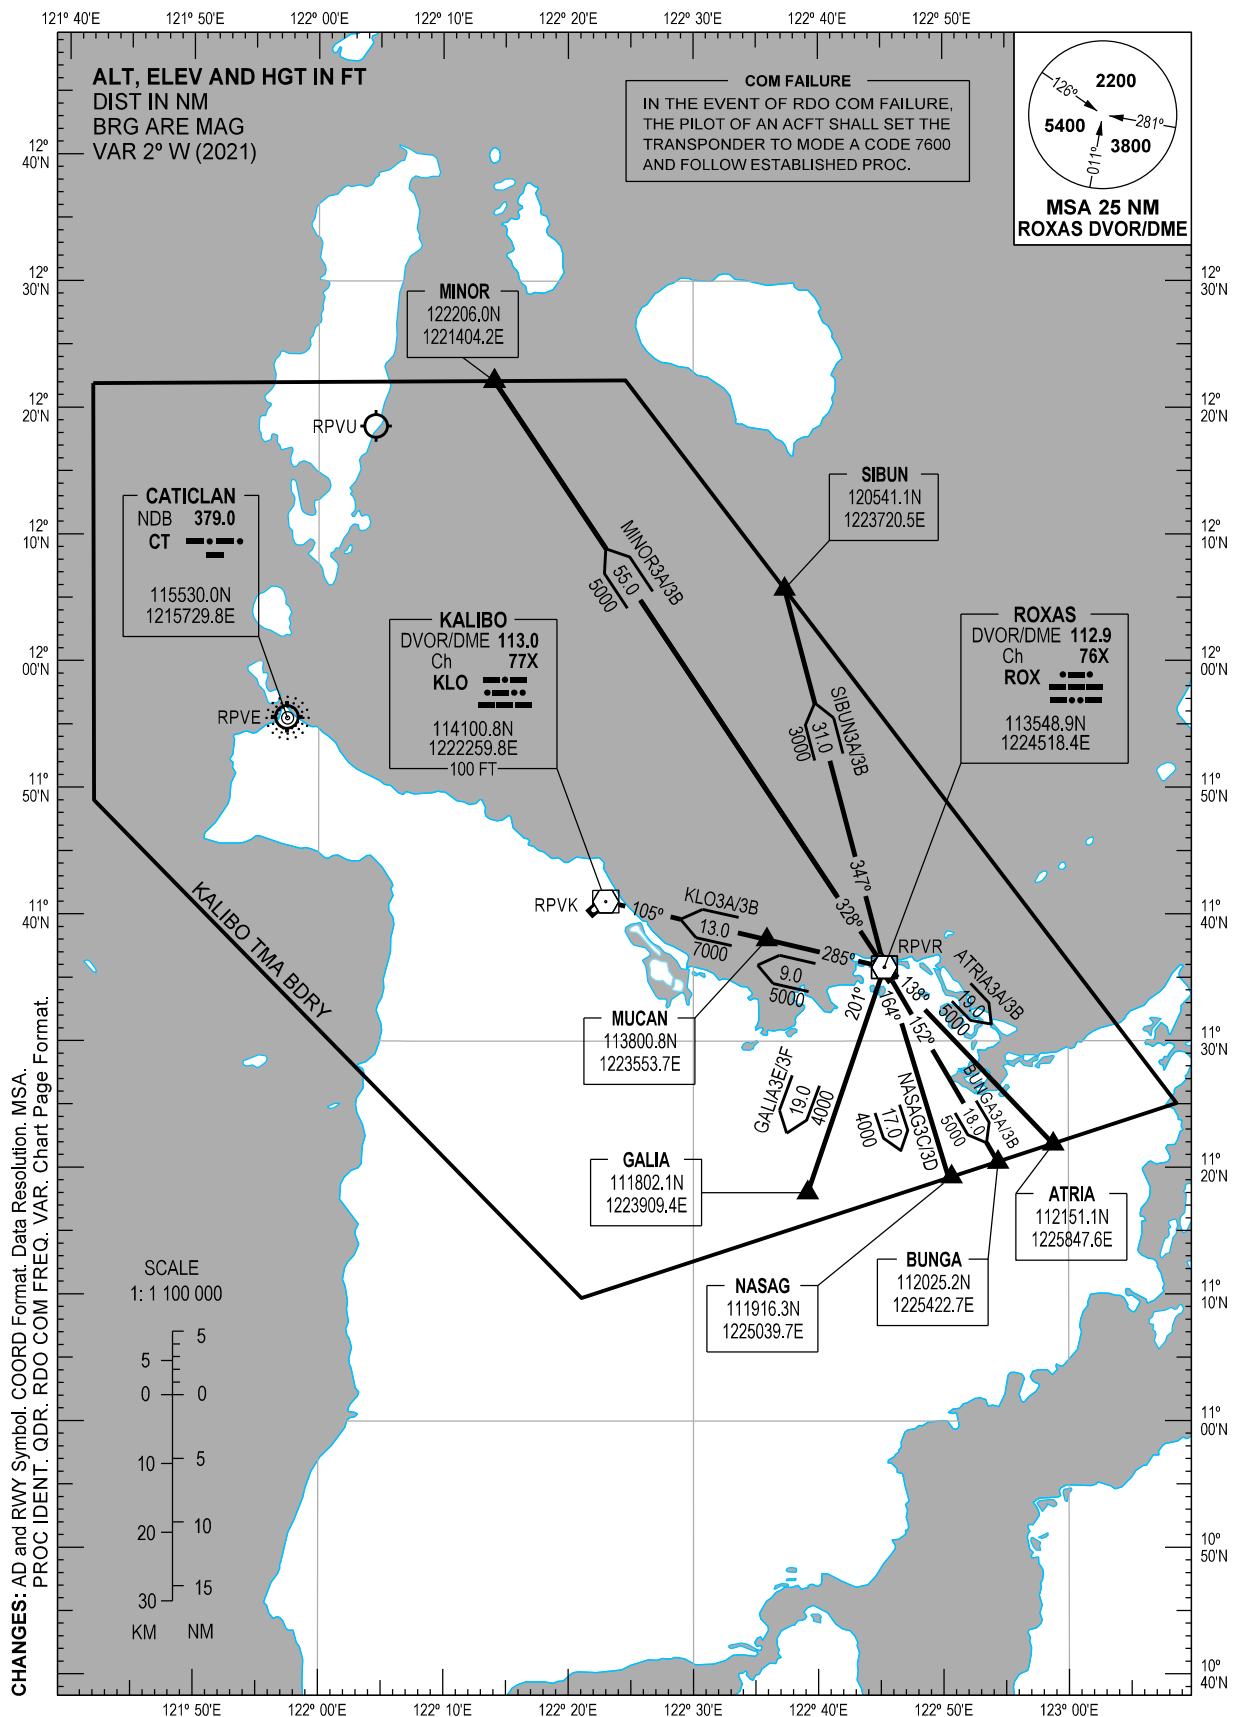

DEPARTURE ROUTE DESCRIPTION

SID	TAKE-OFF	PROCEDURE	REMARKS
ATRIA3A ATRIA3B	RWY 32 - Right turn RWY 14 - Left turn within 5 NM	Climb so as to cross ROX DVOR/DME at or above 5000 FT. Track-out on ROX DVOR/DME Radial 138 to cross ATRIA at or above 6000 FT.	If unable to comply with SID restriction, advise ATC for alternative instructions. VMC climb on course during daytime. May be authorized by ATC subject to traffic condition.
BUNGA3A BUNGA3B	RWY 32 - Right turn RWY 14 - Left turn within 5 NM	Climb so as to cross ROX DVOR/DME at or above 5000 FT. Track-out on ROX DVOR/DME Radial 152 to BUNGA.	
GALIA3E GALIA3F	RWY 32 - Right turn RWY 14 - Straight-out to 2000 FT before making a right turn	Intercept and track-out on ROX DVOR/DME Radial 201 so as to cross GALIA at or above 5000 FT.	
KLO3A KLO3B	RWY 32 - Left turn RWY 14 - Left turn	Intercept and track-out on ROX DVOR/DME Radial 285 climbing to assigned level.	
MINOR3A MINOR3B	RWY 32 - Right turn RWY 14 - Left turn	Intercept and track-out on ROX DVOR/DME Radial 328 so as to cross MINOR at or above 8000 FT.	
NASAG3C NASAG3D	RWY 32 - Right turn RWY 14 - Straight-out to 2000 FT before making a right turn	Intercept and track-out on ROX DVOR/DME Radial 164 so as to cross NASAG at or above 4000 FT.	
SIBUN3A SIBUN3B	RWY 32 - Right turn RWY 14 - Left turn within 5 NM	Intercept and track-out on ROX DVOR/DME Radial 347 so as to cross SIBUN at or above 9000 FT.	

CHANGES: RTE and PROC Description. Page Format.

INSTRUMENT
APPROACH
CHART - ICAO


AERODROME ELEV 9 FT

HEIGHTS RELATED TO
THR RWY 14 - ELEV 11 FT


APP - 120.4 (KALIBO)
TWR - 118.5

ROXAS/Roxas (RPVR)

VOR RWY 14

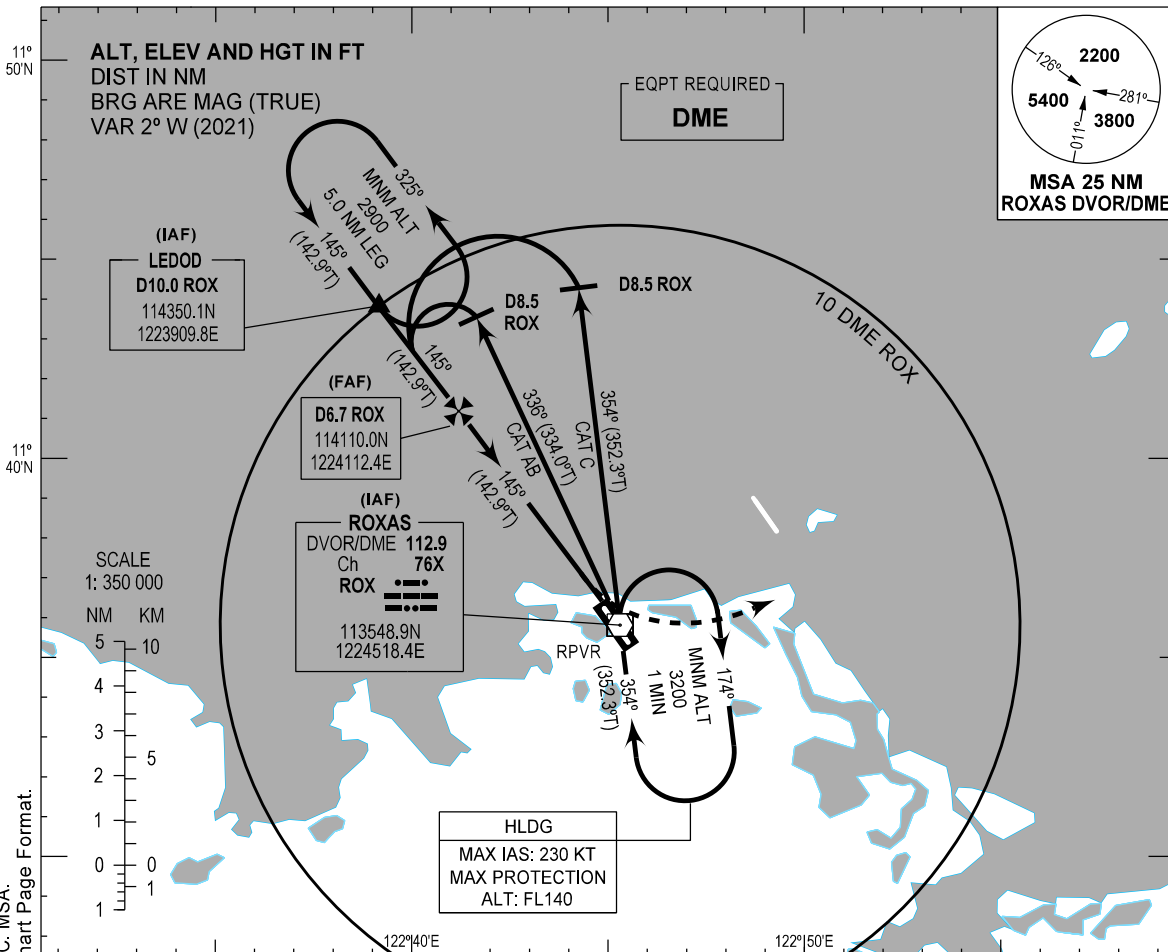

CHANGES: AD and THR ELEV. APP FREQ. COORD Format. Minima Table. Missed APCH PROC. MSA.
Profile View. QDR. RWY Symbol. SIG Point LEDOD. VAR. VIS Deleted. Chart Page Format.

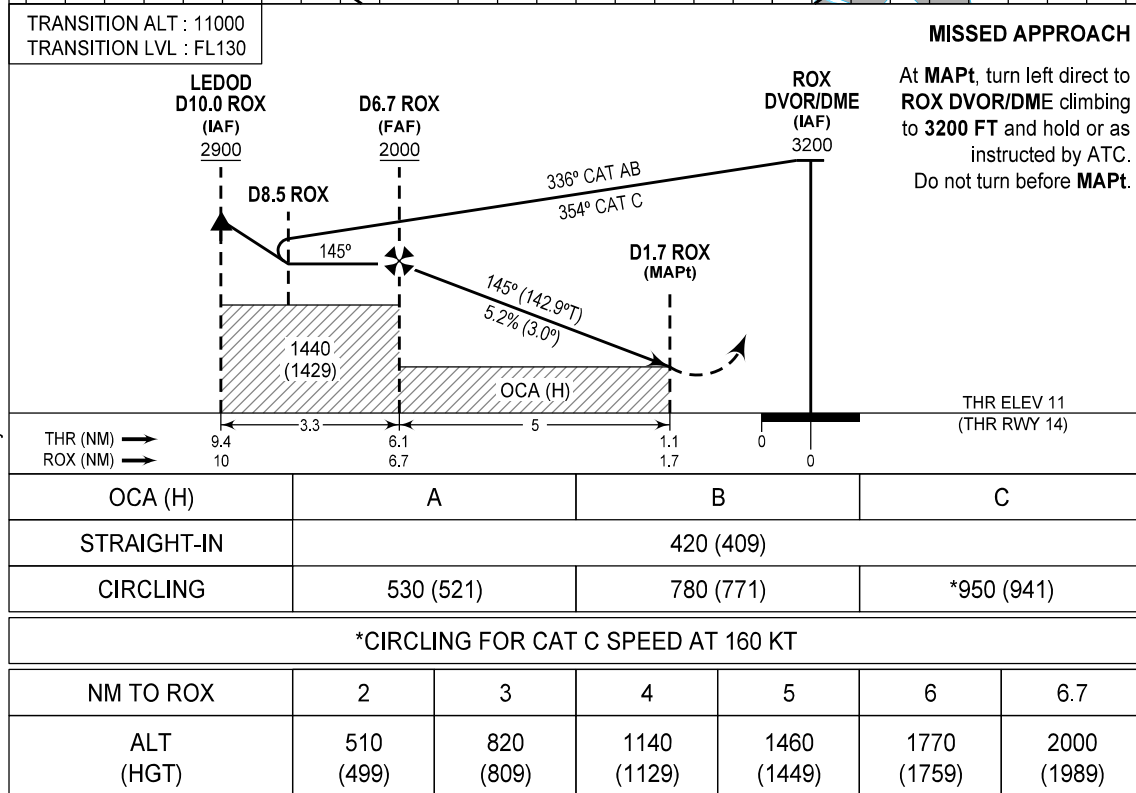

INSTRUMENT
APPROACH
CHART - ICAO


AERODROME ELEV 9 FT

HEIGHTS RELATED TO
THR RWY 32 - ELEV 11 FT

APP - 120.4 (KALIBO)
TWR - 118.5

ROXAS/Roxas (RPVR)


VOR RWY 32

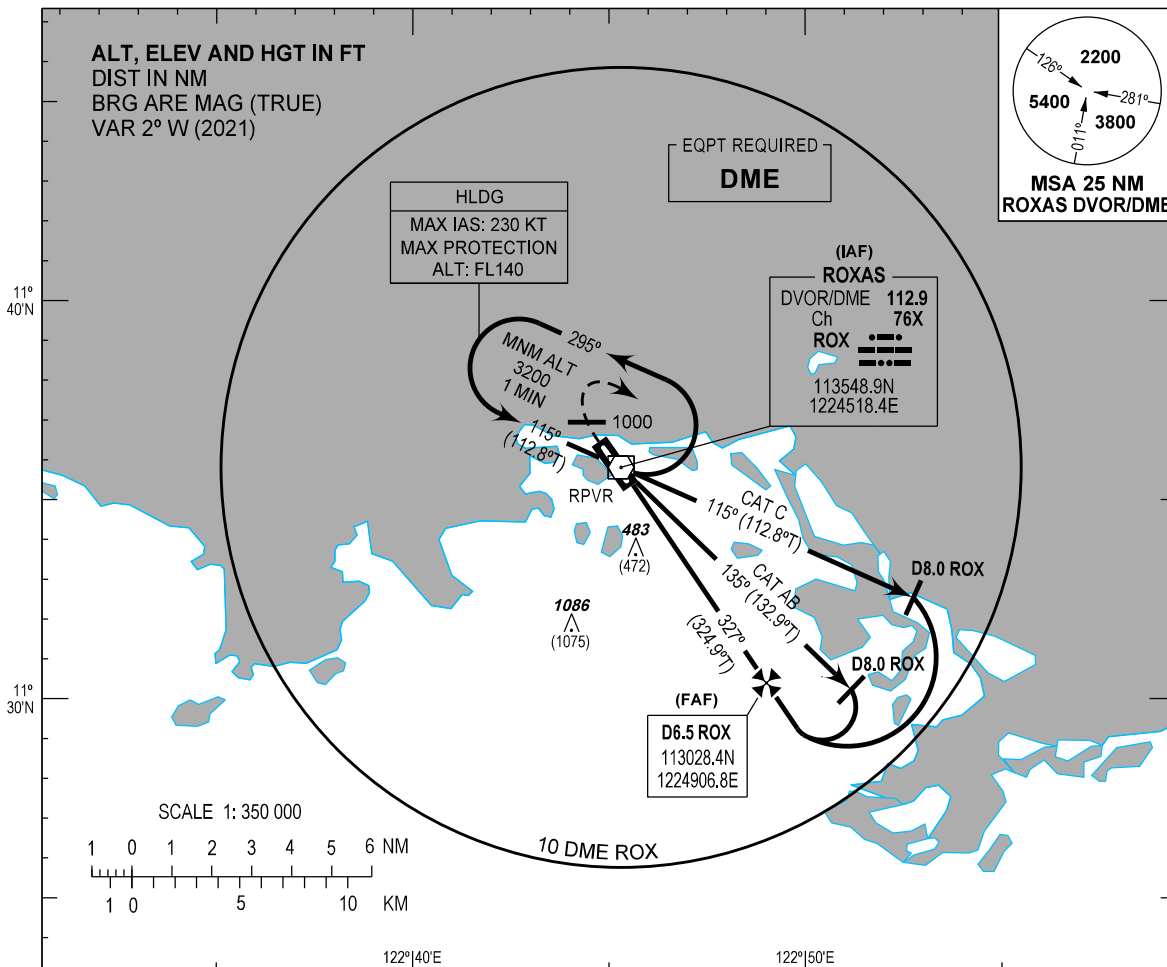

MISSED APPROACH

Climb to **3200 FT**, after
passing **1000 FT**, turn
right direct to **ROX
DVOR/DME** and hold
or as instructed by ATC.

TRANSITION ALT : 11000
TRANSITION LVL : FL130

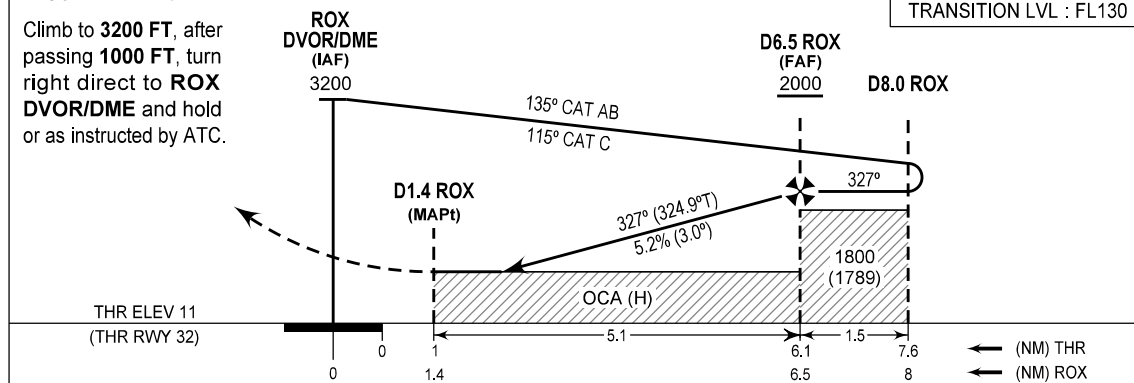

OCA (H)	A	B	C
STRAIGHT-IN	610 (599)		
CIRCLING	610 (601)	780 (771)	*950 (941)

*CIRCLING FOR CAT C SPEED AT 160 KT

NEW CHART

NM TO ROX	2.1	3	4	5	6	6.5
ALT (HGT)	610 (599)	890 (879)	1210 (1199)	1530 (1519)	1850 (1839)	2000 (1989)


TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
9 FT

TWR - 118.5

ROXAS/Roxas (RPVR)
RWY 14

CHANGES: ACFT Type, HGT, VAR and Units of Measurement Deleted. AD ELEV. Data Resolution. Chart Page Format.

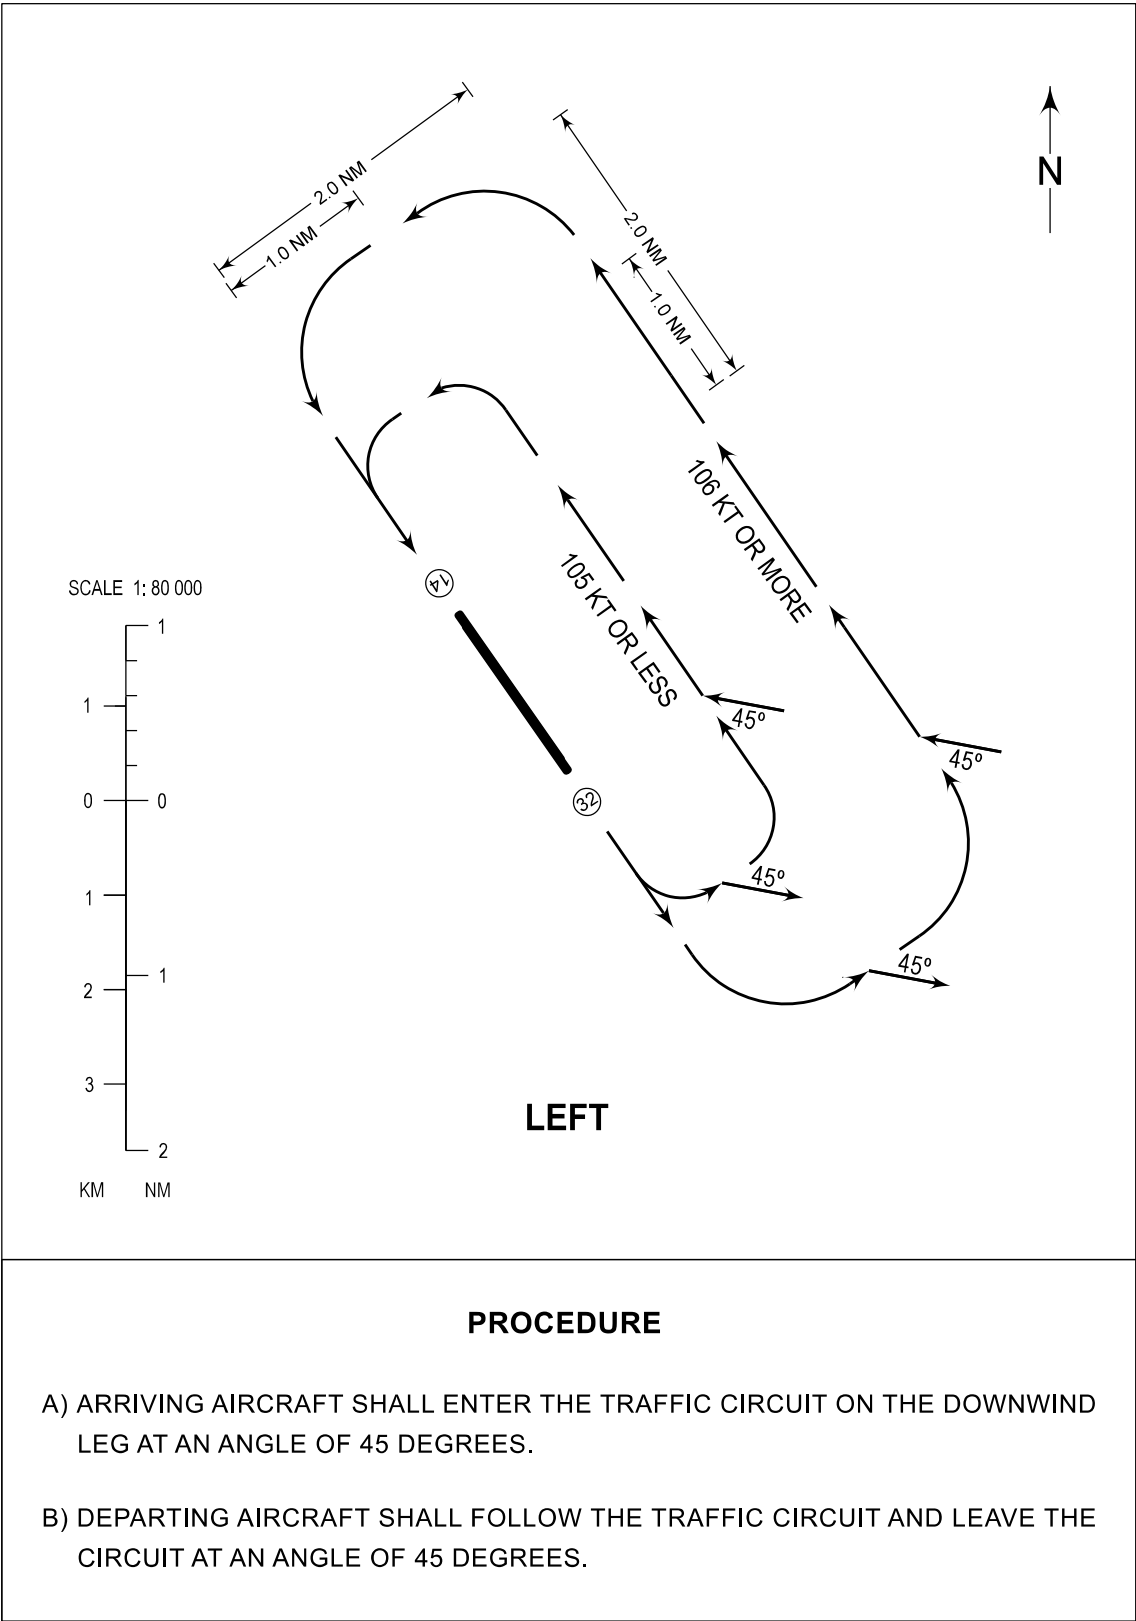

TRAFFIC
CIRCUIT
CHART

AERODROME ELEV
9 FT

TWR - 118.5

ROXAS/Roxas (RPVR)

RWY 32

