

DS-2CE16C0T-IRF HD 720p IR Bullet Camera





Key Features

- 1 megapixel high performance CMOS
- Analog HD output, up to 720p resolution
- Day/Night switch
- DNR
- Smart IR
- Up to 20 m IR distance
- Switchable TVI/AHD/CVI/CVBS
- IP66





Specifications


Camera	
Image Sensor	1 MP CMOS sensor
Signal System	PAL/NTSC
Effective Pixels	1296 (H) × 732 (V)
Min. illumination	0.1 Lux@(F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25 (1/30) s to 1/50,000 s
Lens	2.8 mm, 3.6 mm, 6 mm optional
	Field of view: 70.9° (3.6 mm), 92° (2.8mm), 56.7° (6mm)
Lens Mount	M12
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 180°, Rotation: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 analog HD output
S/N Ratio	>62 dB
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity 90% or less (non-condensation)
Power Supply	12 V DC±15%
Power Consumption	Max. 4 W
Protection Level	IP66
IR Range	Up to 20 m
Dimensions	Φ 70 mm × 154.5 mm (2.76" × 6.08")
Weight	400 g (0.88 lb.)


Order Model

DS-2CE16C0T-IRF



Dimensions



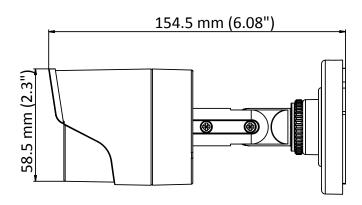

Accessories



DS-1280ZJ-XS Junction Box



DS-1H18 Video Balun



X41T Camera Tester

Distributed by

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision Poland T +48-22-460-01-50 poland@hikvision.com Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision UK T +44-1628-9021-4 support.uk@hikvision.com Hikvision Europe T+31-23-5542770 saleseuro@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com Hikvision Middle East T +971-4-8816086 salesme@hikvision.com

Hikvision France T +33(0)1-85-330-444 info.fr@hikvision.com

Hikvision Oceania T +61-2-8599-4233 salesau@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Hong Kong T +852-2151-1761