HIKVISION

DS-2CE16C0T-VFIR3F
HD720p IR Bullet Camera

Key Features

- 1 megapixel high-performance CMOS

- Analog HD output, up to 720p resolution

- Day/Night switch

- DNR

- Smart IR

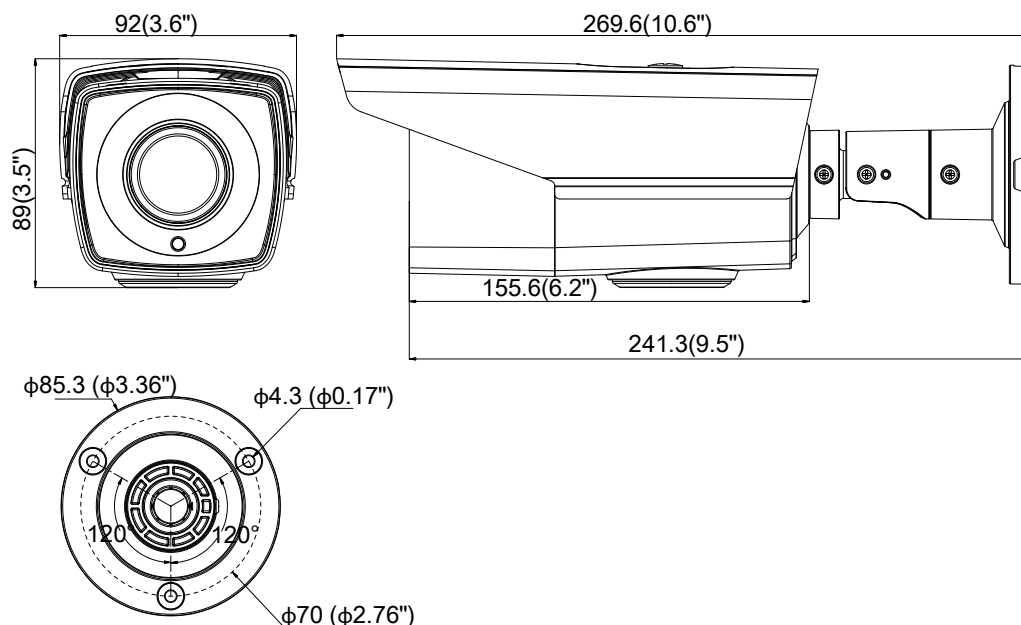- Up to 40 m IR distance

- Switchable TVI/AHD/CVI/CVBS

- IP66

Specifications

Camera	
Image Sensor	1 MP CMOS image sensor
Signal System	PAL/NTSC
Effective Pixels	1296(H) × 732(V)
Min. Illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25 (1/30)s to 1/50,000 s
Lens	2.8 - 12 mm @ F1.4
	Angle of view: 71.78° - 23.42 °
Lens Mount	φ14
Day & Night	ICR
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotation: 0° to 360°
Synchronization	Internal synchronization
Video Frame Rate	720p@25fps/720p@30fps
HD Video Output	1 analog HD output
S/N Ratio	>62dB
General	
Operating Conditions	-40 °C to 60 °C (-40 °F to 140 °F), Humidity 90% or less (non-condensing)
Power Supply	12 VDC±15%
Power Consumption	Max. 4 W
Protection Level	IP66
IR Range	Up to 40 m
Dimensions	92mm×84.8mm×269.6mm (3.62"×3.34"×3.34")
Weight	Approx. 900g (1.98lb)

Order Model

DS-2CE16C0T-VFIR3F

Dimensions

92(3.6")

89(3.5")

269.6(10.6")

155.6(6.2")

241.3(9.5")

φ85.3 (φ3.36")   φ4.3 (φ0.17")

120° 120°

φ70 (φ2.76")

Unit: mm

Accessories

DS-1275ZJ	DS-1280ZJ-S	DS-1H18	X41T
Vertical Pole Mounting	Junction Box	Video Balun	Camera Tester

Distributed by

0100001061107