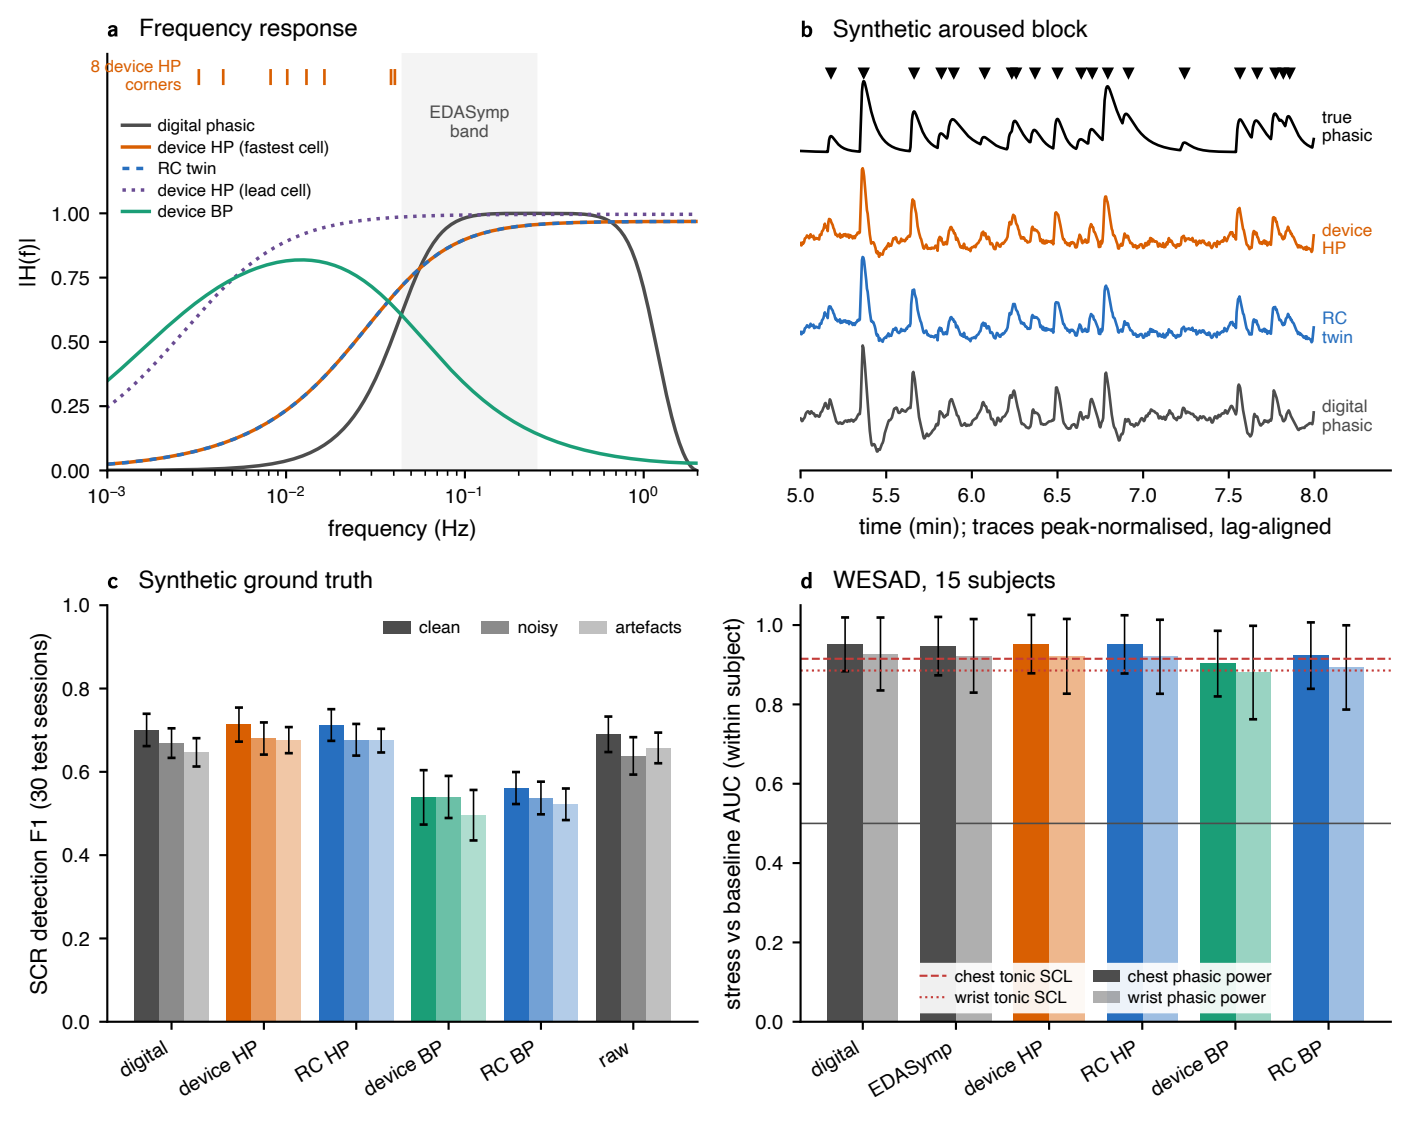
a Frequency response
8 device HP corners
EDASymp band
digital phasic
device HP (fastest cell)
RC twin
device HP (lead cell)
device BP
|H(f)|
1.00
0.75
0.50
0.25
0.00
10^{-3}
10^{-2}
10^{-1}
10^{0}
frequency (Hz)
b Synthetic aroused block
true phasic
device HP
RC twin
digital phasic
5.0
5.5
6.0
6.5
7.0
7.5
8.0
time (min); traces peak-normalised, lag-aligned
c Synthetic ground truth
clean
noisy
artefacts
SCR detection F1 (30 test sessions)
1.0
0.8
0.6
0.4
0.2
0.0
digital
device HP
RC HP
device BP
RC BP
raw
d WESAD, 15 subjects
stress vs baseline AUC (within subject)
chest tonic SCL
wrist tonic SCL
chest phasic power
wrist phasic power
digital
EDASymp
device HP
RC HP
device BP
RC BP