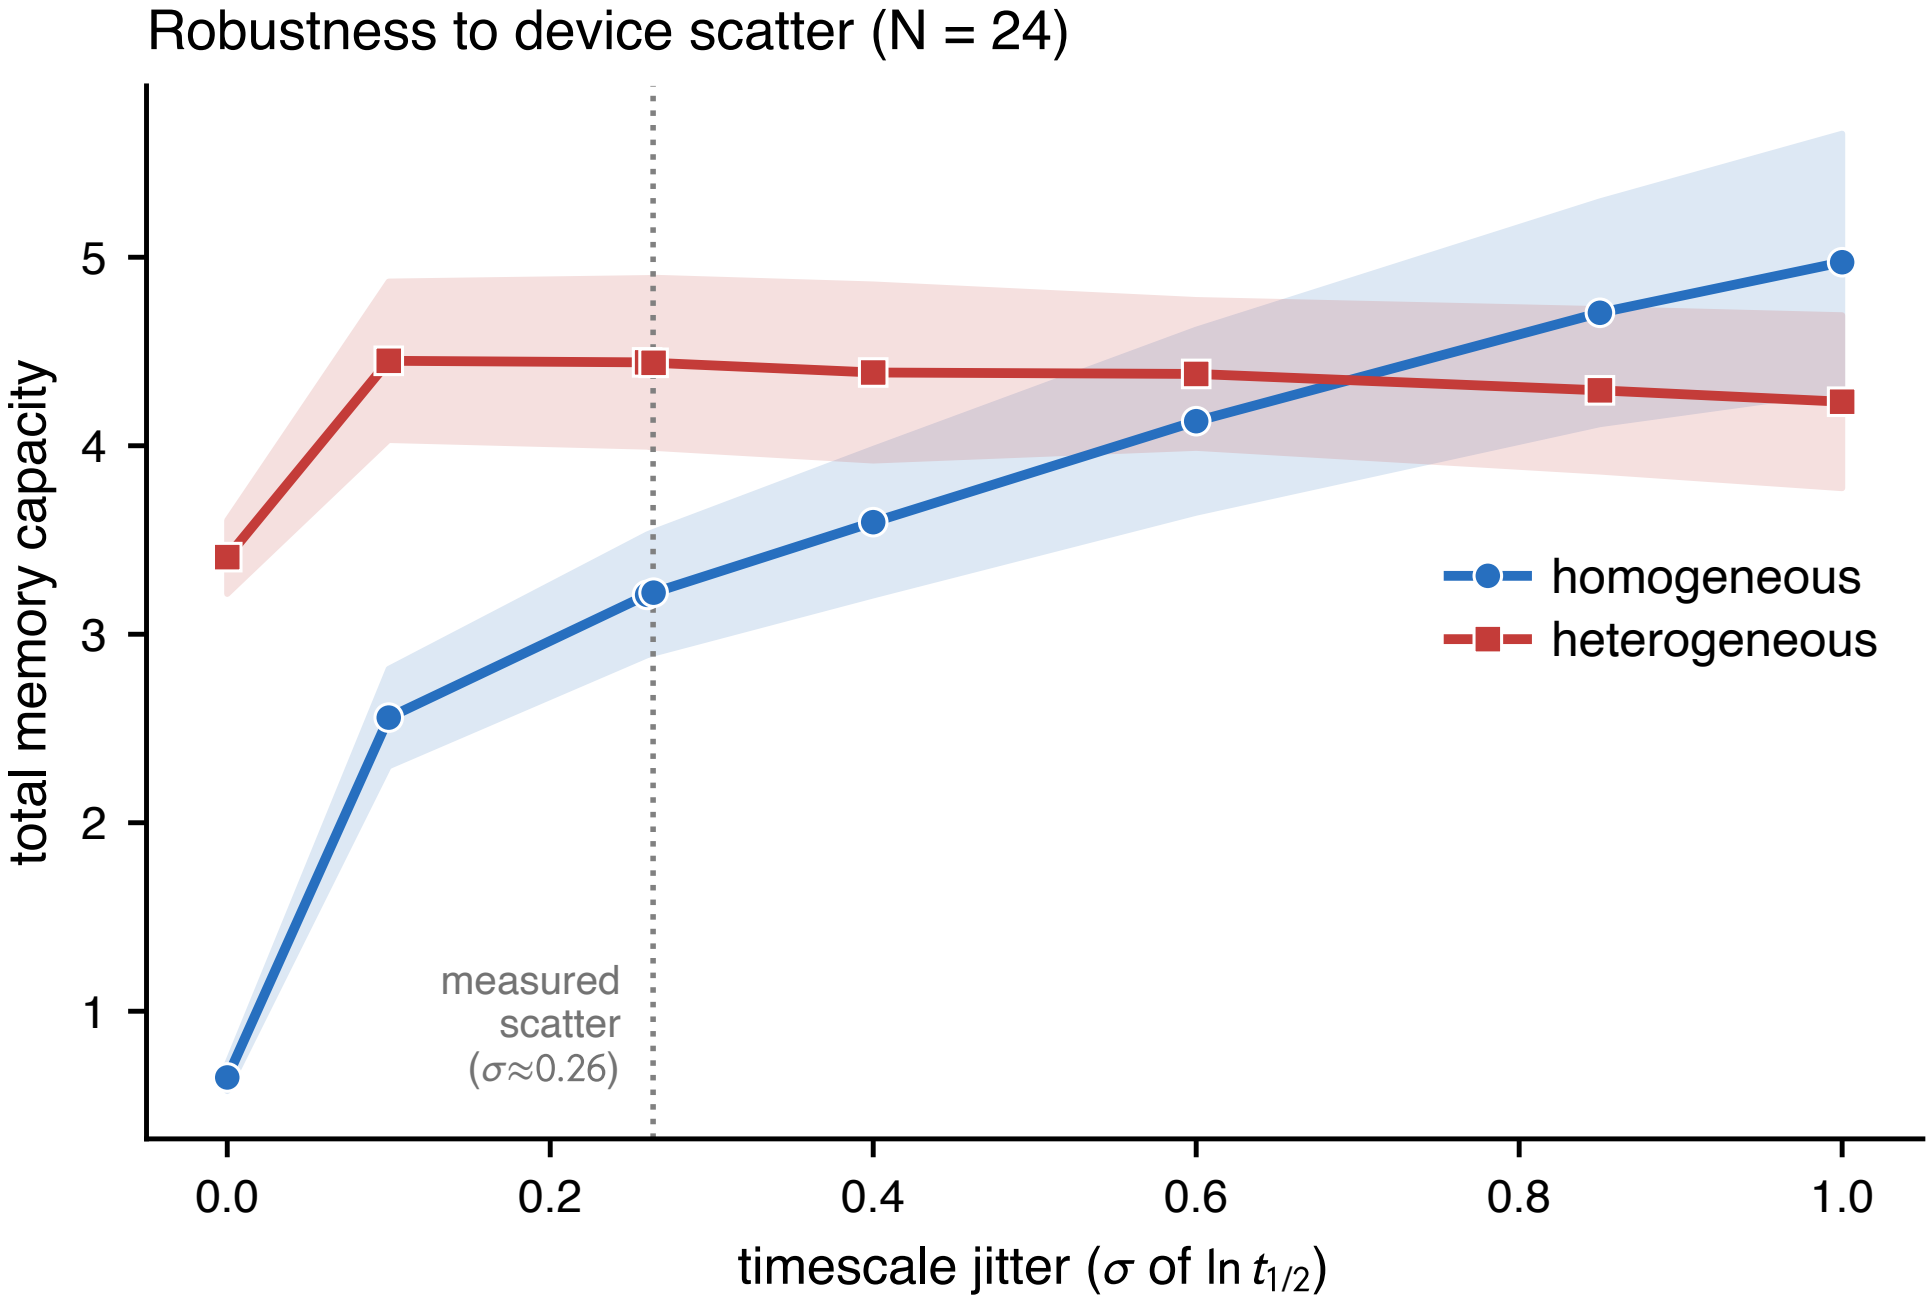
Robustness to device scatter (N = 24)
total memory capacity
1
2
3
4
5
0.0
0.2
0.4
0.6
0.8
1.0
timescale jitter (σ of ln t1/2)
measured
scatter
(σ≈0.26)
homogeneous
heterogeneous