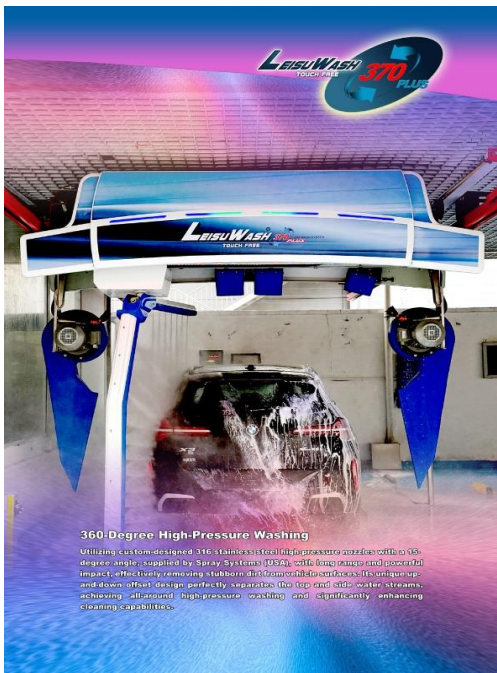
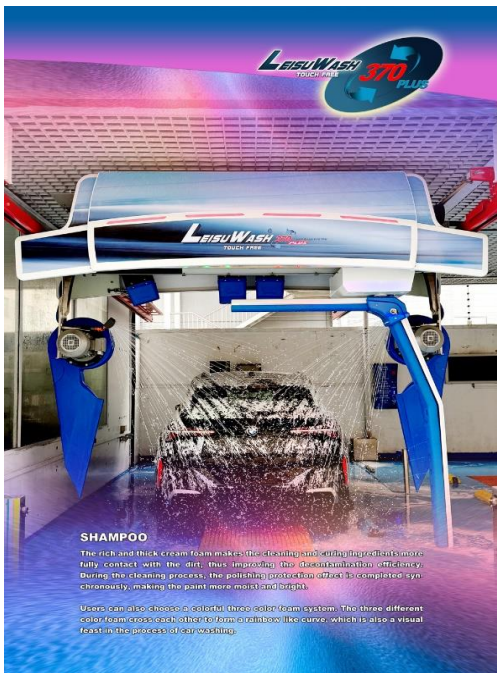


LEISUWASH

A professional Touchless Car Wash manufacturer in China

Hangzhou Leisu Cleaning Equipment Co., Ltd. was established in 2014. It is a national high-tech enterprise specializing in the research and development, production, sales and service of automatic car wash equipment. The products have more than 100 national patent technologies, registered trademarks, CE certification, ISO quality management system certification, SABER certification, etc. And have been exported to 100 countries, Leisuwash thousands of car wash machines are serving customers all over the world.

LeisuWash 370 Prices List

Name/Model	LEISUWASH 370 PLUS	LEISUWASH 370 ULTRA
Equipment photo	 360Degree High-Pressure Washing Utilizing custom-designed 316 stainless steel high-pressure nozzles with a 45-degree angle, supplied by Spray Systems (USA), with long range and powerful impact, effectively removing stubborn dirt from car body surfaces. Its unique up-and-down offset design perfectly separates the top and side water streams, achieving all-around high-pressure washing and significantly enhancing cleaning capabilities.	 SHAMPOO The rich and thick cream foam makes the cleaning and drying hydrophobic water fully contact with the dirt, thus improving the decontamination efficiency. During the cleaning process, the polishing protection effect is completed synchronously, making the paint more moist and bright. Users can also choose a colorful three-color foam system. The three different color foam cross each other to form a rainbow-like curve, which is also a visual feast in the process of deep washing.
Launch time	Year 2026	Year 2026
Unit price (RMB)	USD24000.00	USD25000.00
Three-phase electricity /whole machine power	380V/45Kw	380V/48Kw
Power requirements (kw)	380V/22Kw/50Hz/60Hz	380V/22Kw/50Hz/60Hz

Installation requirements (mm)	7500*3800/4200*3300	7500*3800/4200*3300
Maximum car wash size (mm)	5600*2980*2050	5600*2980*2050
Warranty	3 years	3 years
Main machine rack	Hot-dip galvanizing + powder coating	Hot-dip galvanizing + powder coating
Rail length (mm)	National Standard 7500mm*6mm	National Standard 7500mm*6mm
No-resistance slide system	Anti-slip slide rail /patented technology	Anti-slip slide rail /patented technology
Shipping weight/volume	2600kg/13.5m ³	2800kg/13.5m ³
CPU	Bus servo motion control system	Bus servo motion control system
Vertical/horizontal /rotation	AI three-axis motion control technology	AI three-axis motion control technology
Vehicle detection system	Ultrasonic radar fusion detection technology	Ultrasonic radar fusion detection technology
Main control system	3-in-1 control system + soft start	3-in-1 control system + soft start
Digital safety anti-collision system	Electronic anti-collision system/patented technology	Electronic anti-collision system/patented technology
Main water pump motor power(kw)	Chinese Brand 380V/18.5kw	Germany INNOMOTICS 380V/18.5kw
High-pressure plunger pump	PF36	PF36
Air dryer motor power (kw)	Chinese Brand Top air dryers 5.5kw*4	Germany INNOMOTICS Top air dryers 5.5kw*4
Flushing pressure	80-100kg	80-100kg
Rinse a circle	28 seconds	28 seconds
Car washing time (min)	Quick wash 2min /Better wash 6min	Quick wash 2min /Better wash 6min
Chemical consumption (ml)	20-50ml	20-50ml
Power consumption (kwh)	0.5-0.8kwh/vehicle	0.5-0.8kwh/vehicle
Water consumption (L)	100-200L	100-200L
Whole machine sheet metal process	Some parts are made of 304 stainless steel/hot-dip galvanized + powder coating.	Some parts are made of 304 stainless steel/hot-dip galvanized + powder coating.
24-hour self-service car washing	with payment terminal	with payment terminal
Voice prompt	Human voice guidance	Human voice guidance
Installation frame national standard (mm)	120*120*4 Hot-dip galvanizing	120*120*4 Hot-dip galvanizing

Spray various cleaning chemicals	●	●
360-degree high-pressure washing with smart arm	●	●
Single color SHAMPOO	●	●
WAX	●	●
TOP-RO spot free rinse	●	●
Integrated Air Dryer	●	●
Chassis and wheel hub high-pressure washing	●	●
Panel lighting control system	●	●
LED screen car wash process display	●	●
Unique double-row nozzle of rotating arm	●	●
Sensor aviation quick-plug connection	●	●
Car wash mode and speed can be freely programmed	●	●
APP network remote control system	●	●
Remote software upgrade	●	●
Remote control	●	●
Variable frequency bus servo drive	●	●
Frequency conversion start and operation	●	●
Panel hydraulic struts can freely flip up	●	●
Installation and maintenance tool kit	●	●
HMI Touch Screen	●	●
Car wash quantity report statistics	●	●
Permission Settings	●	●
Automatic standby function	●	●
Fault self-check function	●	●
One-button reset	●	●

Mounting frame	●	●
Multi-liquid multiplexing function	●	●
One key anti-frozen drainage system	●	●
Multi Languages Operation Sytem	●	●
Rotating arm dynamic LED colorful marquee	—	—
TOP high-pressure washing	—	—
Tri-color SHAMPOO	—	—
OVERGLOW HI-GLOSS	—	—
Remotely set water pressure and air dryer noise via	—	—
Side dryer 5.5kw*2	—	—
304 stainless steel frame	—	—
Water Recycling System	—	—
Reverse osmosis water equipment	—	—
304 stainless steel automatic shutter door	—	—
Main Components	Brand	Material
Control system	Germany CodeSys	Bus motion control platform
PLC	SIEMENS	Bus PLC
Motion controllers	Delta, Taiwan	Bus PLC
Bus servo drive	Delta, Taiwan	ETHERCAT Bus Servo
Start/Run/Control	Switzerland ABB/France Schneider	Industrial grade
Electrical components	France Schneider	Industrial control
Ultrasonic/Photoelectric Sensors	Germany B+F	Industrial control
High-pressure plunger pump	Germany PF	Germany PF
Pump station main motor	Germany INNOMOTICS	18.5kw/22kw

Air drying motor	Germany INNOMOTICS	Aluminum casing/5.5kw*4
Side air drying motor	Germany INNOMOTICS	Aluminum casing/5.5kw*2
Engineering drag chain	Germany IGUS	Original import
Drag chain cable	Germany IGUS	Original import
High-pressure hose	USA Parker	471TC/3125PSI/ pressure bearing 200kg
Sealing ring	USA Parker	Acid and alkali resistant
Longitudinal/transverse/ closed loop synchronous belt	Italy MEGADYNE	Industrial grade
Reducer	Italy SITI	IP67 waterproof grade
Whole machine transmission bearings	Japan NSK	304 Stainless steel/rubber cover waterproof bearing
One-way valve/pneumatic components	Taiwan AIRTAC	304 Stainless steel
Rotary joint	USA	316 Stainless steel / pressure bearing 200kg
Human-machine interface	10-inch color bus touch screen	Remote control HMI touch screen
High-pressure nozzle	USA SPRAY brand	316 hard stainless steel /15° angle
P-shaped nozzle	China Leisuwash	304 Stainless steel
Main machine sheet metal process	China Leisuwash	Hot-dip galvanizing + powder coating
Mounting frame	China Leisuwash standard 4mm thickness	Hot-dip galvanizing + powder coating
Rotating Arm	China Leisuwash	304 Stainless steel
Chassis flushing kit	China Leisuwash	304 Stainless steel
Walking Wheel/ Tension Wheel	Germany PA6 Material	Mold encapsulation
Front and back panel	China Leisuwash	Mold PE
Connecting pipes for whole machine pipelines	China Leisuwash	Galvanized pipe + 304 stainless steel
Screws/nuts/spring washers/flat washers	China Leisuwash	304 Stainless steel
Key pins/hoops/ circlips/connectors	China Leisuwash	304 Stainless steel

Remark: Standard ● Optional -