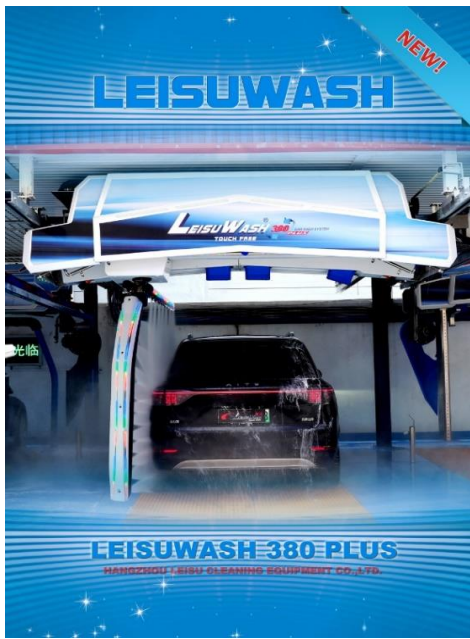
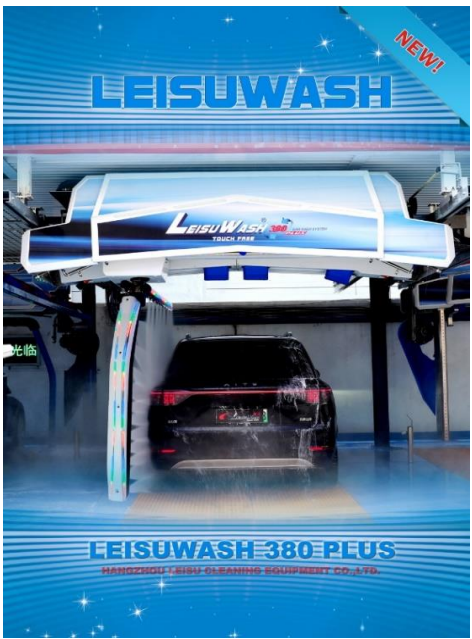


LEISUWASH

A professional Touchless Car Wash manufacturer in China

Hangzhou Leisu Cleaning Equipment Co., Ltd. was established in 2014. It is a national high-tech enterprise specializing in the research and development, production, sales and service of automatic car wash equipment. The products have more than 100 national patent technologies, registered trademarks, CE certification, ISO quality management system certification, SABER certification, etc. And have been exported to 100 countries, Leisuwash thousands of car wash machines are serving customers all over the world.

LEISUWASH 380 Price List

Name/Model	LEISUWASH 380 PLUS	LEISUWASH 380 ULTRA
Equipment photo	 A photograph of the LEISUWASH 380 PLUS touchless car wash machine. A black car is positioned inside the machine, which is spraying water. The machine has a blue and white color scheme with the LEISUWASH logo and '380 PLUS' prominently displayed. A 'NEW!' banner is in the top right corner. The background is a blue gradient with star-like light effects.	 A photograph of the LEISUWASH 380 ULTRA touchless car wash machine. A black car is positioned inside the machine, which is spraying water. The machine has a blue and white color scheme with the LEISUWASH logo and '380 ULTRA' prominently displayed. A 'NEW!' banner is in the top right corner. The background is a blue gradient with star-like light effects.
Launch time	Year 2025	Year 2025
Unit price	USD34,000.00	USD38,000.00
Three-phase electricity /whole machine power	380V/45Kw	380V/48Kw
Power requirements (kw)	380V/22Kw/50Hz/60Hz	380V/22Kw/50Hz/60Hz

Installation requirements (mm)	8600*4200*3300	8600*4200*3300
Maximum car wash size (mm)	5600*3000*2000	5600*3000*2000
Warranty	3 years	3 years
Main machine rack	304 stainless steel	304 stainless steel
Rail length (mm)	National Standard 8500mm*6mm	National Standard 8500mm*6mm
No-resistance slide system	Anti-slip slide rail /patented technology	Anti-slip slide rail /patented technology
Main machine weight/volume	4500kg/14.5m ³	4600kg/14.5m ³
CPU	Bus servo motion control system	Bus servo motion control system
Vertical/horizontal/rotation	AI three-axis motion control technology	AI three-axis motion control technology
Vehicle detection system	Ultrasonic radar fusion detection technology	Ultrasonic radar fusion detection technology
Main control system	3-in-1 frequency conversion main control system	3-in-1 frequency conversion main control system
Digital safety anti-collision system	Electronic anti-collision system/patented technology	Electronic anti-collision system/patented technology
Main water pump motor power (kw)	Germany INNOMOTICS 380V/18.5kw	Germany INNOMOTICS 380V/22kw
High-pressure plunger pump	PF36/304 Stainless steel pump head	WH12140 pump
Air dryer motor power (kw)	Top air dryers 5.5kw*4	Top air dryers 5.5kw*4
Flushing pressure	90-120kg	90-120kg
Rinse a circle	28 seconds	28 seconds
Car washing time (min)	Quick wash 2min /Better wash 6min	Quick wash 2min /Better wash 6min
Chemical consumption (ml)	20-50ml	20-50ml
Power consumption (kwh)	0.5-0.8/vehicle	0.5-0.8/vehicle
Water consumption (L)	100-200L	100-200L
Whole machine sheet metal process	304 stainless steel	304 stainless steel
24-hour self-service car washing	with payment terminal	with payment terminal
Voice prompt	Human voice guidance	Human voice guidance

Installation frame national standard (mm)	120*120*4 Hot-dip galvanizing /304stainless steel	120*120*4 Hot-dip galvanizing /304stainless steel
Spray various cleaning chemicals	●	●
360-degree high-pressure washing with smart arm	●	●
TOP high-pressure washing	—	●
Single color SHAMPOO	●	—
Tri-color SHAMPOO	—	●
OVERGLOW HI-GLOSS	●	●
WAX	●	●
TOP-RO spot free rinse	●	●
Built-in variable frequency air drying system	●	●
Chassis and wheel hub high-pressure washing	●	●
Panel lighting control system	●	●
LED large screen car wash process display	●	●
Rotating arm dynamic LED colorful marquee	—	●
Unique double-row nozzle of rotating arm	●	●
Touch screen remotely sets water pressure and air fan noise	●	●
Sensor aviation quick-plug connection	●	●
Car wash mode and speed can be freely programmed	●	●
APP network remote control system	●	●
Remote software upgrade	●	●
Remote control	●	●
Variable frequency bus servo drive	●	●
Frequency conversion start and operation	●	●
Panel hydraulic struts can freely flip up	●	●
Installation and maintenance tool kit	●	●
HMI Touch Screen	●	●
Car wash quantity report statistics	●	●

Permission Settings	●	●
Automatic standby function	●	●
Fault self-check function	●	●
One-button reset	●	●
Mounting frame	●	●
Multi-liquid multiplexing function	●	●
One key anti-frozen drainage system	●	●
Multi Languages Operation Sytem	●	●
Side dryer 5.5kw*2	—	—
304 stainless steel frame	—	—
Water Recycling System	—	—
Reverse osmosis water equipment	—	—
304 stainless steel automatic shutter door	—	—
Main Components	Brand	Material
Control system	Germany CodeSys	Bus motion control platform
PLC	SIEMENS	Bus PLC
Motion controllers	Delta, Taiwan	Bus PLC
Bus servo drive	Delta, Taiwan	ETHERCAT Bus Servo
Start/Run/Control	Switzerland ABB/France Schneider	Industrial grade
Electrical components	France Schneider	Industrial control
Ultrasonic/Photoelectric Sensors	Germany B+F	Industrial control
High-pressure plunger pump	Germany PF/Taiwan Wuli PT36 / WH12140	304 stainless steel pump head
Pump station main motor	GermanyINNOMOTICS)	18.5kw/22kw
Air drying motor	GermanyINNOMOTICS	Aluminum shell/5.5kw*4

Side air dryer motor	GermanyINNOMOTICS	Aluminum shell/5.5kw*2
Three-in-one inverter	Delta, Taiwan	30KW inverter
Engineering drag chain	GermanyIGUS	Original import
Drag chain cable	Germany IGUS	Original import
High-pressure hose	USA Parker	471TC/3125PSI/ pressure bearing 200kg
Sealing ring	USA Parker	Acid and alkali resistant
Longitudinal/transverse/ closed loop synchronous belt	Italy MEGADYNE	Industrial grade
Reducer	Italy SIT	IP67 waterproof grade
Whole machine transmission bearings	Japan NSK	304 Stainless steel/rubber cover waterproof bearing
One-way valve/pneumatic components	Taiwan AIRTAC	304 Stainless steel
Rotary joint	USA	316 Stainless steel / pressure bearing 200kg
Human-machine interface	10-inch color bus touch screen	Remote control HMI touch screen
High-pressure nozzle	USA SPRAY brand	316 hard stainless steel /15° angle
P-shaped nozzle	China Leisuwash	304 Stainless steel
Main machine sheet metal process	China Leisuwash	304 Stainless steel
Mounting frame	4mm thickness	Hot dip galvanized/304 Stainless steel
Rotating Arm	China Leisuwash	304 Stainless steel
Chassis flushing kit	China Leisuwash	304 stainless steel
Walking Wheel/ Tension Wheel	German PA6 Material	Mold encapsulation
Front and back panel	China Leisuwash	Mold PE
Connecting pipes for whole machine pipelines	China Leisuwash	304 Stainless steel
Screws/nuts/spring washers /flat washers	China Leisuwash	304 Stainless steel
Key pins/hoops/ circlips/connectors	China Leisuwash	304 Stainless steel
Remark: Standard ● Optional -		

我们的供应商均来自世界专业公司
品质正宗 质量可靠 经久耐用 服务保障

HANGZHOU LEISU CLEANING EQUIPMENT CO.,LTD.

Address: No.89, Gaoxin 11th Road, XiaoShan, Hangzhou, Zhejiang, China

<https://www.leisuwash.com/>