


Touchless Series-

Model-CL908

(Latin America Customized)

CHEER WASH EQUIPMENT

CHEER WASH




Highlights

CL908 Model

*CL908 is an upgraded version of CL808 with prolonged frame customized for larger vehicles like minivans (L6770*W2690*H2100mm) .

- **Cleanest Washing Effect**

- **140KGS** Germany TBT wash ceramic plunger water pump
- * **Rotating arm moving horizontally**
- * **Car width detection system**
- * **Enhanced P+F ultrasonic sensor for car width detection**
 - Automatic chemical liquid proportioning system with 5 kinds of foams: pre-soak/ regular foam/ lava / magic foam/ water wax
 - Chassis/Hub rinsing
 - Enhanced washing in front and rear area+rearview mirror

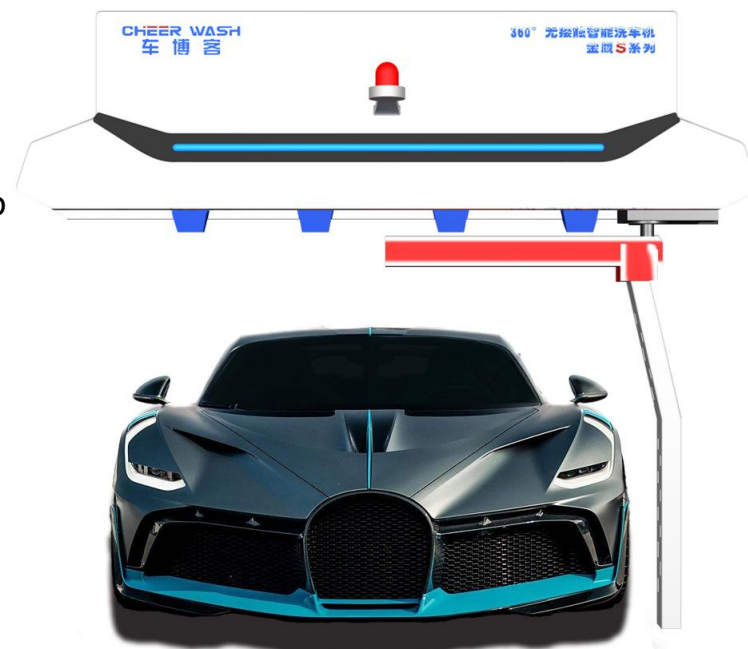

Highlights

CL908 Model

- **Energy saving**
Water& Foam separation design
- **Long lasting & energy saving**
Industry-level 30KW frequency conversion technology (changing frequency of motors for water pump and air dryer)
- **Enhanced user experience**
LED display parking guidance screen
Remote mobile phone/Internet operation
Adjustable 4 washing programs
- **Optional side fans**
Optional 24-hours payment system
- **Safer Design & Quality**
Innovated Embedded Walking structure
Water-electricity seperation



» Main Features

Cleanest washing effect---High pressure water jet & powerful air drying system



The nozzles on the horizontal and vertical sides are aligned in a cross pattern in order to prevent interference, to ensure highest pressure from each direction.



4 sets of 5.5KW air drying fans
integrated with the machine


» Main Features

Cleanest washing effect---Enhanced Germany TBT Wash High Pressure Water Pump



CL908 adopts Customized Germany TBT wash high-pressure plunger pump. (Model:120SS, stainless steel).It is coupling with a 22KW motor (pump capability 140kg)

In order to reduce the noise and vibration of the pump unit, a unique innovation of double layer vibration absorbing system is designed with a elastomeric damper between steel structures. This unique design can also extend the serve life of all parts connected to the system.

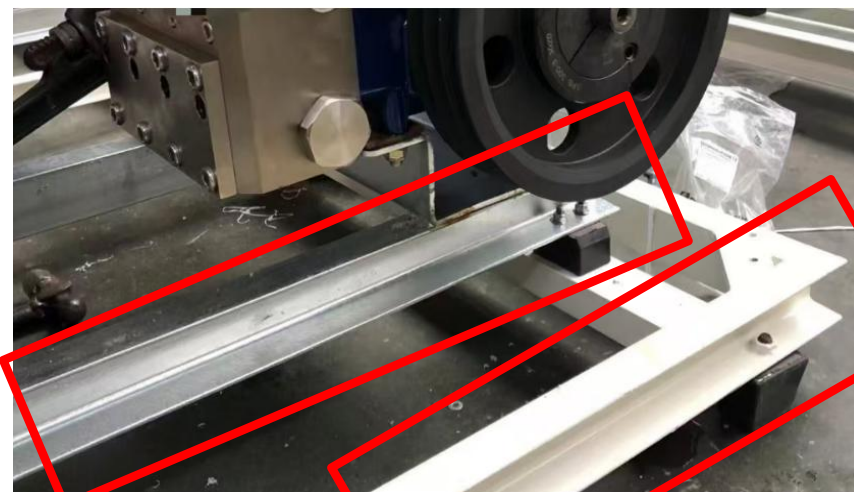

» Main Features

Cleaner washing effect---Rotating arm moving horizontally



More flexible than the fixed L-arm equipment:

Through the precise control, the rotating arm can rotate 90 degrees at 4 corners, ensuring the liquid spray more evenly and more thoroughly and achieving a cleaner washing effect.

» Main Features

Cleaner washing effect--- Enhanced P+F ultrasonic sensor

Each model is equipped with ultrasonic sensors to detect the length of the vehicle, and the time of the arm's rotation is determined by the ultrasonic sensor.

CL908 has added ultrasonic sensors on both sides to detect the width of the vehicle, under the control of horizontally swing arm, the car wash distance is consistently maintained at the industry's optimal cleaning distance of 35 cm.




Other Features

Enhanced cleaning effect & energy saving-- Water & Foam separation design

Double-barrel design of the rotating arm:

The pipelines of water and foam are completely separated

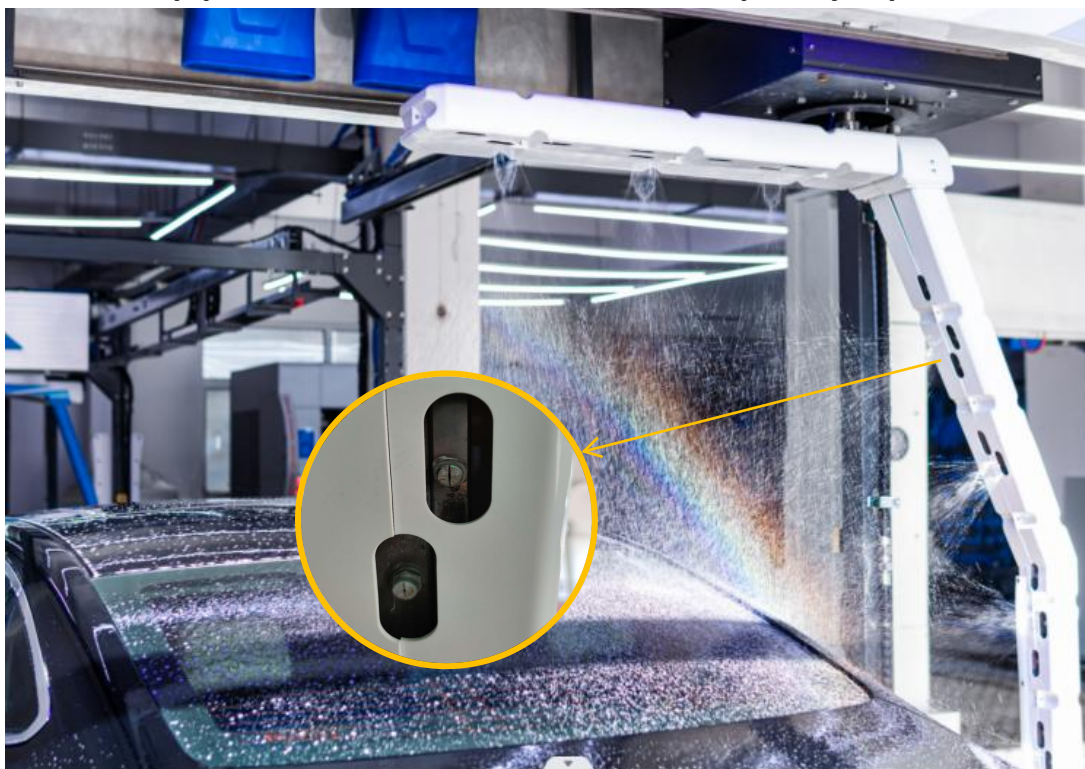

This double-barrel design can maximize the water pressure of high-pressure water and ensure the concentration of different foam liquids, thereby achieving the best cleaning effect and saving a large quantity of water and foam.

More than 1/3 chemical can be saved compared with traditional single pipeline design.

Other Features

Lava foam fall with gorgeous colorful light

Lava foam: generating superior creamy foam to cover the car with better cleaning effect.
Making the car washing process pleasant and impressive.



Shenyang Cheer Wash Equipment Co., LTD

Other Features

Pre-soak Foam & water wax



Pre-soak foam:

Functional foam, automatically break down the dust, dirt, stains on the car surface, which is also one of the keys for automatic car washing



Water wax can form a protective coating on the surface of the car paint

Water wax:

Functional foam, 2 functions:

1.To break up the sheet of water into tiny droplets and prepare well for next step air drying.

2.Offer a layer of protective coating for the car paint and make it shiny and bright

Other Features

Magic foam

The magic foam sprays out from two sides of moving body top which makes it easier for covering the whole body of vehicle surface evenly. Meanwhile to bring visual enjoyment and enhance customers' wash experience



Other Features

Enhanced automatic chemical proportioning system

CL908 has automatic chemical liquid proportioning system with Electronic Proportioning Pumps in a stainless steel cabinet which can provide 5 kinds of chemicals:
Standard foam + pre-soak foam + water wax + lava foam + magic foam

It can automatically mix water, chemical and compressed air to create different kinds of foams.



Other Features

Chassis/Hub rinsing



To clean hub and chassis with water pressure adjustable from 30 to 80 bars from different angles to remove stubborn dirt on the chassis..

Too high water pressure isn't suggested in order to protect especially electrical parts on the chassis



Other Features

Long lasting& Cost Saving--Frequency Convertor




Cheer Wash Real Frequency Converter

- Industry level : 30 KW
- Change frequency for the most important **water pump motor and air drying fans' motor**

Advantages of this real frequency conversion design are as follows:

Make the machine work more stably without vibration.

Save energy (electricity/foam/water).

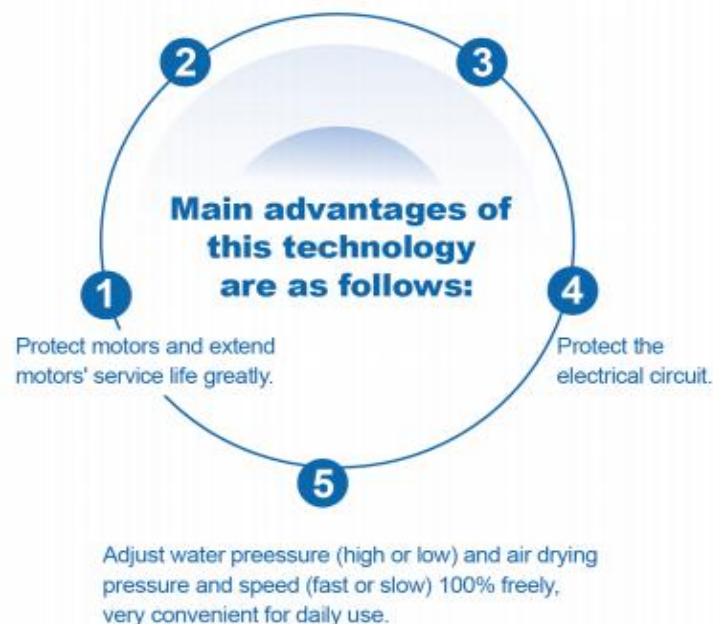

Other Features

Enhanced User Experience---LED display guidance screen

LED display screen can guide cars' parking position and clearly show the washing step operating at present time.

Type B for US version CL908

Size: 1500*700MM Stainless Steel shell

LED circular real lights.



Other Features

Enhanced User Experience

Remote mobile phone/Internet operation


CL808 can be operated by mobile phone and internet remotely, suitable for 24 hours unmanned business.

(Internet access needed)




Other Features

Enhanced User Experience--- Adjustable 4 washing processes

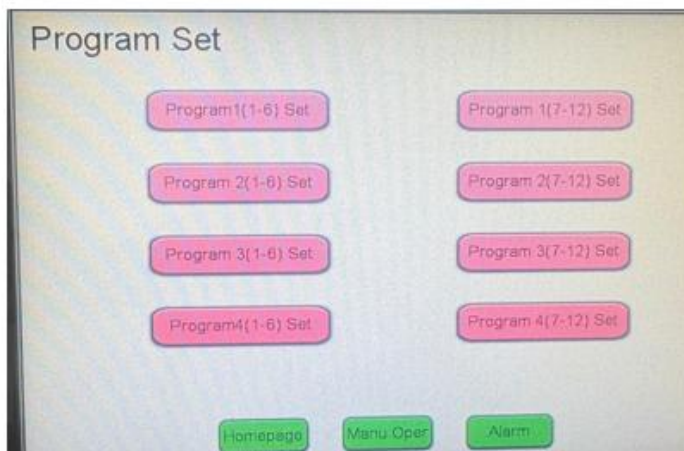

4 washing processes are available for the users to set up 100% freely

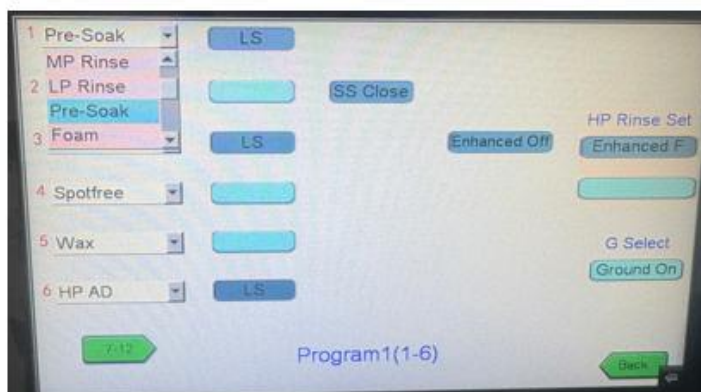

- Each process includes multiple (up to 12) washing steps including but not limited:

Hub / chassis rinsing-- before program

- Pre-soak foam spray
- Magic foam spray
- Lava water-fall foam spray
- High-pressure water rinsing (with high /middle/low water pressure)
- Soft water rinsing (Not standard function, optional with extra cost)
- Water wax spray
- High/low pressure air drying



Other Features

Optional rotatable side fans (5.5 KW each)



Enhance air drying effect especially for the both sides of the car.
The side fans can rotate its blowing direction which is unique for
Cheer Wash.

Other Features

Optional 24-hours payment system

The entire payment and car wash process follows the steps outlined below:

1. Users select a car wash program from available options (usually 4 programs to choose).
2. Users choose their preferred payment method (VIP card, cash, coins, bank cards, credit cards, or QR codes).
3. The system automatically processes the payment signal, carrying out the payment operation.
4. The car wash machine PLC receives startup signal from payment system and starts the machine to wash cars.
5. The system is equipped with an independent coin change system, facilitating convenient and accurate change-giving.
6. In the event of a malfunction or shutdown, the system displays relevant information to prevent erroneous payments.

Payment System A



Payment System B



Other Features

Safer User Experience---Intelligent Anti-collision System



The rotating arm of CL809 is connected with a special rotatable structure.

When encountering obstacles, the arm has a slight angular deviation which will be transmitted to the sensor system, then the safety protection system will be activated and the machine will stop at once.

No.	Date	Time	Times	Message
16	2024/12/25	08:08:26	78	MB F Limit Ala
15	2024/12/25	08:08:26	78	MB R Limit Ala
14	2024/12/24	08:08:23	78	FC protect
13	2024/12/24	08:08:23	78	MB F Limit Ala
12	2024/12/24	08:08:23	78	MB R Limit Ala
11	2024/12/23	08:19:51	78	FC protect
10	2024/12/23	08:19:51	78	MB F Limit Ala
9	2024/12/23	08:19:51	78	MB R Limit Ala

Self-test Fault Alarm System

When the system restarts, PLC will start self-check procedure.

If abnormal cases occur, PLC will alarm and show the fault on HMI screen and record the fault code.

Other Features

Safer User Experience--- Innovated Embedded Walking structure




In embedded structure: 8-wheel longitudinal drive, driven by a sawtooth belt, its travel mode and structure are relatively complex, stable in use.

CL908 adopts embedded walking structure. It's equipped with 16 embedded walking wheels+8 embedded guiding wheels + closed-loop waterproof stepper motor, which ensures the moving main body walking more precisely and more stably.





Other Features

Safer User Experience--Water-electricity separation design

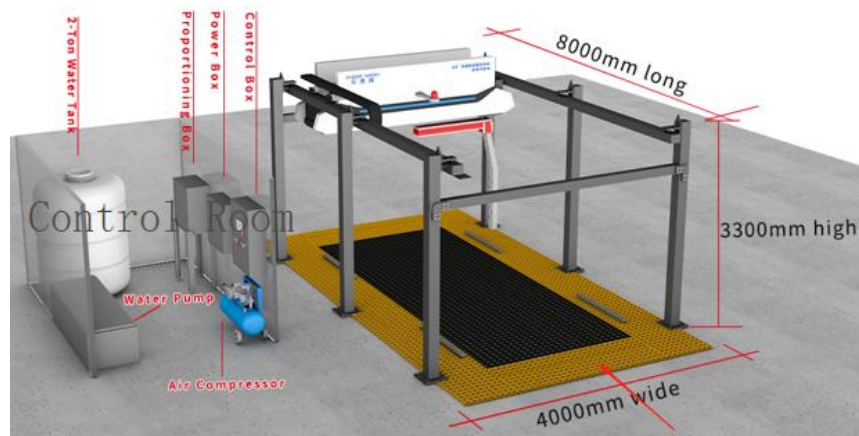


Cheer Wash adopts water and electricity separation technology. Electrical parts are put in separate control room, completely separated from washing bay, which not only ensures a safe working environment but also decreases the damaging risks towards electrical components.

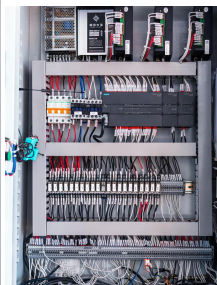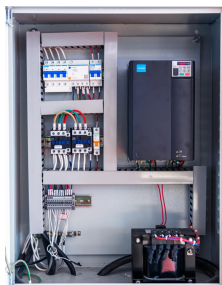

Shenyang Cheer Wash Equipment Co., LTD

Site Planning Renderings for CL908

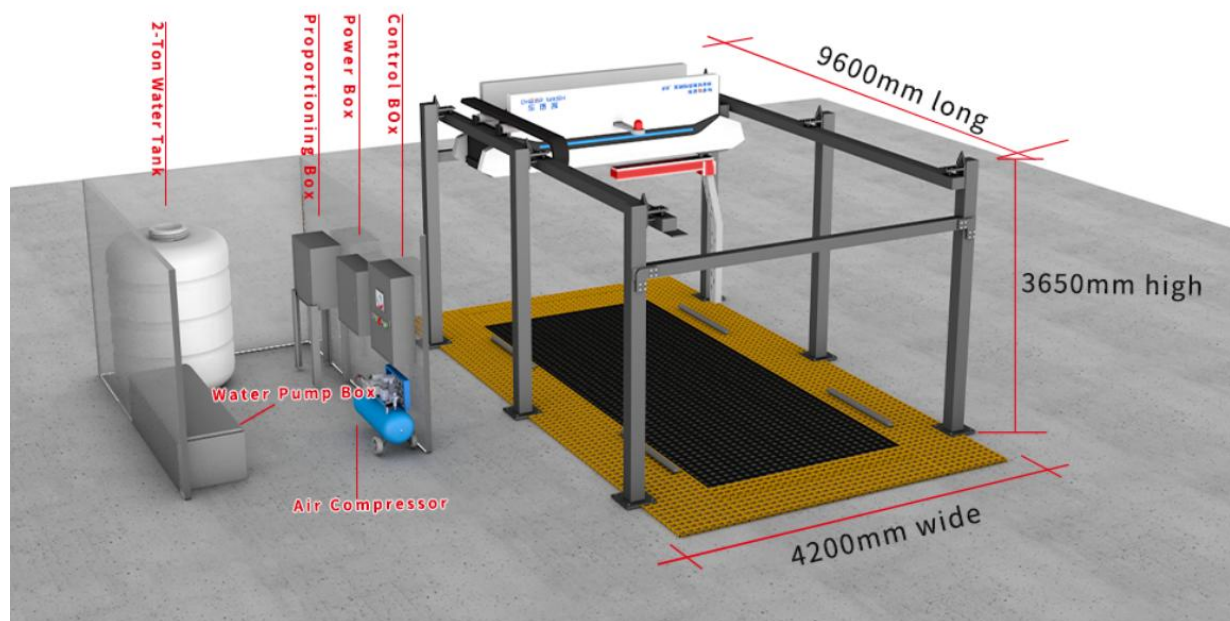

■ **Washing Room Size (Reference):**
L9600*W4200*H3650 MM


■ **Max Vehicle Size:**
L6770*W2690*H2100 MM

- **Reference Control Room Area:**
not less than 6 m², including:
- Pump box
 - Proportioning box
 - Control system box
 - Power box
 - 1 2-ton water tank (prepared by client)
 - 1 air compressor (≥90L/0.8 Mpa pressure)
(prepared by client)

Remarks:

1. The control room should be dry and separated from the washing room, the closer, the better.
2. The control room in above drawing is on the left side of the washing room. It can also be on the right or behind the washing room.

Standard Site Planning Drawings for CL908

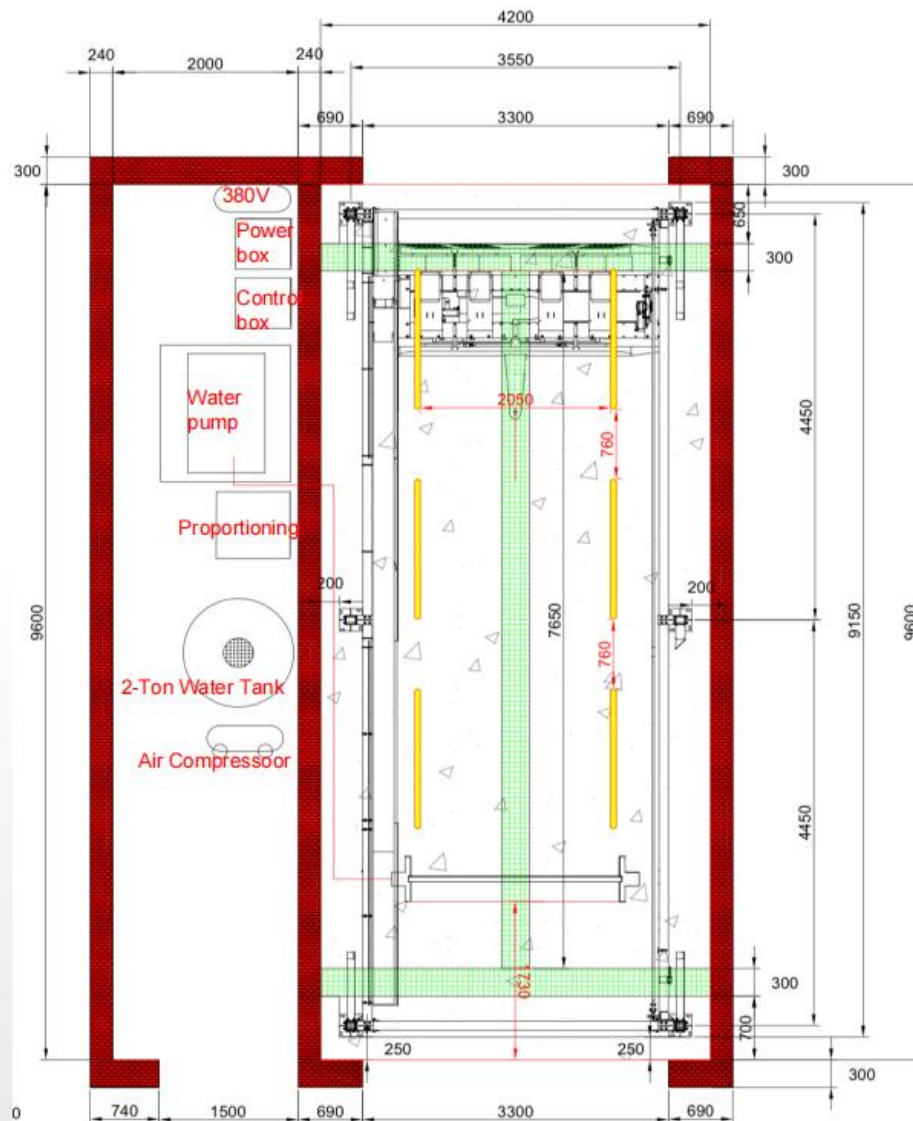

■ **Thickness of Concrete Ground:**
Above 150-200 MM, should be flat.

■ **Reference Drainage Ditch Size:**
L7650*W300*D300 MM

■ **Control Room Power Requirement**
(can be customized):
3 phase 208V/230V
/ Single phase 110V ;60 Hz

Remarks:

1. The above drawing is a standard site planning, where the car comes in from the front and gets out from the back, FYI.
2. If you already have a site but not standard, you can reach to your sales contact for customized design.

Technical Parameters

Technical data sheet	CL908
Max Vehicle Size	L6770*W2690*H2100 MM
Reference Installation Site Size	L9600*W4200*H3650 MM
Minimum Controlling Room Size	6 square meters
Thickness for Concrete Ground	More than 20 cm and should be flat
Water Pump Motor	GB 4 Motor 22KW
Pump Water Pressure Capability	140 KG
Air-drying Motor	4 sets of 5.5KW motors
Standard Water Consumption	130-180L/ circle rinsing
Standard Power Consumption	0.5-1.8KWh
Standard Chemical Liquid Consumption (Adjustable)	20 - 300ML
Washing Time (Adjustable)	3-8 minutes
Moving Body Walking Way	Walking in embedded structure
Total Power	30KW
Power Requirement	3 phase 208V/230V / Single phase 110V ;60 Hz (can be customized)

Touchless series Functions comparison

Technical Parameter	CL508	CL808	CL908
Installation Size	L6800*W3750*H3100mm	L7850*W3820*H3300mm	L9600*W4200*H3650mm
Largest vehicle wash size	L5600*W2600*H2000mm	L5600*W2600*H2000mm	L6770*W2690*H2100mm
High pressure pre-wash for under chassis and wheels	○	○	○
360° rotating spray and wipe-free car washing liquid	○	○	○
360° rotating spray high foam car washing liquid	○	○	○
High pressure flush standard/powerful free switching	○	○	○
Enhanced cleaning of front and rear area	○	○	○
Magic color polish shampoo	○	○	○
Automatic clean rearview mirrors	—	○	○
360° degree horizontal spray Water wax coating	○	○	○
Built-in air drying system (4 fans/Standard/powerful free switch)	○	○	○
Program customization	○	○	○
Colorful light	○	○	○
Automatic chemical proportioning system	pre-soak, shampoo, magic foam, lava foam, wax	pre-soak, shampoo, magic foam, lava foam, wax	pre-soak, shampoo, magic foam, lava foam, wax

Touchless series Functions comparison

Technical Parameter	CL508	CL808	CL908
Parking guidance system	○	○	○
Indicating parking range	○	○	○
Automatic detection of vehicle length	○	○	○
Automatic detection of vehicle width	-	○	○
Intelligent electronic collision avoidance	○	○	○
Mechanical hardware collision avoidance	○	○	○
Security alarm system	○	○	○
Auto standby function	○	○	○
One button start/stop	○	○	○
Car wash quantity counting (total/interval)	○	○	○
Leakage protection	○	○	○
Fault self-checking	○	○	○
Fault alarm and record	○	○	○
Water level monitoring and water shortage protection	○	○	○
Remote maintenance service	○	○	○
Remote control operation	○	○	○
Operation authority system	○	○	○
Oil free (reducer , bearing)	○	○	○
Frequency conversion system	○	○	○
Energy saving system	○	○	○
Hot dip galvanized frame double anticorrosive	○	○	○
Suspension system non-resistance rails Walking Way	○	○	○
System free upgrade service	○	○	○
Water foam separation	-	○	○
Water / electricity separation	○	○	○
Frequency converter and motors voltage	208V/230V, 110V, 60HZ	208V/230V, 110V, 60HZ	208V/230V, 110V, 60HZ

Touchless series Functions comparison

Technical Parameter	CL508	CL808	CL908
Warranty	3 years	3 years	3 years
Installation Size	L6800*W3750*H3100mm	L7850*W3820*H3300mm	L9600*W4200*H3650mm
Largest vehicle wash size	L5600*W2600*H2000mm	L5600*W2600*H2000mm	L6770*W2690*H2100mm
Ground concrete thickness of the site	More than 15 cm and be horizontal	More than 15 cm and be horizontal	Above15-20 cm and be horizontal
Water Pump	18.5KW/208V	22KW/208V	22KW/208V
Air-drying motor	Four 5.5KW motors/208V	Four 5.5KW motors/208V	Four 5.5KW motors/208V
Pump pressure	120KGS	140KGS	140KGS
Standard water consumption	90-140L/Car	90-140L/Car	130-180L/Car
Standard power consumption	0.5-1.2 kWh	0.5-1.2 kWh	0.5-1.8 kWh
Standard chemical liquid consumption	20ML-150ML Adjustable	20ML-150ML Adjustable	20ML-300ML Adjustable
Rail length	6.0M	6.3M	7.5M
Total power	30KW	30KW	30KW
Total Weight	2055KG	2700KG	2900KG
Shipping volume	10CBM	15CBM	18CBM

Services & Customization

Free service



Customized Cheer Wash Procedures

High/Low pressure water, presoak, foam, wax, triple-color, lava water-fall, enhance rinsing, soft water, chassis/hub rinsing...more wash steps can be customized.



Customized Logo

Logo designing service is available.



Customized Linguistic System


All languages are acceptable for the system (Process Guidance Screen + Sound Alert System + PLC Screen).



Free System upgrading

The program can be upgraded by remote system to regularly keep washing machine updated.

Optional service



Customized Framework

Besides standard framework sizes, special frameworks can be customized according to customers' needs.



Customized function

According to different vehicle wash culture, we provide customized function service.



Customized Voltage

The Voltage can be customized according to customers' local standard.



One-Key Emptying

Set the use of compressed air to empty the pipeline of water, foam to ensure the normal use in winter, which can be automatic or manual.

User Cases


GLOBAL AGENT




United States




Russia



Malaysia



Macedonia



Singapore



Hungary



Argentina



Packing Details

Model	Goods	Boxs	Volume(mm)	GW (kg)
CL908 (One Set)	Moving body	1	3700*1400*1400	1200
	Parts 1	1	3150*1220*1040	750
	Parts 2	1	3500*1220*940	830
	Water pump	1	1300*900*1020	510
	Frame	1	9200*500*710	750
Total		5	19.8 CBM	4040 KGS

Note: Because of machine upgrades, the date listed above is only for reference. For more accurate information, please refer to actual purchasing order.