

## Optional Features

### Fixed Side Fans ( not rotatable)

USD1455/Pair



It can be installed on the exit frame to enhance the air-drying effect.  
It can also be installed directly on the moving body of car wash machine and moving together with the machine.  
The air blowing direction can't change.

Voltage: 3 phase 380V

Power : 5.5KW/fan



### Rotatable Side Fans

USD1950/Pair



The extra 2 side fans are installed on the moving body of the machine and the head of the fans can change blowing direction to achieve better drying effect than fixed side fans, Cheer Wash unique design.

Voltage: 3 phase 380V

Power : 5.5KW/fan

### Upper Fans on Exit Frame

USD485/Piece



It is used for air-drying when the vehicle is finally driven out of the washroom to enhance the air-drying effect.

It can be directly installed on the exit mounting frame, usually used together with side fans, a very popular drying way in US and Europe.

Voltage: 3 phase 380V

Power : 5.5KW/fan

### Vertical Ground Sprayer

USD175/ upgrading



Rinsing for car lower body, wheel hubs and chassis, especially enhanced rinsing for lower body.

The upgrading price from common ground sprayer ( refer to the right picture) to this vertical design is: 175 USD / set



### Voice Announcer

USD121/SET



Play various Voice prompt to give customer instruction in every wash step.  
Language and content can be customized

### One-Key Emptying

USD323/SET



Through the program, set the use of compressed air to empty the pipeline of water, foam, and other liquids to ensure the normal use in winter, which can be automatic or manual.


### LED parking stopper

USD 215 /upgrading



LED parking stopper can make the washing bay more beautiful and also make the customer stop their cars more easily.

The upgrading cost from standard metal parking stopper ( refer to the right picture) to this LED design is: 215 USD / set



## Automatic Door

USD1130 / PCS



Sense the vehicle then turn on/ close automatically after the cars drive out. Improve operation efficiency and create a better working environment.

**Material:** high density industrial base cloth + transparent PVC film with 1.5 - 2 mm thickness + galvanized steel columns and cover


**Voltage:** 220V **Power:** 750W **Speed:** 0.6-1.0 m/s

**GW:** 150 KGS / **Volume:** 1.9m<sup>3</sup> / **Size:** not less than 10 m<sup>2</sup>



## Automatic Garage Door (Cold-proof version)

USD2425/PCS



The cold-proof version is equipped with the clump weigh and tension spring on both side of door columns. The wind resistance level is 12, meanwhile both sides of door mount with seal. so the thermal insulation effect is better than normal products, higher 6-8°C. The complete door material is aluminum alloy.

**Size:** not more than 10 square meters , can be customized according to customers' need.

## Barrier

USD485/PCS



Used to control vehicle access.

A simple version of automatic door.

**Working temperature:** -40°C~80°C

**Working humidity:** 30-80%, no condensation

**Power Supply:** ≤DC24V ±10% 10A

**Control frequency:** 430MHz Infrared ray to shoot anti-smash

Wire-controlled start/stop interface

Power failure can be quickly clutch, manual landing lever

**Input power:** 220V 50Hz

**Rated motor power:** 150W

**Running speed:** 3-6m / s, adjustable


**Maximum length of straight rod:** 6m Specification

**Size:** 350\*300\*1070 (mm)

**Housing material:** 2 mm high-strength steel plate

## Led light ( Item no. ZT5018)

USD150/SET

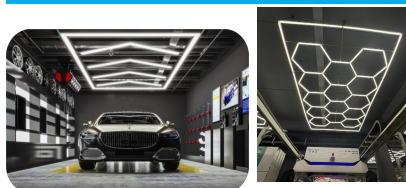

**Size:** 2400\*4800mm

**Voltage :** AC220V

**Light-emitting area :** 80mm

**Power :** 760W

**Luminous flux :** 110-120lm/w

**Average color index :** >90

**Color temperature Pure :** White(5500-6000K)

**Working Lifetime :** 50000H

**Packaging:**

- Light: L121 \* W19 \* H25 CM / 7.5 KGS

- Mounting frame: L245\*W10\*H10 CM / 15 KGS

## Ground Grid

USD10/M<sup>2</sup>



Keep the floor clean from waste water and make the whole wash bay more beautiful.

The bearing pressure is 5 tons/ square meter.

**Size for 1 piece:** 40\*40\*4 CM

**Color:** red / yellow / grey/ black/ green / blue

**Package:** one carton can hold 26 pcs:

**Carton size:** 45\*45\* 65 CM

**Weight ( 1 carton):** 21.5 KGS



## Car wash process display Board

Board A: USD275/SET

Board B: USD430/SET



**Board A**

**Size:** 825\*450mm

**Plastic shell / Light strip**

(Most models already have it as standard configuration. whether you need it please confirm with sales.)

Car wash parking guidance and

Car wash process display board

**Board B**

**Size:** 1500\*700 mm

**Stainless Steel shell**

**LED circular real lights**



## UPS (Uninterruptible Power Supply) Device +Emergency Solution

USD 565 /SET



The UPS solution Includes a UPS device and a system compatible with the car wash machine. It is designed to maintain the car wash system for 10 minutes in the event of a sudden power outage, ensuring machine reset and return to its original position, and opening the automatic door (if applicable) to allow the user to exit safely. The equipment can then operate normally once power is restored.

( Due to transportation safety restrictions, users need to purchase 12V DC batteries locally)

# Car Wash Chemicals



**Pre-soak** USD28/bucket(18L)

With super-comprehensive decontamination ability, it can quickly penetrate, decompose and soften the dirt.



**Water-repellent wax** USD22/bucket(18L)

It can quickly remove 80% of the water of the car body after washing to enhance the gloss of the paint.



**Car wash foam** USD15/bucket(18L)

Excellent decontamination ability, can quickly remove dirt from the surface of the car.



**Rich foam (LAVA waterfall)** USD20/bucket(18L)

Compared with ordinary foam, it has more abundant foaming ability and is specially used for LAVA waterfall



**Special oil for water pump** USD 9/bucket(1L)

High-viscosity index base oil and multifunctional additives, with high load-bearing capacity and anti-wear characteristics, to ensure excellent performance of gears in the pump.

Packaging: Volume: L11\*W7\*H24.5 MM / Weight: 1 KG



**Car wash powder** USD3/BAG(600G)

Alkali, surfactant, oil emulsifier, dispersant, corrosion inhibitor, pigment, flocculant, penetrating agent, water mark remover.

## PACKING LIST ( reference )

| Quantity of Bucket | Total Weight | MEA.              |
|--------------------|--------------|-------------------|
| 9                  | 230KGS       | 1000*1000*540 mm  |
| 26                 | 570KGS       | 1000*1000*1430 mm |
| 48                 | 1100KGS      | 1300*1300*1380mm  |
| 70                 | 1500KGS      | 2085*1000*1440 mm |
| 90                 | 2000KGS      | 3200*1000*1450mm  |



# Water System

## Soften water system

1T: USD 215/SET

2T: USD 270/SET

3T: USD 370/SET



In some areas, raw water is too hard which contains a lot of calcium and magnesium.

Washing a car with such water will leave white stains/ spots on the car surface.

This water softener can remove the excess calcium and magnesium in the water, so that white stains will not be left on car surface after washing.

**Control mode:** Automatic Layout split type

**Water production :** 1 ton/hour

**Filtration speed:** 20-30 m<sup>3</sup>/hour

**Design pressure:** ≤0.7Mpa

**Working pressure:** 0.2-0.4Mpa

**Installation method:** flat on the ground

**Installation size :** 1.1\*0.6\*1.7 meters

**Equipment weight:** 65 KGS

**Material:** fiberglass + plastic

**Inlet water hardness:** ≤ 6mmol/L

**Discharge water hardness:** ≤0.03mmol/L

**Connection size with tank:** 2.5-8NPSM

**Power supply voltage :** 220V/50Hz

**Power consumption :** 10W

**Resin tank specification:** 200\*1100 mm

**Resin tank thickness :** 11mm

**Resin tank lining:** food grade

**Design pressure:** 0.7Mpa

**Test pressure :** 0.8Mpa

| Model               | Q'ty | Volume /mm   | GW/KGS |
|---------------------|------|--------------|--------|
| Soften Water System | 1    | 1650*800*440 | 65     |

## Water reverse osmosis system

1 T: USD 1,470 / set



For groundwater and tap water, especially water sources with higher hardness and more scale.

The output water meets the pure water standard and can be drunk directly.

**Strongly recommend to take this RO system, to enhance the cleaning effect of car wash and drying.**

This RO effect is better than soften water system.

**Tips:** standard voltage is: single phase 220V / 50HZ, if local voltage is different, a customization fee of 300 USD is needed.

**Machine size:** 750\*650\*1530 CM

**Machine weight:** 100 KGS

**Production capacity :** 1000 L/Hr

**Power :** 1.8kw

**Power supply :** AC 220V 50Hz

**Inlet water pressure :** > 0.2 MPa

**Inlet water flow :** > 2 ton / hour

# Inside Car Wash Devices

## Automatic Mat Cleaner TJ638

USD 1000 / SET



Adopt dry-type bubble spray cleaning technology, maximum efficient dust removal, low moisture content. Immediately use after clean.

**Tips: standard voltage is: 220V / 50HZ, if local voltage is different, a customization fee of 130 USD is needed.**

**Feature:** water wash +foam wash Car mat

**Power Consumption:** 550 W

**size:** <= 60cm

**Size :** L94 \* W50 \* H102 CM

**Clean time for each:** 20 Seconds

**Weight:** 86 KGS

**Power:** 220V 50Hz

## Car Mats Spin Dehydrator

USD327/SET



Dry the car mats by physical centrifugation.

**Voltage:** 220V(380V)50Hz

**Load:** 13-20KGS

**Power:** 750W

**Weight:** 65KGS

## Car Mats Quick Dryer

USD558/SET



Dry up the carpet rapidly, while killing the bacteria and virus thoroughly by powerful oxidant ions generated by high pressure ionization. free of chemical detergents, safe and environment friendly. Sterilizing rate reaches as high as 99.99%.

Drying car mats by electric heating.

**Tips: standard voltage is: 220V / 50HZ, if local voltage is different, a customization fee of 130 USD is needed.**

**Power:** 220V 50Hz

**Power Consumption:** 3000W+300W

**Size :** 800x600x1300

**Weight:** 60KGS

## 70L Vacuum cleaner

USD145/SET



The stainless steel tank is strong and durable, with a powerful low-noise motor, the vacuum cleaner has a specially strong suction, new-style large wheel plate, stable and beautiful. A complete set of accessories are provided.

**Feature:** wet and dry

**Volume:** L51\*W54\*H89 CM

**Capacity:** 70L

**Weight:** 18 KGS

**Power:** 3600W

**Tank diameter:** 440mm

**Voltage:** 220V-240V

**Air flow rate:** 106L/S

**Vacuum suction:** 21000 Pa

## Tyre inflator (Nitrogen Generator)

USD640/SET



Nitrogen is an inert gas with high stability. Nitrogen molecule is larger than oxygen molecule, so it is not easy to expand and contract with heat which can maintain stable tire pressure. Therefore, after the tire is filled with nitrogen, it can have very close contact with the ground, and the vehicle has comfort, controllability, shock absorption and safety.

**Input air pressure:** 5-9kg/cm<sup>2</sup>

**Capability:** 2m<sup>3</sup>/h

**Output Nitrogen pressure:** 4-8kg/cm<sup>2</sup>

**Charge time:** 1 minute

**Size :** 670\*460\*1400

**Power:** 220V/50HZ/50W

**Weight:** 110KGS

Quality and customer service is everything !

# Accessories

## Air pump-90 L

USD 285/SET



Used to provide air for forming the all chemicals and one-key emptying.

**Gas tank capacity:** 90L/min  
**Voltage:** 220V/50Hz  
**Power:** 800 W\*3  
**Rotational speed:** 1400r/min

**Maximum pressure:** 0.8Mpa  
**Weight:** 60KGS  
**Size:** 90\*35\*48cm

## Air pump-160L

USD530/SET



Used to provide air for forming the all chemicals and one-key emptying.  
Especially meet some customized modes needing more air than normal.

**Voltage:** 220V/50Hz  
**Rotational speed:** 1400r/min  
**Maximum pressure:** 0.8Mpa  
**Weight:** 130KGS

**Power:** 1680W\*3  
**Gas tank capacity:** 160L  
**Size:** 1500\*470\*880 MM

## Tool box

USD145/SET




Including all tools for installing a car wash machine.



## Red/Green arrow guidance light

USD 75 / piece



To help the car owners with better understanding when to drive forward and when to stop

## Flyer print

USD159/5000PCS



Paper, used in the customer's local market for product promotion.

Can be customised as customers' requirements.

## Pipeline extension

USD40/M



Including all cables and hoses for water and chemicals.

# 24-HOUR PAYMENT SYSTEM

System A USD 2800 / SET      B: USD 3570 / SET      C: USD 2145 / SET      D: USD 1500 / SET

The entire payment and car wash process follows the steps outlined below:

- 1, Users select a car wash program from available options ( usually 4 programs to choose).
- 2, Users choose their preferred payment method (VIP card, cash, coins, bank cards, credit cards, or QR codes).
- 3, The system automatically processes the payment signal, carrying out the payment operation.
- 4, The car wash machine PLC receives startup signal from payment system and starts the machine to wash cars.

Payment System A



Payment System B



Payment System C



| Item             | Description                                                                                                          | Remarks                                                                                                  | Price / USD |
|------------------|----------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-------------|
| Payment System A | VIP Card / Cash/ Coin / Credit Card / Bank Card / Apple Pay/ other payment <b>supported by Nayax</b> in local market | - VIP cards need to be made by an employee<br>- with change-giving function                              | 2800        |
| Payment System B |                                                                                                                      | - Integrated with VIP card-marking system and the customers can make cards by themselves<br>- no changes | 3570        |
| Payment System C | VIP Card /Credit Card / Bank Card / Apple Pay/ other payment <b>supported by Nayax</b> in local market               | - VIP cards need to be made by an employee                                                               | 2145        |
| Payment System D | Banknote / Coin                                                                                                      | No changes                                                                                               | 1500        |
| VIP card         |                                                                                                                      |                                                                                                          | 0.22 / card |

# Pre-housing Car Wash Bay

Integrated pre-housing car wash bay ( Basic)

USD 3625 / SET

## Basic model

**Drive-through Car wash bay size ( outside ) :**

L9330\*W5330 \* H4330 MM

**Inner space size:**

L9000\*W5000 \* H4000 MM

**Reference Weight:** 2000KGS

**Reference Volume:** 9.5 CBM



## Classic model

**Drive-through Car wash bay size ( outside ) :**

L9330\*W5330 \* H4930 MM

**Inner space size:**

L9000\*W5000 \* H4000 MM



**Control room size :**

L2000\*W3000 \* H3000 MM



| Standard parts                                  | Quantity | Price / USD |
|-------------------------------------------------|----------|-------------|
| quick-assembly container frame ( basic model)   | 1 set    | 3625        |
| quick-assembly container frame ( classic model) | 1 set    | 7090        |
| control room                                    | 1 set    | 1700        |

| Optional parts                              | Quantity | Price / USD |
|---------------------------------------------|----------|-------------|
| Non-illuminated letters                     | 5 sets   | 644         |
| Illuminated letters                         | 5 sets   | 1636        |
| 8 mm Tempered Glass                         | 4 sets   | 2538        |
| Wall panels added to back&forth washing bay | 1 set    | 357         |