


FILTER SOLUTIONS PILOT COLLECTION

2026 PRODUCT CATALOG

Replacement Filters · Inline Filters · RO Membranes · UF Systems

B2B / OEM / Private Label

qloratech.com | carol.qloratech@gmail.com

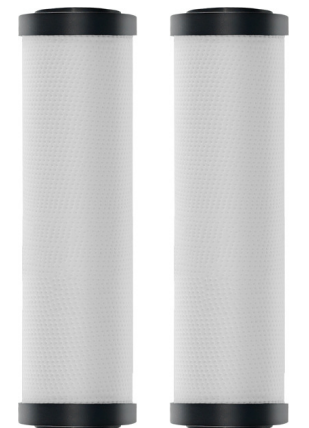

Selected Filtration Platforms

A compact overview of representative products for project discussion and OEM development.

03 PP Sediment Filters

04 Carbon Filtration

05 UDF Granular Carbon

06 PPC Composite Filter

07 Scale-Control Series

08 Mineral Inline Filter

09 RO Membrane Elements

10 UF Drinking Water System

PILOT CATALOG NOTE

Technical values are based on the supplied pilot materials. Final specifications, labeling, packaging and compatibility must be confirmed before order placement.

REPLACEMENT FILTERS

PP Sediment Filter Series

Standard melt-blown polypropylene cartridges for preliminary sediment reduction.

AVAILABLE SIZES	10 in. / 20 in.
NOMINAL RATINGS	1 micron / 5 micron
10 IN. DIMENSIONS	253 x 60 mm
20 IN. DIMENSIONS	508 x 60 mm
FILTER MEDIA	Melt-blown polypropylene
PROCESS OPTIONS	Embossed / smooth / needle-punched

- Designed for suspended solids, sediment and rust particle reduction.
- Service life depends on inlet-water quality and actual water consumption.

Suggested replacement reference: 5 micron 3-6 months; 1 micron approximately 6 months, subject to water conditions.



REPLACEMENT & INLINE FILTERS

Carbon Filtration

Two common carbon platforms for chlorine, taste and odor improvement.

10 in. CTO Carbon Block



DIMENSIONS

254 x 70 mm

INNER DIAMETER

28 mm

CONSTRUCTION

Compressed carbon block

OUTER LAYER

PP non-woven wrap

T33 Post Carbon Inline Filter



DIMENSIONS

242 x 50 mm

TYPE

Post activated carbon

FORMAT

10 in. inline format

APPLICATION

Final-stage taste polishing

REPLACEMENT FILTERS

UDF Granular Activated Carbon Filter

A standard 10-inch granular carbon cartridge for residential purifier configurations.

DIMENSIONS	254 x 70 mm
INNER DIAMETER	28 mm
FILTER MEDIA	Granular activated carbon
FORMAT	Standard 10 in. cartridge
FLOW DIRECTION	Directional installation
APPLICATION	Residential water purifier


- Commonly used for chlorine, taste and odor improvement within multi-stage systems.
- Product label shown is the supplied pilot sample; final OEM artwork is project-specific.



COMPOSITE FILTERS

PPC Composite Filter

A compact combination of PP sediment media and coconut-shell activated carbon.

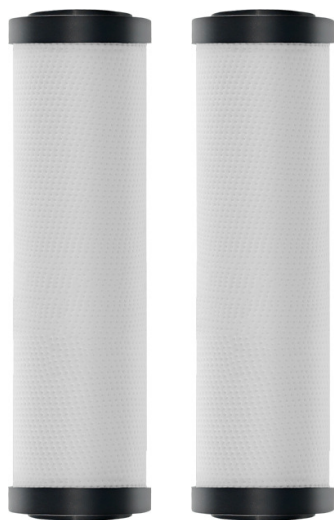

DIMENSIONS	252 x 69 mm
INNER DIAMETER	28 mm
MICRON RATING	1 micron
FILTER MEDIA	PP cotton + coconut-shell carbon
WORKING PRESSURE	0.1-0.5 MPa
OPERATING TEMPERATURE	4-52 C
APPLICABLE WATER	Municipal tap water

- Combines sediment interception and carbon adsorption in one cartridge.
- Suitable where a compact multi-function replacement stage is preferred.

SPECIALTY FILTERS

Scale-Control Carbon Series

Slim and Big Blue formats for residual chlorine reduction and scale-control applications.



FORMAT	LENGTH	OD	ID
10 in. Slim	250 mm	70 mm	28 mm
20 in. Slim	504 mm	70 mm	28 mm
10 in. Big Blue	254 mm	110 mm	28 mm
20 in. Big Blue	509 mm	110 mm	28 mm

CONFIGURATION OPTIONS

Sintered scale-inhibition carbon or PP + FOF composite media
Typical replacement reference: 3-6 months, subject to water conditions

Flat-end cartridge dimensions are based on supplied pilot specifications.

INLINE FILTERS

Multifunctional Mineral Inline Filter

A transparent media cartridge for optional taste and mineral-conditioning configurations.



DIMENSIONS

240 x 53 mm

CONNECTION

Internal thread (supplier 2-fen designation)

MEDIA 1

Tourmaline ceramic balls

MEDIA 2

Far-infrared ion balls

MEDIA 3

Maifan stone particles

MEDIA 4

Weak-alkaline ion balls

APPLICATION

Optional post-treatment stage

- Media combination can be reviewed according to target water profile and taste preference.
- Mineral output and pH effect require project-specific validation; no fixed claims are made.

RO MEMBRANES

Dry RO Membrane Elements

Available membrane formats for residential and high-flow under-sink RO configurations.



MODEL	OUTPUT	RATED FLOW	ELEMENT SIZE
1812-75	75 GPD	12 L/h	46 x 298 mm
2012-100	100 GPD	16 L/h	47 x 298 mm
3013-400	400 GPD	60 L/h	68 x 333 mm
3013-600	600 GPD	90 L/h	68 x 333 mm
3013-800	800 GPD	120 L/h	68 x 333 mm

SUPPLIED TEST CONDITIONS

Water temperature 25 C; inlet pressure 0.6 MPa; inlet TDS 250 ppm.
Operating range: 5-45 C; working pressure: 0.3-0.8 MPa.

Supplier-branded samples are shown for configuration reference only. Final OEM branding and membrane selection require confirmation.
Actual permeate flow varies with temperature, pressure and feed-water quality.

WATER FILTRATION SYSTEMS

5-Stage / 6-Stage UF System

A non-electric under-sink or wall-mounted platform for municipal tap-water filtration.

FILTRATION RATING	0.01 micron UF membrane
WORKING PRESSURE	0.1-0.3 MPa
OPERATING TEMPERATURE	5-40 C
INSTALLATION	Under-sink / wall-mounted
POWER REQUIREMENT	No electricity required
5-STAGE DIMENSIONS	350 x 380 x 130 mm
6-STAGE DIMENSIONS	350 x 410 x 135 mm

- 5-stage: PP + GAC + CTO + UF + post carbon.
- 6-stage: PP + GAC + CTO + UF + post carbon + additional T33 stage.

Net weight reference: 5-stage 3.75 kg; 6-stage 3.95 kg. Manual measurements are for reference only.



QLORA

OEM & PRIVATE LABEL

Build the Right Filter Combination for Your Market

Representative pilot platforms can be reviewed for media selection, cartridge dimensions, product combinations, labeling and packaging coordination.

PRODUCT SELECTION

Choose representative formats by application.

MEDIA CONFIGURATION

Review sediment, carbon, mineral and scale-control media.

PRIVATE LABEL

Coordinate label and packaging artwork after specification approval.

PROJECT SUPPORT

Confirm dimensions, connections and performance before production.

Discuss Your Project

carol.qloratech@gmail.com

qloratech.com