

1. Todos os dispositivos receberam IP automaticamente via DHCP? Inclua em sua resposta prints de tela que comprovem a sua resposta.
2. Os testes de conectividade (ping) entre todos os dispositivos e os servidores foram bem-sucedidos? Inclua em sua resposta prints de tela que comprovem a sua resposta.

TESTE PING (COMPONENTES)

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.50.11

Pinging 192.168.50.11 with 32 bytes of data:

Reply from 192.168.50.11: bytes=32 time<1ms TTL=128
Reply from 192.168.50.11: bytes=32 time<1ms TTL=128
Reply from 192.168.50.11: bytes=32 time<1ms TTL=128
Reply from 192.168.50.11: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.50.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.50.12

Pinging 192.168.50.12 with 32 bytes of data:

Reply from 192.168.50.12: bytes=32 time<1ms TTL=128
Reply from 192.168.50.12: bytes=32 time<1ms TTL=128
Reply from 192.168.50.12: bytes=32 time<1ms TTL=128
Reply from 192.168.50.12: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.50.12:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.50.13

Pinging 192.168.50.13 with 32 bytes of data:

Reply from 192.168.50.13: bytes=32 time<1ms TTL=128
Reply from 192.168.50.13: bytes=32 time<1ms TTL=128
Reply from 192.168.50.13: bytes=32 time<1ms TTL=128
Reply from 192.168.50.13: bytes=32 time<1ms TTL=128
```

```
C:\>ping 192.168.50.14

Pinging 192.168.50.14 with 32 bytes of data:

Reply from 192.168.50.14: bytes=32 time<1ms TTL=128
Reply from 192.168.50.14: bytes=32 time<1ms TTL=128
Reply from 192.168.50.14: bytes=32 time<1ms TTL=128
Reply from 192.168.50.14: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.50.14:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.50.15

Pinging 192.168.50.15 with 32 bytes of data:

Reply from 192.168.50.15: bytes=32 time<1ms TTL=128
Reply from 192.168.50.15: bytes=32 time=10ms TTL=128
Reply from 192.168.50.15: bytes=32 time=14ms TTL=128
Reply from 192.168.50.15: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.50.15:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 14ms, Average = 6ms
```

```
C:\>ping 192.168.50.16

Pinging 192.168.50.16 with 32 bytes of data:

Reply from 192.168.50.16: bytes=32 time<1ms TTL=128
Reply from 192.168.50.16: bytes=32 time<1ms TTL=128
Reply from 192.168.50.16: bytes=32 time<1ms TTL=128
Reply from 192.168.50.16: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.50.16:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 192.168.50.17

Pinging 192.168.50.17 with 32 bytes of data:

Reply from 192.168.50.17: bytes=32 time<1ms TTL=128
Reply from 192.168.50.17: bytes=32 time<1ms TTL=128
Reply from 192.168.50.17: bytes=32 time<1ms TTL=128
Reply from 192.168.50.17: bytes=32 time=10ms TTL=128

Ping statistics for 192.168.50.17:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 10ms, Average = 2ms
```

TESTE PING (SERVIDORES)

```

C:\>PING 192.168.50.1

Pinging 192.168.50.1 with 32 bytes of data:

Reply from 192.168.50.1: bytes=32 time<1ms TTL=128
Reply from 192.168.50.1: bytes=32 time<1ms TTL=128
Reply from 192.168.50.1: bytes=32 time<1ms TTL=128
Reply from 192.168.50.1: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.50.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>PING 192.168.50.2

Pinging 192.168.50.2 with 32 bytes of data:


Reply from 192.168.50.2: bytes=32 time=1ms TTL=128
Reply from 192.168.50.2: bytes=32 time=11ms TTL=128
Reply from 192.168.50.2: bytes=32 time<1ms TTL=128
Reply from 192.168.50.2: bytes=32 time<1ms TTL=128

Ping statistics for 192.168.50.2:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 11ms, Average = 3ms

```

- Os PCs e notebooks conseguiram acessar a página web meusite.local via navegador? Inclua em sua resposta prints de tela que comprovem a sua resposta.

Teste index.html

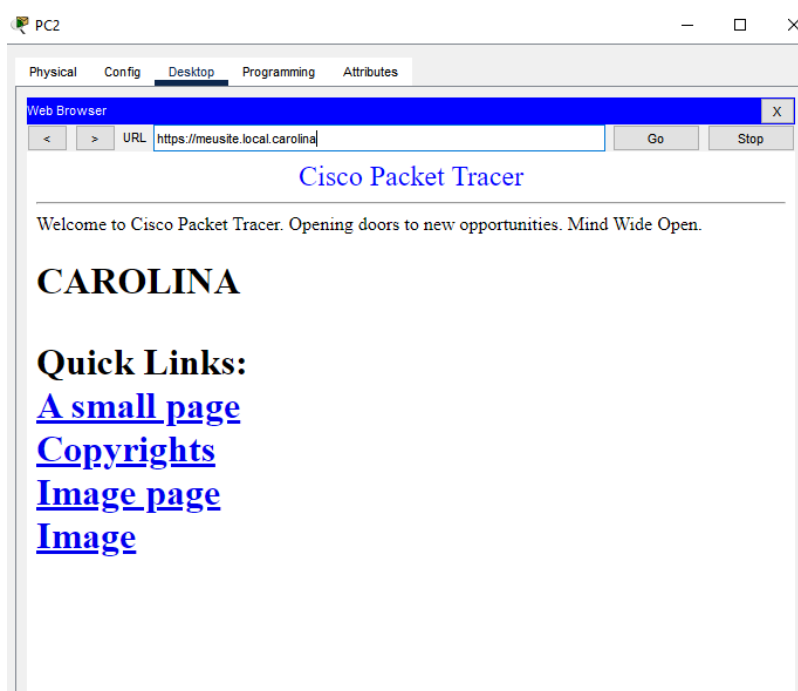

4. Caso algum dos testes tenha falhado, identifique o possível erro e descreva como corrigi-lo

NENHUMA FALHA