
PROJECT 3D VIEWS



Front left



Front right

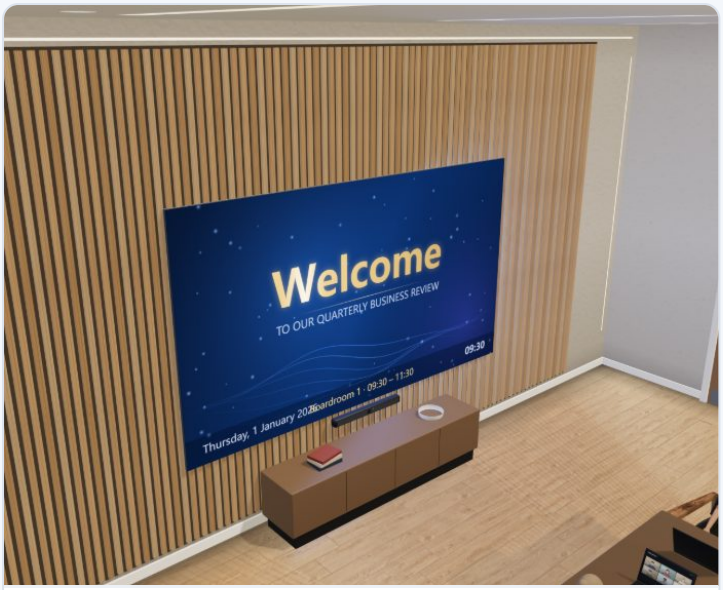

Front view



Elevated view

PROJECT PROPOSAL

UslimIII SMD 1.5

LED Display Configuration Solution

Date of Creation 2026/10/15

Unilumin

Table of Contents

01 **Project Overview** 3

Screen Layout
Display Parameters

02 **Render & Drawing** 4

Rendering
Drawing

03 **Control System** 5

System Components

04 **Wiring Diagrams** 6

Signal Wiring
Power Wiring

05 **Technical Specifications** 8


Geometry & Resolution · Optical & Viewing
Electrical & Control · Mechanical & Environmental

06 **Configuration Summary** 10

Recommended Solution · Summary

01 Project Overview

SCREEN LAYOUT

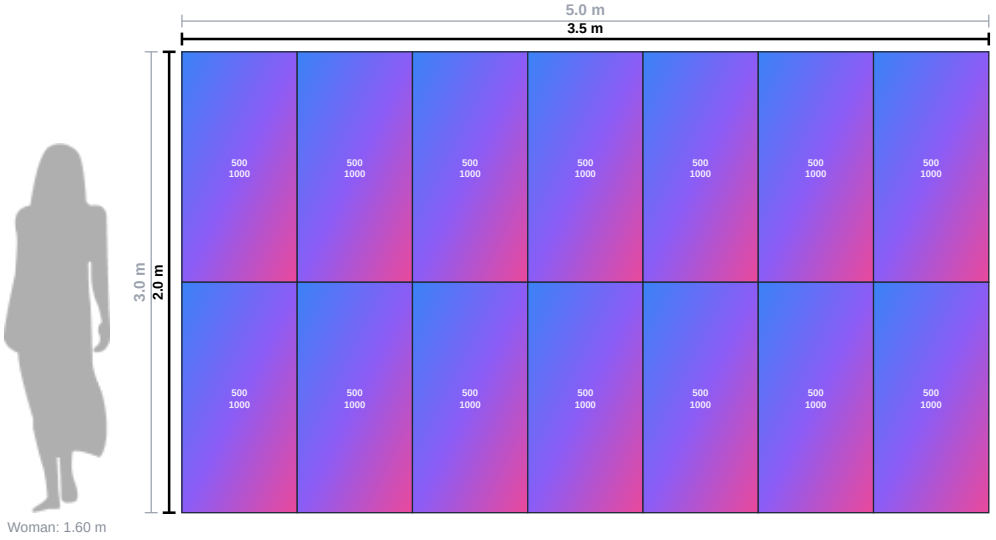

DISPLAY PARAMETERS


Screen Parameters		
Screen Dimension	Product Model	**UslimIII SMD 1.5**
	Width × Height	**3.50 × 2.00 m**
	Display Area	**7.00 m²**
	Diagonal	**158.7 inch**
	Resolution	**2240 × 1280 px**
Cabinet Info	500×1000mm	**14 pcs**
	Total Cabinets	**14 pcs**
Load & Power	Total Weight	**147 kg**
	Max Power	**3360 W**
	Typical Power	**1120 W**
	Max Heat	**11464 BTU/h**
	Typical Heat	**3821 BTU/h**

02 Render & Drawing

RENDERING



DRAWING

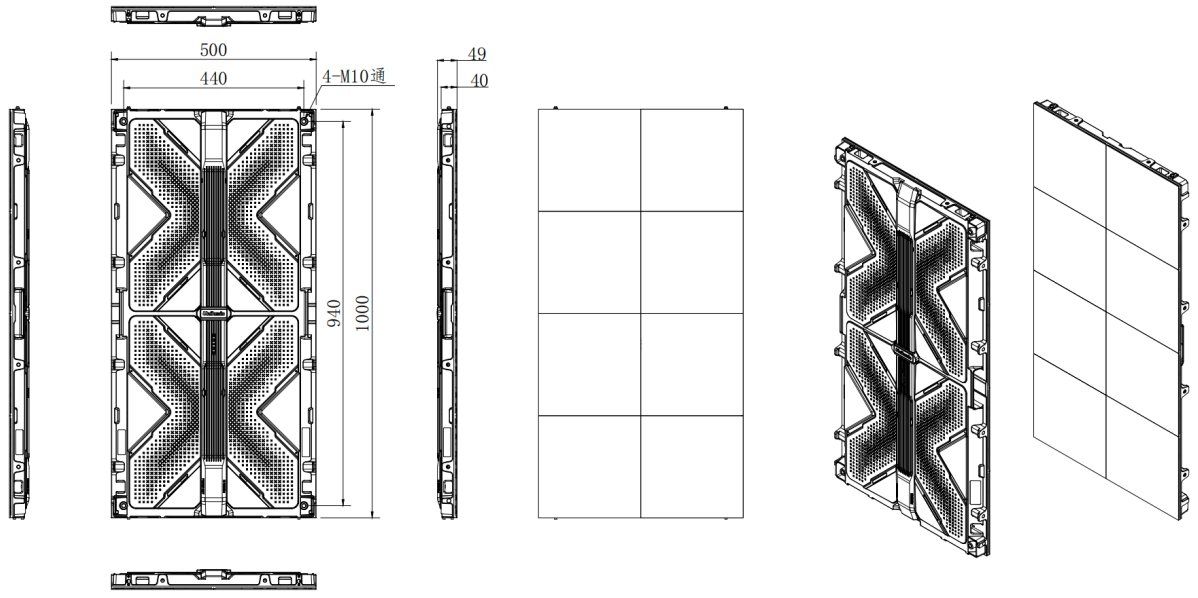

03 Control System

SYSTEM COMPONENTS

TYPE	MODEL	QTY
Main Controller	VX600PRO	1

Model Name: VX600PRO

FRONT VIEW




REAR VIEW



04 Wiring Diagrams

SIGNAL WIRING DIAGRAM


Signal Cables: **6**

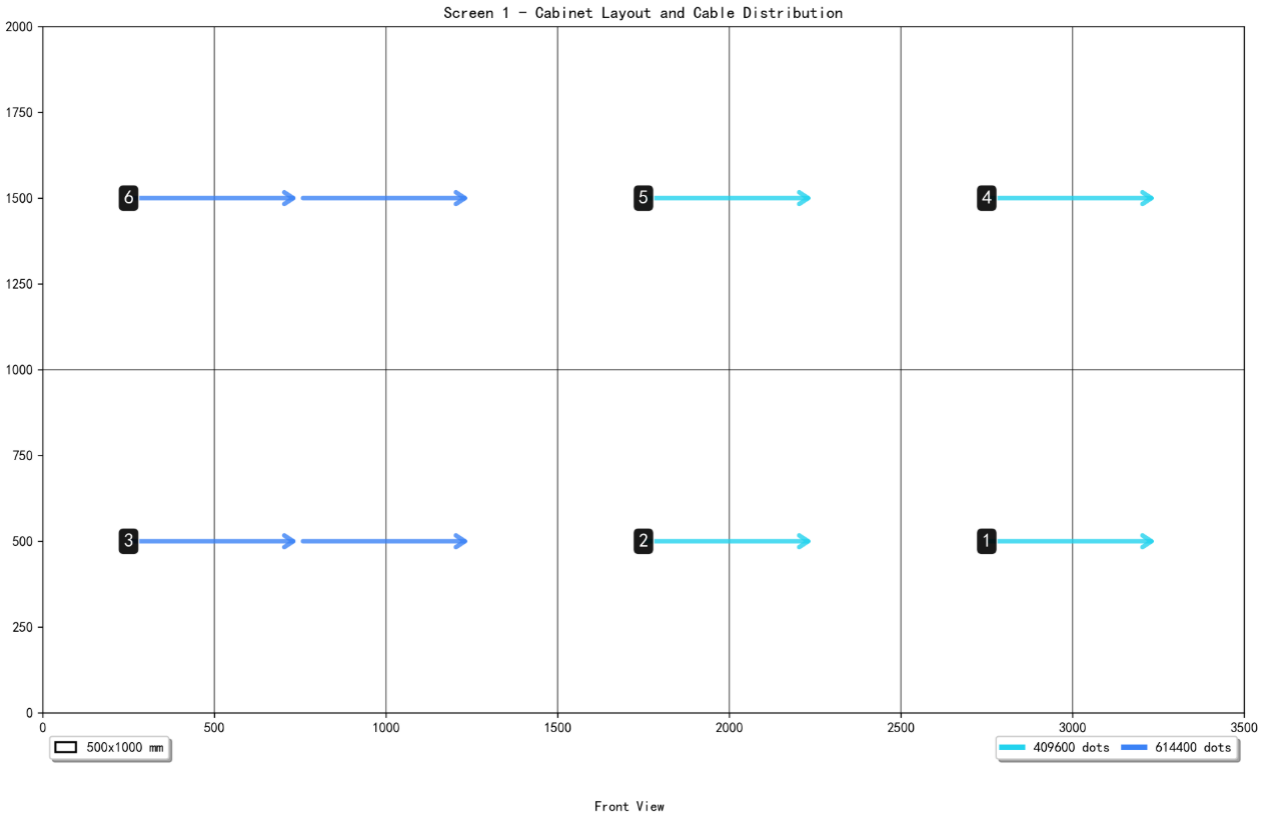

04 Wiring Diagrams

POWER WIRING DIAGRAM

Voltage: **220V** Power Lines: **2**

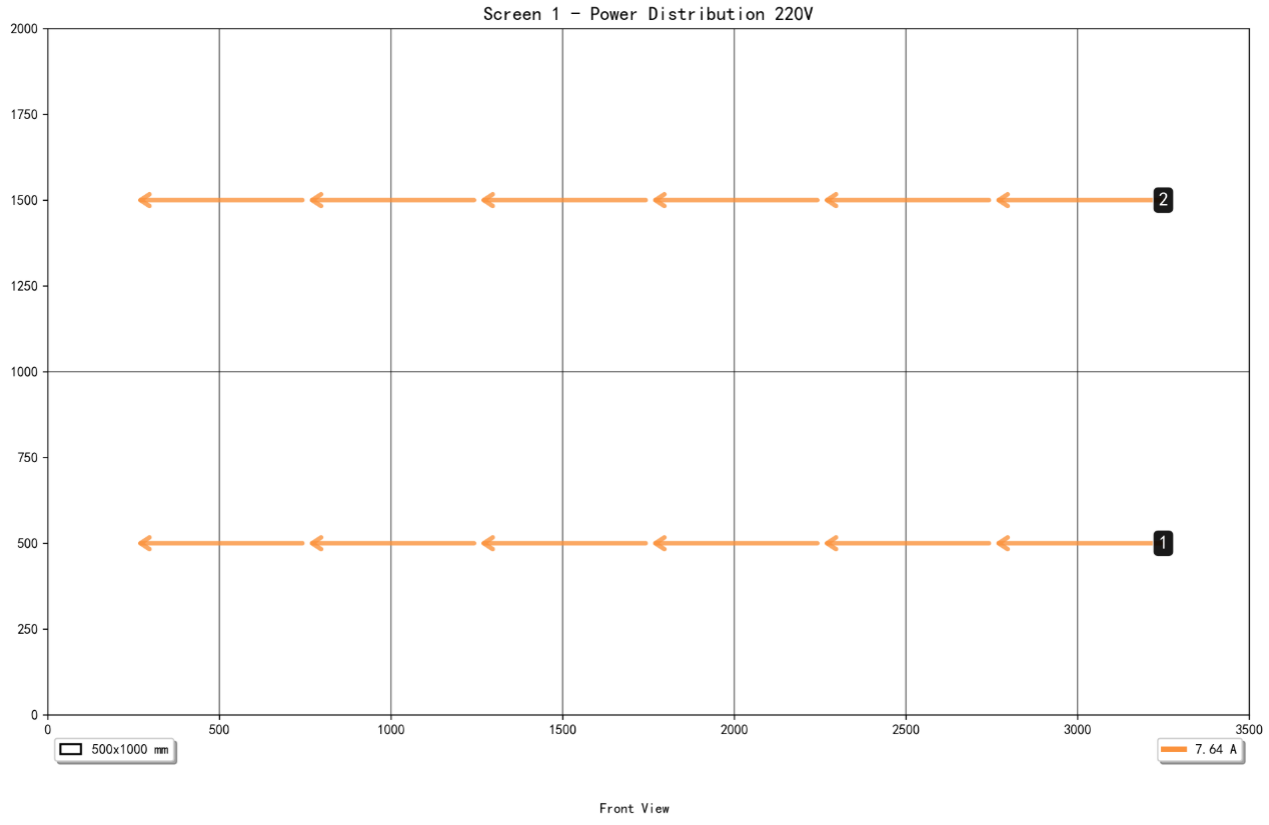

Front View

05 Technical Specifications

UslimIII SMD 1.5 · 500×1000mm

GEOMETRY & RESOLUTION

Pixel Pitch	**1.5625 mm**
Aspect Ratio	**1:2**
Module Resolution	**160×160 Pixels**
Module Size	**250mm×250mm**
Cabinet Resolution	**320×640 Pixels**
Cabinet Size	**500mm×1000mm×40mm**

OPTICAL & VIEWING PARAMETERS

Brightness	**800 cd/m²**
Contrast	**5000 : 1**
Brightness Control	**Manual/Automatic**
Calibration	**Support brightness and chroma**
Color Temp	**2,000K~9,300K Adjustable**
Viewing Angle	**H160°/V160°**
Recommended Viewing Distance	**2 m**

05 Technical Specifications (Cont.)

UslimIII SMD 1.5 · 500×1000mm

ELECTRICAL & CONTROL PARAMETERS

Input Voltage	**220 V**
Max Power / Cabinet	**240 W**
Typical Power / Cabinet	**80 W**
Refresh Rate	**5760 Hz**
Processing	**14 Bit**
Signal Wiring	**Horizontal**
Power Wiring	**Horizontal**

MECHANICAL & ENVIRONMENTAL PARAMETERS

LED Type	**SMD**
Environment	**indoor**
Cabinet Weight	**10.5 kg**
Maintenance	**Front**
IP Rating	**IP 30**
Material	**Die-cast Aluminum**
Curvature	**Customized according to customers' needs**
Working Temp	**-20°C ~ 60°C**

* Specifications are for reference only. Please refer to the actual product.

06 Configuration Summary

RECOMMENDED SOLUTION

Product Type	Model	Qty	Unit	Description
Display				
LED Cabinet	UslimIII SMD 1.5 500×1000mm	14	PCS	-
Video Processing				
Main Controller	VX600PRO	1	PCS	-
Accessories				
Signal Cable	Network Cable	6	PCS	Inter-cabinet signal connection
Power Cable	Power Line	2	PCS	Power supply line
Spare				
To be configured				

Summary	
Total Types	4
Total Pieces	23

* Accessories and spare parts will be configured based on project requirements. Free/Paid ratio will be displayed after accessory configuration is complete.