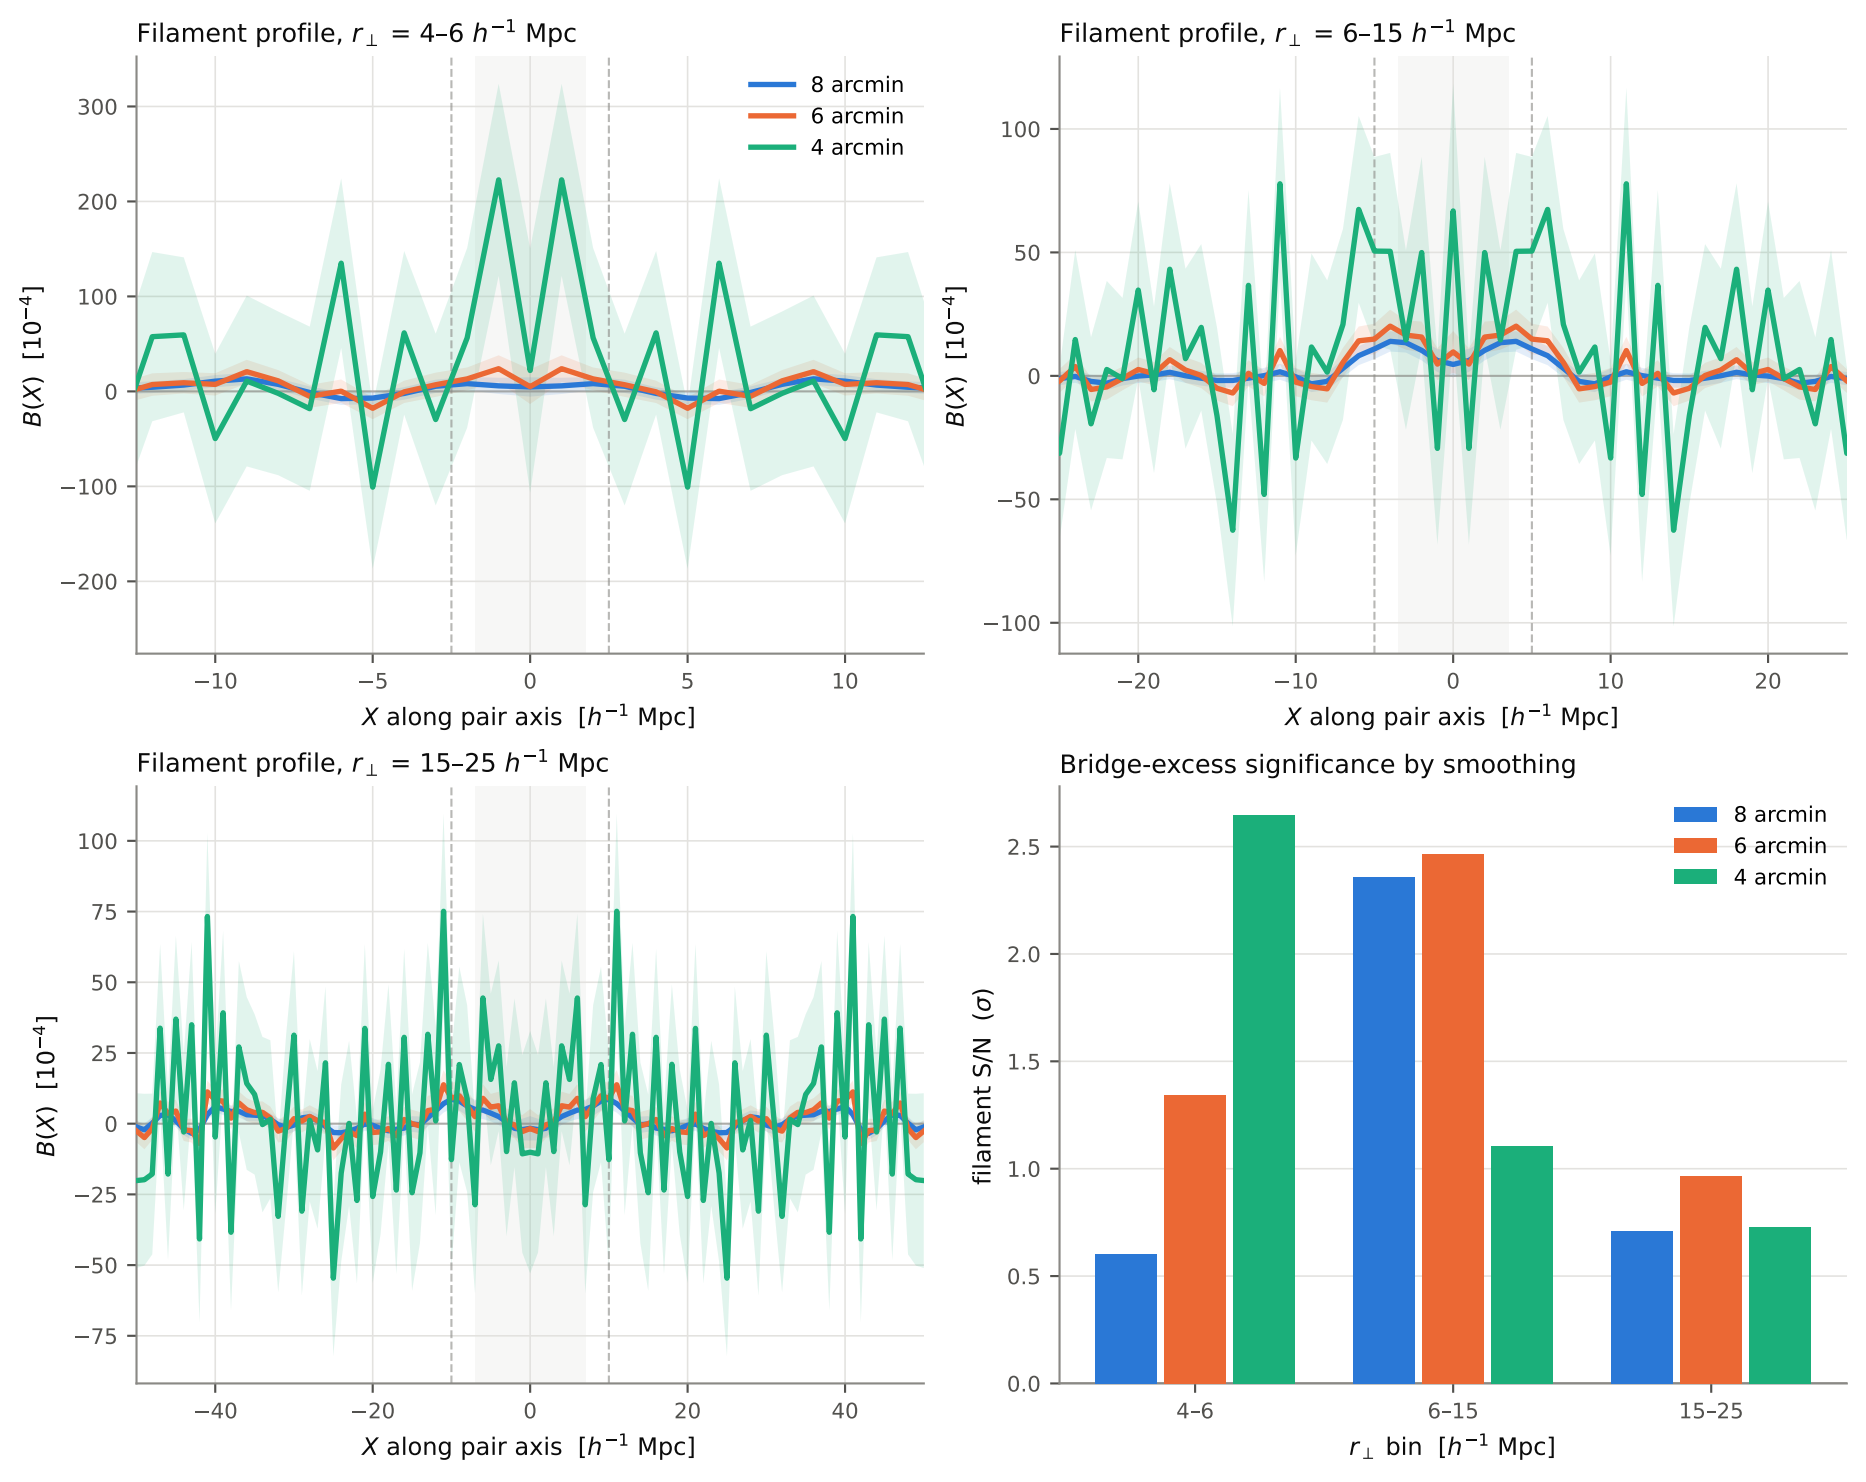
Filament profile, $r_\perp$ = 4–6 h^{-1} Mpc
8 arcmin
6 arcmin
4 arcmin
$B(X)$ [10^{-4}]
X along pair axis [h^{-1} Mpc]
Filament profile, $r_\perp$ = 6–15 h^{-1} Mpc
$B(X)$ [10^{-4}]
X along pair axis [h^{-1} Mpc]
Filament profile, $r_\perp$ = 15–25 h^{-1} Mpc
$B(X)$ [10^{-4}]
X along pair axis [h^{-1} Mpc]
Bridge-excess significance by smoothing
8 arcmin
6 arcmin
4 arcmin
filament S/N (σ)
4–6
6–15
15–25
$r_\perp$ bin [h^{-1} Mpc]