Power Supply: Converts the input supply to regulated +5 V DC and provides circuit protection

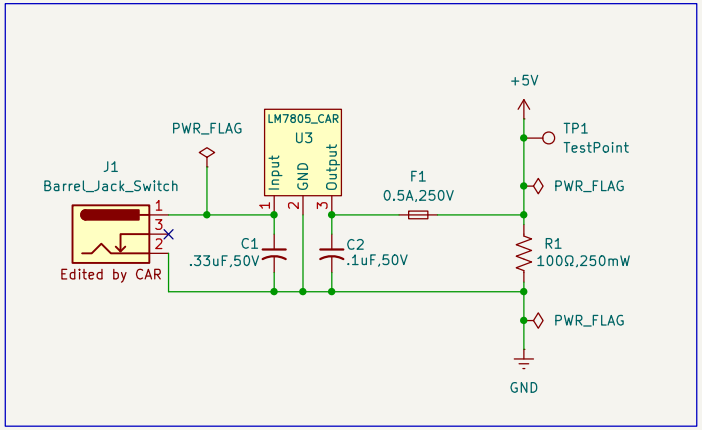

Optical Detection: Uses infrared light and a phototransistor to detect objects interrupting the sensor's light path

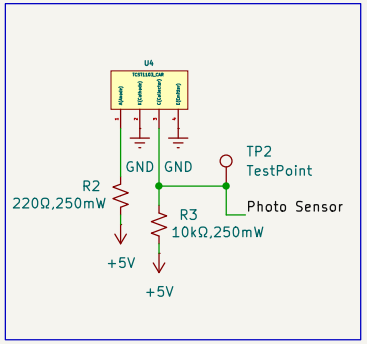

Microcontroller and Control: Processes the sensor signal and controls the subsystem's programmed responses

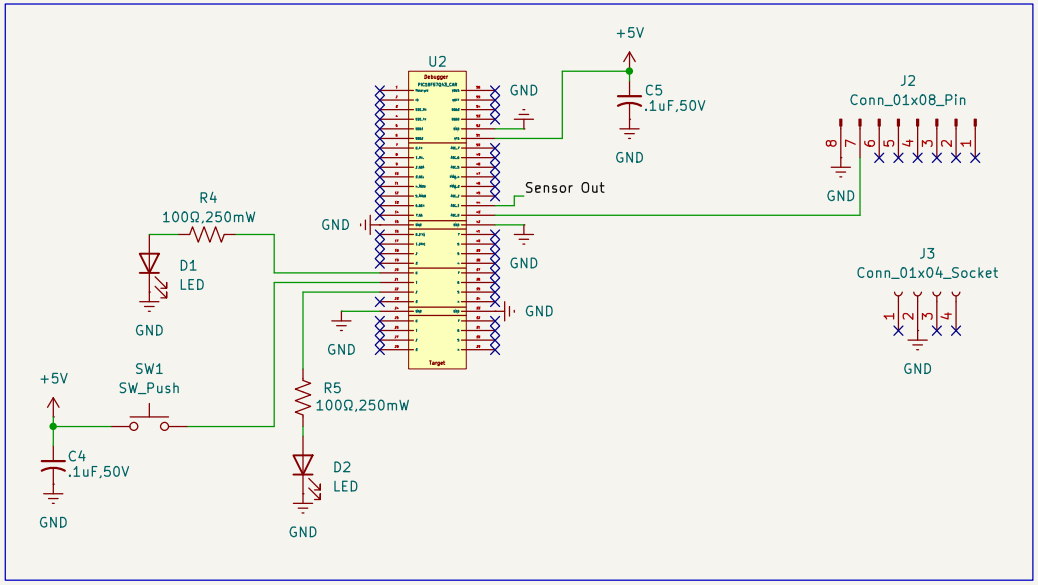
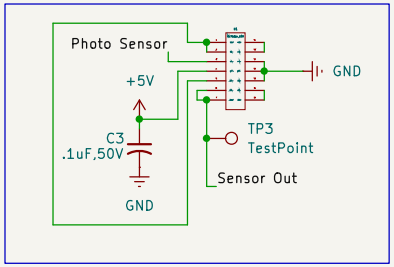
Sensor Interface: Provides sensor power, ground, and the Sensor Out connection to the microcontroller