Converts 9V battery voltage into stable 5V rail protected by fuse and bulk capacitors.

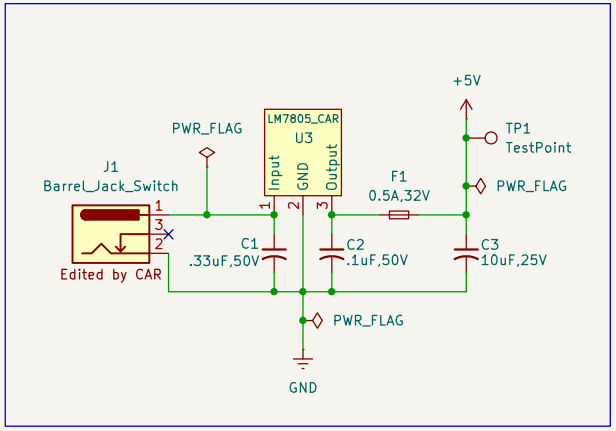

Uses an infrared beam to turn physical movement into 0V or 5V voltage.

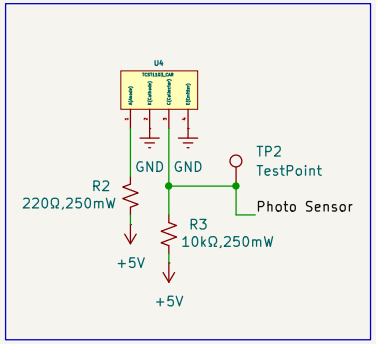

Acts as an electrical shield to strengthen sensor signal.


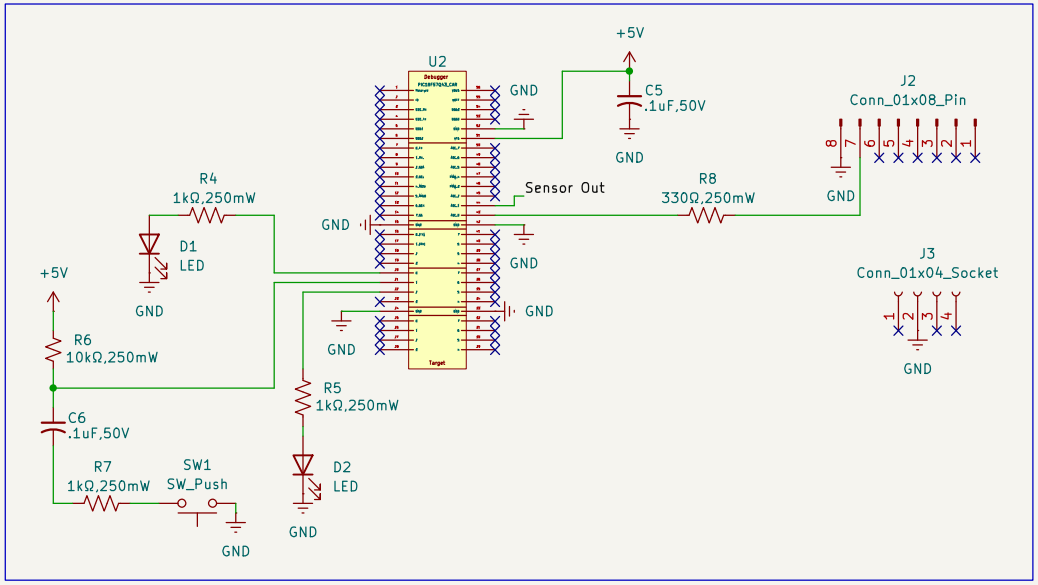
Serves as decision maker to monitor sensor input and execute code commands.