LEG A (lies on a +-Y panel)

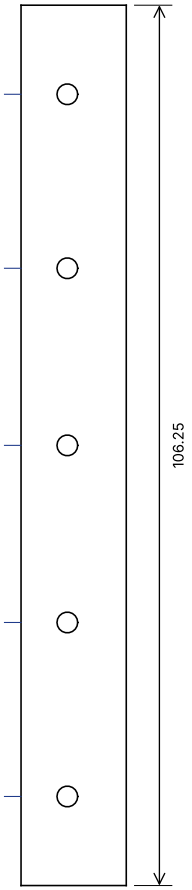

LEG B (lies on a +-X panel)



END VIEW



FEATURE TABLE

A Leg A: 5x dia 2.50 thru, centres 5.59 from the heel (outside corner), V 10.75, 31.75, 53.125, 74.5, 95.5 from the bottom end

B Leg B: 5x dia 2.50 thru, centres 7.59 from the heel, V 10.75, 31.75, 53.125, 74.5, 95.5 from the bottom end

S Stock: 6061-T6 angle 1/2 × 1/2 × 1/16 in (12.70 × 12.70 × 1.59), cut to 106.25 +0/-0.2, ends square. Root radius inside the angle 1.0 max. If not stocked, machine from bar.

E Hole pattern is symmetric about mid-length: the part may be installed either end up.

N Notch in leg B, from the free edge: 4.61 deep, V 13.35 to 22.25 from the bottom end, inside corners R1.5 max (clears the micro-D jackposts). This end is the BOTTOM: mark it.

NOTES

Units: millimetres. Third-angle projection. Tolerances unless stated: features and hole positions +-0.1; outline +-0.2.
Threads: ISO metric coarse, 6H. Holes marked INSERT are tapped for stainless free-running helical coil inserts, length 1.5D, supplied and installed by the shop; drill and tap to the insert maker's data. Inserts flush to 0.25 below.
Every drilled and tapped hole runs through to an open volume (venting). Break sharp edges 0.1-0.3; deburr all holes.
Finish: as machined for this unit. Please also quote: clear anodize MIL-A-8625 Type II Class 1, with the H01 host face and the panel/angle faces under rivets masked and conversion coated MIL-DTL-5541 Type II Class 3 (electrical bonding).
Assembly is by Carthage: fasteners locked and torqued per the SLANT assembly procedure (to be issued).
Fit-check unit built to the flight layout. Material certs appreciated; no inspection report required.
Model: the STEP file of the same part number governs any dimension not shown here.

PART	**SLANT-H08 Corner angle, notched**
MATERIAL	6061-T6 angle, 1/2 × 1/2 × 1/16 in
QTY	1
MASS (model)	10.5 g
PROJECT	SLANT 1U housing, assembly rev 16
OWNER	Carthage College, Space Sciences
DRAWN / CHECKED	from model 2026-10-08 / _____
SHEET REV	D