
SLANT carrier board, placement

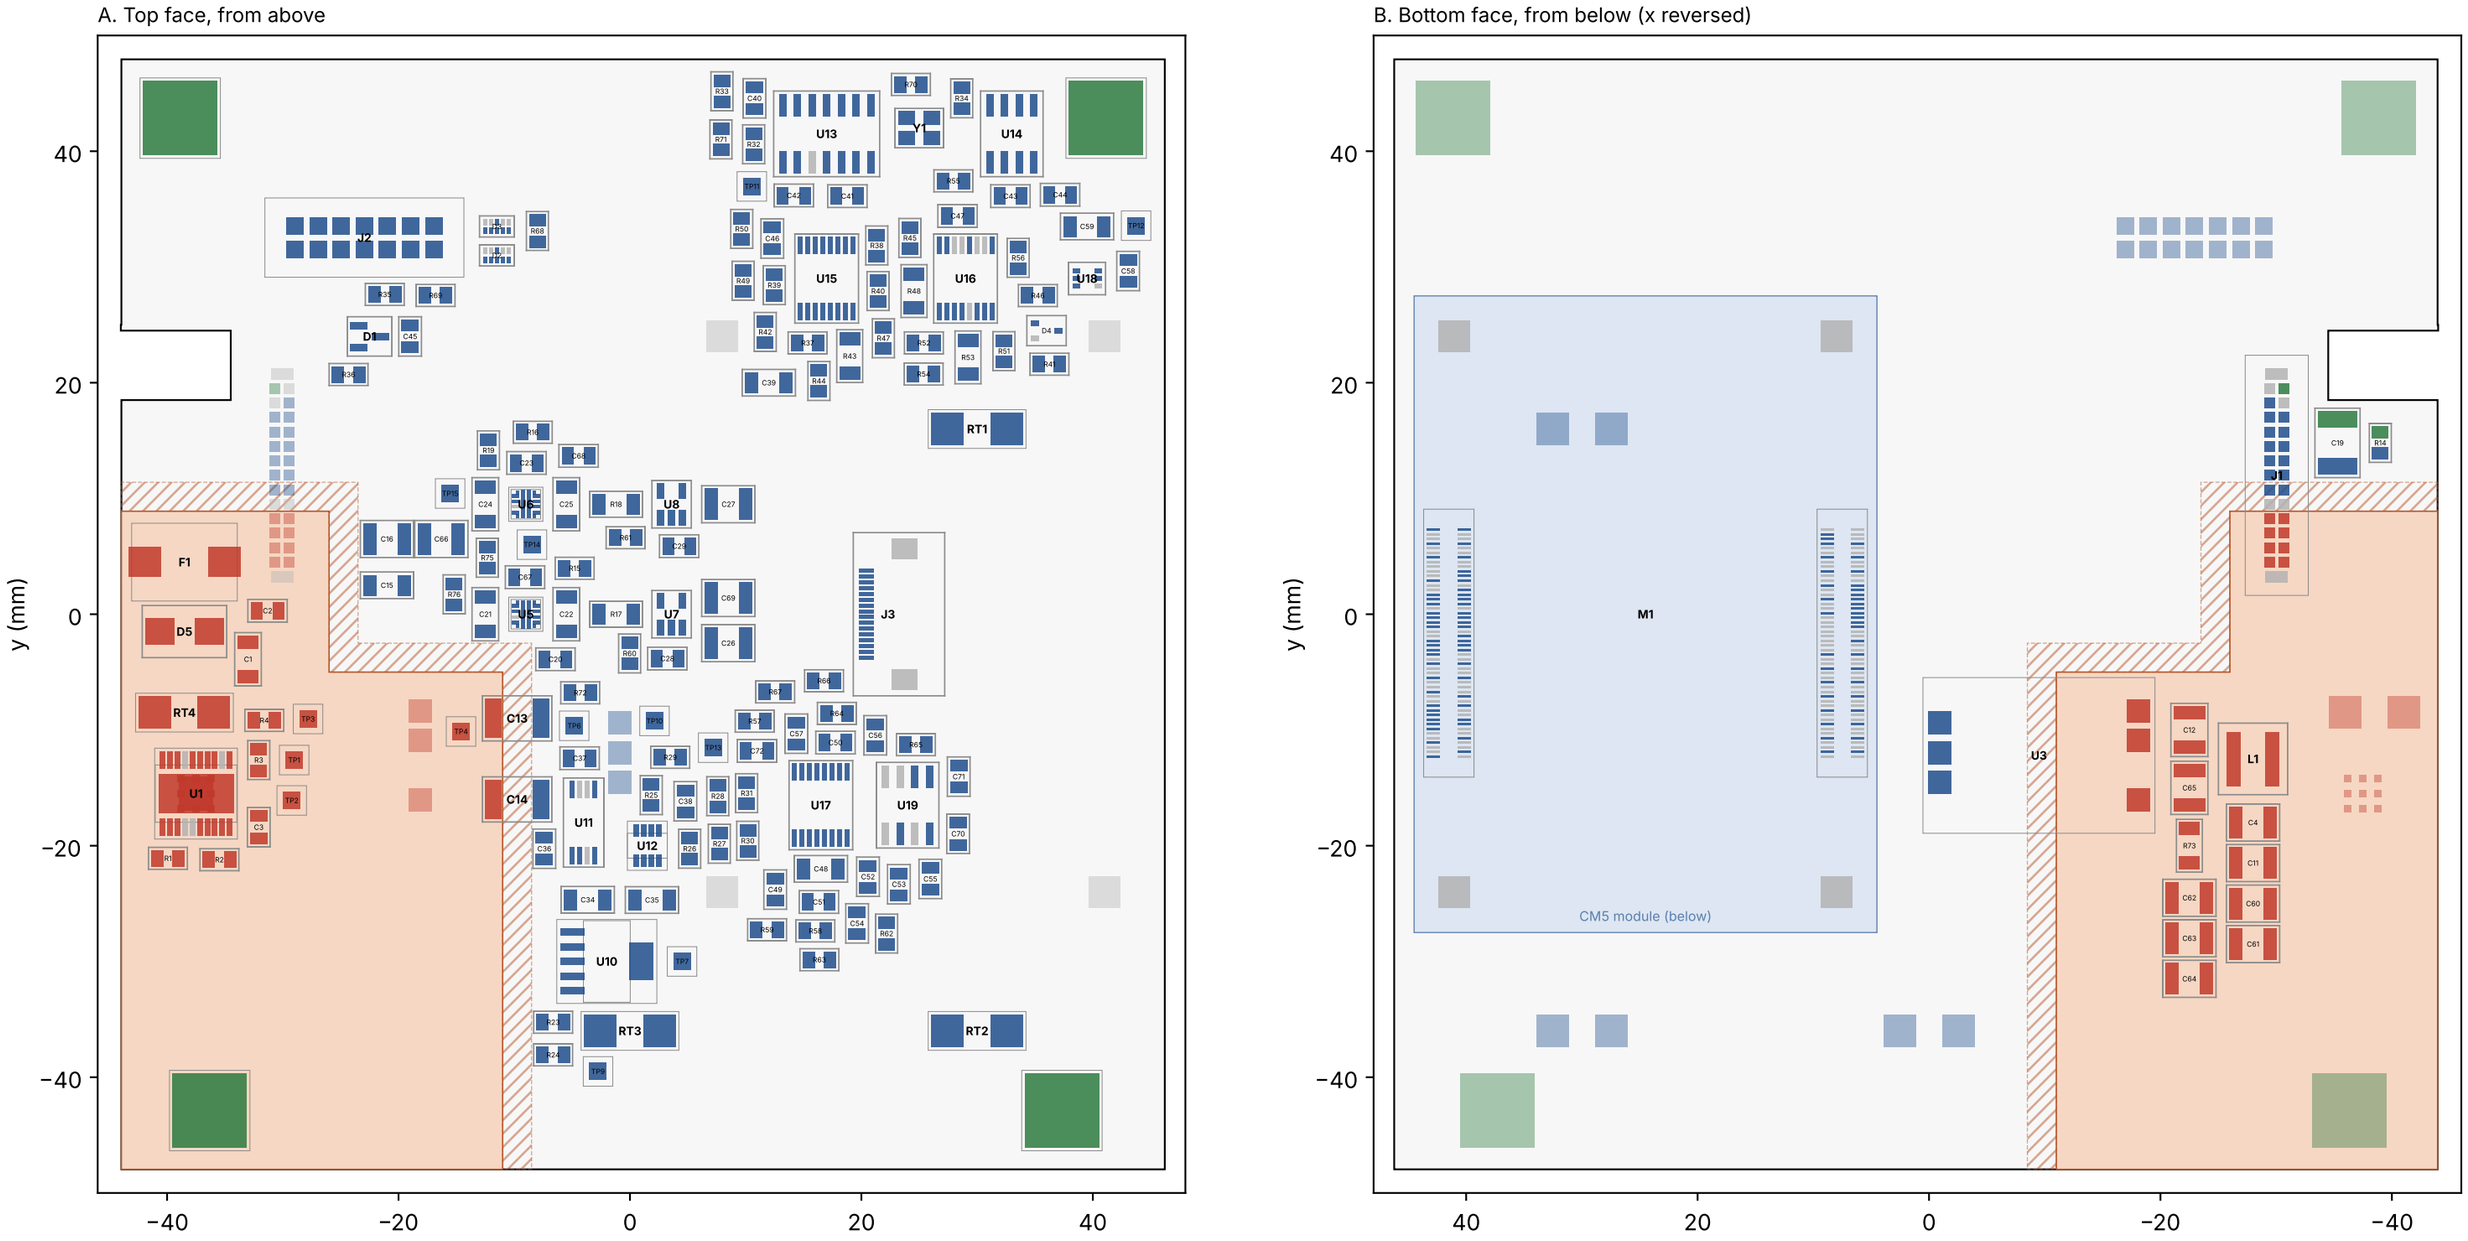

Shaded: host-side zone (bus power, PRI_RTN, limiter, host thermistor). Hatched: 2.5 mm moat (IPC-2221B B2, 301-500 V). Pads: red host side, blue payload, green chassis, grey no net; faint pads are through-hole pads of parts on the other face.