

# From Behavioral State Vocabularies to Distributed Embodiment: SOFTSIM and GA144 as an Executable Framework

Christopher A. Tucker

## Abstract

This paper is the implementation-oriented third step in a sequence of related studies. A prior historical paper argued that an older line of machine-intelligence thought remains architecturally useful when read in terms of sensing, state, control, action, and adaptation. A second paper showed that Sony’s **ERS-111 R-CODE** sample corpus can be read through a compact behavioral state vocabulary rather than as a set of unrelated scripts. The present paper asks what follows if that vocabulary is treated not only as an analytic description, but as a candidate implementation grammar. Its main claim is that the GreenArrays toolchain, especially **arrayForth**, boot-descriptor loading, **SOFTSIM**, and physical **GA144** deployment, provides a continuous path from behavioral decomposition to executable distributed embodiment. On this reading, behavior diagrams are neither loose metaphors nor final programs. They are intermediate control descriptions that can be mapped onto communicating **F18A** nodes, initialized reproducibly, exercised functionally in simulation, and then carried toward hardware realization. The paper positions this workflow as a concrete framework for studying fast-reactive and slow-supervisory embodied control without collapsing both layers into one monolithic controller.

## 1 Introduction

This paper is written as the third in a sequence. The first paper argued that a historically underused architecture of machine intelligence can be recovered by reading symbolic logic, circuitry, control, and embodied behavior together rather than apart [1]. The second paper moved from historical reconstruction to preserved robotic software and argued that Sony’s **ERS-111 R-CODE** sample set is organized by a compact behavioral state vocabulary centered on initialization, sensing, action, synchronization, and recovery [2]. The present paper takes the next step. It asks how such a vocabulary can be made executable on a distributed substrate instead of remaining a descriptive layer over legacy code.

The relation among the three papers is therefore architectural rather than merely chronological. The first paper supplies the engineering hypothesis: embodied machine intelligence can be organized through explicit relations among sensing, state or memory, control, action, recovery, and adaptation. The second paper supplies the intermediate behavioral representation: a reusable vocabulary of states and transitions extracted from a preserved robot corpus. The present paper treats that representation as something to be instantiated. Its task is to ask whether the vocabulary can be mapped onto executable node-local processes, initialized reproducibly, inspected in simulation, and carried toward a distributed hardware substrate.

That question matters because much current robotics work still separates high-level cognition from low-level embodied viability too sharply. Systems may be rich in perception, planning, or language conditioning while remaining comparatively weak in persistent local organization: postural maintenance, contact response, local recovery, and bounded reactive loops that keep a physical agent workable in the world while larger tasks are being pursued. One common way of talking about that split is through fast/slow or *System 1* / *System 2* language, where rapid background response and slower supervisory interpretation are treated as distinct but cooperating cadences [3, 4].

The aim of this paper is not to claim that GreenArrays hardware solves contemporary robotics in general. It is narrower and more practical. The claim is that the **F18A** / **arrayForth** / **SOFTSIM** / **GA144** stack offers a usable experimental path for implementing distributed embodied control in explicit small processes. The power of this move is that behavioral descriptions become testable engineering objects: not merely names for robot actions, but allocation, loading, communication, and inspection obligations on a distributed substrate. That makes it a good setting in which to test whether behavioral decompositions derived from robot code can be turned into node-local loops, inter-node handoffs, and slower supervisory interventions without being absorbed into a single centralized controller.

## 2 Research Question and Thesis

The guiding question is how a behavioral state vocabulary should function after analysis. Is it only a retrospective interpretive device for reading robot scripts, or can it serve as an intermediate implementation layer that connects behavior design to executable distributed systems?

The thesis of this paper is that the GreenArrays toolchain supports the stronger reading. In this environment, a behavior description can be mapped onto concrete communicating **F18A** nodes, assembled into persistent per-node images, initialized declaratively through boot-descriptor mechanisms, executed functionally in **SOFTSIM**, and then carried to physical **GA144** hardware [5, 6]. The result is not yet a finished robotic architecture. It is an executable framework for studying how fast reactive loops, local state, and slower supervisory control might be separated, coordinated, inspected, and eventually embodied in hardware. In that sense, the paper does not treat the earlier historical and corpus studies as proof of the implementation claim. It treats them as the conceptual and representational prerequisites for a concrete test of distributed embodiment. The proof burden remains execution: node allocation, load structure, cadence separation, behavioral handoff, simulation evidence, and eventual hardware evidence must be shown rather than inferred from the earlier analyses.

## 3 From Behavioral Vocabulary to Implementation Grammar

The earlier R-CODE study argued that apparently different Sony sample routines reuse a small recurrent vocabulary of control forms: startup regularization, sensing, conditional branching, iter-

ative action, synchronization, and recovery [2]. That finding has two possible interpretations. The weaker one is taxonomic: the vocabulary merely groups legacy scripts into comparable families. The stronger one is constructive: the vocabulary identifies a set of behavior blocks that can be re-instantiated on another substrate.

This paper adopts the stronger interpretation. In that reading, a behavior diagram is not yet machine code, but it is more than a sketch. It specifies roles that an implementation must realize: persistent loops, transition conditions, local memory, recovery paths, and coordination points. Such a description is therefore well suited to a substrate whose basic unit is not a single giant process but a collection of communicating node-local programs.

That is where the GreenArrays environment becomes relevant. The **F18A** architecture is already distributed in form. It consists of many small communicating nodes with explicit port semantics, node-local memory, and fine-grained execution [5]. The programming model described by **arrayForth** then reinforces that decomposition by treating code as persistent per-node object images rather than as one flat binary [6]. What the earlier paper recovered at the level of behavioral analysis thus meets a substrate that is already organized for decomposition.

If the claim is embodiment rather than simulation alone, however, the substrate must be specified in enough detail to constrain the proposed mapping. The physical chip therefore becomes part of the argument, not only its eventual destination.

## 4 The GA144A12 Physical Substrate

The physical target for this work is not a generic many-core processor. It is the **GA144A12**, revision A12-PC-2026.03, a controlled production-candidate instance of the **GA144** isolated-linear processor family: a multicomputer array built from **F18A** computers [7, 8]. At the chip level, the device contains 144 independent, architecturally identical **F18A** computers arranged as 18 columns by 8 rows. Node coordinates are written as Cartesian addresses, with node 000 at the lower left and nodes such as 017, 700, and 717 marking other corners of the array. This coordinate scheme is important for the paper because node allocation is not an abstract partitioning step. It is a placement decision on a real communication fabric.

Each **F18A** is an 18-bit computer with its own local RAM, ROM, stacks, registers, and communication ports [5]. The computers operate independently and asynchronously, communicating through point-to-point ports whose transfers suspend until the matching neighboring operation occurs. This means that a behavioral design mapped to the **GA144A12** is not compiled into one global instruction stream. It becomes a set of small local programs whose coordination is expressed through explicit node placement, port direction, and communication discipline.

The chip-level datasheet and product brief add the physical configuration needed to move from this generic **F18A** model to an actual board target. Of the 144 computers, 22 edge nodes are equipped with one or more I/O pins [7, 8]. The resulting external interface includes 25 programmable digital I/O pins, five analog inputs and five analog outputs, two 18-bit parallel interfaces, and two high-

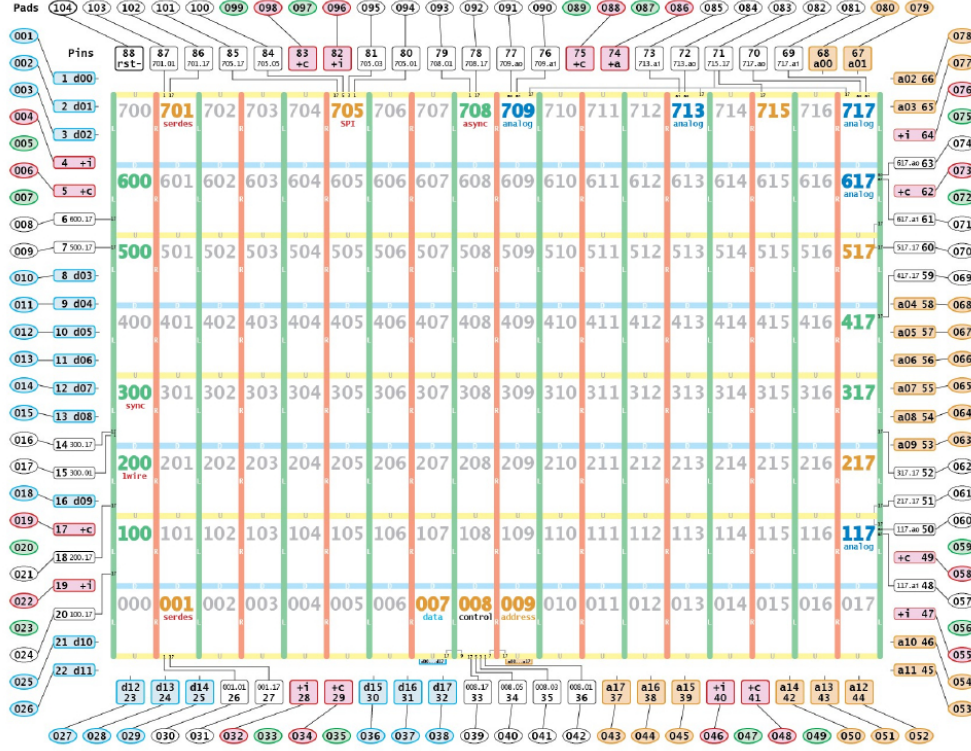


Figure 1: GA144A12 array layout and pin designation, showing the 18 by 8 node fabric, communication-port directions, I/O-capable nodes, boot specializations, analog nodes, and external pin mapping. Adapted from the GA144A12 revision A12 datasheet [7].

speed **SERDES** nodes. The bottom bus group, for example, uses nodes 007, 008, and 009 to control the parallel interfaces and four GPIO pins commonly used for external memory control. Other nodes provide synchronous, asynchronous, SPI, or one-wire-oriented boot and ROM specializations. These specializations matter because embodiment is not only a question of where code runs. It is also a question of where sensors, actuators, boot sources, memory interfaces, and board-level communication paths enter the array.

The datasheet and product brief also give the physical and electrical boundary of this claim. They describe a peak aggregate capability of up to 96 billion operations per second, distributed memory of 9216 words of RAM and 9216 words of ROM across the array, and application-dependent power scaling from suspended microwatt operation to hundreds of milliwatts under heavier activity [7, 8]. That power behavior is not merely a clock-rate parameter: the product brief frames energy use as a function of each computer’s software- and event-controlled duty cycle. The package is a 10 mm by 10 mm, 88-pin QFN with 0.4 mm pin pitch and an exposed die-attach paddle used as common ground and primary thermal path. Separate core, I/O, and analog supply domains are identified, and the stated operating range is  $-40^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . These details do not prove a robotics result by themselves, but they make the physical-manifestation claim more concrete: a behavior architecture carried to **GA144A12** must respect package, power, reset, boot, I/O, thermal,

| Architectural feature                                                                                 | Relevance to this paper                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 144 F18A computers                                                                                    | Provides the physical node population for mapping behavior diagrams to many small local programs.                                                                      |
| 18 by 8 node array                                                                                    | Makes node allocation a concrete placement and routing problem rather than a purely logical decomposition.                                                             |
| Asynchronous port communication                                                                       | Supports local reactive loops and explicit handoffs, while requiring communication discipline when moving from <b>SOFTSIM</b> to hardware.                             |
| Per-node RAM, ROM, stacks, and registers                                                              | Lets behavior blocks be hosted as node-local routines with local state and compact control loops.                                                                      |
| 22 I/O-capable edge nodes                                                                             | Connect the internal behavior fabric to physical sensors, actuators, memory devices, and board-level signals through digital, analog, serial, and parallel interfaces. |
| Specialized boot nodes and ROMs                                                                       | Provide practical entry points for bringing node ensembles into known execution states after reset.                                                                    |
| 25 GPIO pins, 5 analog inputs, 5 analog outputs, two SERDES nodes, and two 18-bit parallel interfaces | Show that the chip is not only a compute fabric but an embodied I/O substrate.                                                                                         |

Table 1: GA144A12 architectural features relevant to executable embodiment.

and board-design constraints.

For the present paper, the most important conclusion is architectural. The **GA144A12** is a physical fabric of many asynchronous, communicating, locally programmed computers with concrete I/O and boot resources. That makes it a serious candidate substrate for testing whether behavior diagrams can be realized as distributed executable organization. It also sets the limits of the claim. **SOFTSIM** can validate functional organization before hardware work, but the real chip remains necessary for claims about physical timing, electrical behavior, I/O interaction, power, thermal behavior, and board-level reliability.

## 5 The GreenArrays Execution Path

The practical value of the GreenArrays stack lies in the continuity of its workflow. The manuals and local notes together support a five-stage path: behavioral model, node allocation, per-node assembly, declarative initialization, and executable realization.

The first stage is the behavior description itself. Here the relevant object is a compact control representation: a loop, a sensing condition, a supervisory trigger, a recovery branch, or a state-maintaining routine. The second stage assigns these roles to concrete nodes and communication paths. This is the point at which a state machine or behavior ladder becomes a distributed organization rather than a conceptual diagram.

The third stage is per-node implementation. **arrayForth** Chapter 4 describes an incremental environment in which each node has a persistent object bin containing RAM image, ROM image, and labels [6]. That matters because it makes implementation structurally congruent with the distributed behavior idea. One does not begin from a monolithic application image and then

discover decomposition afterward. The decomposition is present in the object model from the start.

The fourth stage is declarative initialization. Chapter 6’s boot-descriptor machinery provides a way to specify how many nodes are touched, how memory and registers are initialized, and how a node ensemble is brought into execution-ready form [6]. This is not just a loading convenience. It is part of the argument of the paper. If a behavior architecture is to be studied seriously, it must be instantiated reproducibly. The boot-descriptor layer supplies that reproducible instantiation path.

The fifth stage is executable realization. **SOFTSIM** provides a functional environment in which the resulting node program can be loaded, stepped, and inspected, while **GA144** provides the physical distributed substrate on which the same style of program can be manifested. The important constraint is that the simulator should be treated as a functional witness, not as a timing-faithful proxy for the hardware. It can validate organization and value-level behavior, while real-chip testing remains necessary for timing, contention, and physical I/O questions.

## 6 Current Evidence Status

The present state of the work should be stated explicitly because the argument depends on separating established execution facts from pending experiments. The local **arrayForth** / **SOFTSIM** environment has already been reached through the installed project path, and the documented simulator vocabulary has been observed after **SOFTSIM LOAD**. Two stock blocks have also been exercised: block 1698, which loads a larger populated simulator state, and block 1737, which provides the smaller baseline now used as the trusted starting point. In both cases, stepping with **SUPER** advanced the simulator rather than leaving a static display. This establishes a limited but important baseline: the local toolchain is live, the documented examples are present, and **SOFTSIM** can be used as an operator-facing functional execution environment.

That baseline does not yet prove the paper’s constructive claim. The current blocker is more specific. The stored 1737 block loads and steps, but prompt-entered attempts to retype or mutate the same style of small assembly body have failed at words such as **clc** and **unext**. The most plausible working diagnosis is therefore not a general simulator failure, but a block-context problem: the stored block appears to provide compilation or loading conditions that direct prompt entry does not reproduce. The next experiment must preserve that trusted block context, duplicate 1737, make only one small behavioral mutation, and observe whether the duplicated block still loads and steps.

This distinction matters for the paper’s evidential discipline. The confirmed stock examples support the claim that the environment is usable. A successful duplicated-block mutation would support the stronger claim that the environment can host custom behavior. A two-node handoff would then support the still stronger claim that a reactive/supervisory cadence can be instantiated as distributed execution rather than merely described as an architecture.

## 7 Experiment Plan and Success Criteria

The experiments should proceed in a deliberately small sequence. Each step adds one kind of proof burden while holding the others as steady as possible. This is important because a failure in this toolchain can arise from several different sources: assembly syntax, block context, node image construction, initialization, inter-node communication, simulator inspection, or hardware behavior. A useful experiment sequence should avoid mixing those failure modes too early.

| Experiment           | Purpose                                                                          | Success criterion                                                                                    |
|----------------------|----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| 1737 baseline        | Establish the smallest known-good <b>SOFTSIM</b> execution path                  | Block loads, node 000 is visible, and <b>SUPER</b> advances execution                                |
| One-node mutation    | Show that the toolchain can host custom behavior rather than only stock examples | A duplicated block with one changed <b>go</b> body loads, steps, and differs visibly from baseline   |
| Two-node cadence     | Instantiate the smallest fast/reactive and slow/supervisory split                | Two nodes load and execute; a supervisory token or mode change alters the reactive node’s behavior   |
| Marker observability | Show that distributed behavior can be inspected rather than merely asserted      | selected memory or state markers change in the expected relation to mode changes                     |
| Diagram mapping      | Connect a paper-facing behavior diagram to executable node organization          | Diagram elements map to node roles, code locations, load structure, and observed execution           |
| GA144 manifestation  | Carry the smallest stable organization toward hardware                           | A <b>SOFTSIM</b> -validated organization is prepared for, or demonstrated on, the physical substrate |

Table 2: Incremental experiments needed to turn the framework claim into execution evidence.

The first two experiments are especially important because they determine whether the paper can move from framework to implementation without overclaiming. The 1737 baseline only shows that existing examples run. The one-node mutation is the first real test of construction. Until that mutation succeeds, the paper should avoid saying that behavior diagrams have already been made executable in this environment. It can say that the environment provides a promising and partially validated path.

For this paper, a behavioral handoff should also be defined operationally. The minimal handoff is not a full robot task. It is a visible transfer of control influence between two node-local processes: a fast node continues a compact local loop, a slower node produces a token or mode condition, and the fast node changes its local behavior in response. If this can be loaded, stepped, and inspected in **SOFTSIM**, then the paper has functional evidence for cadence separation. If the same organization can later be manifested on **GA144**, then the paper gains hardware evidence as well. The two claims should remain distinct.

## 8 Fast and Slow Cadence

One reason this implementation path is worth isolating is that it offers a concrete place to study fast and slow control decomposition. Public robotics literature now contains multiple explicit versions of this pattern, in which a faster reactive layer cooperates with a slower interpretive or value-guided layer [4]. The GreenArrays stack is relevant not because it replicates those systems wholesale, but because it offers a different implementation emphasis: distributed low-latency node processes instead of one heavy central controller.

In the present framing, fast control corresponds to local reactive loops: posture maintenance, contact response, bounded actuator logic, sensing, and recovery. Slow control corresponds to supervisory choice, mode transition, task redirection, or larger behavioral revision. This is conceptually close to familiar behavior-based and layered-control traditions [9, 10], but the present paper adds an implementation claim. It argues that the split can be explored on a distributed asynchronous substrate whose programming and loading machinery already respects node locality.

This has methodological value. It lets a researcher ask not only whether a behavior architecture is intelligible on paper, but whether its parts can be given separate executable homes, separate initialization conditions, and separate inspection points. That makes the architecture more testable. One can begin with a minimal one-node reactive loop, then expand to a two-node handoff, then move toward richer supervisory decomposition while keeping the relationship among behavior, implementation, and loading visible.

## 9 A Minimal Research Program

The current local notes suggest a practical research program that starts small and stays traceable. The first step is not a large multi-node robotic brain. It is a minimal structural mutation of a known-good **SOFTSIM** load pattern. That means preserving a confirmed small example, introducing a controlled one-node variant, verifying that it still loads and steps correctly, and only then extending the pattern toward a two-node cadence experiment.

This sequence is methodologically important because it separates three kinds of error that would otherwise be conflated: syntax or assembly error, load-and-initialization error, and inter-node coordination error. Once these are disentangled, the implementation path becomes suitable for more serious behavior experiments. A reactive loop can be isolated, a supervisory trigger can be added, and the resulting handoff can be inspected first in **SOFTSIM** and later on hardware.

The broader value proposition is architectural rather than benchmark-driven. **GA144** is interesting here because it offers a plausible low-energy, many-node substrate for persistent small embodied loops. The point is not that current notes prove superior robot performance or timing efficiency. The point is that the substrate fits the decomposition under study: background reactive processes that remain active continuously rather than as occasional subroutines.



## 10 Contribution of the Third Paper

Within the three-paper sequence, the present paper occupies a distinct role. The first paper recovered an architectural lineage for embodied machine intelligence. The second showed that a preserved robot-code corpus can be read through a stable behavioral state vocabulary. The third paper turns that vocabulary toward execution. Its contribution is to identify a concrete toolchain in which behavior blocks, node decomposition, initialization, and functional execution can be studied together rather than in isolation.

That contribution should be stated carefully. The paper does not yet present a completed distributed robot controller, nor does it claim timing validation, energy benchmarking, or parity with contemporary foundation-model robot systems. Its claim is narrower and still useful: behavior diagrams can serve as an intermediate representation for executable distributed embodiment, and the GreenArrays stack provides a disciplined environment in which that claim can be explored incrementally.

## 11 Conclusion

The main result of this paper is a framework claim. A behavioral state vocabulary need not remain a retrospective analytic lens over preserved robot code. It can function as an implementation grammar when paired with a substrate that already supports node-local programming, explicit communication, reproducible initialization, and functional execution.

Within that framing, the GreenArrays environment supplies a continuous path from behavior description to distributed realization: node-level implementation in `arrayForth`, declarative ensemble setup through boot descriptors, functional execution in `SOFTSIM`, and eventual physical manifestation on `GA144`. This does not complete the larger research program, but it makes the next step concrete. Instead of discussing fast and slow embodied control only at the level of architecture, we can now study how such a decomposition behaves when given explicit executable form on a distributed substrate.

## References

- [1] Christopher A. Tucker. Berkeley and heiserman as an unexhausted architecture for embodied machine intelligence, 2026. Manuscript.
- [2] Christopher A. Tucker. A behavioral state vocabulary in Sony ERS-111 R-CODE, 2026. arXiv:2607.12115.
- [3] Daniel Kahneman. *Thinking, Fast and Slow*. Farrar, Straus and Giroux, 2011.
- [4] Y. Wang et al. Hume: Introducing system-2 thinking in visual-language-action model, 2025. URL <https://arxiv.org/abs/2505.21432>.

- [5] GreenArrays, Inc. *F18A Technology Reference*, 2011. Document DB001.
- [6] GreenArrays, Inc. *arrayForth User's Manual*, 2011. Document DB013.
- [7] GreenArrays Product Engineering. *GA144A12 Datasheet*, 2026. Document GA144A12-DS-A12-PC, revision A12-PC-2026.03.
- [8] Cartheur Research, B.V. *PB001 – Isolated-Linear Processor*, 2026. Product Brief Datasheet, version 1.2, February 2026.
- [9] Ronald C. Arkin. *Behavior-Based Robotics*. MIT Press, 1998.
- [10] Rodney A. Brooks. Intelligence without representation. *Artificial Intelligence*, 47(1–3):139–159, 1991.