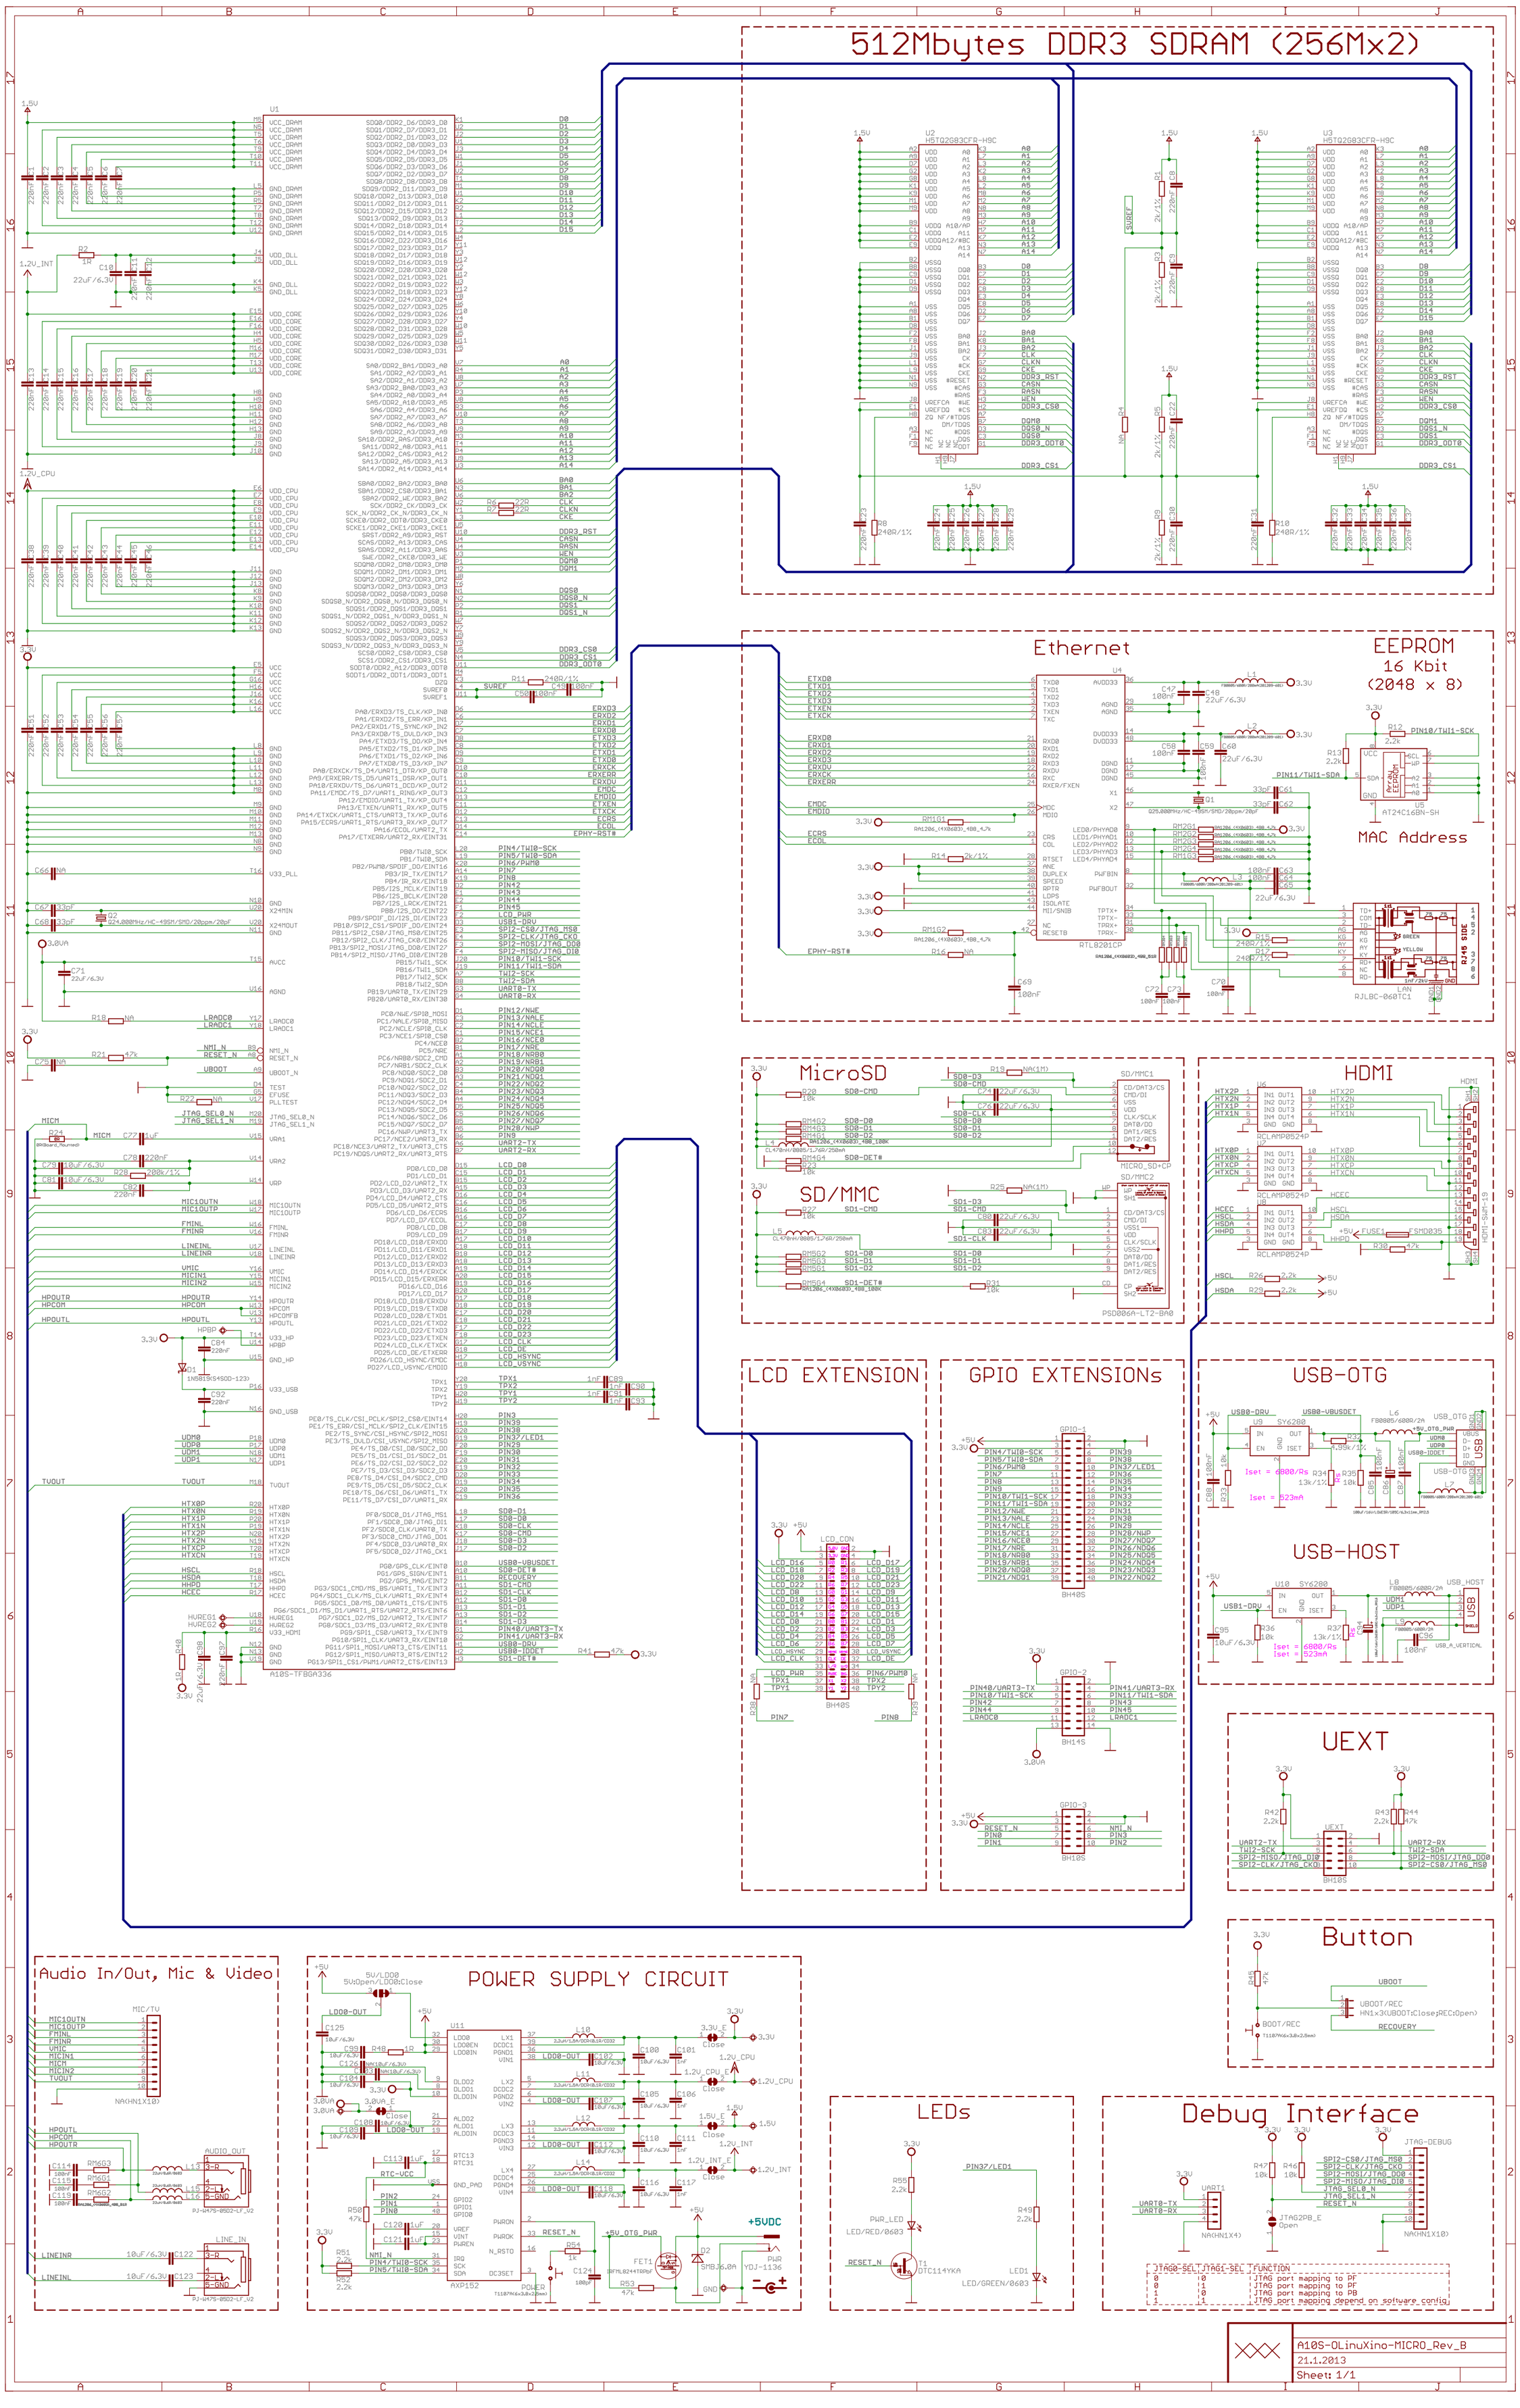
512Mbytes DDR3 SDRAM (256Mx2)
Ethernet
EEPROM
16 Kbit
(2048 x 8)
MAC Address
MicroSD
SD/MMC
HDMI
LCD EXTENSION
GPIO EXTENSIONs
USB-OTG
USB-HOST
UEXT
Audio In/Out, Mic & Video
POWER SUPPLY CIRCUIT
LEDs
Debug Interface
Button
A10S-OLinuXino-MICRO_Rev_B
21.1.2013
Sheet: 1/1