



MapX built-in scenarios · urban and rural planning

Scenario Handbook


Six planning scenarios: study design, data and methods




1. Development Suitability Baseline




2. Carrying Capacity Assessment




3. 15-minute Life Circle Coverage



4. Public Facility Siting



5. Urban Growth Monitor



6. Land-use Conflict Screening

About this handbook

This handbook turns the six built-in urban and rural planning scenarios in MapX into self-contained chapters: study design, data, methods and platform capabilities, how to run the scenario, and what one example run produced — with the limits stated.

Edition	First edition · October 2026
Scope	The six built-in urban and rural planning scenarios in MapX
Content	Scenario pages from the MapX documentation and the built-in data catalog
Data	Each scenario's entry layers, with source, licence and attribution per layer
Related docs	Scenarios, built-in datasets, analysis, plan mode, charts, reports
Support	support@mapxagent.com

Content and screenshots come from the MapX documentation and the built-in scenarios; map layer credits and licences are attached to each entry dataset. Example figures illustrate the shape of the deliverables only.

Contents

	Foreword	4
01	Development Suitability Baseline Nairobi	6
02	Carrying Capacity Assessment Jakarta	16
03	15-minute Life Circle Coverage Jakarta	25
04	Public Facility Siting Dar es Salaam	34
05	Urban Growth Monitor Hanoi	43
06	Land-use Conflict Screening Kigali	52
	Appendix	62

Foreword

A scenario bundles everything a piece of spatial analysis needs before you type anything: a study area, the prepared datasets for it, a method that maps onto the platform's analysis tools, and suggested questions that work with that data. Opening one turns an empty project into a project that is ready to answer a real planning question.

What this handbook covers

This handbook collects the six built-in urban and rural planning scenarios in MapX. Each scenario has one chapter, and every chapter follows the same structure: the planning question, the data it ships, how the study works, the platform capabilities it uses, how to run it, what one example run produced, and the limits to state when you read the results.

Scenario	Study area	Layers	What it answers
Development Suitability Baseline	Nairobi	8	Which land is buildable once ecology, slope and flood constraints are applied
Carrying Capacity Assessment	Jakarta	6	How much development the water, climate and flood-hazard constraints allow
15-minute Life Circle Coverage	Jakarta	7	Who is covered by schools, clinics and green space within walking distance, and who is not
Public Facility Siting	Dar es Salaam	7	Where coverage gaps are, and which candidate sites close them
Urban Growth Monitor	Hanoi	7	How fast, in which direction, and how compactly the built-up area is expanding
Land-use Conflict Screening	Kigali	8	Where development collides with ecological space, steep slopes and riverbanks

How to read it

- For "where can the city build, and how much can it hold": start with chapters 1 (Nairobi) and 2 (Jakarta); chapter 6 (Kigali) applies the same constraint logic to built-up land.
- For public service coverage and facility siting: read chapter 3 (life circle) before chapter 4 (siting) — the first finds the gaps, the second proposes sites.
- For urban expansion and growth management: go straight to chapter 5 (Hanoi).
- Every chapter stands on its own; the Related list at the end of each chapter names the documentation topics to continue with.

| About the numbers

The areas, shares, rankings and site counts in this handbook come from one example run with the default settings on the shipped data. They show the shape and plausible magnitude of the deliverables, not what your run will return. Your study window, parameter choices and data version will change the values; each chapter's Example output box repeats this caveat.

| Data and licences

Every entry layer in the six scenarios comes from the MapX built-in data catalog, with source, licence and attribution attached per layer. Scenarios are analysis aids: they deliver layers, charts and reports, and they do not replace statutory planning documents.

The map displays the Embakasi region with various development control tiers and protected areas. The legend indicates the following categories:

- Development control tiers:**
 - Tier 1 - Priority development (class 4): Green
 - Tier 2 - Managed development (class 3): Orange
 - Tier 3 - Restricted (classes 1-2): Red
- Protected areas:** Light blue
- Ecological protection area:** Purple
- 50 m riparian buffer:** Light blue

Key locations and features labeled on the map include:

- Locations:** Turitu, Kiambu, Riabai, Mugumo, Juja Farm, Karura Kanyungu, Ruiru, Kiambaa, Westlands, Embakasi North, Embakasi West, Embakasi East, Embakasi South, Kibira, Makadara, Lower Sabana, Kikuyu, Dagoretti, Kilimani, Starehe, Kibira, Embakasi, Kajado North, Langata, Kajado East, Mavoko, Ongata Rongai, Matasia, Kiserian, Ngong, Gichoto, Kikuyu, Githaru, Kabete, Roysambu, Kasarani, Ruiru, Matungulu.
- Water Bodies:** Lake Langata, Lake Mavoko.
- Infrastructure:** Roads, rivers, and a 50 m riparian buffer along the water bodies.

AT A GLANCE	
STUDY AREA Nairobi	ENTRY LAYERS 8 layers
KEY METHODS Hard-constraint screening · weighted overlay · capacity estimate	DELIVERABLES Suitability classes, constraint layers, capacity tables, charts and a report

Development Suitability Baseline answers the first question of any growth plan: **where can this city build, and how much can it hold** once ecological, terrain and flood constraints are respected. It follows the two-part appraisal logic used in Chinese territorial planning — hard constraints first, suitability and carrying capacity second, boundary and tiered controls last.

What the scenario ships

Opening the scenario imports eight prepared layers for the Nairobi window. Every layer comes from the **built-in datasets** catalog with its default style, legend, source, licence and attribution attached.

Layer	Data	Role in the study
Road network	52,642 OSM lines	Existing urban skeleton; reference for the boundary and for infill versus new growth
Watercourses	718 OSM lines	Source of the 50 m riparian buffer
Administrative boundaries	26 ADM3 units (geoBoundaries)	Attribution, summary tables and map labels
Protected area constraints	379 Overture features across Kenya	Part of the ecological exclusion
DEM	Copernicus DEM GLO-30, 30 m (1,459–1,954 m)	Slope classes
Land cover	Esri Sentinel-2 2020, 10 m, 9 classes (57% built-up)	Ecological classes and the existing built-up surface
Flood hazard	WRI Aqueduct, 1 km	Flood avoidance line
Population	GHS-POP, 1 km	Current population reference for the capacity comparison (hidden by default)

The layer order is the display order: points, then lines, then polygons, then rasters. All eight stay in the project for follow-up questions; only the surfaces you see in the legend above are styled as deliverables.

How the study works

The method is a chain of three planning questions. Each one maps onto deterministic **analysis** tools, so every number in the report can be traced back to a run.

Stage	Question	What MapX runs	Output
1. Screen the hard constraints	Which land is off-limits?	Slope, Reclassify, Buffer, Raster calculator, Overlay erase, Raster class area, Zonal statistics	Ecological protection mask and its polygons, the 50 m riparian buffer, constraint-area tables
2. Grade and size what remains	How suitable is the remaining land, and how many people can it carry?	Weighted overlay (equal weights by default), Reclassify, Grid at 1 km, Zonal statistics	Suitability classes 1–4, population per evaluation cell, class-area and capacity tables
3. Propose the boundary	Where should the development boundary run, and what tiers apply?	Raster to polygons, Overlay erase and dissolve, Zonal summary, Label anchors	Development control tiers (priority / managed / restricted), charts and a written report

The constraint definitions are explicit. Ecological protection is the union of protected areas, the water, tree and flooded-vegetation land-cover classes, and the 50 m watercourse buffer; slope is split at 8°, 15° and 25°; flood is an avoidance line, not a suitability score. Suitability is then graded 1–4 over the land that survives those exclusions.


The capacity estimate is a planning convention. Carrying capacity is derived at 100 m² of urban construction land per person. The report states the assumption; it is an estimate, not a measured capacity.

Run it

The screenshots below come from this scenario's reference workspace. Each step names the platform surface it uses, so you can follow the same path in your own project.

1. Open the scenario


Open **Scenarios** in the top menu, select this card and choose **Open scenario**. The whole bundle imports at once: every layer keeps its default style, legend, source and attribution, and the camera flies to the study area. Use the **Layers** panel to switch layers on and off before you type anything.

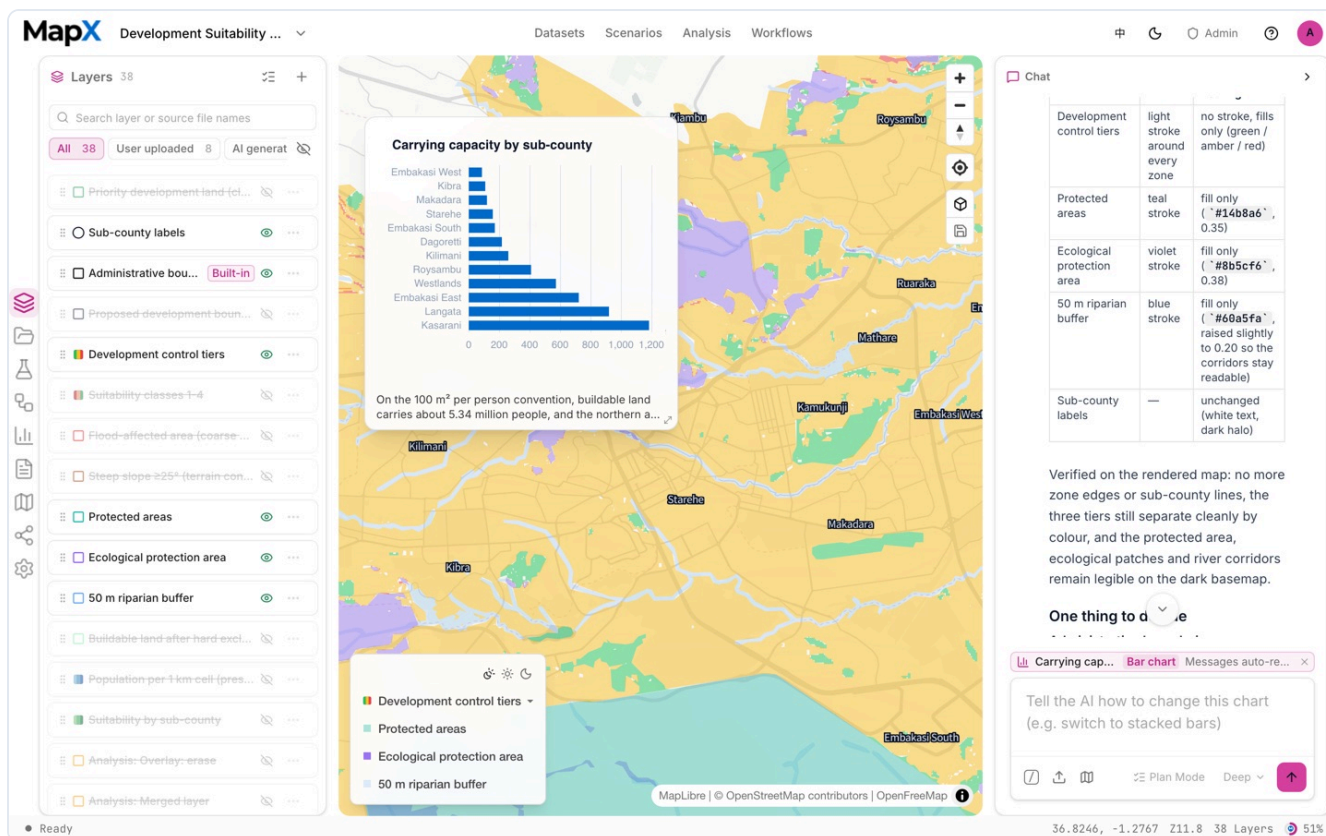

The Nairobi scenario opened in the workspace: the imported layers, the map and the chat panel ready for the suggested question

2. Ask the suggested question and review the plan


The scenario ships one suggested question: "Run a development-suitability study for Nairobi: screen the ecological, terrain and flood constraints, grade buildable land and carrying capacity, then propose a development boundary with tiered controls; deliver layers, charts and a report." **Plan mode** turns it into a reviewable plan: the AI asks which admin units and constraints to use and whether the ecological mask is a hard exclusion, then writes the plan document — objective and scope, data inputs, method and pipeline, quality checks, risks, deliverables and execution. Every section is marked as **system evidence** or **evidence + judgement**, and the assumptions are listed before anything runs.

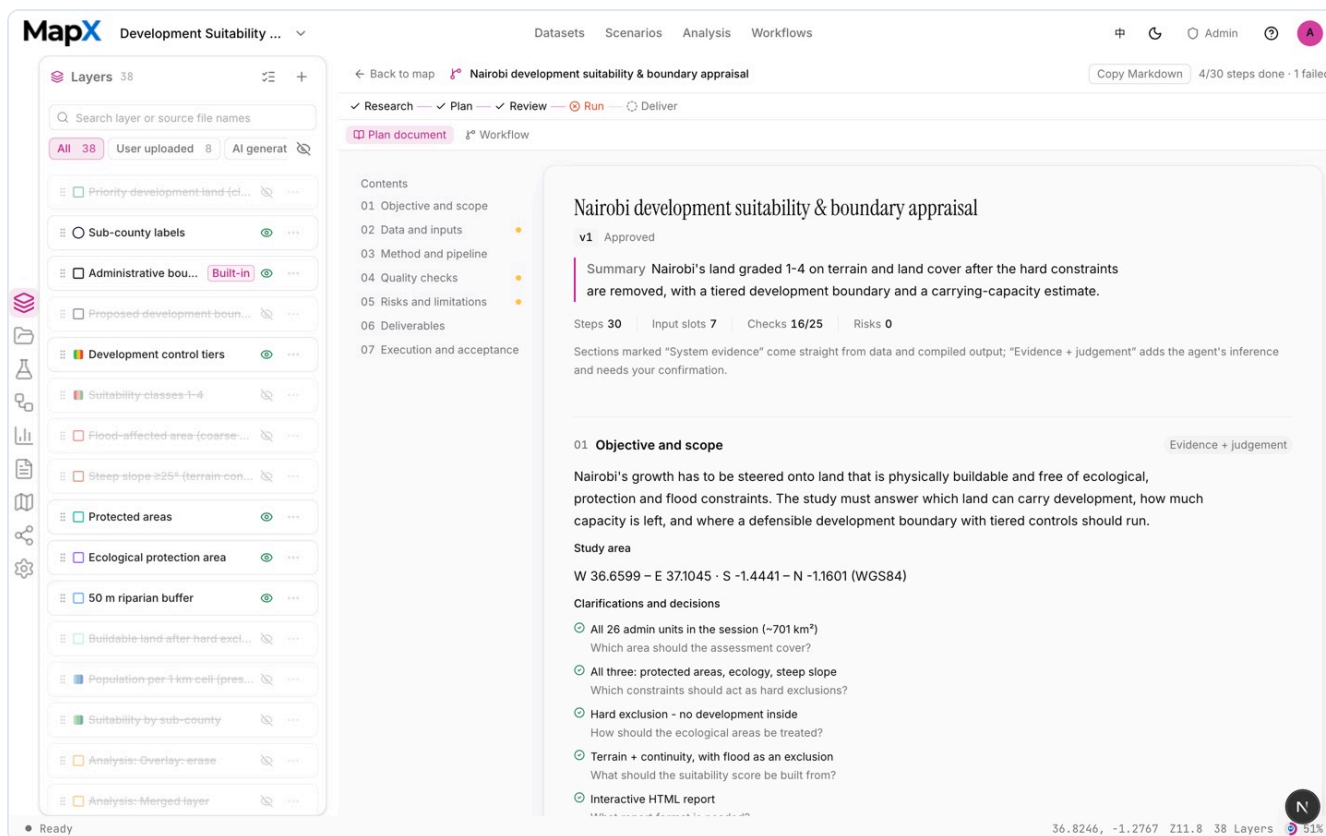

The plan workbench for Nairobi: the approved plan document, its seven sections and the recorded clarifications and decisions

3. Approve the plan and run the analysis


Approving the plan starts a chain of deterministic **analysis** tools: slope and reclassification, raster calculator masks for the ecological protection area, buffering along waterways, overlay erase for the hard exclusions, the 1 km evaluation grid and zonal statistics. The **Analysis** ledger keeps the operator, inputs, parameters, status and result layer of every run, so each number in the report can be traced back to a step.

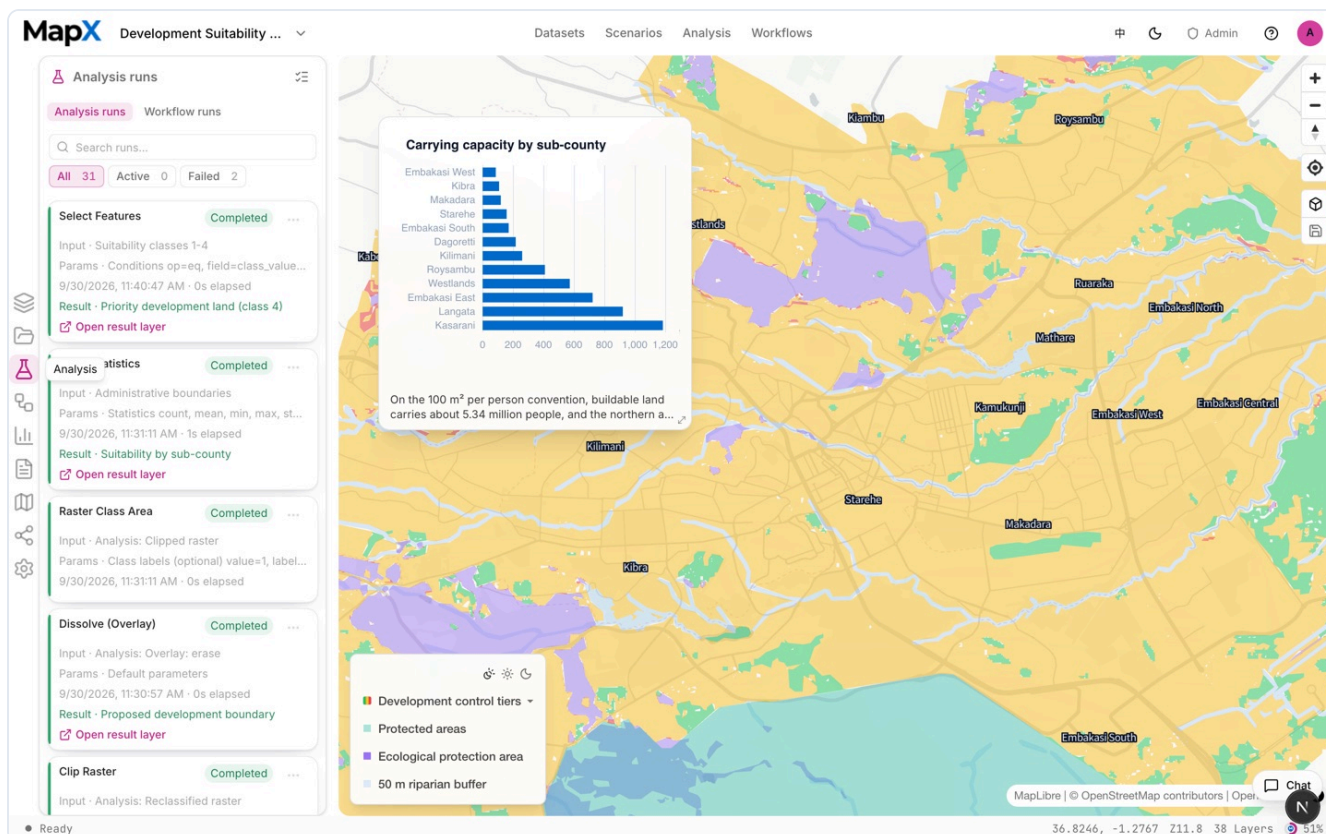

The analysis ledger for Nairobi: every operator run with its input, parameters, elapsed time and result layer

4. Style the result on the map


The layers arrive styled, and the **layer style editor** lets you change the renderer, colours, opacity, outline, labels and legend without writing code. Here the development control tiers keep human-readable class names, labels come from an anchor layer, and the constraint layers stay translucent so the tiers remain the strongest signal.

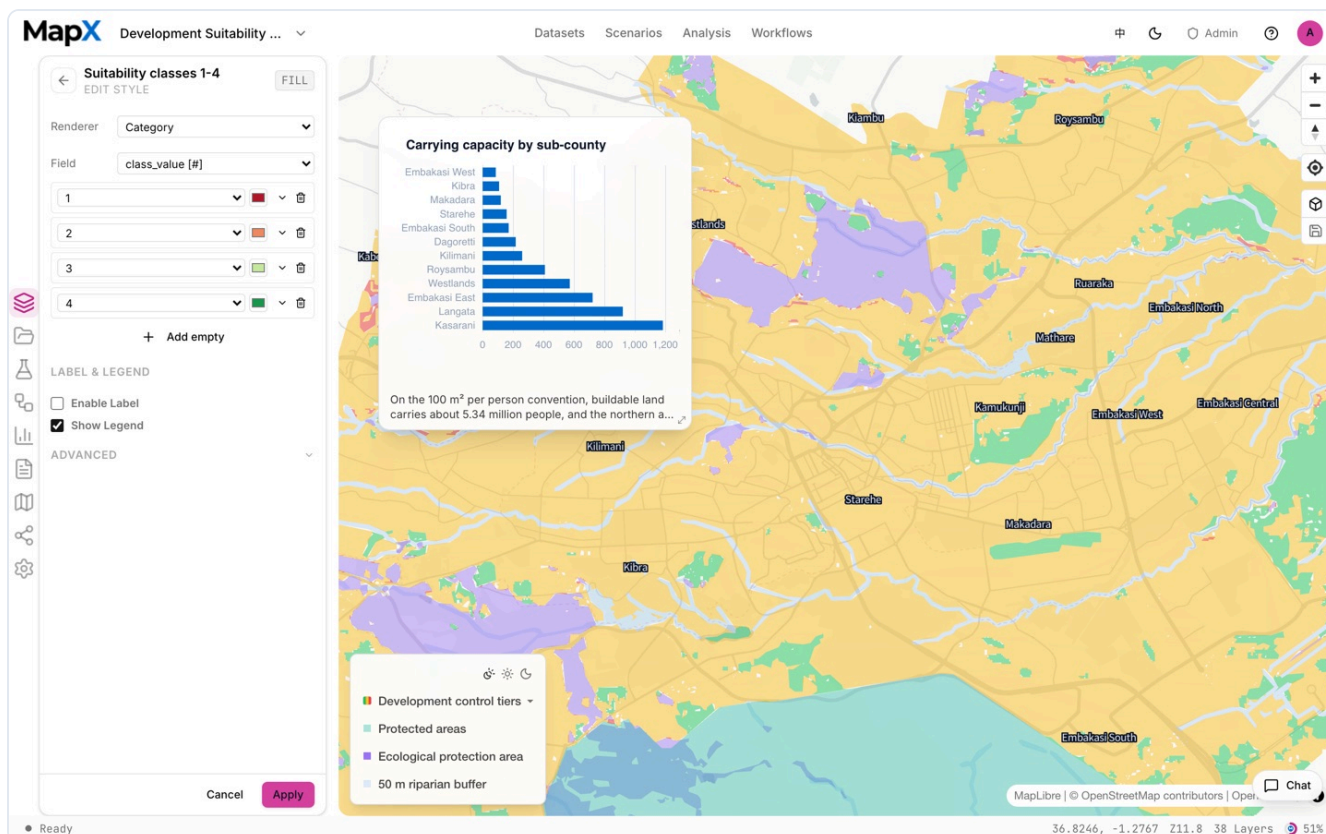


The layer style editor open on a scenario deliverable: renderer, colours, outline, label field and legend controls

5. Turn the result into charts and a report

Any result can become a **chart** — donut, pie, bar, heatmap, combo and more — with palettes, axis options and the choice to pin it to the map. The **report** canvas then combines the map, the charts and the tables into one document you can preview, revise and export; the same run can also produce a Word report for a formal submission.

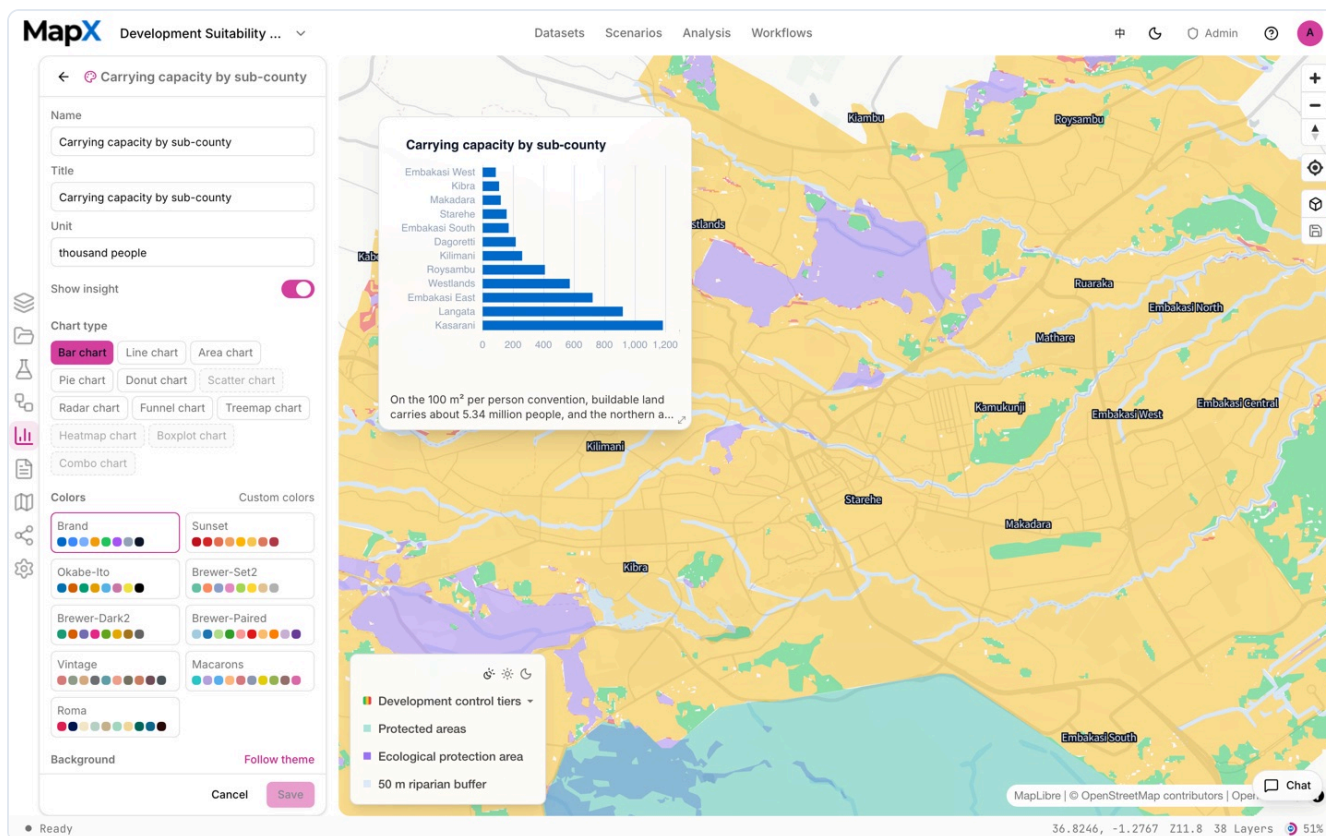

A chart from this scenario opened in the chart editor, with its type, colours and data settings

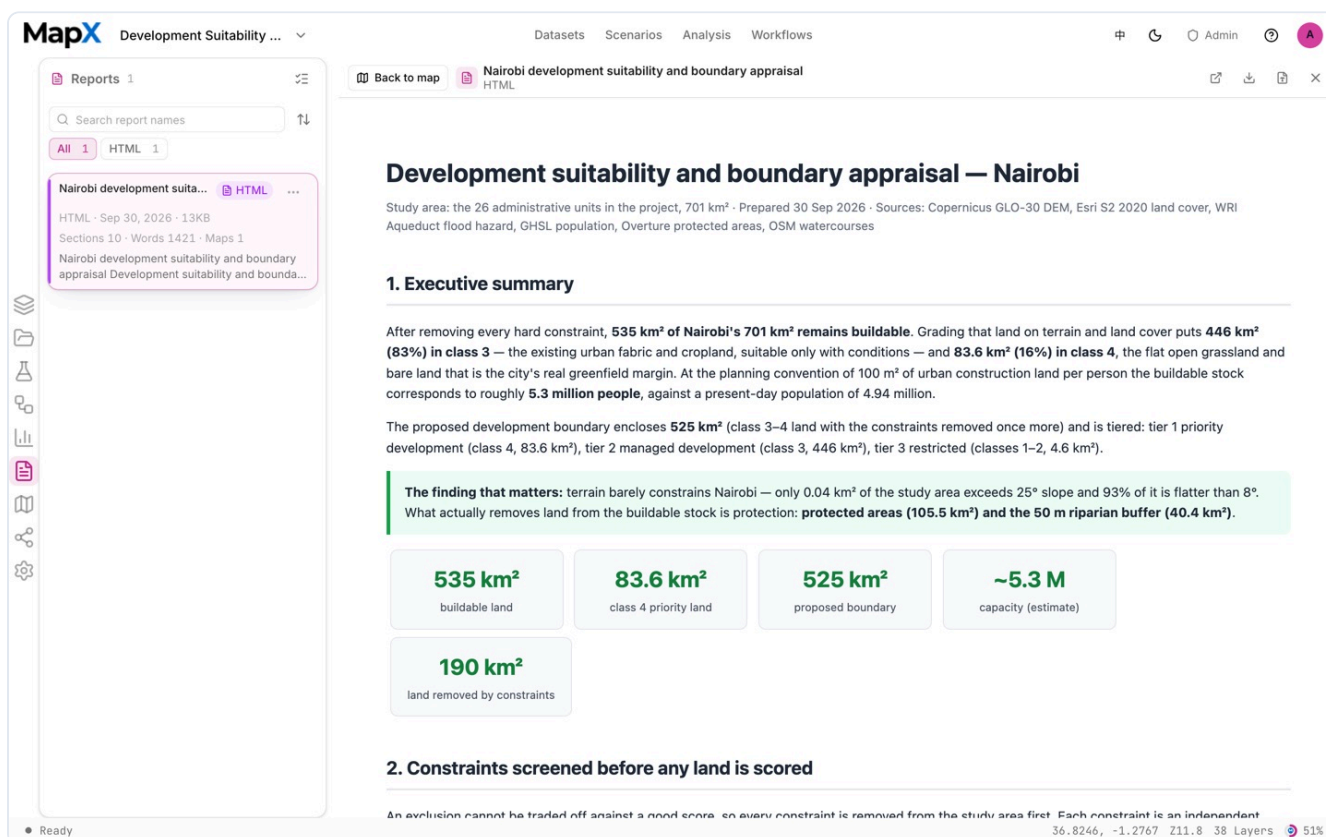

The scenario report opened in the report canvas, with an executive summary, figures and embedded maps

Example output

NOTE

The screenshots above come from one example run with the default settings on the shipped data. They show the shape of the deliverables, not what your run will return.

A finished run hands back a named, reusable set of deliverables instead of a single map:

- **Layers** — the buildable-land result, the suitability classes and the development control tiers, plus the constraint layers (ecological protection, protected areas, riparian buffer) as styled, legend-ready map layers.
- **Tables** — class areas with an admin cross table, the population per evaluation cell, and the district-level summary.
- **Charts** — the class-area composition, the constraints screened and the capacity ranking, each editable and pinnable.
- **Report** — an assessment document that combines the map, the figures and the threshold table, ready to share or export.

The layer names follow the run language, but the deliverable set is stable enough to plan a handover around.

Read the results with care

▲ **Flood is an avoidance constraint here.** The shipped 1 km flood raster has only a few valid cells in this window; treat it as a "keep clear of the floodplain" line. A graded flood factor needs a different dataset.

▲ **Capacity is an estimate at 100 m² per person.** Report it as a planning assumption, never as measured capacity.


▲ **Population never enters the suitability score.** It is a present-day reference for comparing what exists with what the land could hold.

▲ **The ecological mask is a product of its inputs.** It uses protected areas plus three land-cover classes and a 50 m buffer; grass and shrub are deliberately excluded, and local statutory boundaries should replace the country-wide preview when you have them.

▲ **Equal weights are the default composite.** If you want AHP or expert weights, run the weighted overlay as a documented sensitivity variant and compare the class tables.

Carrying Capacity Assessment Jakarta

Assess how terrain, wetness, flood depth and rainfall constrain Jakarta's growth, grade carrying capacity, and flag the districts where pressure is highest.

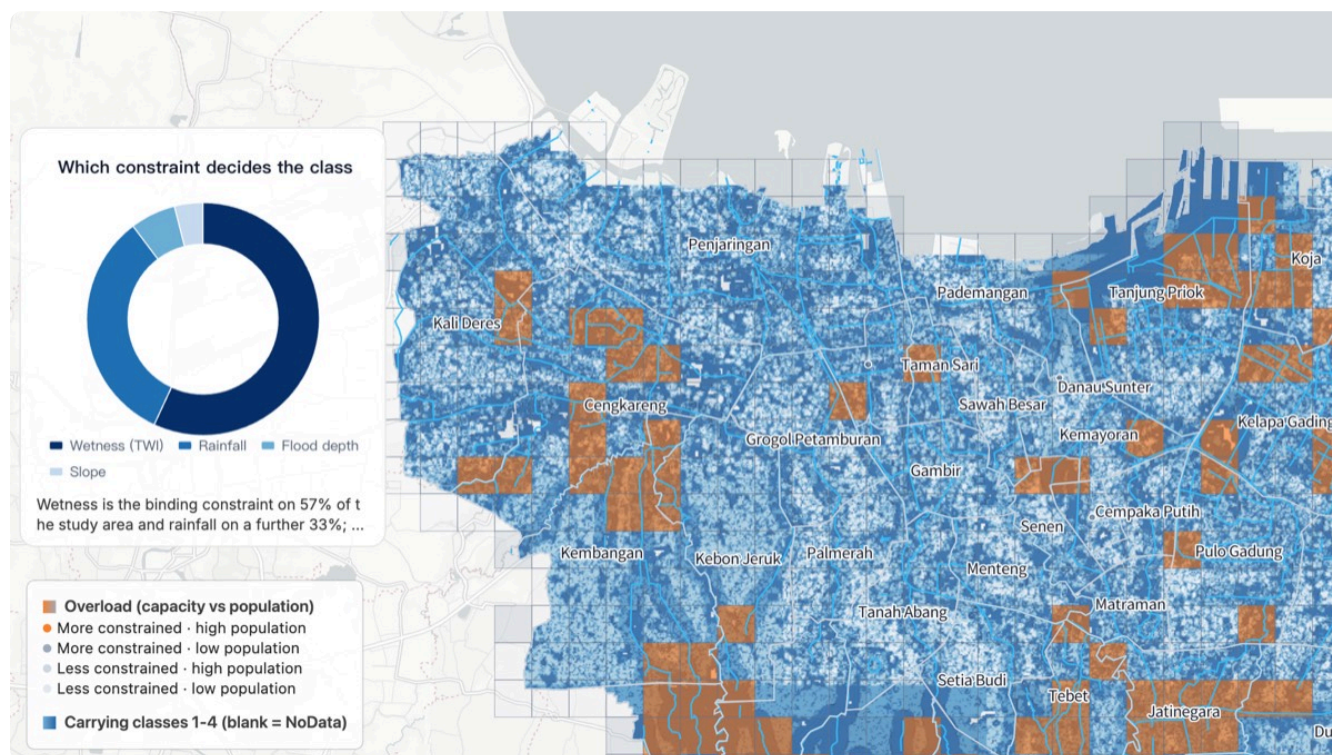

The Jakarta scenario as delivered: carrying-capacity classes 1–4, overload cells and the constraint-composition chart

AT A GLANCE	
STUDY AREA Jakarta	ENTRY LAYERS 6 layers
KEY METHODS Fuzzy membership · limiting-factor composite · pressure quadrants	DELIVERABLES Capacity classes, overload cells, constraint tables, charts and a report

Carrying Capacity Assessment asks how much development a city can absorb before its water, climate and hazard constraints become the binding limit. For Jakarta — a low, flat delta city with frequent waterlogging — the study reads four constraints together, grades the result, and separates "constrained land" from "land under pressure".

What the scenario ships

Six prepared layers cover the Jakarta window. The rasters except rainfall start hidden so the class raster stays readable; turn them on when you want to inspect a single factor.

Layer	Data	Role in the study
River network	OSM waterways	Drainage and flood corridor
Administrative boundaries	46 kecamatan (OCHA COD-AB ADM3); 44 on the mainland	Study-area definition, attribution and district labels
Precipitation	CHIRPS, ~5.35 km	Rainfall membership (waterlogging constraint)
Population	WorldPop, 100 m (hidden)	Exposure and pressure axis
Flood hazard	WRI Aqueduct, ~900 m (hidden)	Flood-depth membership
Terrain	SRTM, 30 m (hidden)	Slope and topographic wetness

All six come from the **built-in datasets** catalog, with source, licence and attribution attached.

How the study works

The design follows the "shortest stave" reading of carrying capacity: the most limiting factor decides the class, not the average.

Stage	Question	What MapX runs	Output
1. Build the capacity classes	Which factor limits each place, and how strongly?	Slope, Topographic wetness index, Fuzzy membership, Raster calculator (<code>minimum</code>), Focal statistics repair, Euclidean distance, Reclassify	Four-class carrying-capacity raster with the 300 m drainage-corridor adjustment
2. Diagnose pressure	Where is low capacity combined with high population?	Grid at 1 km, Zonal statistics, Quadrant (median split)	Overload cells, population per cell, district pressure table
3. Explain and mitigate	Which constraint dominates, and what should each district do?	Raster class area, Zonal statistics, Charts, Report	Class-area and dominant-constraint tables, mounted pressure chart and report

Four memberships feed the composite. Slope is scored from 0–25°, wetness from the TWI range calibrated inside the study window (6.08–9.28), flood depth from 0–3 m and rainfall from 1770–2521 mm inside the same window. Rainfall is a *waterlogging* constraint: more rain means a stronger limitation, not a bigger resource.

Gaps are repaired, not hidden. The flood raster stops at its model domain and the wetness index is undefined on perfectly flat cells. Both are filled from their own neighbourhood mean and reported as a data repair; a coverage floor of 99% of the study area is the acceptance check.


Population is the pressure axis. It enters the overload quadrant and the capacity estimate, never the suitability composite — a crowded district is not thereby an unsuitable one.

Run it

The screenshots below come from this scenario's reference workspace. Each step names the platform surface it uses, so you can follow the same path in your own project.

1. Open the scenario

Open **Scenarios** in the top menu, select this card and choose **Open scenario**. The whole bundle imports at once: every layer keeps its default style, legend, source and attribution, and the camera flies to the study area. Use the **Layers** panel to switch layers on and off before you type anything.

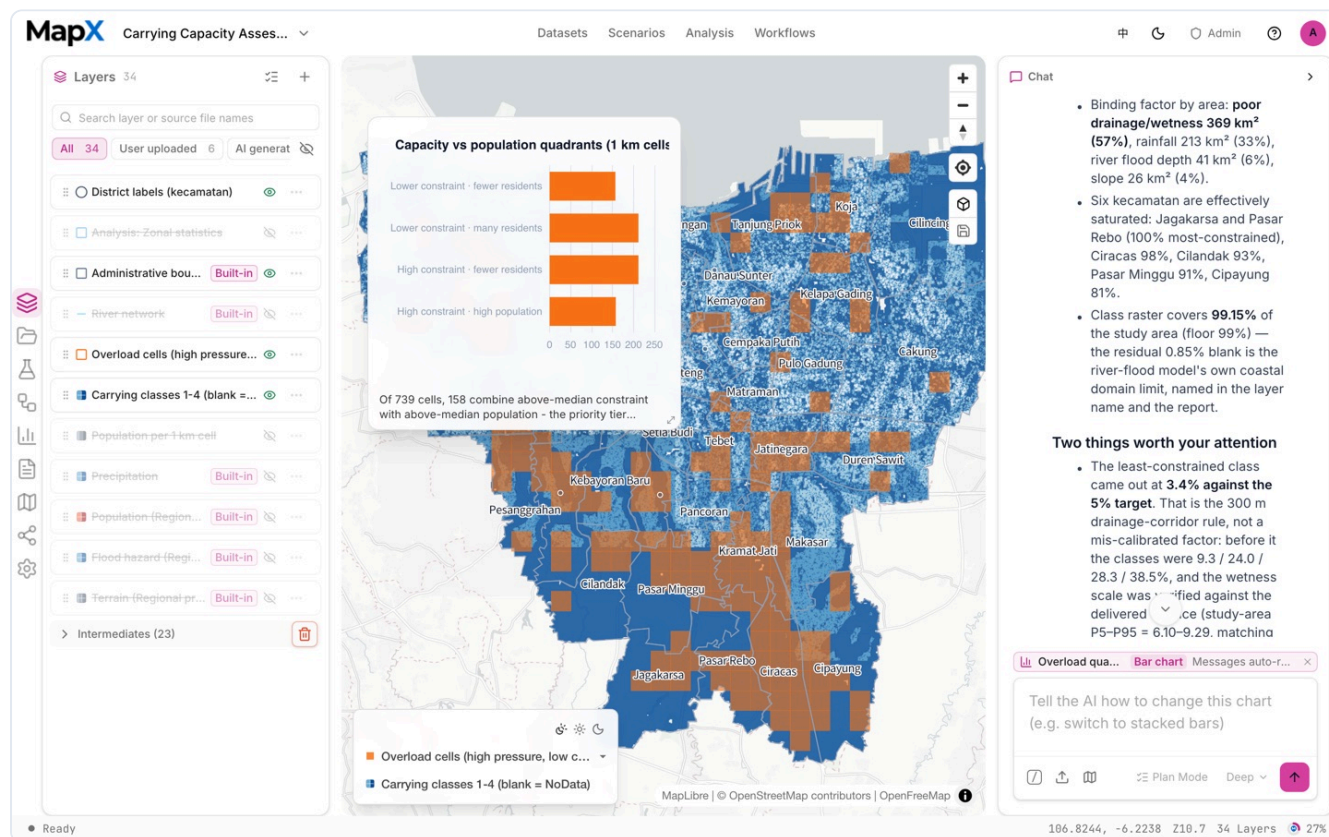

The Jakarta carrying-capacity scenario opened in the workspace, with the imported layers, the map and the chat panel

2. Ask the suggested question and review the plan

The suggested question is: *"Run a resource-and-environment carrying-capacity study for Jakarta: assess how water, climate and flood constraints limit growth, flag overloaded areas, then recommend measures by dominant constraint; deliver layers, charts and a report."* **Plan mode** asks how to read the study extent, whether to use the strict limiting-factor rule or the compensating variant, and which numbers the report should quote — then writes the plan document with its data inputs, method, quality checks, risks and deliverables.


The screenshot displays the MapX interface for a Carrying Capacity Assessment. The left sidebar shows a list of layers, including District labels, Analysis-Zonal statistics, Administrative boundaries, River network, Overload cells, and Carrying classes. The main panel shows the 'Plan document' for 'Jakarta resource-environment carrying capacity'. The document is titled 'v1 Approved' and includes a summary: 'Summary Jakarta capacity: 4 constraints, overload cells, mitigation.' It also shows progress: 'Steps 30', 'Input slots 6', 'Checks 8/20', and 'Risks 0'. The document is divided into sections: '01 Objective and scope' (Evidence + judgement) and '02 Data and inputs' (System evidence). The '02 Data and inputs' section includes a table of input slots and bindings.

Input slot	Type	Requirement	Source
Study area (ADM3)	Layer	Required	Administrative boundaries
DEM raster	Layer	Required	Terrain (Regional preview)

The plan workbench for Jakarta: the approved plan, the recorded method decisions and the evidence markers

3. Approve the plan and run the analysis


The run chains deterministic **analysis** tools: slope and topographic wetness, fuzzy membership for each limiting factor, focal-statistics repair for the two disclosed input gaps, the limiting-factor composite (shortest stave), the 300 m drainage corridor, the 1 km grid, zonal statistics and the pressure quadrant.

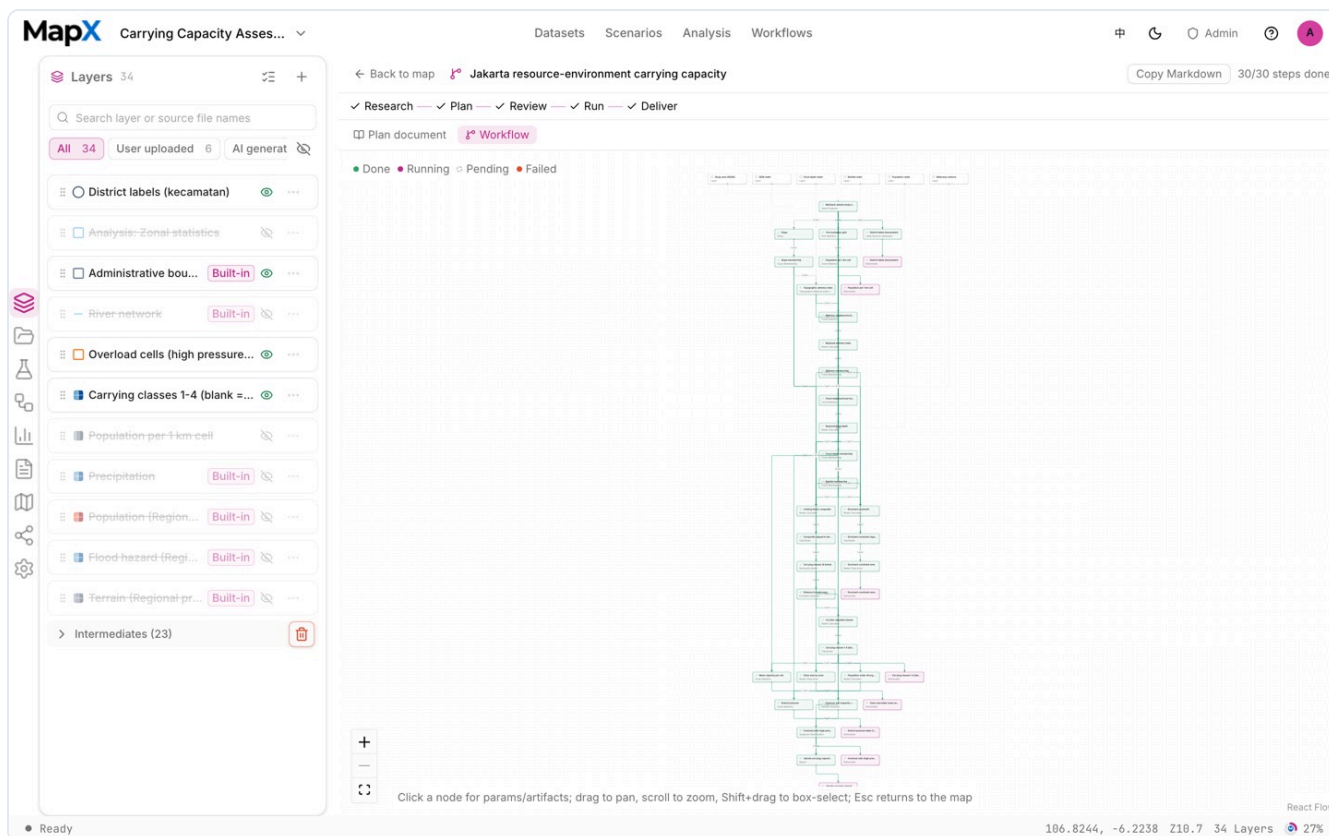

The analysis graph for this scenario: each node is a deterministic operator, with inputs, parameters and artifacts available on click

4. Style the result on the map


The carrying classes use a reversed blue ramp so the most constrained land is the darkest; the overload cells sit on top in orange, and district labels come from an anchor layer instead of the boundary polygons.

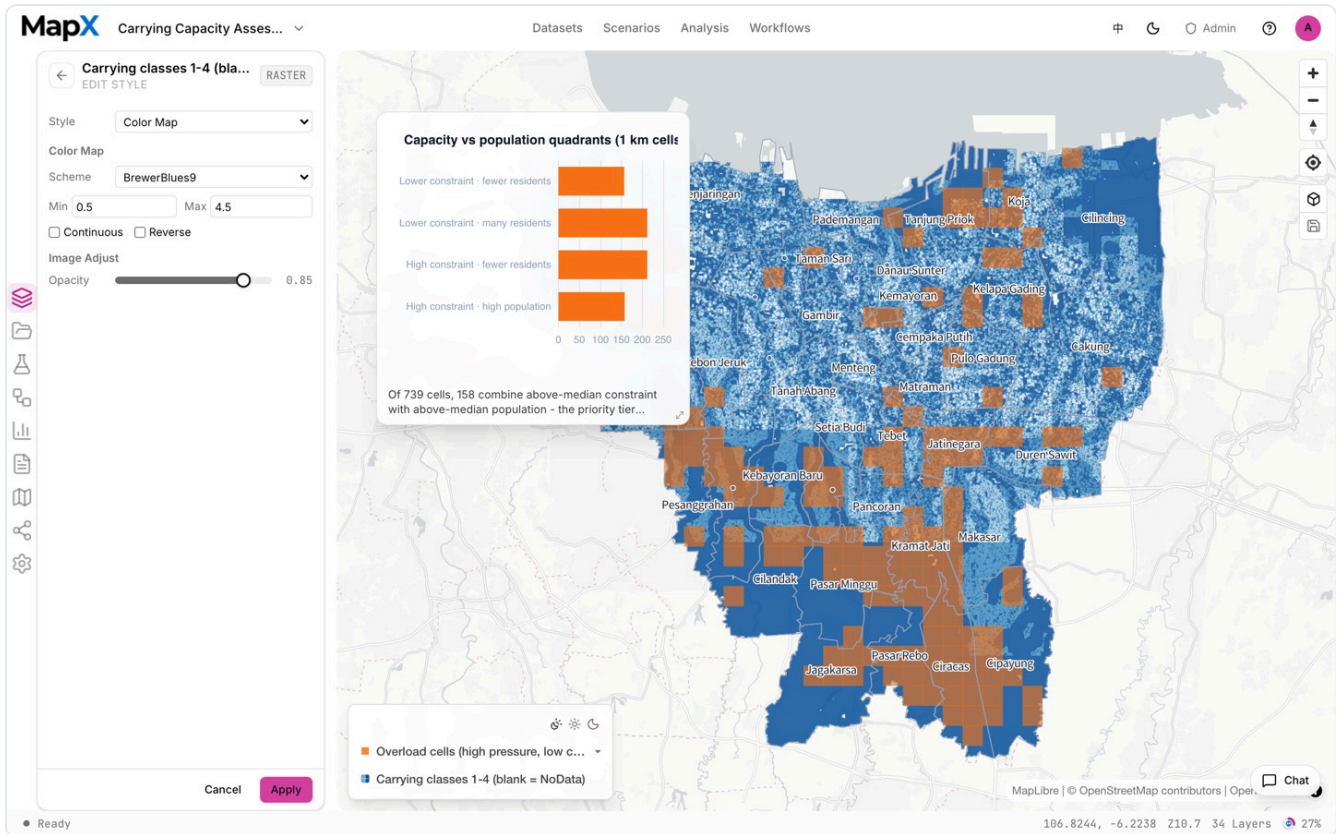


The layer style editor open on a scenario deliverable: renderer, colours, outline, label field and legend controls

5. Turn the result into charts and a report

The constraint-composition chart answers which factor decides each class, and the district charts rank the pressure. Both are **charts** you can restyle or pin, and the **report** collects the threshold table, the coverage statement and the class shares in one document.

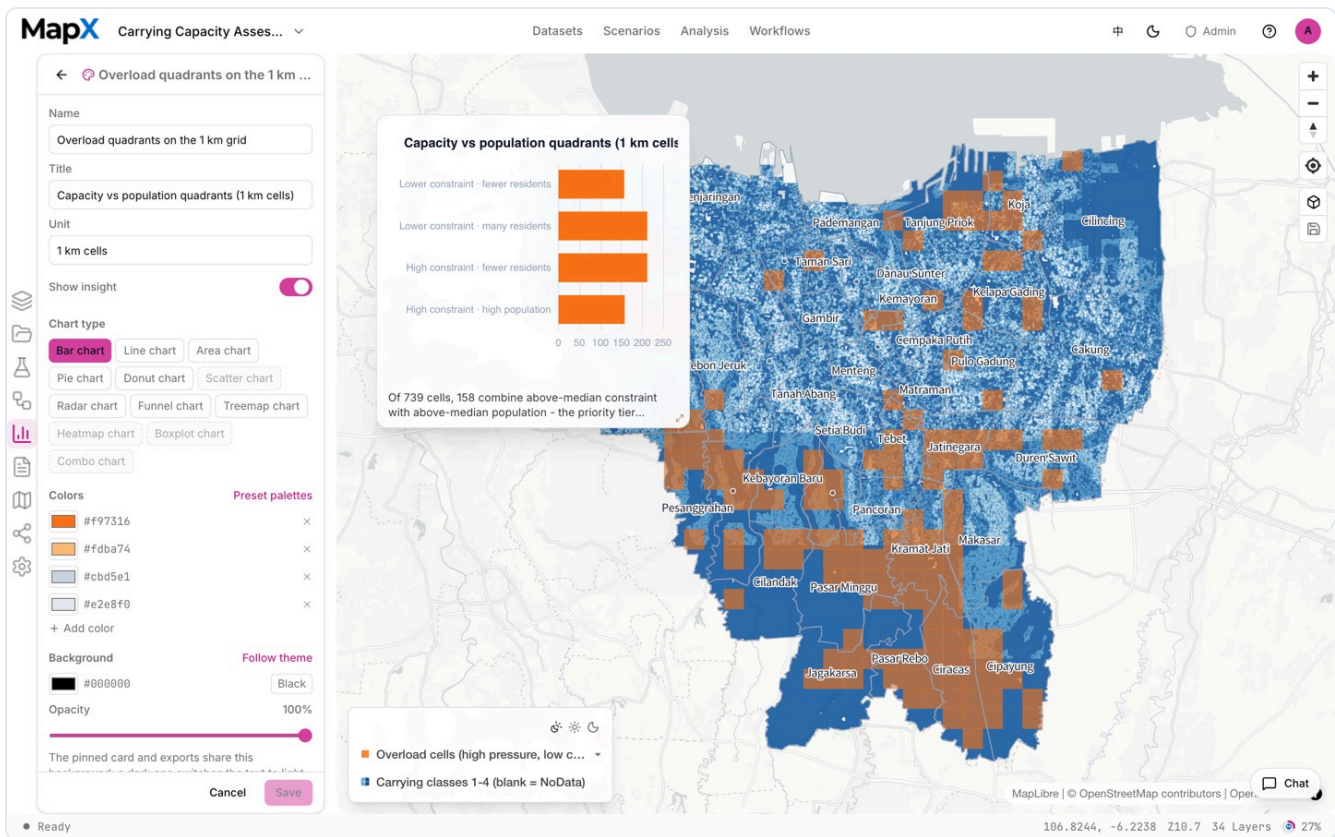

A chart from this scenario opened in the chart editor, with its type, colours and data settings

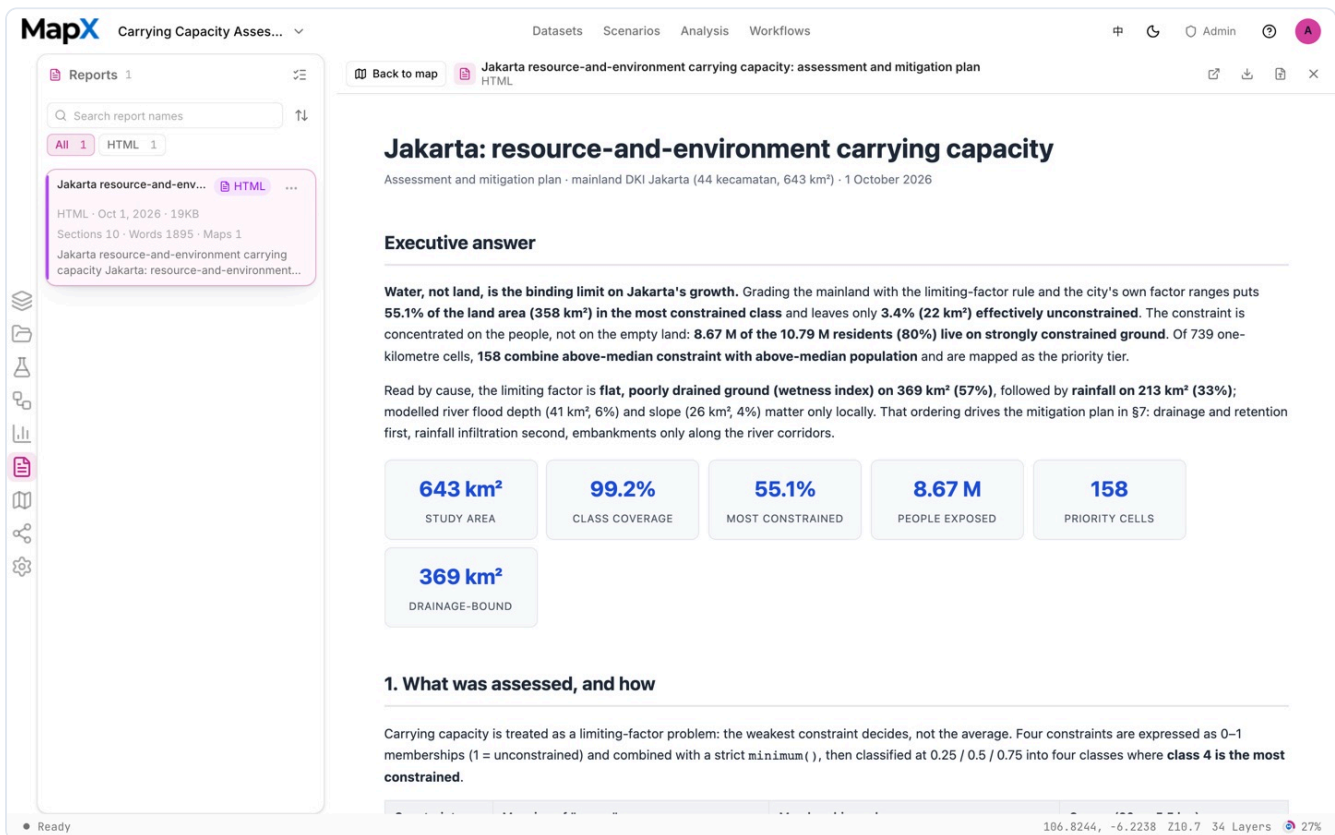

The scenario report opened in the report canvas, with an executive summary, figures and embedded maps

Example output

NOTE

The screenshots above come from one example run with the default settings on the shipped data. They show the shape of the deliverables, not what your run will return.

A finished run hands back a named, reusable set of deliverables instead of a single map:

- **Layers** — the four-class carrying-capacity raster with the drainage-corridor adjustment, the overload cells, the 1 km population grid and the district label layer.
- **Tables** — the class-area table with its admin cross table, the dominant-constraint table and the district pressure list.
- **Charts** — the constraint-composition chart and the pressure ranking, editable and ready to pin.
- **Report** — the assessment document with the threshold table, the data-repair statement and the five acceptance checks.

The layer names follow the run language, but the deliverable set is stable enough to plan a handover around.

Read the results with care

▲ **Rainfall is a constraint, not a resource.** The scenario treats wetter as more limiting, following the waterlogging reading used in territorial appraisal.

▲ **Population is never a suitability factor.** It is exposure and pressure only.

▲ **The 300 m drainage corridor is an analysis default.** It degrades cells inside the corridor and must be labelled as an assumption.


▲ **Two gaps are repaired and disclosed.** Never impute zero — zero falsely asserts "no flood". The report names what was filled and how much area it affected.

▲ **Land subsidence is out of scope.** The catalog ships no subsidence dataset, so the report says "subsidence not modelled" instead of substituting another raster.

▲ **Rainfall resolution is coarse.** At ~5.35 km it is a background constraint; quote it as such.

15-minute Life Circle Coverage Jakarta

Audit who can reach a school, a clinic and a park within an 800 m walk in central Jakarta, rank the neighbourhoods with the biggest shortfall, and score accessibility.

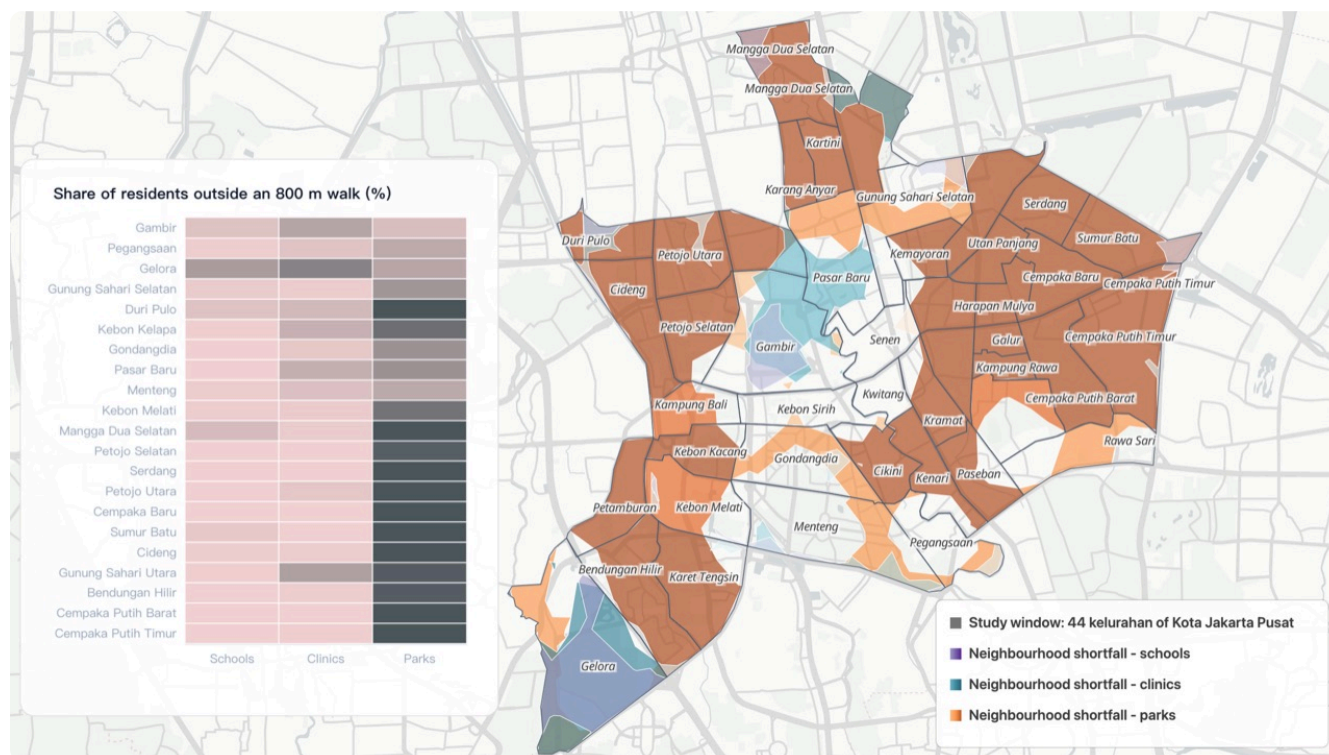

The Jakarta life-circle run as delivered: three neighbourhood shortfall ramps, ADM4 boundaries and the pinned three-class comparison heatmap

AT A GLANCE	
STUDY AREA Jakarta	ENTRY LAYERS 7 layers
KEY METHODS Walking service areas · shortfall population · 2SFCA	DELIVERABLES Three shortfall layers, a neighbourhood table, boards and a heatmap, a report

15-minute Life Circle Coverage measures the daily-life side of planning: **who can reach a school, a clinic and a park on foot**, and which neighbourhoods carry the largest shortfall. It is the MapX version of a 15-minute life-circle audit, and it deliberately reports two rulers — coverage and accessibility — instead of a single score.

What the scenario ships

Seven prepared layers cover Jakarta; the scenario's default study window is Kota Jakarta Pusat (central Jakarta).

Layer	Data	Role in the study
Education facilities	OSM education POIs (7,470 city-wide)	Schools that supply the education circle
Health facilities	Healthsites.io (2,447 city-wide)	Clinics and hospitals that supply the health circle
Road network	Overture transportation	The walking network used for service areas
Administrative boundaries	46 kecamatan (ADM3)	District framing and attribution
Green space and parks	OSM green polygons (3,942)	Source of the destination-park set
Neighbourhood boundaries	kelurahan (ADM4); 44 in the study area, 1.09 km ² average	The evaluation unit that is ranked and named
Population	WorldPop, 100 m	Residents at risk of being outside a circle

All layers come from the **built-in datasets** catalog with styles and attribution attached.

How the study works

Stage	Question	What MapX runs	Output
1. Coverage audit	How much of each neighbourhood is outside the walk?	Select features, Overlay clip/dissolve/erase, Network service area at 800 m, Zonal statistics, Field calculator	Shortfall layer per class with <code>gap_sum</code> and a share-of-residents column
2. Service mix and balance	Which neighbourhoods lack one, two or all three classes?	Zonal summary chaining, Overlay dissolve/erase	Neighbourhood summary table with population, coverage count 0–3 and three shortfall columns
3. Accessibility diagnosis	Where is access hardest, even inside the circle?	2SFCA accessibility, Top N ranking, Label anchors, Charts	Top-10 shortfall boards, per-class accessibility scores and a pinned heatmap

One radius makes the classes comparable. All three classes use an 800 m network walk, the upper end of the 15-minute life-circle standard (GB 50180-2018, 800–1000 m). A class-standard sensitivity — schools 800 m, clinics 1000 m, parks 500 m — is available as a documented variant.

The park definition is a decision, not a detail. The shipped green layer contains road verges, golf fairways and tiny slivers. The scenario keeps `leisure = park` polygons of at least 0.5 ha and uses one centroid per park (with the default definition and the shipped data, 33 destination parks in the study area). Relaxing that definition changes the answer dramatically, so the definition is printed in the report.


Coverage and accessibility answer different questions. The shortfall layer says whether residents can walk there; the 2SFCA score says how much supply there is per resident within reach. When they disagree, that disagreement is the finding.

Run it

The screenshots below come from this scenario's reference workspace. Each step names the platform surface it uses, so you can follow the same path in your own project.

1. Open the scenario


Open **Scenarios** in the top menu, select this card and choose **Open scenario**. The whole bundle imports at once: every layer keeps its default style, legend, source and attribution, and the camera flies to the study area. Use the **Layers** panel to switch layers on and off before you type anything.

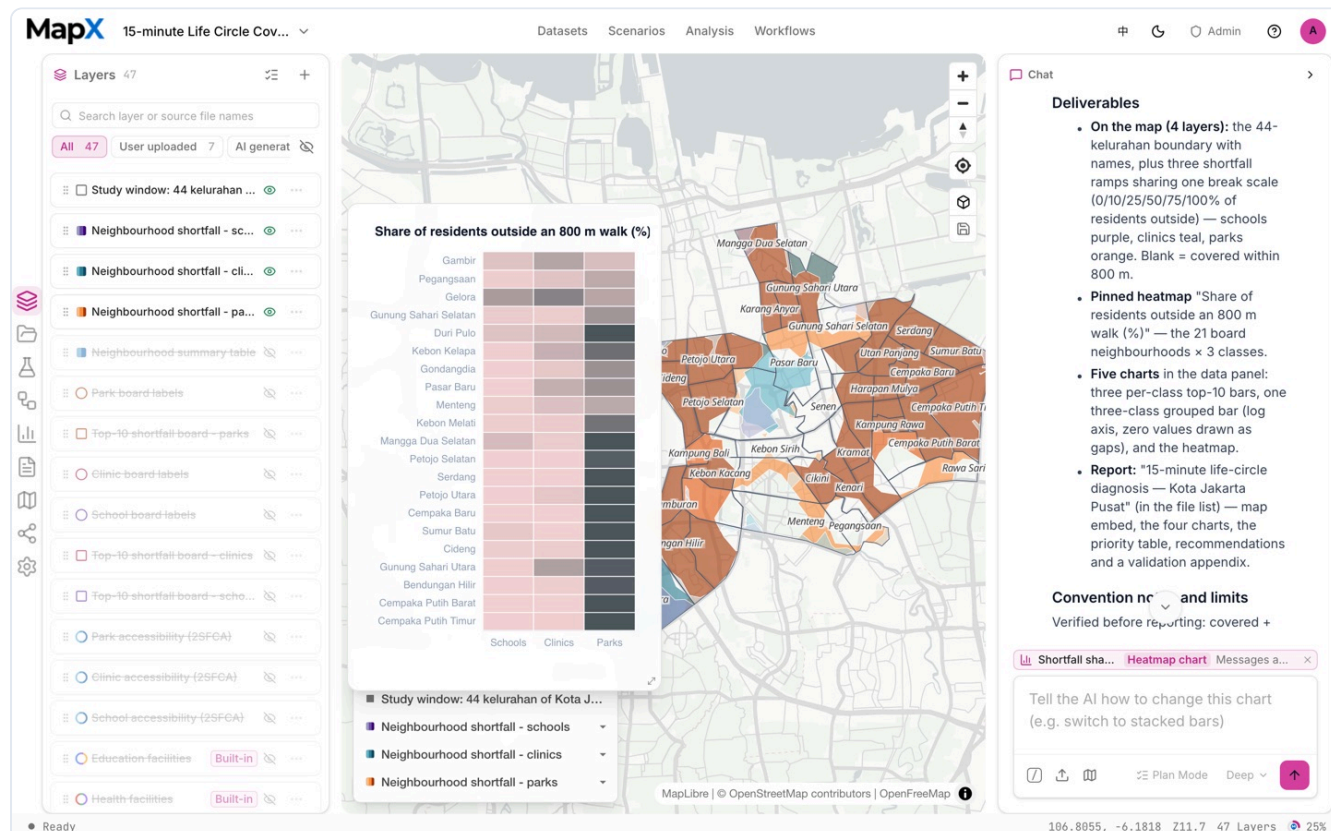

The Jakarta life-circle scenario opened in the workspace: imported facility layers, the map and the chat panel

2. Ask the suggested question and review the plan


The suggested question is: *"Run a 15-minute life-circle diagnosis for central Jakarta (Jakpus): check the walking service areas of schools, clinics and parks, find coverage gaps and imbalanced districts, and name the areas to prioritise; deliver coverage layers, charts and a report."* **Plan mode** asks the four decisions that change the answer — study unit, walking radius, supply assumption and deliverables — and fixes the rest, including the park definition, in the plan document.

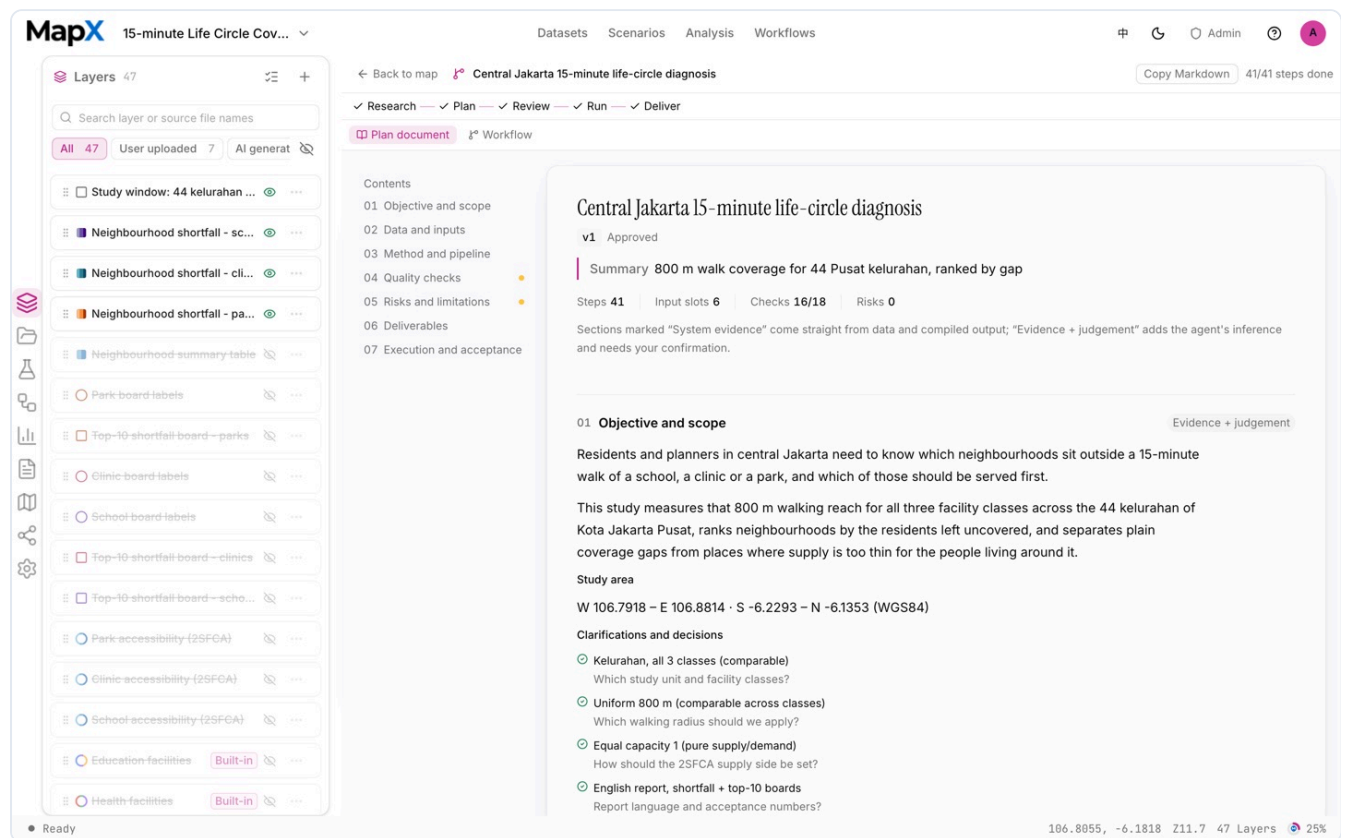

The plan workbench for the life-circle scenario: the approved plan and the recorded clarifications

3. Approve the plan and run the analysis


The run uses selection, clipping and erasing to shape the study area, network **service areas** at 800 m for all three facility classes, zonal statistics to count the residents left outside, field calculations for the shortfall shares, the accessibility model (2SFCA) and a chained summary table. The graph shows every branch, including the three facility classes side by side.

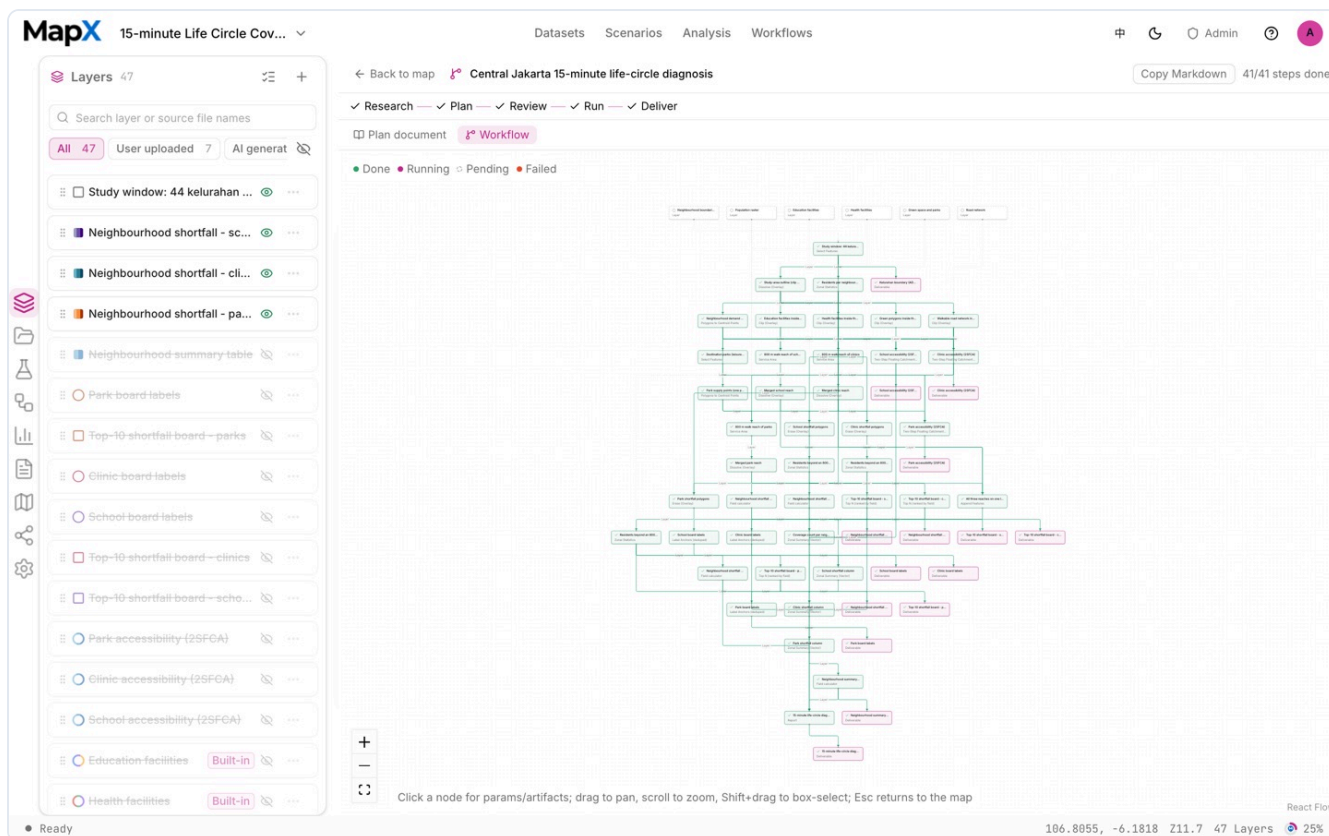

The analysis graph for this scenario: each node is a deterministic operator, with inputs, parameters and artifacts available on click

4. Style the result on the map


The three shortfall ramps share one break scale, so a dark purple and a dark teal mean the same share; the ADM4 boundary sits on top with neighbourhood labels, and blank space means inside the circle.

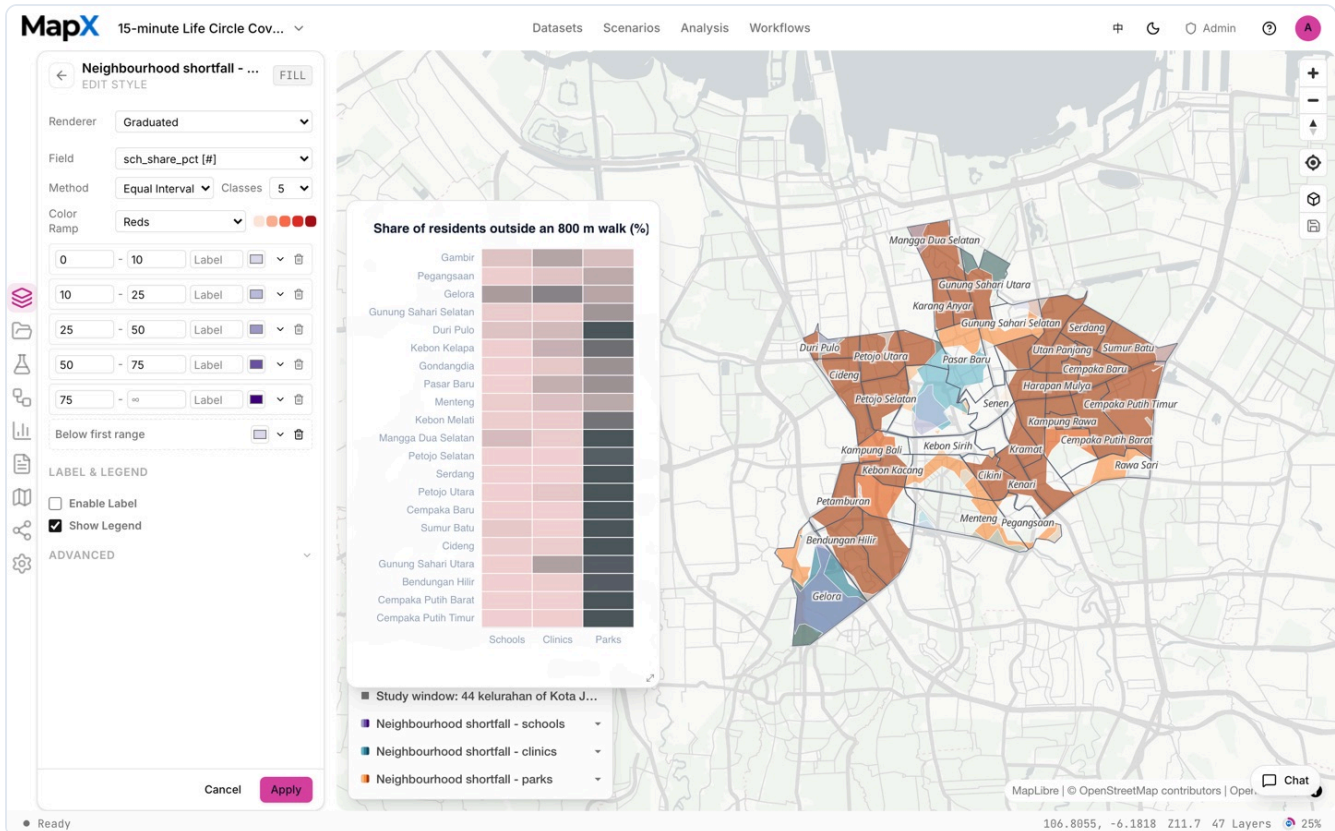


The layer style editor open on a scenario deliverable: renderer, colours, outline, label field and legend controls

5. Turn the result into charts and a report

The run produces per-class ranking boards, a three-class comparison and a heatmap that can be pinned to the map while you pan the ramps. The **report** then names the priority neighbourhoods and states the radius, the park definition and the caveats.

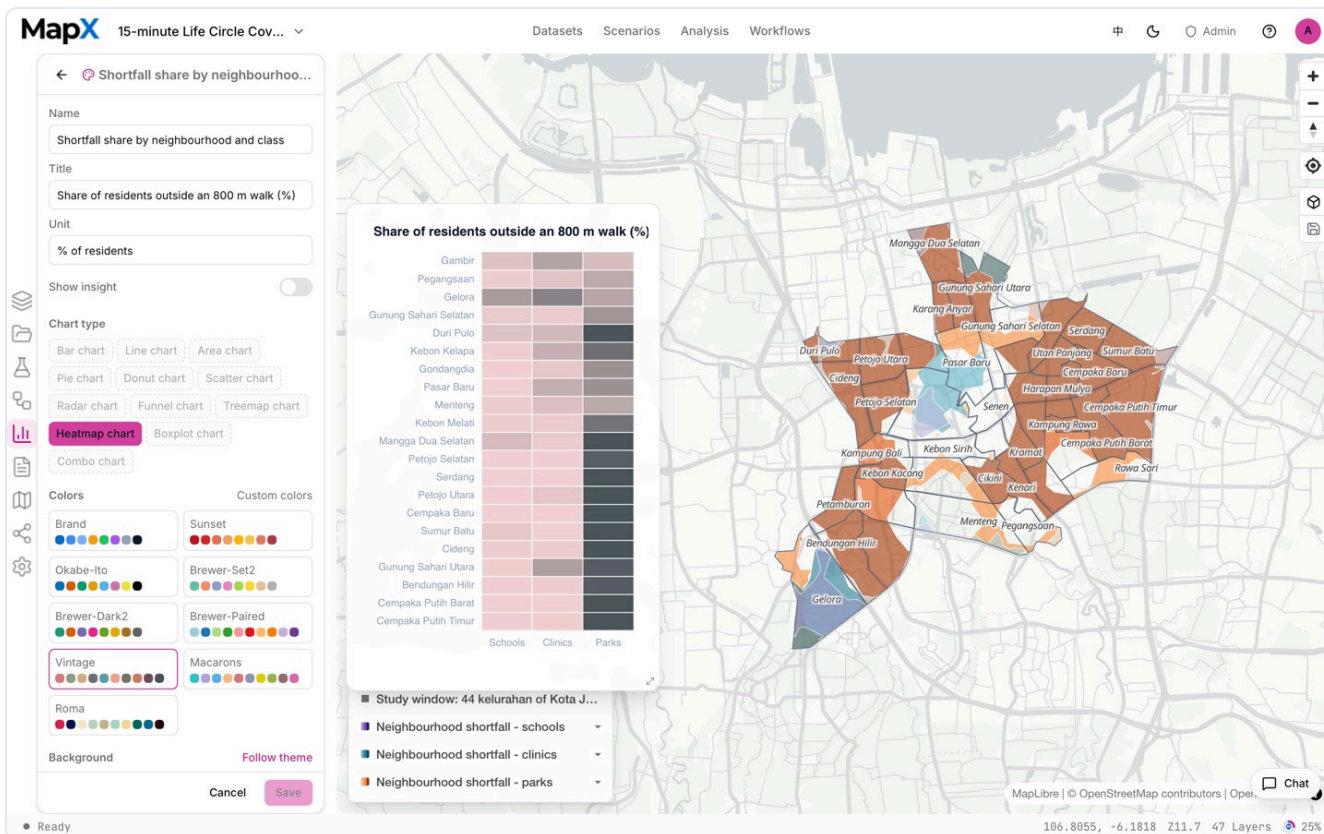

A chart from this scenario opened in the chart editor, with its type, colours and data settings

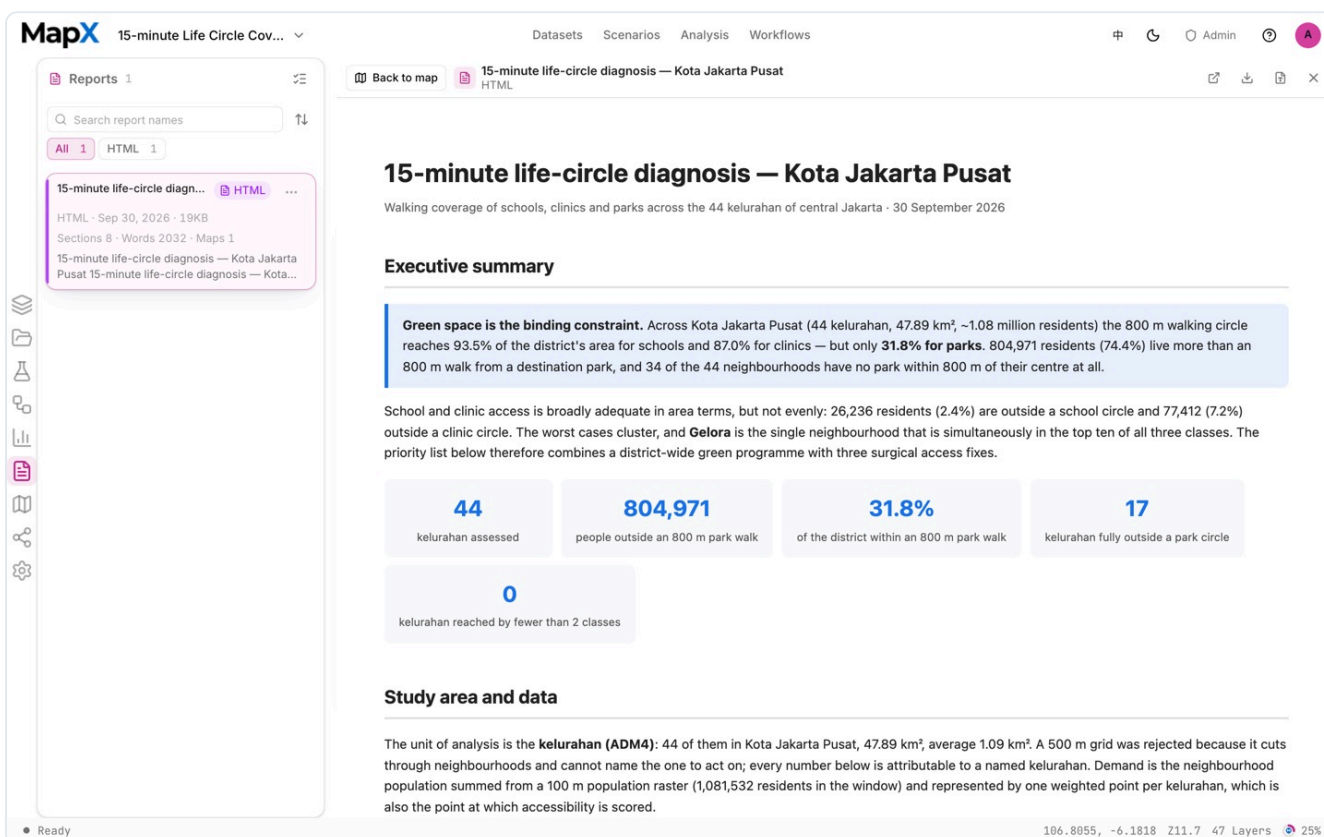

The scenario report opened in the report canvas, with an executive summary, figures and embedded maps

Example output

NOTE

The screenshots above come from one example run with the default settings on the shipped data. They show the shape of the deliverables, not what your run will return.

A finished run hands back a named, reusable set of deliverables instead of a single map:

- **Layers** — one neighbourhood shortfall layer per facility class, the accessibility scores, the top-10 boards, the neighbourhood summary table as a layer, and the labelled boundary.
- **Tables** — the neighbourhood summary with population, coverage count and the three shortfall columns, plus the per-class ranking boards.
- **Charts** — three class rankings, a grouped comparison and a heatmap, all editable and pinnable.
- **Report** — the diagnosis document naming the priority neighbourhoods, with the radius, the park definition and the coverage caveats.

The layer names follow the run language, but the deliverable set is stable enough to plan a handover around.

Read the results with care

▲ **Coverage is a network distance.** When the mapped street network is incomplete, the gap is overestimated; the report says so.

▲ **A park is represented by its centroid.** The 800 m distance is measured to the park's centre, an accepted approximation when gate data is unavailable.

▲ **Blank means inside the circle.** In the shortfall layers, unshaded neighbourhoods are covered — they are not missing data.

▲ **cov_count counts intersection, not full coverage.** A neighbourhood that a circle only clips counts as covered; quote the covered area when a borderline case matters.

▲ **Capacity is not modelled.** The 2SFCA score uses a default capacity of 1, so it ranks within a class only; cross-class comparison uses the shortfall population.

▲ The answer is **neighbourhood-level**. "Where inside one kelurahan should we build?" is the **Public Facility Siting** scenario.

The map displays the Moyo District in South Sudan, divided into various wards. A legend in the bottom right corner explains the symbols used:

- Recommended school sites (MCLP):** Indicated by blue dots.
- Recommended clinic sites (MCLP):** Indicated by green dots.
- School shortfall board (top 10 wards):** Indicated by orange shading.
- Clinic shortfall board (top 10 wards):** Indicated by red shading.
- Demand/supply quadrants (500 m):** Indicated by colored dots:
 - Low density · high population (priority for new facilities): Red dot.
 - High density · high population: Yellow dot.
 - High density · low population: Blue dot.
 - Low density · low population: Grey dot.

Numbered circles (1-5) on the map highlight specific areas of interest, likely corresponding to the recommended sites or shortfall boards.

AT A GLANCE	
STUDY AREA Dar es Salaam	ENTRY LAYERS 7 layers
KEY METHODS Coverage diagnosis · candidate screening · MCLP vs k-median	DELIVERABLES Shortfall boards, candidate cells, recommended sites, a marginal curve and a report

Public Facility Siting answers the last mile of public-service planning: **given what already exists, where should the next schools and clinics go?** The scenario runs the full arc — coverage diagnosis, demand gap, candidate screening and siting comparison — and reports how many currently unserved residents each recommended site would bring within reach.

What the scenario ships

Seven layers cover the Dar es Salaam region. The watercourse layer starts hidden; it exists so the 30 m river setback can be applied to candidate sites.

Layer	Data	Role in the study
Education facilities	OSM education POIs (2,223)	Raw supply for the school analysis
Health facilities	Healthsites.io (1,463)	Raw supply for the clinic analysis
Road network	OSM roads (102,464 lines)	Walking/driving network for service areas and site snapping
Watercourses	OSM waterways (11,160 lines, hidden)	30 m riparian setback applied to candidates
Ward boundaries	OCHA COD-AB ADM3 (90 wards, 1,667 km ²)	Shortfall ranking, candidate scope and balance checks
Building footprints	Overture (481,681 polygons)	Built-up intensity screen for candidate cells
Population	WorldPop, 100 m	Demand and coverage weights

How the study works

Stage	Question	What MapX runs	Output
1. Coverage diagnosis	Who is outside the standard today?	Select features (class screen), Overlay clip, Service area (800 m schools / 1000 m clinics), Overlay erase, Zonal statistics, Top N	Ward shortfall layer and a top-10 board per class
2. Demand gap	Where is demand high and supply low?	Grid at 500 m, Zonal statistics, Quadrant (median split), 1 km demand grid	Pressure quadrants (diagnostic) and the unserved-population demand layer
3. Siting comparison	Which new sites serve the most people?	Grid inside the worst wards, Overlay erase (30 m corridor), Zonal statistics/summary, Centroid points, Location-covering (MCLP), Location-allocation (k-median)	Recommended sites, the efficiency comparison, marginal coverage curve and residual gaps

The supply set is narrowed before anything is computed. Of 2,223 education points, 1,312 are schools — kindergartens, colleges and universities are not school supply for a walking-radius question. Of 1,463 health

points, only 363 are clinics, hospitals or doctors; **1,020 entries (69.7%) are pharmacies** and are excluded. Without that screen, a "clinic" analysis is really a pharmacy map.

Candidates are a shortlist, not the whole city. The scenario ranks the 90 wards by unserved population, keeps the ten worst, lays a 500 m grid inside them, removes the 30 m river corridor, drops cells that are already built out (building footprint share above 30%) and then caps the survivors by residential population. The ladder for large windows is documented; the physical filters are never relaxed to fit a budget.


Two models, one recommendation. The primary model is maximum coverage (MCLP): place k sites so the most unserved people fall within the standard radius. A k -median run with the same candidates and demand is reported alongside as the efficiency comparison — it minimises travel, but it is not the recommendation.

Run it

The screenshots below come from this scenario's reference workspace. Each step names the platform surface it uses, so you can follow the same path in your own project.

1. Open the scenario


Open **Scenarios** in the top menu, select this card and choose **Open scenario**. The whole bundle imports at once: every layer keeps its default style, legend, source and attribution, and the camera flies to the study area. Use the **Layers** panel to switch layers on and off before you type anything.

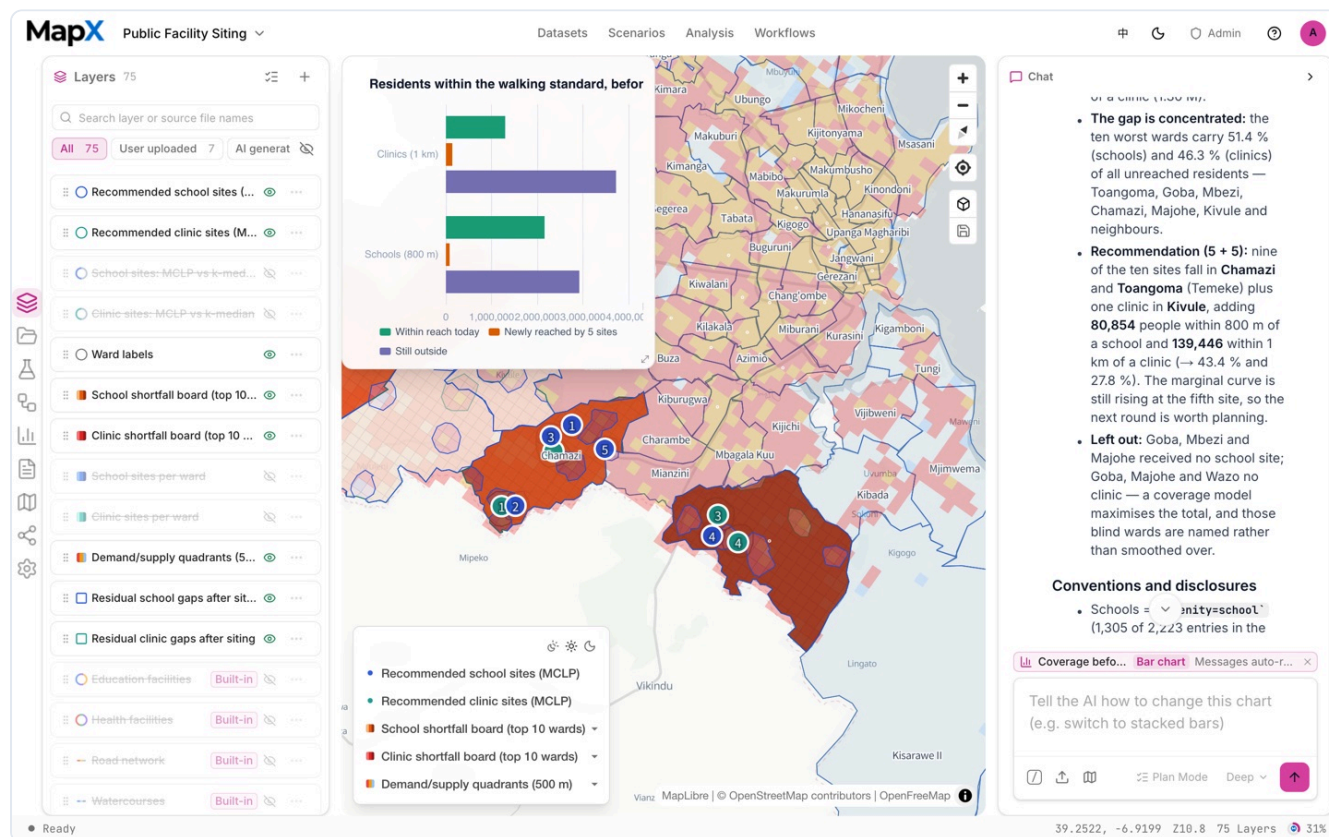

The Dar es Salaam siting scenario opened in the workspace, with the imported layers, the map and the chat panel

2. Ask the suggested question and review the plan


The suggested question is: *"Run a public-facility siting study for Dar es Salaam: diagnose the coverage and demand gaps of existing schools and clinics, then compare candidate sites for new facilities and recommend where to build; deliver layers, charts and a report."* **Plan mode** records the supply-set definitions, the radius per class, the demand basis, the number of sites and the report language before the run starts.

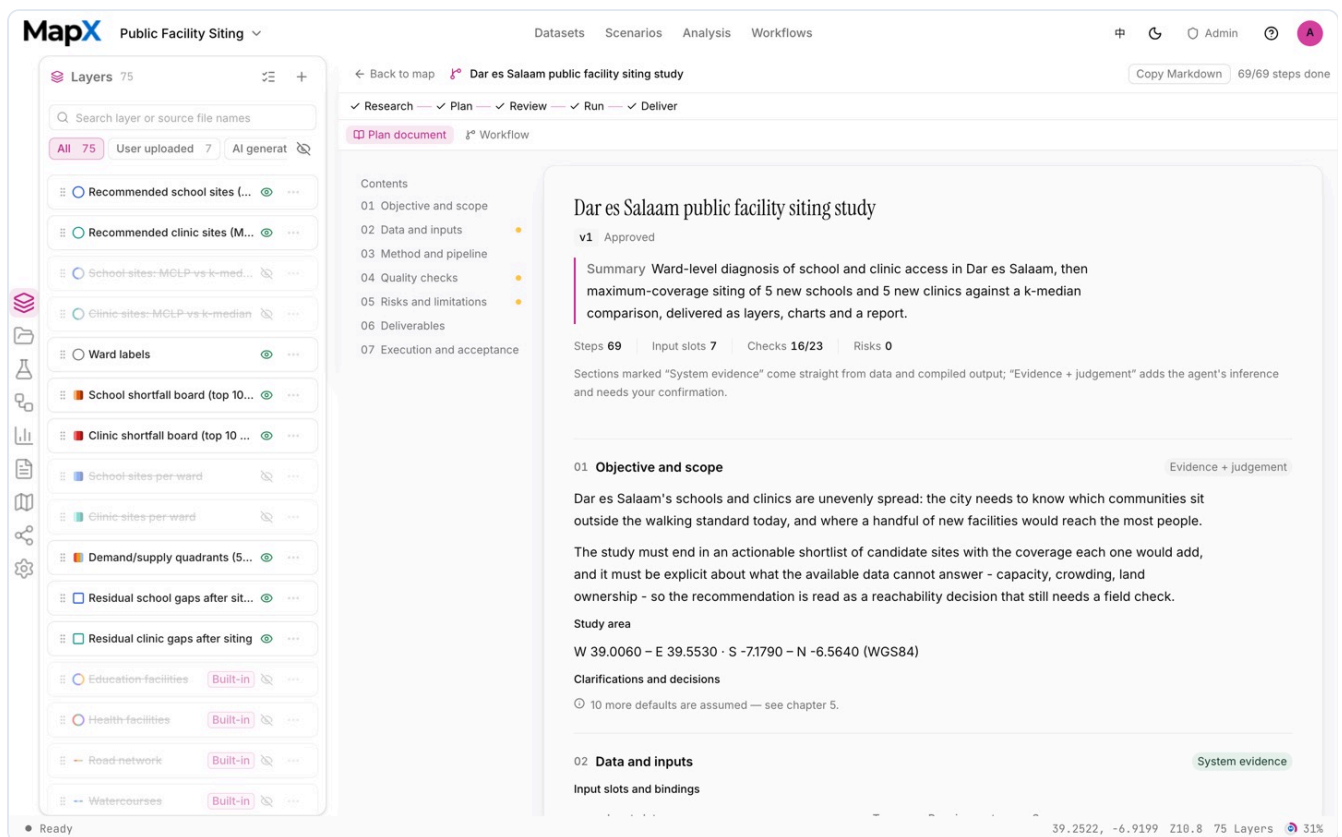

The plan workbench for Dar es Salaam: the approved plan, input slots and recorded decisions

3. Approve the plan and run the analysis


The chain screens the supply set by facility class, builds the status-quo **service areas** (800 m schools, 1000 m clinics), erases them from the wards to get the shortfall, prepares the unserved demand on a grid, screens the candidate cells and then runs the two siting models: maximum coverage (MCLP) as the recommendation and k-median as the efficiency comparison.

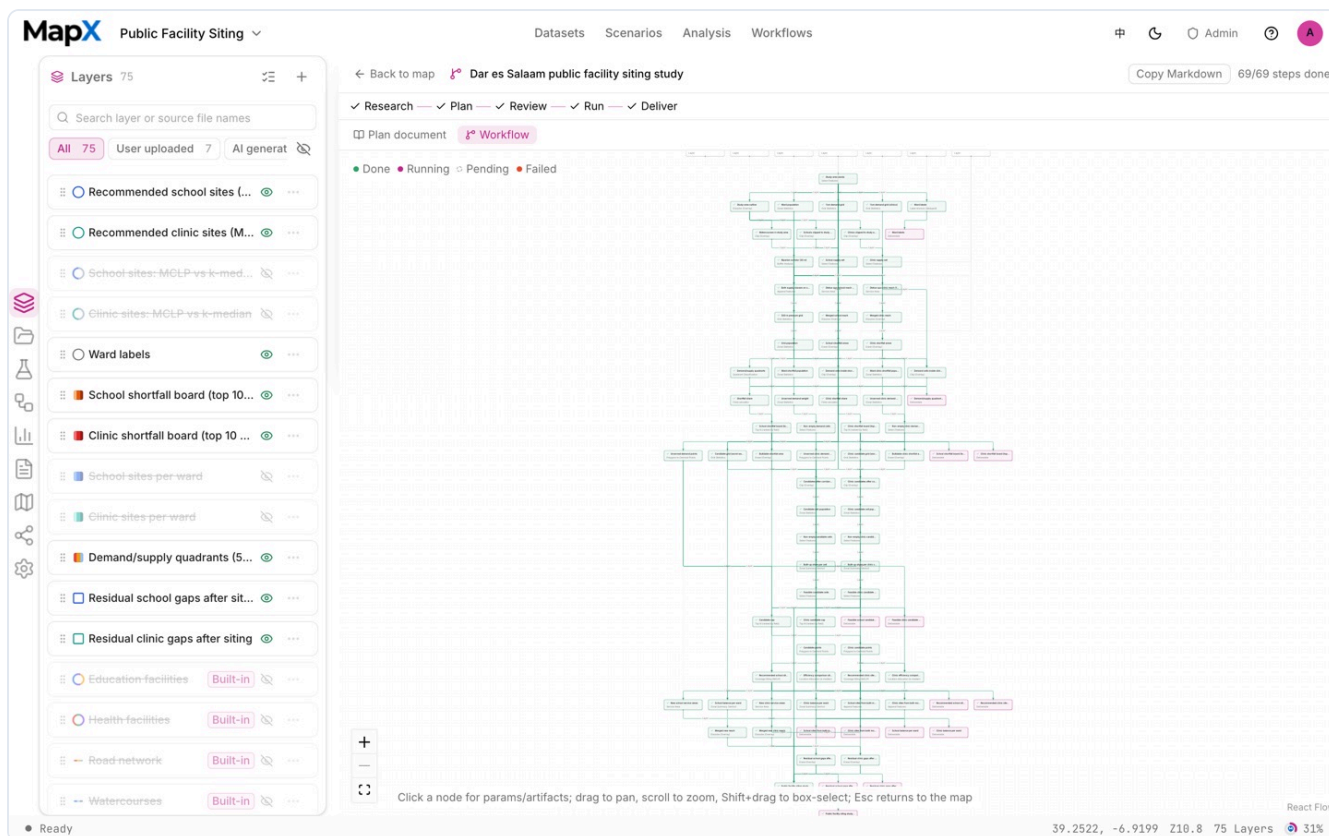


The analysis graph for this scenario: each node is a deterministic operator, with inputs, parameters and artifacts available on click

4. Style the result on the map

Recommended sites are ranked circles in the class hue, the shortfall boards and demand/supply quadrants stay as hidden reference layers, and the legend states which model each marker belongs to.

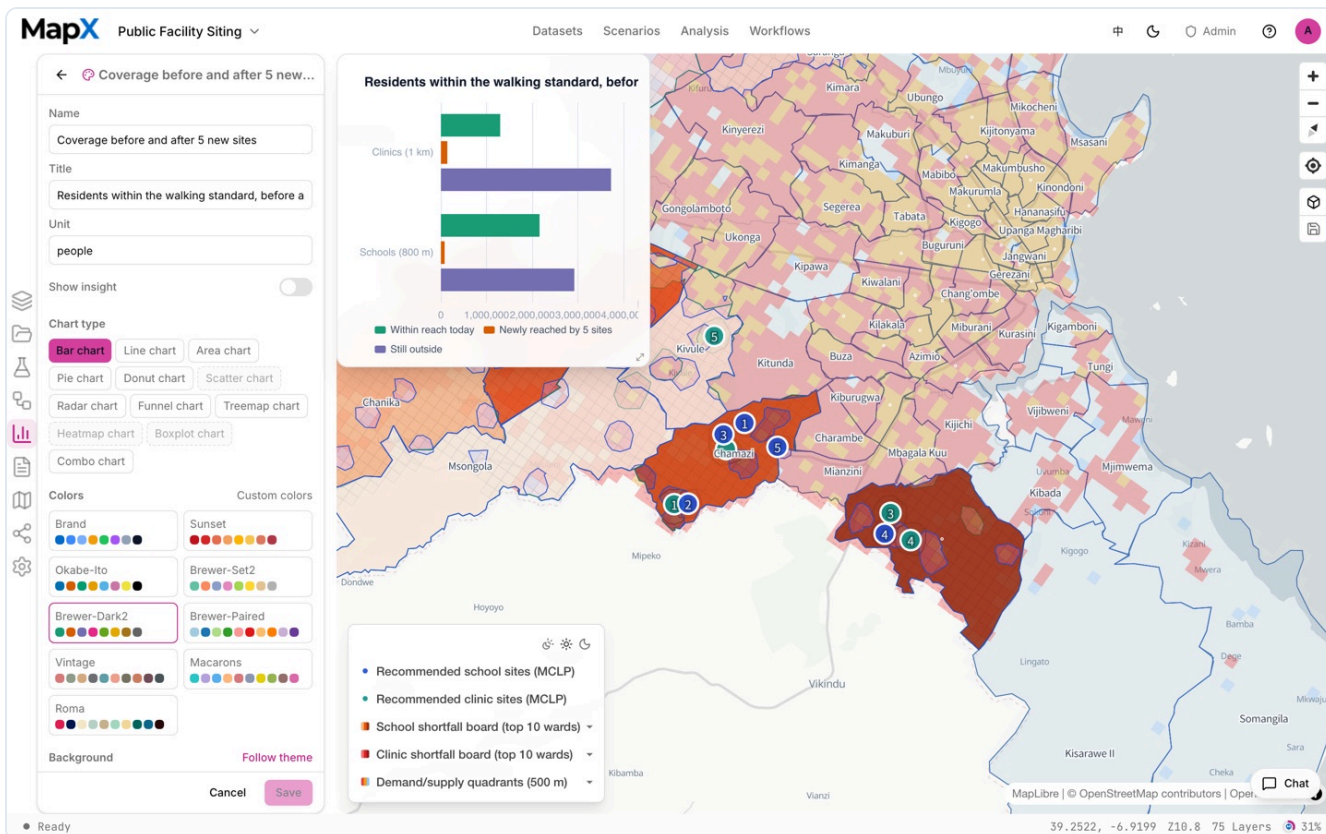

A chart from this scenario opened in the chart editor, with its type, colours and data settings

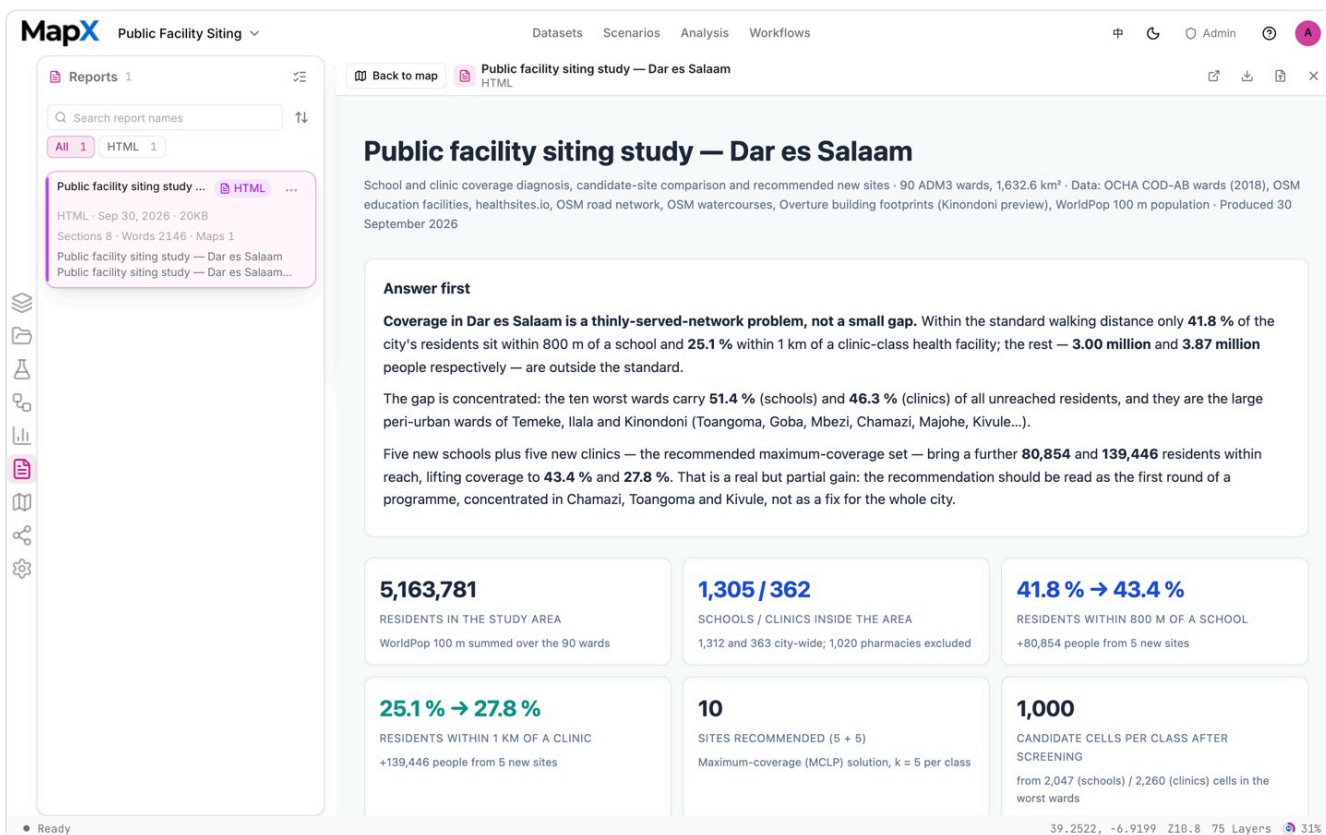

The scenario report opened in the report canvas, with an executive summary, figures and embedded maps

Example output

NOTE

The screenshots above come from one example run with the default settings on the shipped data. They show the shape of the deliverables, not what your run will return.

A finished run hands back a named, reusable set of deliverables instead of a single map:

- **Layers** — the recommended sites for each facility class, the comparison sites, their service areas, the residual gaps, the shortfall boards and the demand/supply quadrants.
- **Tables** — the ward balance table, the selected-site list and the feasibility counts for the candidate filters.
- **Charts** — the marginal coverage curve and the before/after coverage comparison.
- **Report** — the siting study with the supply-set definitions, the before/after pair and the capacity, crowding and fairness disclosures.

The layer names follow the run language, but the deliverable set is stable enough to plan a handover around.

Read the results with care

- ▲ **Capacity is not modelled.** The clinic layer has no bed or staff counts and the school layer has a capacity value on only 15 of 2,223 features, so the run is plain maximum coverage; the report writes "capacity not modelled".
- ▲ **Coverage is binary.** "Within 800 m of a school" is not "able to enrol". Run the 2SFCA crowding branch if you need a supply-per-resident reading.
- ▲ **Construction intensity is footprint share only.** Only 34 of 481,681 building footprints carry a height value, so never infer floors or population capacity from the building layer.
- ▲ **A recommended site is a candidate-cell optimum.** Land ownership, zoning and site access still need a field check.
- ▲ **Fairness is not optimised.** MCLP maximises the total; the ward balance table exists so wards that received nothing are named rather than hidden.

▲ **The ward layer is the 2018 administrative vintage.** Dar es Salaam is still the three-council structure in this release; do not describe it as the current five-municipality structure.

Urban Growth Monitor **Hanoi**

Reconstruct Hanoi's built-up expansion phase by phase, measure how much is infill versus outward growth, and connect growth to population and night lights.



The Hanoi run as delivered: infill, edge and outlying expansion forms over the built-up raster, with population and night-light quadrants

AT A GLANCE	
STUDY AREA Hanoi	ENTRY LAYERS 7 layers
KEY METHODS Phased expansion metrics · landscape expansion index · centre and ellipse	DELIVERABLES Expansion-form layers, phase tables, quadrant grid, charts and a report

Urban Growth Monitor asks three questions a growth-management plan needs to answer: **how fast is the city expanding, where is it going, and is the growth compact or sprawling?** It reconstructs the expansion phase by phase, separates infill from edge and outlying growth, and overlays population and night lights to find where growth and activity disagree.

What the scenario ships

Seven layers cover the Hanoi window. Only the built-up area is visible by default; the rest are context and analysis inputs.

Layer	Data	Role in the study
Road network	OSM roads (hidden)	Test whether new built-up land follows the main axes
Watercourses	OSM waterways, 2,565 lines (hidden)	River corridors as a growth constraint
Administrative boundaries	50 ADM3 units (hidden)	Attribution and cross tables
Built-up area	GHSL 2020 density, max 7,967 m ² /cell (visible)	Growth-intensity backdrop
Built-up history	WSF Evolution 1985–2015 build year, 733k valid cells (hidden)	The phase and form source
Population	WorldPop 2020 (hidden)	Demand and activity axis
Night lights	VIIRS, December 2017 median, 611 m (hidden)	Economic-activity proxy

How the study works

Stage	Question	What MapX runs	Output
1. Reconstruct the expansion	How much built-up land was added in each period?	Expansion metrics (<code>periodBreaks</code> 1990 / 2000 / 2010 / 2015), Raster class area, Land change matrix	Phase table with new area, annual growth, intensity and compactness; built-year cross table
2. Measure the form	Is new growth infill, edge expansion or outlying?	Landscape expansion index on two built-up masks, Raster to polygons, Mean centre, Standard deviational ellipse, Directional distribution, Buffer and zonal summary	Infill / edge / outlying layer, centre shift and ellipse, share of new built-up near roads and waterways
3. Connect to activity	Where do population and night lights diverge?	Grid at 1 km, Zonal statistics, Quadrant (median split)	Population × night-light quadrants and the growth-management targets

Form is measured with the landscape expansion index (LEI), not density. Density cannot tell a dense low-rise extension from a dense infill block; the LEI separates them by how much of a new patch touches the earlier built-up area. The scenario uses the ≤ 1990 and ≤ 2015 masks (one-cell neighbourhood, 50% threshold, four-cell minimum patch) and reports the shares with those parameters attached.

The centre and the ellipse describe direction. The gravity centre and its standard deviational ellipse are computed per phase, so the report can say how far and in which direction the city's mass moved, and whether it stretched along one axis.


Population and night lights are read together. Cells with high population but low night light are the classic mismatch — a growth-management priority rather than a success story.

Run it

The screenshots below come from this scenario's reference workspace. Each step names the platform surface it uses, so you can follow the same path in your own project.

1. Open the scenario


Open **Scenarios** in the top menu, select this card and choose **Open scenario**. The whole bundle imports at once: every layer keeps its default style, legend, source and attribution, and the camera flies to the study area. Use the **Layers** panel to switch layers on and off before you type anything.

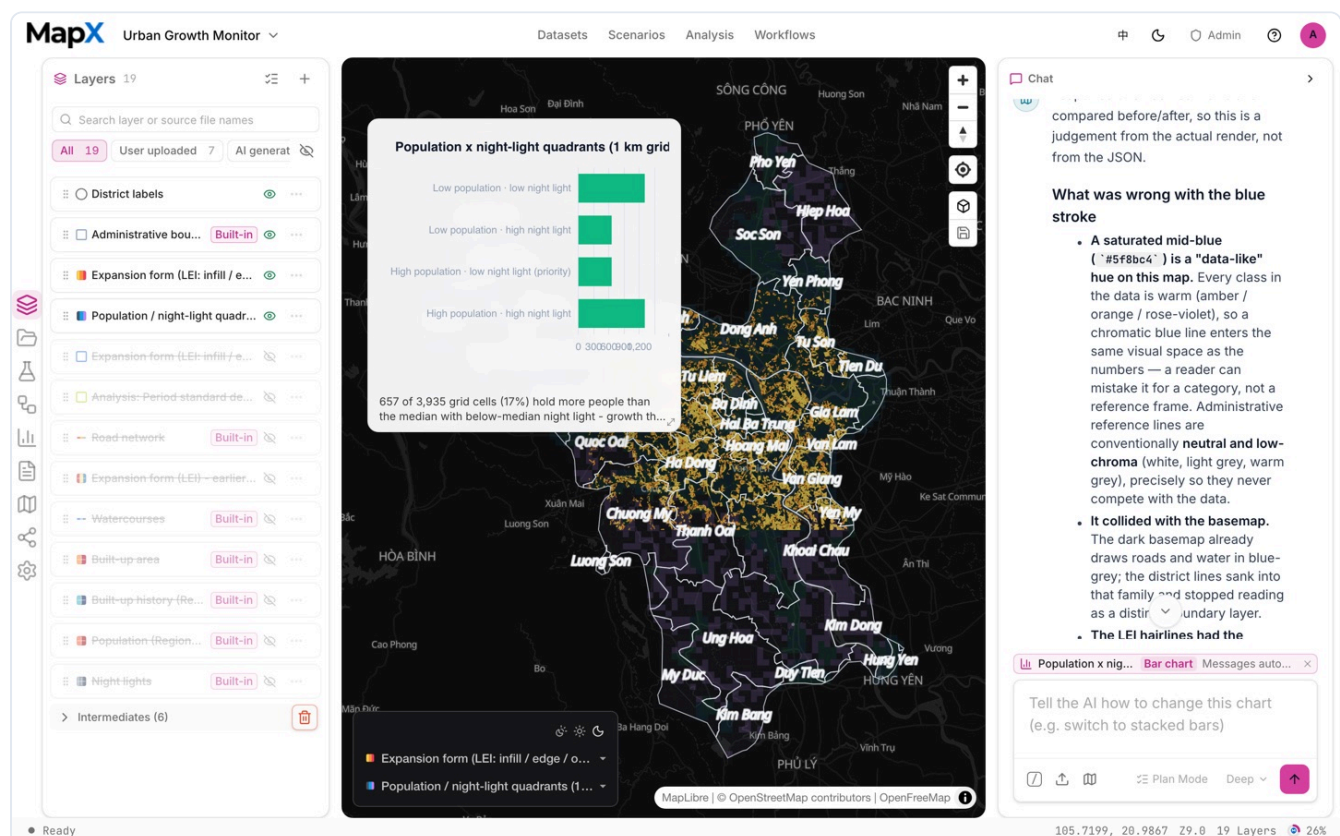

The Hanoi growth scenario opened in the workspace, with the imported layers, the dark basemap and the chat panel

2. Ask the suggested question and review the plan


The suggested question is: *"Run an urban-growth monitoring study for Hanoi: reconstruct the staged expansion of built-up land, analyse its speed, direction and intensity, flag the main growth-management issues with boundary guidance; deliver layers, charts and a report."* **Plan mode** confirms the study area, the two mask years used for the form measurement and the report numbers before anything runs.

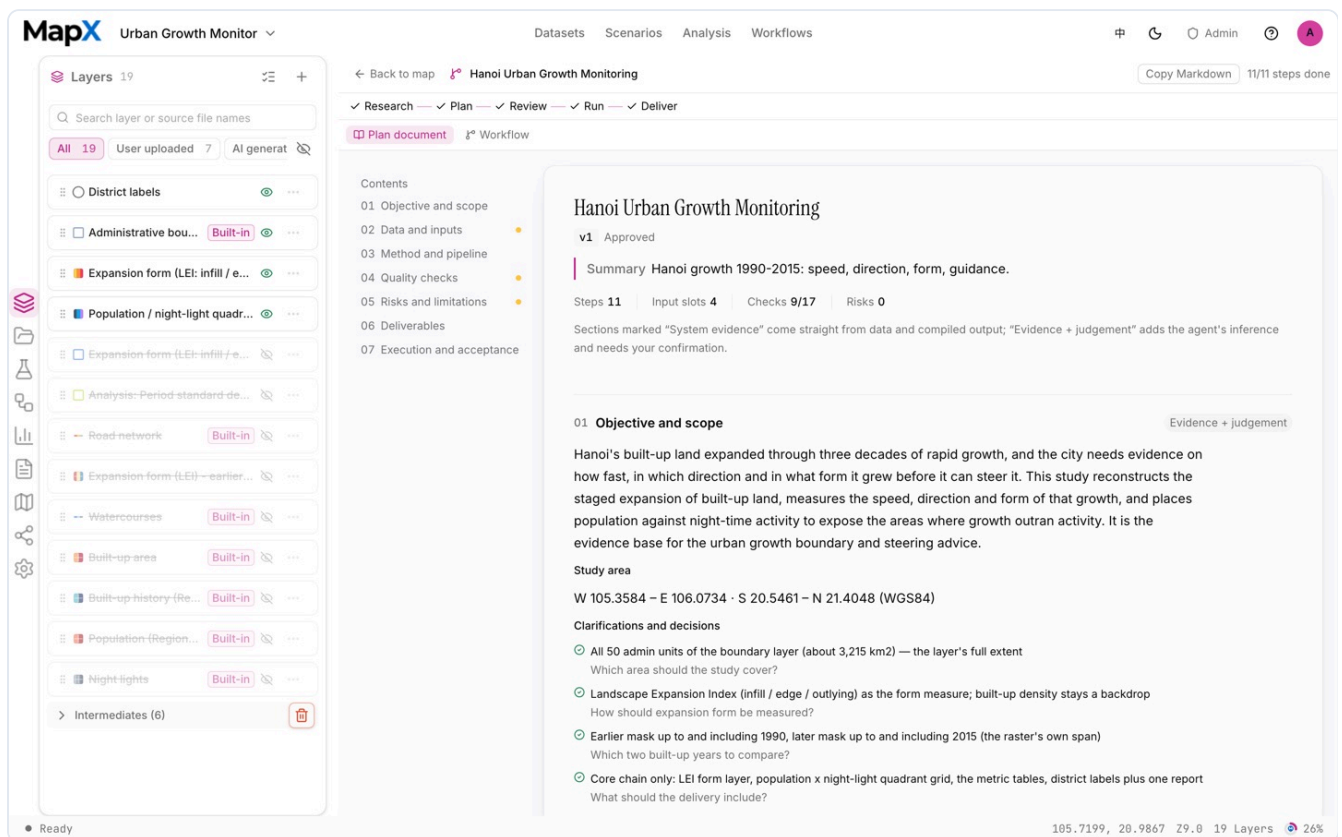

The plan workbench for Hanoi: the approved plan and the recorded method decisions

3. Approve the plan and run the analysis


The run chains deterministic **analysis** tools: the phased expansion metrics, the landscape expansion index between the two built-up masks, polygon conversion for the form layer, the gravity centre and standard deviational ellipse, and the 1 km grid with population and night-light quadrants.

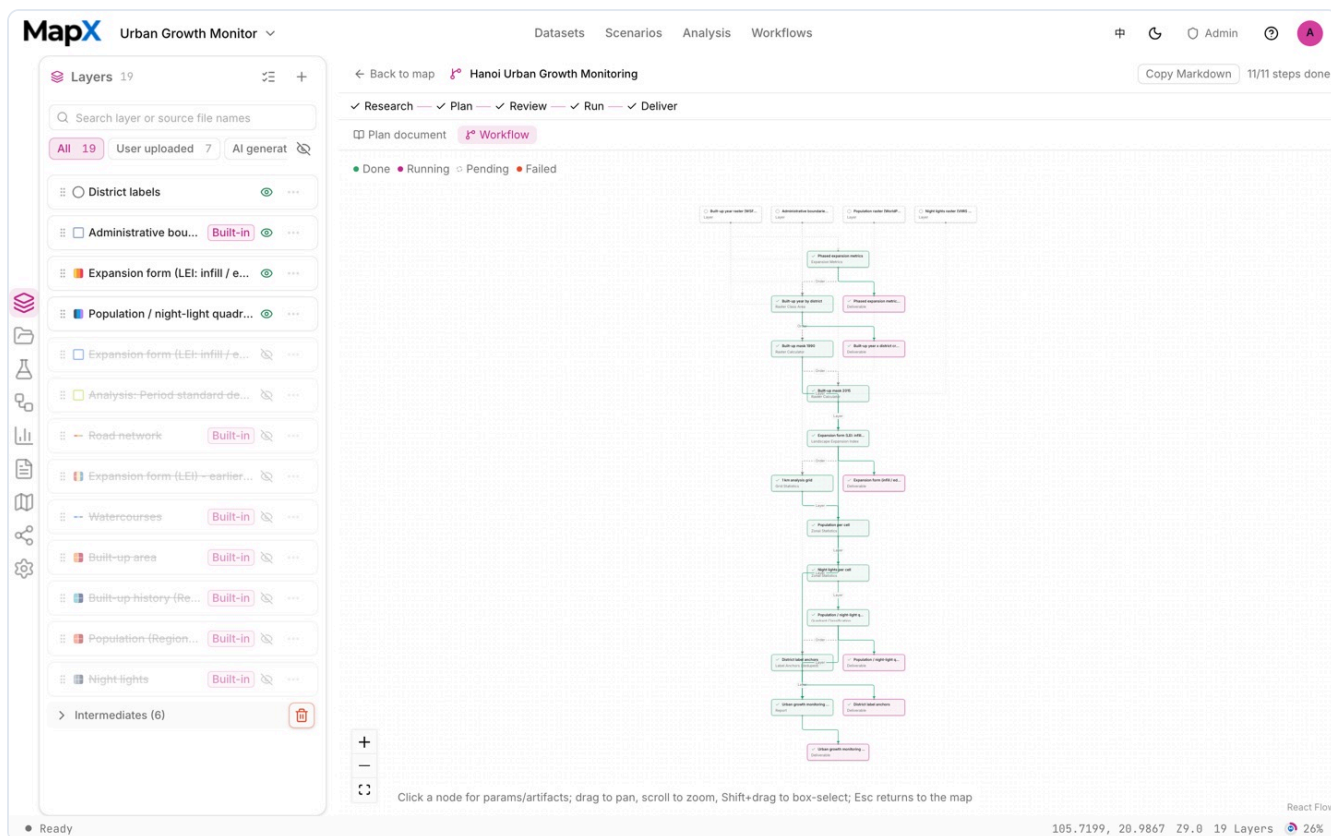

The analysis graph for this scenario: each node is a deterministic operator, with inputs, parameters and artifacts available on click

4. Style the result on the map


The expansion-form layer keeps three human-readable classes on the dark basemap, with the quadrant grid and district labels as light references; the layer style editor is where the hue family and label halo are set.

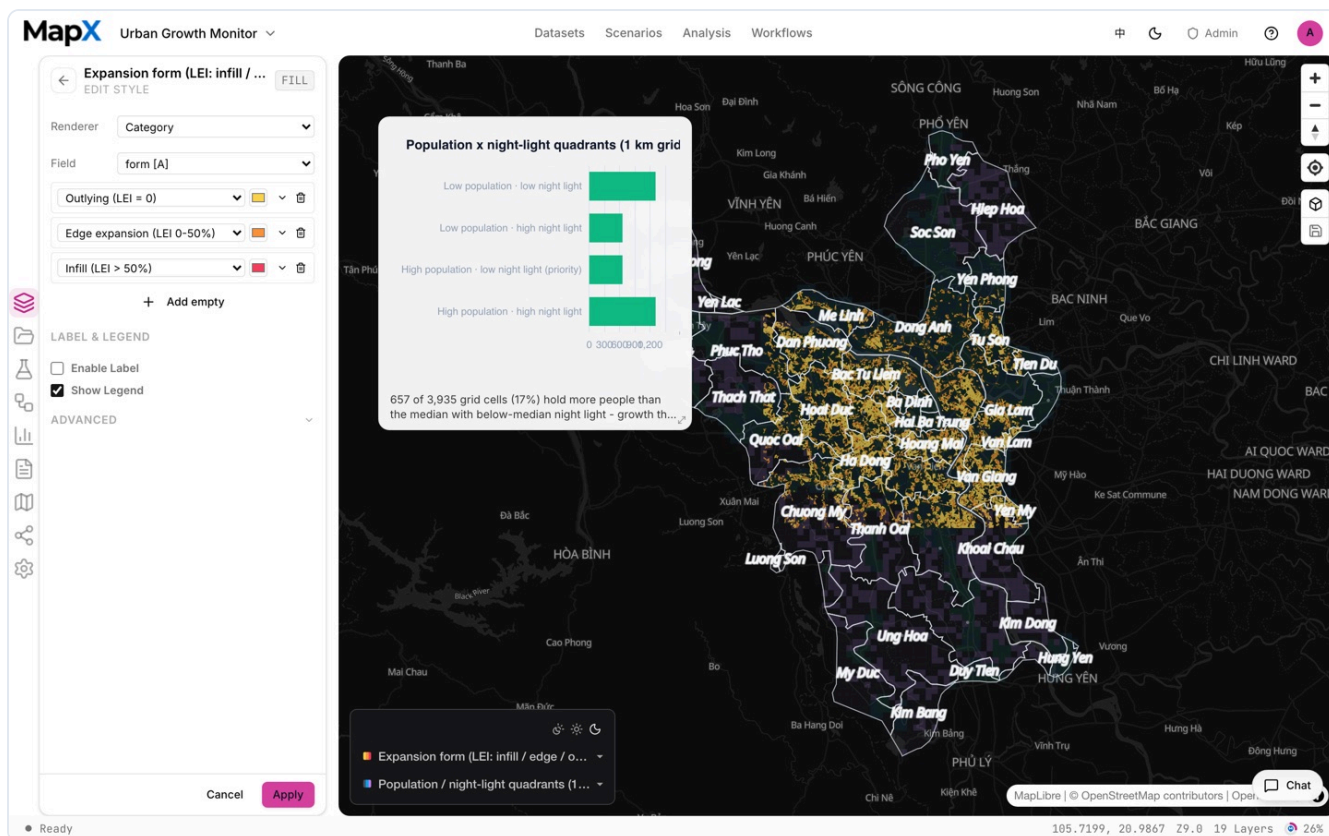


The layer style editor open on a scenario deliverable: renderer, colours, outline, label field and legend controls

5. Turn the result into charts and a report

The run produces a dual-axis growth chart, a form-composition donut and a quadrant distribution. All are **charts** you can restyle or pin, and the **report** records the phase table, the form shares and the year-mismatch caveats.

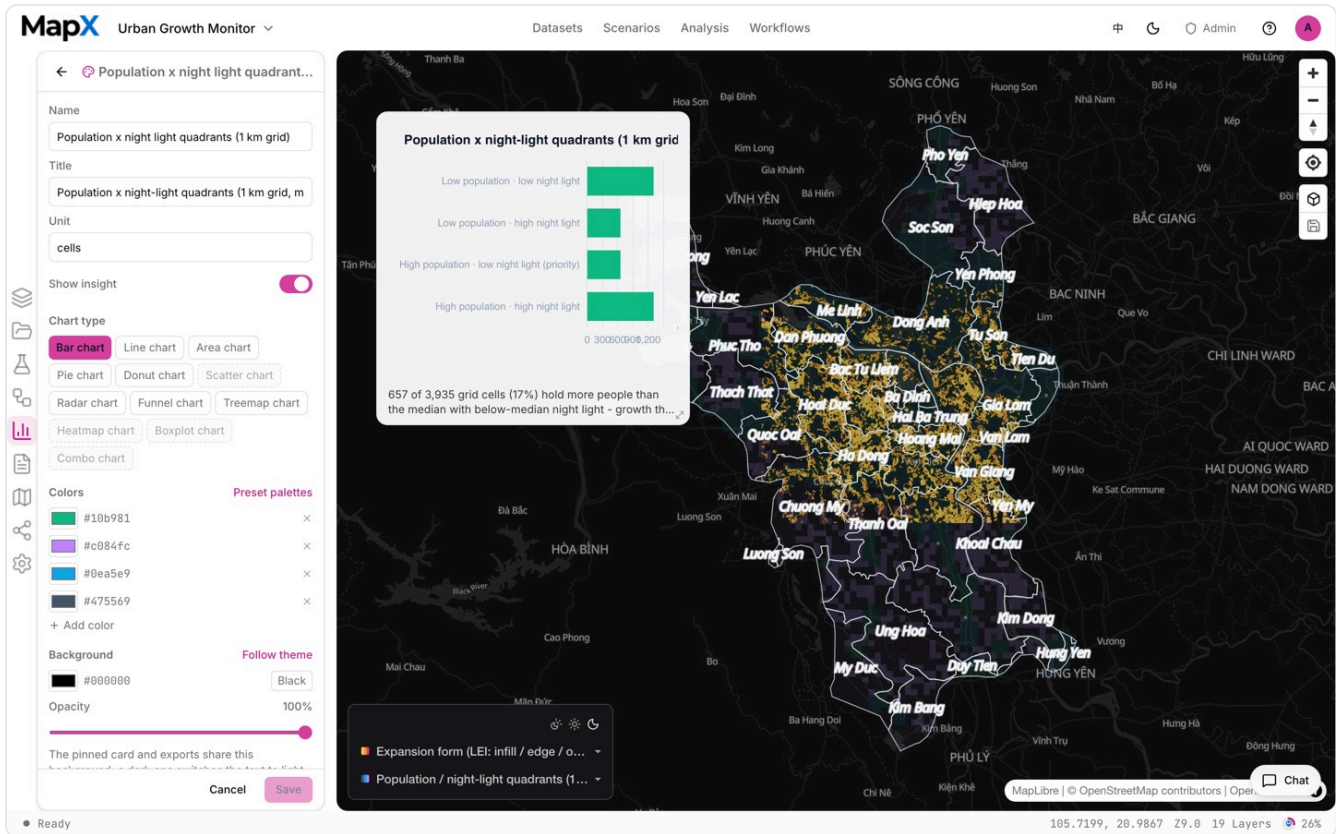

A chart from this scenario opened in the chart editor, with its type, colours and data settings

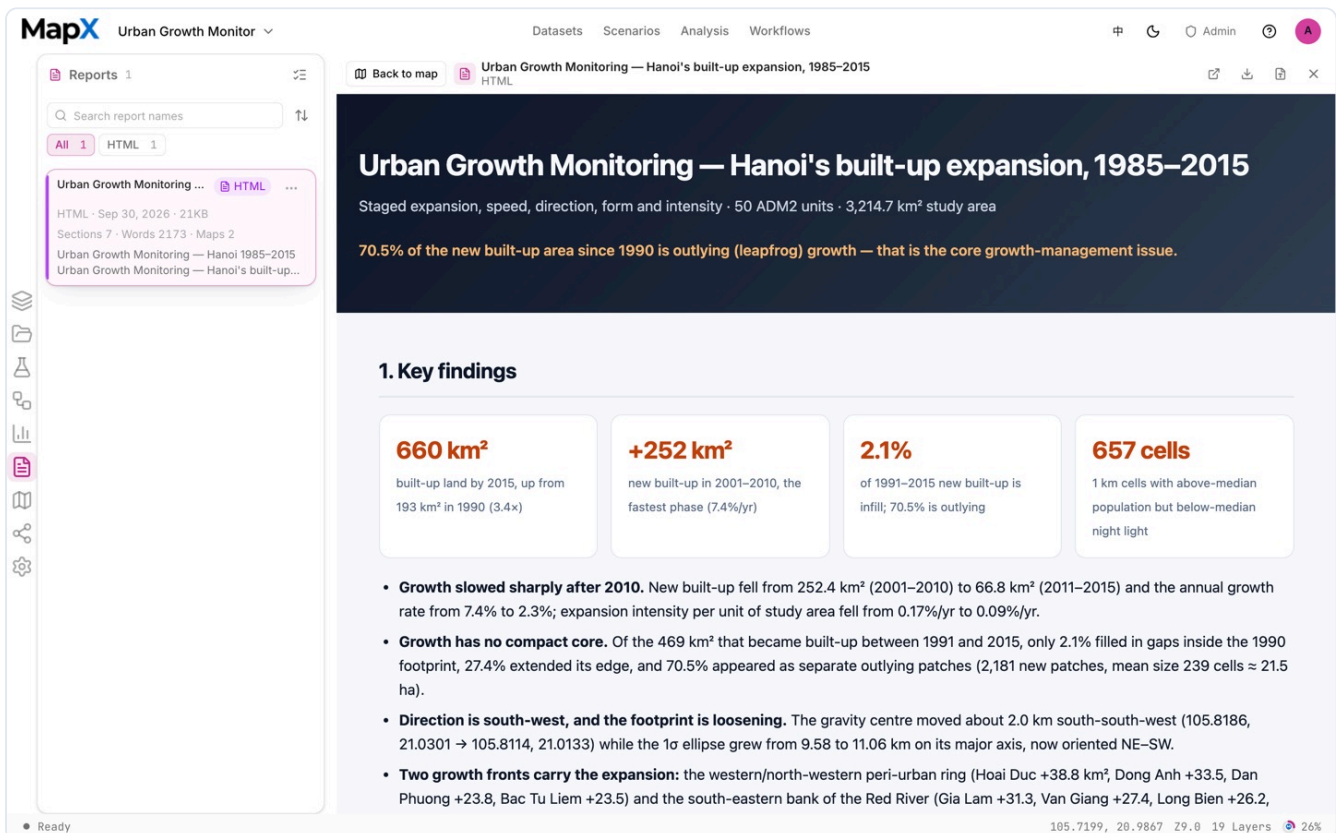

The scenario report opened in the report canvas, with an executive summary, figures and embedded maps

Example output

NOTE

The screenshots above come from one example run with the default settings on the shipped data. They show the shape of the deliverables, not what your run will return.

A finished run hands back a named, reusable set of deliverables instead of a single map:

- **Layers** — the expansion-form layer (infill, edge, outlying), the population and night-light quadrant grid, the phase rasters as context and a labelled district reference.
- **Tables** — the phase metrics (new area, annual growth, intensity, compactness, centre and ellipse) and the built-year cross table.
- **Charts** — the phase growth chart, the expansion-form donut and the quadrant distribution.
- **Report** — the growth-monitoring document with the phase definitions and the reference-year caveats.

The layer names follow the run language, but the deliverable set is stable enough to plan a handover around.

Read the results with care

▲ **The sources have different reference years.** Build year is ≤ 2015 , built-up density and population are 2020, night lights are December 2017. Any cross-source regression is a trend indication only.

▲ **Only one land-cover vintage is shipped.** Do not claim which land-use category was converted into built-up land.


▲ **Compactness is a per-pixel shape metric.** A raster mask's staircase edge dominates its perimeter; compare it only within the same raster and resolution, never across cities.

▲ **LEI depends on its parameters.** Quote the neighbourhood size, threshold and mask years with the infill/edge/outlying shares. Cells on the raster edge are counted as non-built, so the boundary band skews towards edge and outlying.

▲ **"New patches" are clusters of a class mask.** For patch structure, quote the whole-new-built patch count from your run (2,181 patches, mean 21.5 ha, in the example run).

Land-use Conflict Screening **Kigali**

Find where Kigali's development presses on ecological space, steep slopes and riverbanks, grade the conflicts, and turn them into remediation priorities.

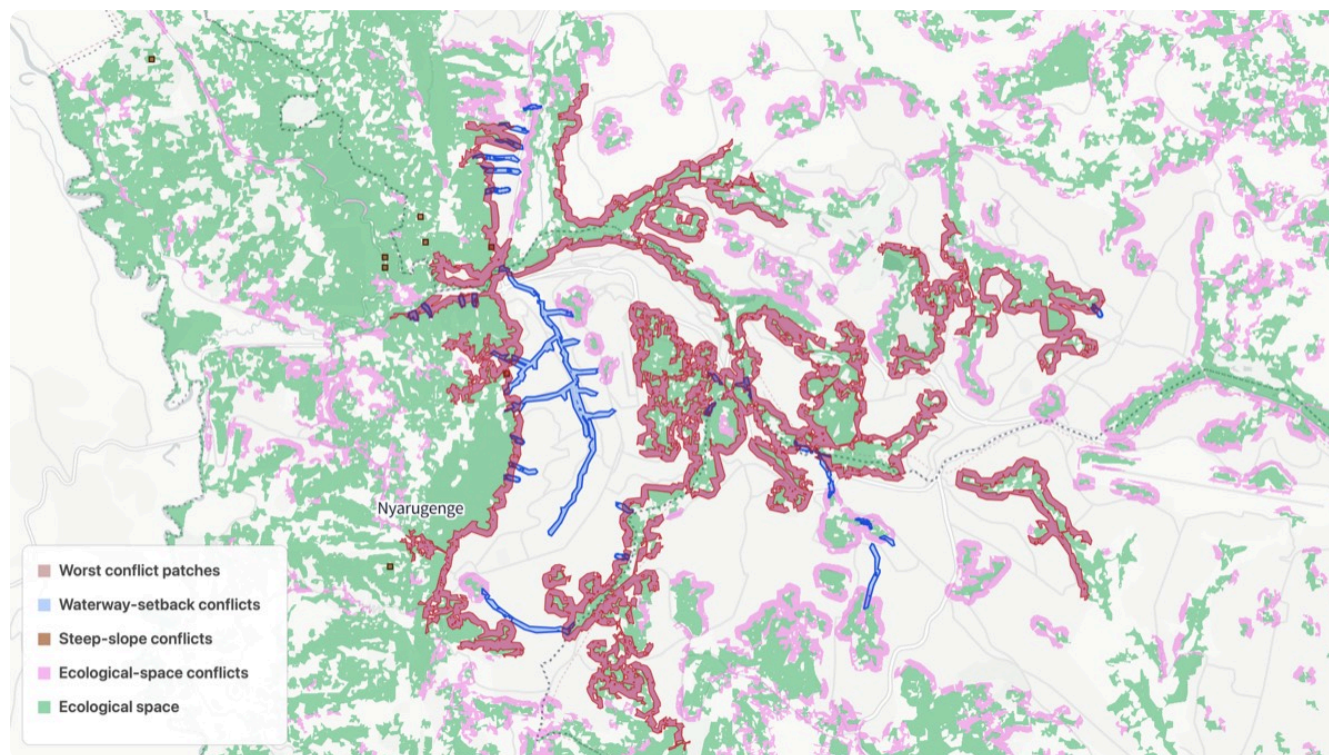

The Kigali run as delivered: ecological space with the three conflict families and the worst-patch board

AT A GLANCE	
STUDY AREA Kigali	ENTRY LAYERS 8 layers
KEY METHODS Conflict screening · grading and prioritisation · remediation guidance	DELIVERABLES Four conflict layers, a worst-patch board, an exposure grid and a report

Land-use Conflict Screening checks whether a hilly city's built-up land collides with the constraints it should respect: **ecological space, steep slopes, riverbanks and protected areas**. It reports each conflict family on its own and then a de-duplicated union, so one patch cannot be counted twice, and it ends with remediation priorities instead of a single "risk score".

What the scenario ships

Eight layers cover the Kigali window. Only land cover is visible by default; the other layers are analysis inputs and cross-checks.

Layer	Data	Role in the study
Watercourses	OSM waterways, 416 lines (hidden)	30 m setback corridor
Administrative boundaries	8 ADM3 units (hidden)	Study area, attribution and labels
Protected area constraints	Overture, 14 features in Rwanda; 1 inside the city (hidden)	Background and cross-check for ecological space
Building footprints	Overture, 644,665 polygons (hidden)	Context layer; not used as the development surface (see below)
Land cover	ESA WorldCover 2021, 10 m, 11 classes (visible)	Ecological classes and the built-up surface
Terrain	SRTM 30 m, clipped to the city (hidden)	Slope classes
Surface water	JRC Global Surface Water, 0–99% frequency (hidden)	Water presence cross-check
Population	GHSL, 100 m (hidden)	Exposed population per assessment cell

How the study works

Stage	Question	What MapX runs	Output
1. Identify the conflicts	Where does built-up land meet each constraint?	Raster calculator, Raster to polygons, Overlay clip, Euclidean distance (100 m / 30 m), Buffer, Slope, Reclassify	Ecological-space mask, steep-slope classes and the four conflict families
2. Grade and prioritise	Which conflicts matter most, and where do they cluster?	Append features, Zonal summary on a 500 m grid, Top N patch ranking, Label anchors	Conflict area per cell, exposed population, worst-patch board
3. Remediate	What should be done per type and severity?	Select features, Zonal statistics, Charts, Report	Remediation table, charts and a compliance report

Ecological space is a composite, because the protected layer is nearly empty here. Inside the city, the protected-area layer contains a single unnamed feature of about 0.09 km². The working definition is therefore the trees, shrub, water and wetland land-cover classes (WorldCover 10 / 20 / 80 / 90), with protected areas kept as a background cross-check and the 30 m waterway corridor as a separate constraint.

Development is read from the built-up land-cover class, not from building footprints. The shipped footprint layer has 644,665 polygons; on this data, clipping, intersecting and aggregating it all exceed the platform's step budget. The runnable surface is the built-up class of the same 10 m land-cover raster, and the report states the substitution and the reason.


Conflict families are reported per type plus a union. A patch can sit on a steep slope *and* inside the waterway setback. The scenario reports each family's area, then the de-duplicated union — never a naive sum presented as "total conflicts".

Run it

The screenshots below come from this scenario's reference workspace. Each step names the platform surface it uses, so you can follow the same path in your own project.

1. Open the scenario


Open **Scenarios** in the top menu, select this card and choose **Open scenario**. The whole bundle imports at once: every layer keeps its default style, legend, source and attribution, and the camera flies to the study area. Use the **Layers** panel to switch layers on and off before you type anything.

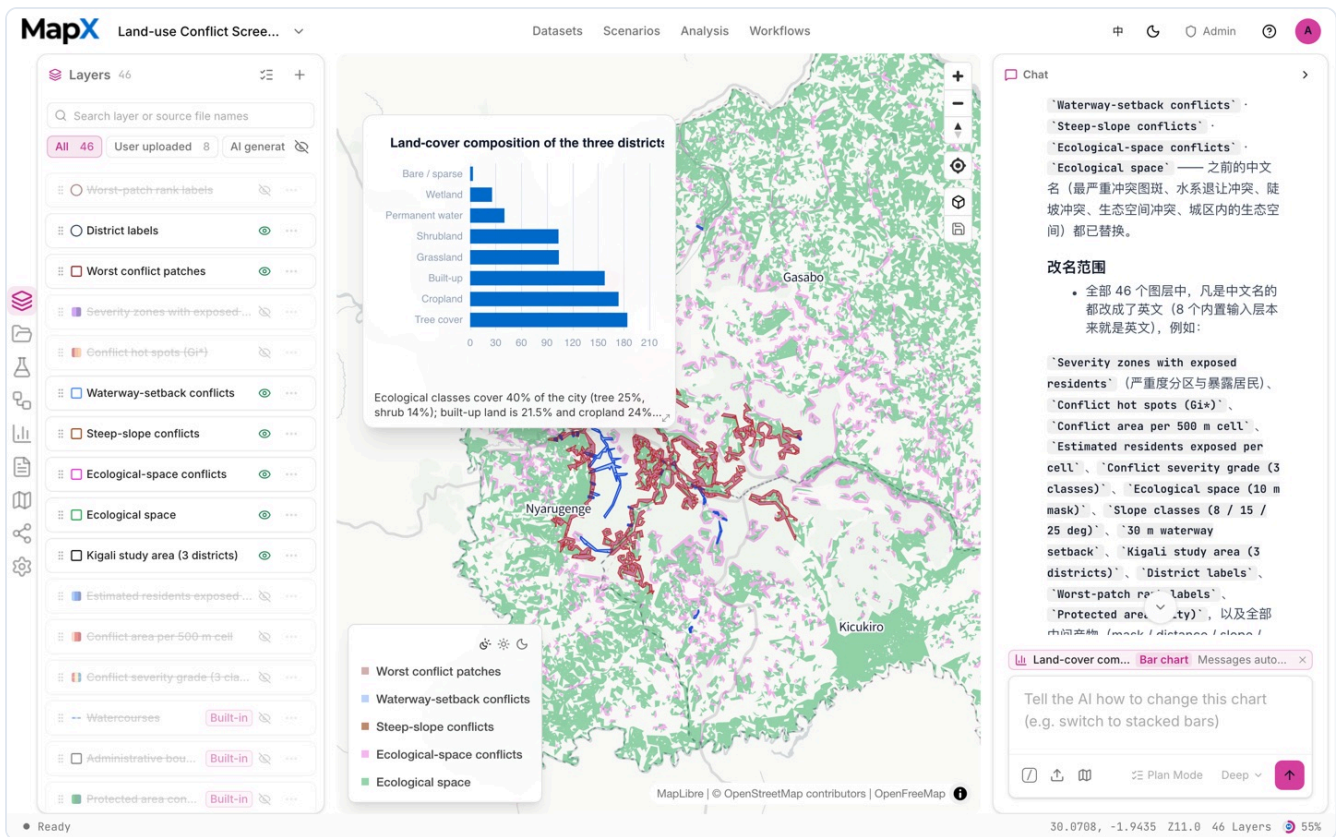

The Kigali conflict scenario opened in the workspace, with the imported layers, the map and the chat panel

2. Ask the suggested question and review the plan


The suggested question is: "Screen land-use conflicts for Kigali: find development encroaching on ecological space, steep slopes or riverbanks, grade conflicts by severity, locate hotspots and recommend fixes; deliver layers, charts and a report." **Plan mode** records the ecological-space definition, the development surface and the rule that conflict families are reported per type plus a de-duplicated union.

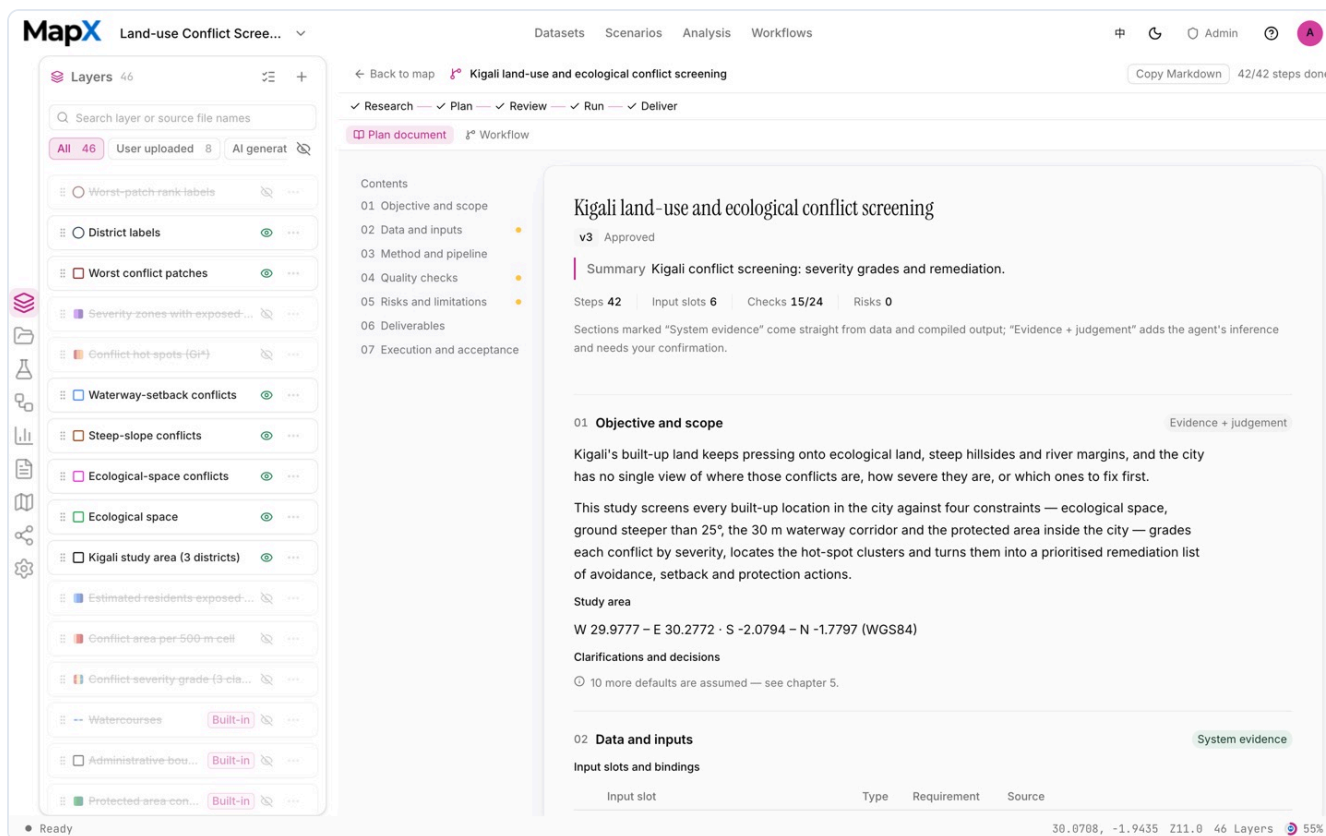

The plan workbench for Kigali: the approved plan and the recorded definition decisions

3. Approve the plan and run the analysis


The chain uses raster algebra and polygon conversion to build the ecological-space layer, Euclidean distance for the 100 m encroachment band and the 30 m waterway setback, buffering, slope reclassification, the steep-slope mask, and the 500 m grid where conflict area and exposed population are summed.

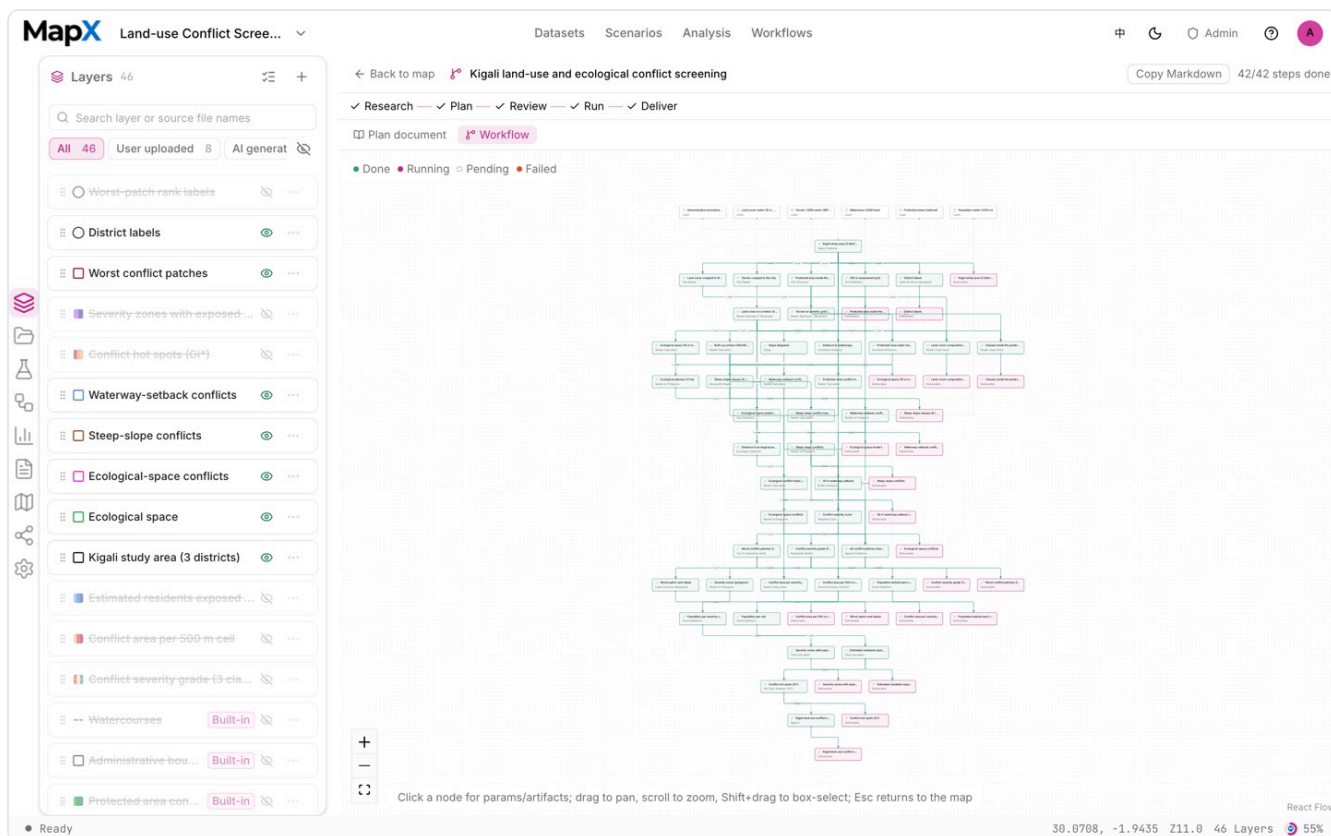

The analysis graph for this scenario: each node is a deterministic operator, with inputs, parameters and artifacts available on click

4. Style the result on the map


Each conflict family owns one hue so the four translucent layers stay readable together; the worst-patch board is styled as a dark-red fill with rank labels from an anchor layer, and legend titles carry the definitions.

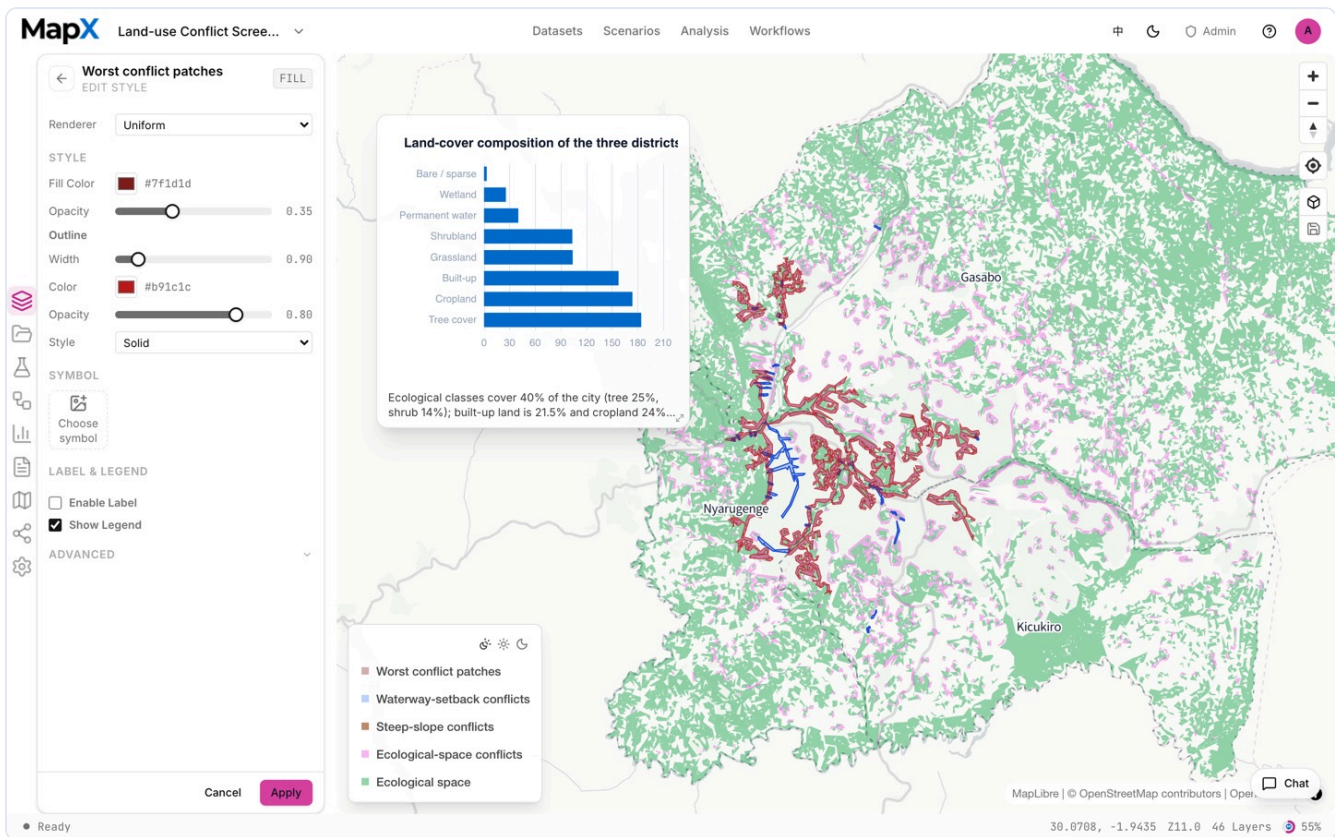


The layer style editor open on a scenario deliverable: renderer, colours, outline, label field and legend controls

5. Turn the result into charts and a report

The run reports conflict area per family and the exposed population, with the union stated separately. The **charts** and the **report** quote those definitions rather than a single risk score.

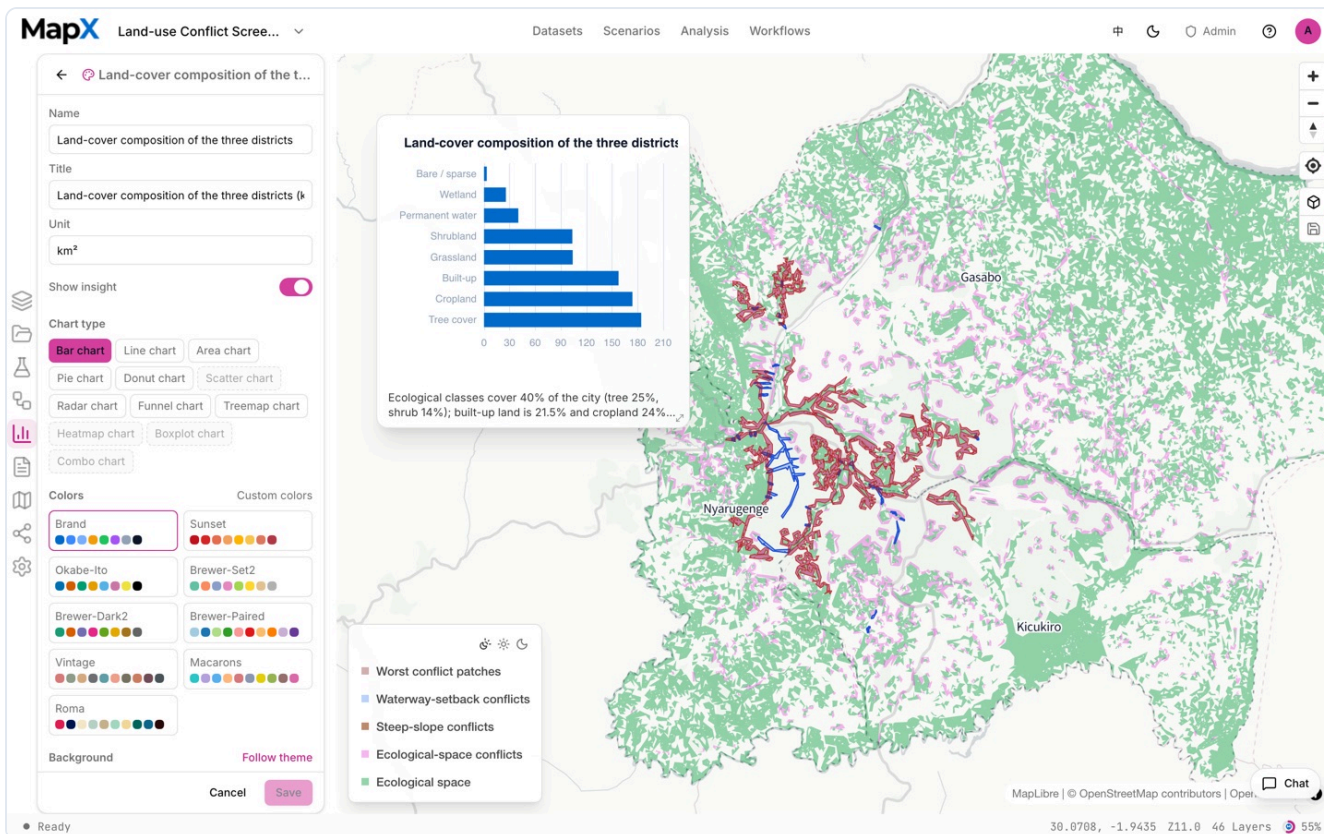

A chart from this scenario opened in the chart editor, with its type, colours and data settings

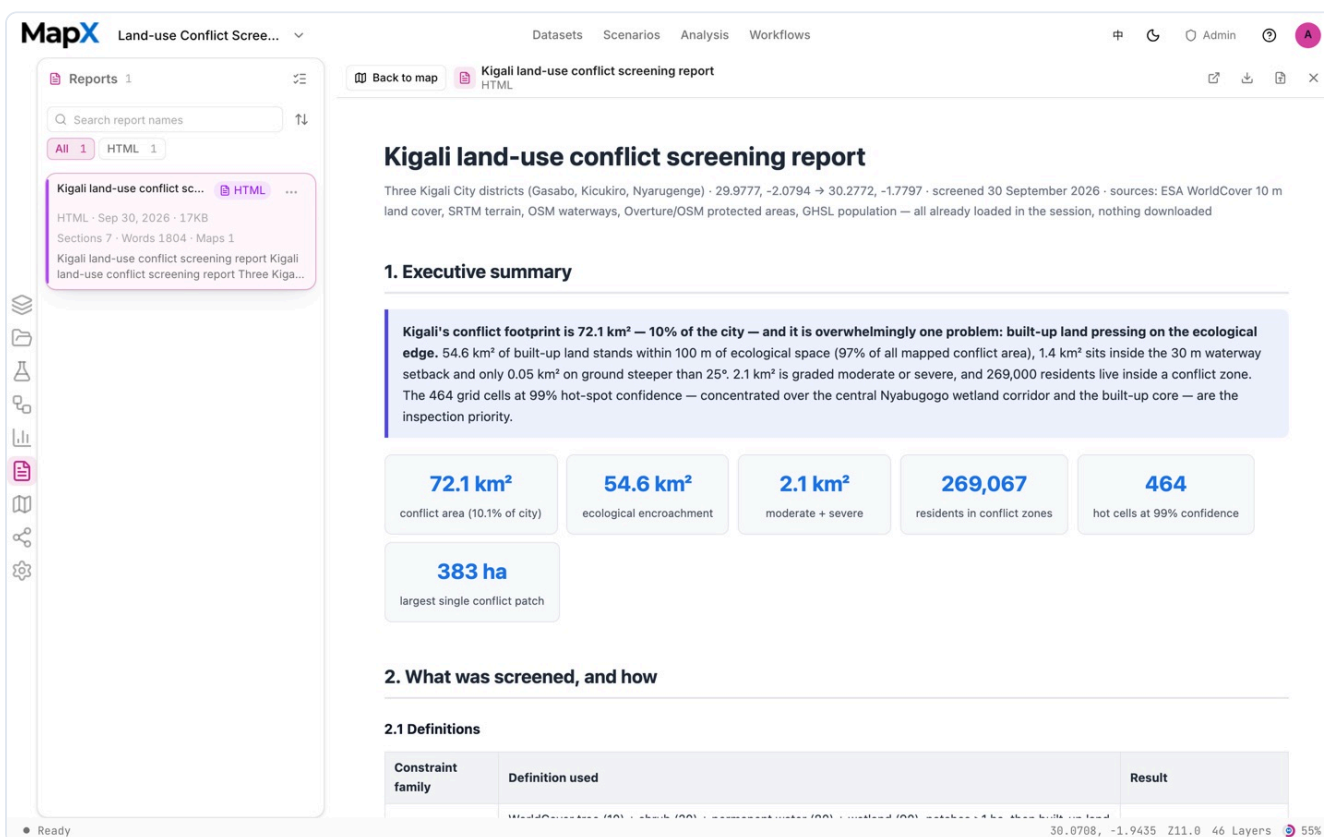

The scenario report opened in the report canvas, with an executive summary, figures and embedded maps

Example output

NOTE

The screenshots above come from one example run with the default settings on the shipped data. They show the shape of the deliverables, not what your run will return.

A finished run hands back a named, reusable set of deliverables instead of a single map:

- **Layers** — the ecological-space layer, the four conflict families (ecological encroachment, steep slope, waterway setback, protected area) and the worst-patch board, all with their definitions in the legend.
- **Tables** — the per-type conflict areas plus the de-duplicated union, and the exposed population per assessment cell.
- **Charts** — the conflict-area and exposure summaries, editable and ready for the report.
- **Report** — the compliance document with the definitions, the areas and the remediation guidance.

The layer names follow the run language, but the deliverable set is stable enough to plan a handover around.

Read the results with care

▲ **The in-city protected layer is nearly empty.** It cannot carry the ecological definition alone; the composite and the cross-check are both reported.

▲ **No building height, no volume.** The footprint layer carries a height value on almost none of its features, and on this data it falls outside the step budget — the report says development is read from land cover.

▲ **No slope-stability data.** Do not output a landslide risk class; the scenario gives "steep slope + setback + foundation treatment" guidance instead.

▲ **Report areas per type plus a union.** One developed patch can hit several constraints; a sum would double-count it.

▲ **The 100 m encroachment band is an analysis default.** It expresses "development pressing on ecological space" because one reference year cannot contain a cell that is both built-up and ecological.

▲ **Surface-water frequency is classed before use.** Raw 0–99% frequency is not a binary constraint.

APPENDIX A

Appendix A: Scenarios at a glance

Scenario	Study area	Layers	Key methods	Deliverables
1 Development Suitability Baseline	Nairobi	8	Hard-constraint screening, weighted overlay, capacity estimate	Suitability classes, development control tiers, charts and a report
2 Carrying Capacity Assessment	Jakarta	6	Fuzzy membership, limiting-factor composite, pressure quadrants	Capacity classes, overload cells, charts and a report
3 15-minute Life Circle Coverage	Jakarta	7	Walking service areas, shortfall population, 2SFCA	Three shortfall layers, a neighbourhood table, boards and a heatmap
4 Public Facility Siting	Dar es Salaam	7	Coverage diagnosis, candidate screening, MCLP vs k-median	Recommended sites, a marginal coverage curve, a ward balance table
5 Urban Growth Monitor	Hanoi	7	Phased expansion metrics, landscape expansion index, centre and ellipse	Expansion-form layers, phase tables, a quadrant grid
6 Land-use Conflict Screening	Kigali	8	Conflict screening, grading, remediation guidance	Four conflict layers, a worst-patch board, an exposure grid

Appendix B: Get started

- Open the **Scenarios** catalog from the MapX top menu and pick the scenario you need.
- Choose **Open scenario**: the whole layer bundle imports into the current project with default styles, no upload or configuration required.
- Start the analysis with the scenario's **suggested question**, or edit it first.
- In **plan mode**, answer the clarifications, review the plan document and approve it.
- When the run finishes, export a report, work with the charts or share the map; keep asking follow-up questions to adjust the scope and thresholds.

Appendix C: Data and licences

Scenarios are assembled from the built-in data catalog, and every layer carries its source, licence and attribution. Land cover, population, built-up area, protected areas and road networks each have their own vintage and resolution; state the year and scale whenever you combine them. Scenario output is analysis, not a statutory planning document.



From data to decisions

MapX brings spatial data, deterministic analysis and AI collaboration into one workspace.

app.mapxagent.com

Support · support@mapxagent.com