


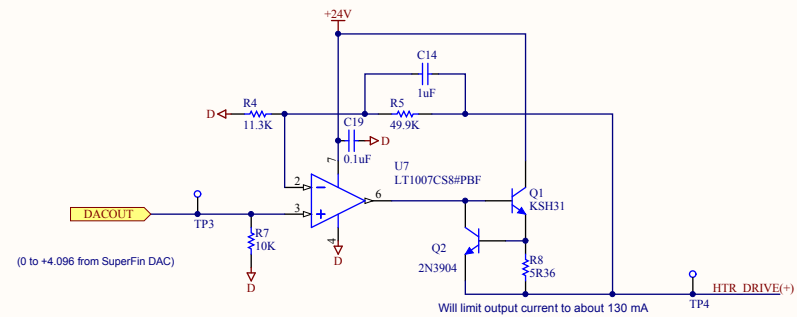


Title		
Size	Number	Revision
B		
Date:	12/20/2012	Sheet of
File:	\\.\780-00050, rev1, Pg1, SCH, Temp Controller Dev Board SchDoc	

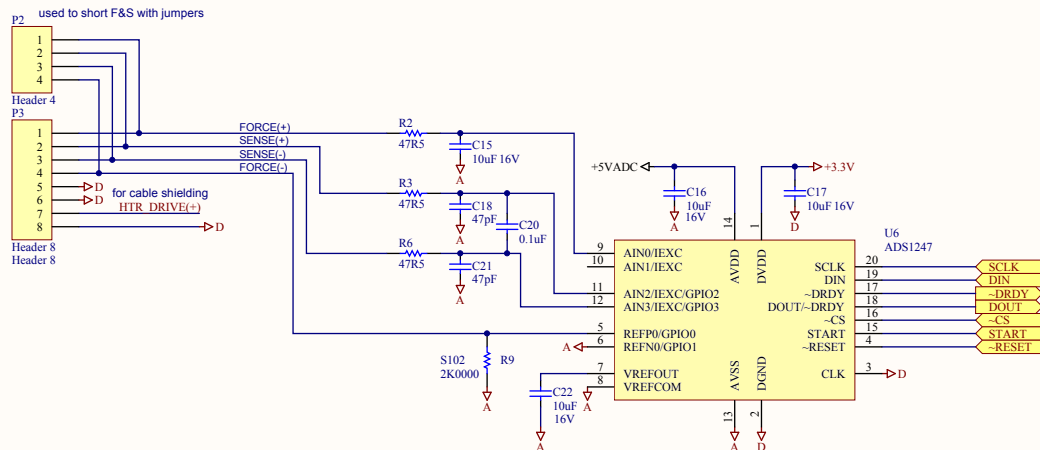



(0 to 22.18V, 0 to 1.97W into 250 ohm load)
worst case pwr Q2 = 0.58W (@ 12V out)




(0 to 22.18V, 0 to 2.46 W into 200 ohm load)
worst case pwr Q2 = 0.72 W (@ 12V out)

Title		
Size	Number	Revision
B		
Date:	12/20/2012	Sheet of
File:	\\.\780-00050, rev1 Pg2, SCH, Temp Control Board SchDoc	

p4 used to short F&S with jumpers

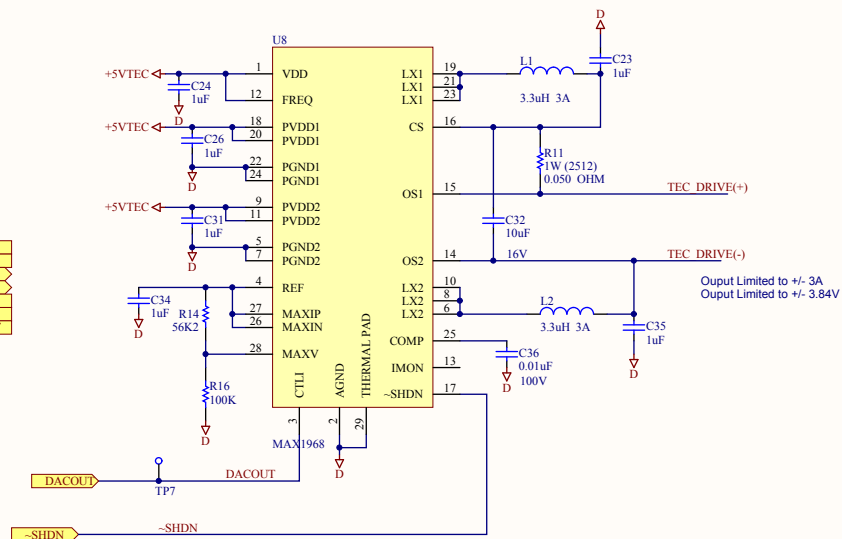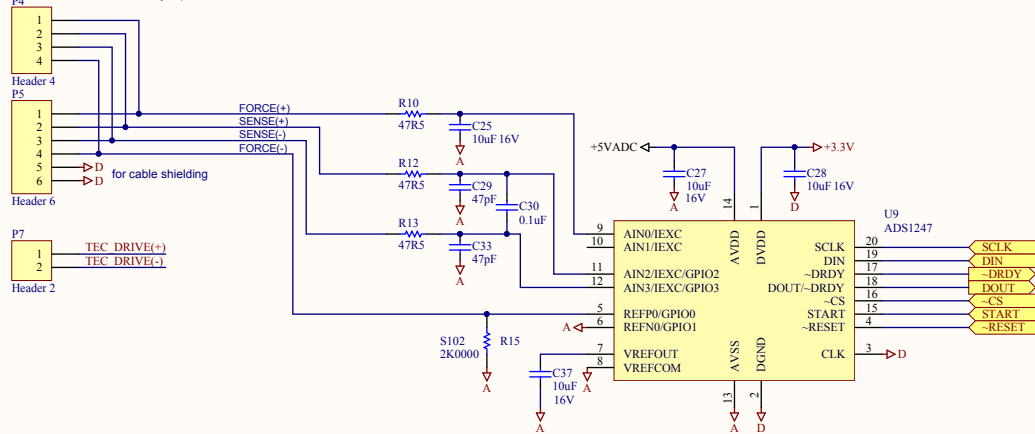

Title		
Size	Number	Revision
Date:	12/20/2012	Sheet of
File: \\...780-00050, rev1, Pg3, SCH, Temp Control Board SchDoc		

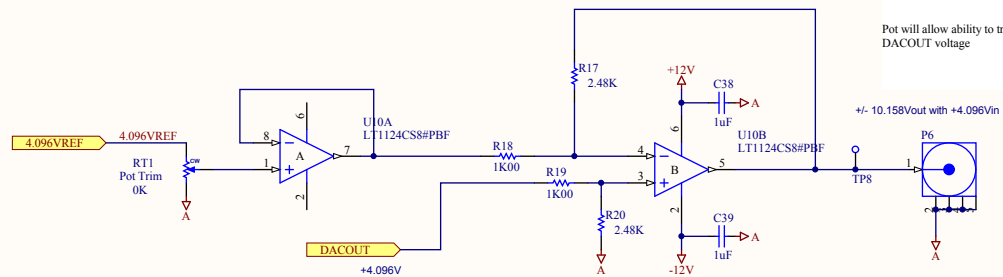

Amplifier used as analog readback of value measured by ADC. With digital gain of 1, a FS reading on the ADC will equal +10V on amp output.

Pot will allow ability to trim out full range of DACOUT voltage

Title		
Size	Number	Revision
Date:	12/20/2012	Sheet of
File: \\.\780-00050, rev1, Pg4, SCH, Temp Control Board SchDoc		