

Highlights

Optimizing warnings from hydrologic ensemble prediction systems for improved decision making

Jesús Casado-Rodríguez, Peter Salamon, Stefania Grimaldi, Corentin Carton De Wiart, Christel Prudhomme, Calum Baugh, Ervin Zsoter, Ilias Pechlivanidis, Nina Bosshard, Michaela Mikulickova

- Probabilistic NWP models outperform deterministic counterparts in terms of flood warning skill.
- Using persistence (consecutive forecasts) as a warning criteria is not effective in probabilistic systems.
- Building grand ensembles adds limited value to the skill of the best-performing NWP. Specifically, the improvement provided by deterministic NWPs is only significant for short lead times.

Optimizing warnings from hydrologic ensemble prediction systems for improved decision making

Jesús Casado-Rodríguez^a, Peter Salamon^a, Stefania Grimaldi^a, Corentin Carton De Wiart^b, Christel Prudhomme^b, Calum Baugh^b, Ervin Zsoter^b, Ilias Pechlivanidis^c, Nina Bosshard^c, Michaela Mikulickova^d

^a*European Commission, Joint Research Centre, Directorate E - Space, Security and Migration, Via Enrico Fermi 2749, Ispra, 21027, (VA), Italy*

^b*European Centre for Medium Range Weather Forecasts, Shinfield Park, Reading, WC2R 2LS, UK*

^c*Swedish Meteorological and Hydrological Institute, Folkborgsvägen 17, Norrköping, Sweden*

^d*Slovak Hydrometeorological Institute, Jeséniova 17, Bratislava, Slovakia*

Abstract

Early Warning Systems are critical in mitigating the impacts of floods, the most frequent and economically damaging natural hazard worldwide. These systems rely on hydrological simulations driven by meteorological forecasts, both of which are inherently uncertain. Ensemble Prediction Systems (EPS) were developed decades ago to account for these uncertainties by generating multiple future scenarios that portray the forecast uncertainty. The advantages of probabilistic modelling have been proven over the last decades both in the fields of meteorology and hydrology. In order to issue a flood warning, the probabilities provided by EPS need to be converted into dichotomous values of "warning" or "not warning". This conversion is often done by application of thresholds, whose definition is pivotal for the final skill of the system. While meteorological and hydrological models are under continuous development —higher spatial and temporal resolution, better process representation, improved calibration—, the methodologies for converting discharge forecasts into flood warnings lack continuous evaluation. In this paper, we use discharge simulations from the European Flood Awareness System (EFAS) to assess the skill of the four NWP models of different nature —probabilistic and deterministic—within the system, and search for methods to combine all the NWP into a grand ensemble that enhances overall skill. Additionally, we evaluate the effects of the current notification criteria —probability threshold

and persistence— and determine their optimal values. Our results demonstrate that probabilistic NWP models outperform deterministic ones, which demonstrate skill only at short lead times. Additionally, our findings suggest that the persistence criterion is beneficial for removing inconsistencies between consecutive forecasts in deterministic NWP, but should be omitted from probabilistic systems. By applying optimal notification criteria to a single probabilistic NWP (ECMWF-ENS), we observe an improvement of up to 6.4% in skill compared with the current EFAS procedure, which employs four NWP models. When compared with the optimized ECMWF-ENS warnings, grand ensembles only yield significant improvements in skill (up to 4.2%) within the first two days lead time. Two methods to build the grand ensemble stand out —equiprobability among all model runs or skill weighted—; we discuss advantages and drawbacks of these two approaches. Overall, our study underscores the importance of selecting appropriate flood notification criteria and limits the value added to the grand ensemble by deterministic NWPs to the shortest lead time range.

Keywords: EFAS, early warning system, flood warnings, probabilistic forecasting

1. Introduction

Floods are the natural disaster that causes the biggest economical losses in Europe WMO (2021). In the European Union (EU), flood damages amounted to a total cost of approximately EUR 280 billion in the period 1980-2022, representing 43% of all meteorological hazards EEA (2023). The historical data show an increasing tendency in flood damages over Europe EEA (2023); Paprotny et al. (2018), and climate projections indicate an exacerbation of this trend with increasing frequency and severity of extreme events Alfieri et al. (2017); Martina Angela Caretta et al. (2023). In this scenario, Flood Early Warning Systems (FEWS) emerge as one of the multiple adaptation measures to be taken. The major flood event in the Elbe River in 2002 triggered the development of the European Flood Awareness system (EFAS), a continental scale FEWS that has been running since 2005 and whose monetary value has been proven Pappenberger et al. (2015). The magnitude of the flood that hit Germany and Belgium in July 2021, the most costly in the last 40 years, EEA (2023) was a reminder of the importance of FEWS and their continuous improvement. On a global scale, the United Nations launched

the initiative Early Warnings for All to ensure that the entire World population is warned about weather, water and climate hazards by 2027 Egerton et al. (2023). Continental systems like EFAS, and particularly its global counterpart GloFAS (Global Flood Awareness System), are cornerstones in achieving the objectives of this UN initiative.

FEWS rely on meteorological forecasts generated by Numerical Weather Prediction (NWP) models. Over the past thirty years, Ensemble Prediction Systems (EPS) have been developed within the realm of NWP models to address uncertainties in the initial conditions. EPS provide equiprobable forecasts at any given time and location, enabling the quantification and dissemination of probabilistic forecasts Cloke and Pappenberger (2009). In comparison to deterministic models, EPS have demonstrated enhanced consistency across consecutive forecasts Buizza (2008) and improved precipitation forecasts at longer lead times Molteni et al. (1996).

Approximately two decades ago, the success of EPS in meteorology led to the adoption of this paradigm in flood forecasting Diomedede et al. (2008); Bartholmes et al. (2009); Thielen et al. (2009); Yang et al. (2020). Hydrological Ensemble Predictions Systems (HEPS) propagate the uncertainties in the meteorological forecasts by forcing hydrological models with the members of a meteorological ensemble. Although this approach is the most common, it only considers the uncertainty in the initial meteorological condition, but does not include other sources of uncertainty, such as model representation or model parameterization Cloke and Pappenberger (2009).

The decision to issue weather-related warnings, such as floods, is delicate as it might result in significant costs, either due to unpreparedness if an event is missed or the mobilization of resources in false alarms. Weather forecasting systems often issue a higher number of false alarms than missed events Bouttier and Marchal (2023), despite the potential risk of eroding trust in the system, known as the 'cry wolf' effect LeClerc and Joslyn (2015). This latter research showed that an increase in false alarms diminishes the credibility of the system, leading end-users to disregard precautionary measures. However, they also demonstrated that incorporating uncertainty estimates in warning messages can assist users in making informed decisions. Therefore, HEPS have the potential to enhance both the skill and trustworthiness of flood warning system, if particular attention is given to the balance between false alarms and missed events.

The European Flood Awareness System (EFAS) is the hydrological forecast component of the Copernicus Emergency Management Services (CEMS)

56 of the European Commission Thielen et al. (2009). EFAS is an operational
 57 system that monitors and forecasts floods in a extensive European domain,
 58 encompassing not only European Union member states. Its primary objec-
 59 tive is to enable proactive measures in anticipation of significant flood events.
 60 EFAS functions as a complementary system to national or regional coun-
 61 terparts, with a specific focus on trans-boundary rivers and medium-range
 62 forecasts.

63 Since 2020, EFAS has been generating forecasts twice a day, with a 6-
 64 hour resolution and lead times extending up to 10 days. It couples four
 65 weather forecasts of diverse nature —deterministic and probabilistic— with
 66 the distributed, physically-based hydrological model LISFLOOD-OS Burek
 67 et al. (2013). The simulation produces a set of water fluxes and state vari-
 68 ables, from which river discharge is utilized to issue flood warnings. EFAS
 69 employs a threshold exceedance approach for issuing warnings Bartholmes
 70 et al. (2009), where continuous discharge time series are converted into bi-
 71 nary series of exceedance or not-exceedance over a discharge threshold (the
 72 5-year return period). In their work, Bartholmes et al. Bartholmes et al.
 73 (2009) developed a notification criteria based on two types of persistence:
 74 persistence in a particular forecast is determined by the number of NWP
 75 members predicting the exceedance, while persistence over several forecast
 76 establishes that a flood signal is reliable when consecutive forecasts predict
 77 the event. In this study, we will use the term "probability of exceedance"
 78 to refer to the first type of persistence, as the number of NWP members
 79 exceeding the discharge threshold can be translated into a probability, as-
 80 suming equiprobability among them). We will keep the term "persistence"
 81 to denote only the consistency among consecutive forecasts.

82 The criteria applied in EFAS have evolved and currently stand at a 30%
 83 probability threshold and a persistence of 3 consecutive forecasts. These cri-
 84 teria are independently applied to the two deterministic and the two proba-
 85 bilistic NWP models, issuing a notification only if at least one of the models
 86 of each type predicts the flood. Additionally, EFAS notifications are exclu-
 87 sively dispatched to locations with a minimum catchment area of 2000 km²
 88 and for lead times longer than 48 hours. The first limit is based on the infe-
 89 rior hydrological performance in smaller catchments, while the second limit
 90 is a consequence of EFAS serving as a supplementary system to national or
 91 regional services. Previous studies have examined the skill of EFAS notifica-
 92 tions Bartholmes et al. (2009) and the response of end users Demeritt et al.
 93 (2013). However, the continuous advances in NWP performance Bauer et al.

(2015), as well as in the resolution and representation of hydrological processes in EFAS Joint Research Centre - European Commission (2020, 2023), requires a new evaluation of the notification criteria to harness the potential of the system.

The objective of this analysis is to assess the skill of a continental flood forecasting system like EFAS in its current state, and explore new notification criteria that can maximize its warning skill. In particular, the first goal is to determine the value of combining several NWP models of different nature in a single system, specifically seeking the appropriate combination method to build a grand ensemble. The second goal is to optimize the two notification criteria —probability threshold and persistence—, analysing the interplay between them and reconsidering whether the persistence criterion is meaningful in a purely probabilistic approach. The third and final goal is to analyse the evolution of the notification skill with catchment area to discern if the newer, higher resolution models are skillful in smaller catchments.

To address our research questions, we conducted an analysis of EFAS4 discharge simulations for the period 2020-2023. Section 2 enumerates the datasets used in the analysis. Section 3 explains the two experiments that analyse the skill of individual NWP models and different combinations of those models, the criteria optimization process, and the skill metrics we targeted. Section 4 follows a similar structure, presenting first the skill of individual NWP, followed by that of the combination methods, and ends with an exploration of the relationship between notification skill and catchment area. Section 5 discusses the importance of the spatio-temporal framework and target metric in skill analysis like the one here presented, the trade-offs between the notification criteria, the benefits of combining NWP models, and the challenges in selecting a combination method.

2. Data

The data used in this analysis is taken from the operational setup of the European Flood Awareness System (EFAS) in its version 4 Joint Research Centre - European Commission (2020). EFAS generates a hydrological forecast twice a day (00 and 12 UTC) forced by the meteorological forecast of four different NWP models outlined in Table 1. EFAS integrates forecasts from probabilistic models (COS and ENS) and deterministic models (DWD and HRES) to issue flood warnings.

Table 1: Characteristics of the numerical weather prediction models used in EFAS4.

Model	Provider	Acronym	Max. lead time	No. ensembles	Spatial resolution
COSMO-LEPS		COS	5.5 days	20	~ 7 km
ICON-EU/ICON	DWD	DWD	7 days	1	~ 6.5 -13 km
HRES	ECMWF	HRES	10 days	1	~ 9 km
ENS	ECMWF	ENS	10 days	51	~ 18 km

129 The study period spans from the release of EFAS4 in October 2020 until
130 June 2023. For this period we use the EFAS forecasts as the discharge pre-
131 diction and the EFAS reanalysis as a proxy of discharge observations. Using
132 reanalysis as ground truth avoids the limitation of observational data (e.g.
133 gaps in the observed time series, difference in recorded period...), and reduces
134 model representation and calibration errors from the analysis. The previous
135 data sets were converted from a continuous variable —discharge— into bi-
136 nary events of exceedance or not exceedance over a threshold. Following the
137 current EFAS setup, the flood threshold is the discharge associated with the
138 5 year return period, which was computed by fitting a Gumbel distribution
139 to the annual maxima from the discharge simulated in the EFAS4 long-term
140 run (1991-2023) .

141 In contrast the original EFAS skill assessment Bartholmes et al. (2009),
142 the current analysis focused solely on real gauging stations rather than all
143 river cells in the model, which would have cause an autocorrelation issue.
144 A selection was made from the approximately 4000 gauging stations in the
145 EFAS database based on two conditions: the contributing area must ex-
146 ceed 500 km^2 , and the hydrological performance, measured in modified KGE
147 (Kling-Gupta efficiency) Kling et al. (2012); Gupta et al. (2009); Knoben
148 et al. (2019), must not fall below 0.50. The lower bound on catchment was
149 set due to the relatively coarse spatial resolution of NWP and EFAS temporal
150 resolution (6 h), which limits hydrological performance in small catchments.
151 The condition based on hydrological performance ensures the validity of us-
152 ing model simulations as proxies for observations is valid. Ultimately, 1979
153 gauging stations were included in the analysis, accounting for a total of 1683
154 events (exceedances over the 5 year threshold) during the study period. As
155 explained in section 3.4, the optimization of the notification criteria was con-
156 ducted on a subset of 1239 stations with a contributing area larger than 2000
157 km^2 (874 events), while the entire set was used to analyze the influence of

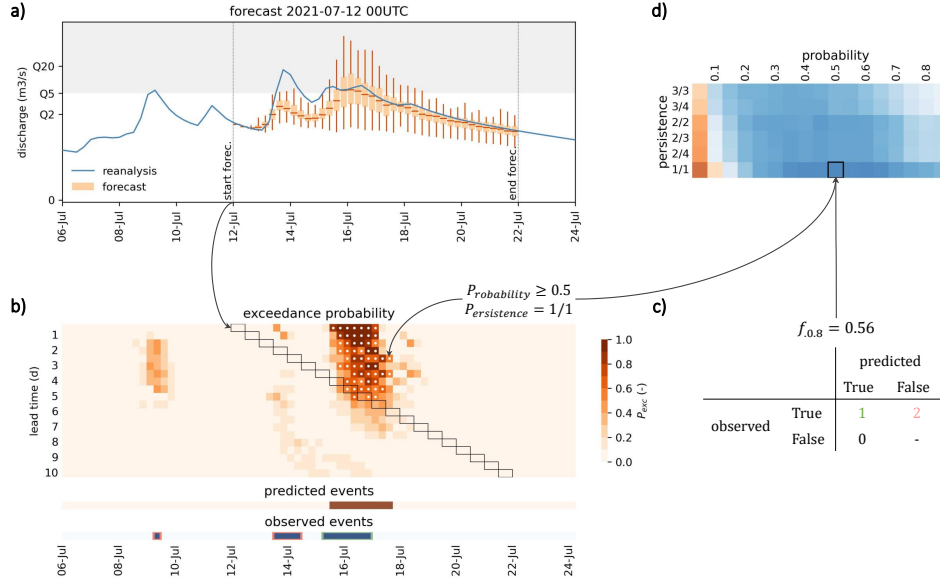


Figure 1: Overview of the skill assessment framework. a) Hydrographs comparing observed and forecasted discharge with the discharge associated to the 5-year return period. b) Matrix of total exceedance probability (white dots identify pairs of date and lead time that meet the notification criteria, whereas black rectangles delineate the location of the forecast hydrograph from panel (a) in the probability matrix) and identification of predicted events for specific values of probability threshold and persistence. c) Confusion matrix for the selected station, constructed based on the previous notification criteria. d) Evaluation of the f-score across all combinations of probability threshold and persistence; the black square highlights the skill score corresponding to the notification criteria in panel (b).

158 catchment area on warning skill.

159 3. Methods

160 The skill assessment comprises four steps, as depicted schematically in
 161 Figure 1: (a) transformation of both observed and forecasted discharge time
 162 series into corresponding time series of the probability of exceeding the 5-
 163 year return period; (b) construction of an exceedance probability matrix that
 164 consolidates the overlapping forecasts, followed by identification of predicted
 165 events through the application of specific notification criteria on that matrix;
 166 (c) calculation of the contingency table —hits, misses and false alarms—, (d)
 167 evaluation of the skill of the system across all possible combinations of the
 168 notification criteria.

169 3.1. Exceedance over threshold

170 The notification process starts by converting the continuous time series
 171 of the target variable into time series of exceedance or non-exceedance over
 172 a predefined threshold. Within EFAS, flood notifications are based on dis-
 173 charge, and the critical threshold is the discharge associated with a 5-year
 174 return period (Q_5) generated from a 30-year historical simulation. While
 175 alternative alert systems might rely on disparate variables, such as precip-
 176 itation Bouttier and Marchal (2023) or river stage Nevo et al. (2022), and
 177 employ different thresholds for defining events, the underlying methodology
 178 remains similar.

179 The application of the discharge threshold yields distinct outcomes when
 180 comparing a single time series—like observations or deterministic forecasts—with
 181 an ensemble forecast. In the former case, the time series is converted into
 182 a binary sequence, where 0 represents non-exceedance and 1 denotes ex-
 183 ceedance. Conversely, ensemble forecasts lead to a probability time series,
 184 with values fluctuating between 0 and 1. Since forecasts—both deterministic
 185 and probabilistic—are generated more frequently (every 12 hours) than the
 186 forecast horizon, they overlap. To address this, the ensemble forecasts are
 187 restructured into an exceedance probability matrix that connects each time
 188 step to increasing lead times, as illustrated in panel (b) of Figure 1. Such
 189 a configuration simplifies both the analysis and the subsequent computa-
 190 tions. Within this matrix, an individual forecast is represented by a diagonal
 191 (black rectangles). The uppermost rows represent shorter lead times, where
 192 the probability of accurate prediction generally increases. For instance, in the
 193 example in Figure 1, the flood event occurring around July 16 was predicted
 194 with a 50% probability five days in advance, increasing close to certainty
 195 within two days of the event.

196 3.1.1. Combination of NWP

197 One of the particularities of EFAS is the simultaneous use of four NWP,
 198 both deterministic and probabilistic. The purpose of using multiple NWP is
 199 to leverage the strengths of each model. Thus, a primary aim of this study
 200 is to develop an effective method for integrating deterministic and proba-
 201 bilistic forecasts. In practical terms, EFAS forecasts produce four distinct
 202 probability matrices, one for each NWP, in contrast to the single matrix de-
 203 picted in panel (b) of Figure 1. The challenge lies in devising a methodology
 204 to combine these four matrices into a total exceedance probability matrix,
 205 thereby enhancing the system’s predictive accuracy compared to the use of

206 a single NWP. We explored three different approaches for calculating the to-
 207 tal exceedance probability and compared them with EFAS current approach,
 208 which does not incorporate a total probability framework.

209 In the current EFAS procedure, a notification is issued if at least one
 210 deterministic and one probabilistic NWP predict the event. This approach
 211 will be referred to as *1 deterministic + 1 probabilistic* (1D+1P) from here on.
 212 As each model is evaluated independently, the current procedure does not
 213 calculate a total probability matrix. The most straightforward method to
 214 compute the total probability is the *model mean* (MM); it is a simple mean
 215 over the four exceedance probability matrices, meaning all models are given
 216 equal weight. In other words, the single member of a deterministic model is
 217 considered significantly more important than any members of a probabilistic
 218 model. An alternative approach would be to assign the same weight to each
 219 member, regardless of whether it belongs to a deterministic or a probabilistic
 220 model. This approach will be referred to as *member weighted* (MW). In this
 221 approach, each NWP receives a weight relative to the number of members it
 222 contains, meaning the probabilistic models have greater influence than the
 223 deterministic ones. However, neither of these approaches take into account
 224 the performance of the NWP. To address this limitation, the *Brier weighted*
 225 approach (BW) assigns a weight to each model based on its probabilistic
 226 skill. The Brier score Brier (1950) —a probabilistic error metric that ranges
 227 from 0 to infinite, with 0 being the optimal value— is used as a measure of
 228 probabilistic skill. The Brier score is calculated using the equation:

$$BS = \frac{1}{T} \sum_{t=1}^T (P_{obs,t} - P_{pred,t})^2 \quad (1)$$

229 where BS is the Brier score of a single station, T is the number of time steps,
 230 $P_{obs,t}$ is the observed probability of exceedance, and $P_{pred,t}$ is the predicted
 231 probability of exceedance at a specific time step. The results of the BW
 232 approach are highly sensitive to how Brier scores are converted into weights.
 233 The conversion function must transform the values from a metric whose
 234 optimal value is 0 to a weight with an optimal value of 1. Additionally, it
 235 should be exponential to amplify the differences among NWP, considering the
 236 extremely low BS values that are characteristic in rare events where both the
 237 observed and predicted probabilities are 0 most of the time. Inverse distance
 238 weighing (eq. 2) fulfils both conditions. Values of the exponent p from 1 to

Table 2: Contingency table in a binary classification. E_{obs} is the sum of observed events and E_{pred} the sum of predicted events.

		Observed		E_{pred}
		True	False	
Forecasted	True	hit	false alarm	
	False	miss	true negative	
		E_{obs}		

239 9 were tested, and 7 was found to be the optimal value.

$$w = \frac{BS^{-p}}{\sum BS^{-p}} \quad (2)$$

240 The weights in the BW method are specific to each NWP and lead time,
 241 whereas in the MM and MW methods they remain stable over lead time.

242 3.2. Contingency table

243 The skill assessment of a warning system involves a binary classification
 244 task that compares two time series: the predicted and observed events. Typ-
 245 ically, the contingency table (Table 2) is used to summarize performance in
 246 this type of classification problem. Given that floods are rare events, the
 247 classification task is highly imbalanced, resulting in the number of true ne-
 248 gatives being orders of magnitude larger than any of the other terms in the
 249 contingency table. Consequently, we must omit the true negatives from both
 250 the computation of the contingency table and the selection of the target skill
 251 metric not to overestimate skill (Section 3.3).

252 The derivation of the binary time series of observed events is straight
 253 forward by application of the discharge threshold (Q_5) over the reanalysis
 254 time series. Conversely, deriving the binary time series of predicted events
 255 involves applying two notification criteria to the matrix of total probability
 256 of exceedance (or the individual matrices of exceedance probability for each
 257 NWP in the 1D+1P approach). The probability threshold sets the minimum
 258 value of the exceedance probability at which a high risk of flooding is con-
 259 sidered and a notification must be issued. In the current EFAS setup, the
 260 threshold is 30% and applies only to the probabilistic forecasts. Addition-
 261 ally, the persistence criterion was introduced to remove false alarms caused
 262 by the erratic behaviour of some NWP Bartholmes et al. (2009). This cri-
 263 terion aims to replicate the behaviour of a forecaster, who would wait to

264 send the warning until consecutive forecasts predict the event. In the cur-
 265 rent procedure, notifications are sent if 3 consecutive forecasts exceed the
 266 probability threshold (hereafter referred to as 3/3 persistence). Panel (b) in
 267 Figure 1 illustrates the application of these two notification criteria on the
 268 matrix of exceedance probability. For every time step (columns), the white
 269 dots identify the lead times that meet the criteria. Eventually, a flood event
 270 is predicted at a particular time step if any of the lead times meet the criteria.

271 The terms of the contingency table result from comparing the predicted
 272 and observed events. We consider a hit any observed event in which at least
 273 one time step was correctly predicted. The number of misses and false alarms
 274 are calculated, respectively, as the difference between the observed (E_{obs}) or
 275 predicted (E_{pred}) events and the hits (eq. 3).

$$\text{misses} = E_{obs} - \text{hits} \quad (3)$$

$$\text{false alarms} = E_{pred} - \text{hits} \quad (4)$$

276 The process is repeated for all possible combinations of the two criteria and
 277 across all stations. We tested probability threshold values ranging from 5%
 278 to 95% and six persistence values: 1/1 (no persistence), 2/4, 2/3, 2/2, 3/4
 279 and 3/3 (the current persistence criterion). The outputs of this process are
 280 matrices of hits, misses and false alarms for each station an combination of
 281 the probability threshold and persistence that will be used in the subsequent
 282 section to compute skill metrics.

283 3.3. Skill metrics

284 The fact that the classification task we face is highly imbalanced is fun-
 285 damental in the selection of the skill metric from the myriad of options. For
 286 instance, the odds ratio and the Hanssen-Kuipers score (HK) Hanssen and
 287 Kuipers (1965) were discarded because both include the true negatives, which
 288 is a term to be excluded in an imbalanced classification. Instead, we have
 289 selected three skill metrics specific for imbalanced classification, i.e., that
 290 exclude the true negatives.

291 Recall is the proportion of observed events that are correctly predicted
 292 (eq. 5); in some contexts it is also known as hit rate, probability of detection
 293 or sensitivity. Bartholmes Bartholmes et al. (2009) proved that recall is equal
 294 to HK for highly imbalanced classifications, such as floods. Precision, a.k.a.
 295 positive predicted value or frequency of hits, is the proportion of the predicted
 296 events that are correct (eq. 6). There is a well known trade-off between recall

and precision. In the specific case of flood notifications, very strict criteria would cause very few notifications with high certainty, which means that they will be mostly correct (high precision), but a lot of events would be missed (poor recall). On the other hand, very relaxed criteria would cause a large amount of uncertain notifications, which means a small number of missed events (high recall) but a large number of false alarms (poor precision). As a compromise, the f_β score is a metric that balances recall and precision (eq. 7). In its most common version ($\beta = 1$) it is the harmonic mean of recall and precision, granting equal importance to both terms. However, higher importance can be given to precision ($\beta < 1$), therefore limiting the amount of false alarms, or to recall ($\beta > 1$), reducing the amount of misses. In our study, after suggestions from forecasters analyzing EFAS on a daily basis, we selected $f_{0.8}$ as the target skill metric. This metric balances precision and recall giving a slightly higher value to the former. The idea behind is to limit the amount of false alarms, which would jeopardize the trust of the recipients of the warnings. Both recall, precision and the f_β score range from 0 to 1, being 1 their optimal value.

As a final validation metric, we used bias, which represents the proportion between the number of predicted and observed events and is calculated as the quotient between recall and precision (eq. 8). Its optimal value is 1, which means that the number of notifications issued is equal to the number of observed events, and it ranges from 0 to infinity. All four metrics presented here can be plotted in the Roebber diagram Roebber (2009). We modified the original Roebber diagrams and replaced the critical success index by our target metric ($f_{0.8}$).

$$\text{recall} = \frac{\text{hits}}{E_{obs}} = \frac{\text{hits}}{\text{hits} + \text{misses}} \quad (5)$$

$$\text{precision} = \frac{\text{hits}}{E_{pred}} = \frac{\text{hits}}{\text{hits} + \text{false alarms}} \quad (6)$$

$$f_\beta = (1 + \beta^2) \frac{\text{precision} \cdot \text{recall}}{\beta^2 \cdot \text{precision} + \text{recall}} \quad (7)$$

$$\text{bias} = \frac{E_{pred}}{E_{obs}} = \frac{\text{hits} + \text{false alarms}}{\text{hits} + \text{misses}} = \frac{\text{recall}}{\text{precision}} \quad (8)$$

3.4. Optimal notification criteria

The current EFAS notification criteria involve 5 variables: minimum catchment area, minimum lead time, combination of NWP, probability thresh-

old and persistence. We analysed and optimized all these variables, initially isolating each one to understand its individual effects.

We have conducted two main experiments to explore the benefits of combining NWP. The first experiment analyzes each NWP individually with two objectives: identifying the strengths and weaknesses of each NWP, and understanding how the notification criteria affect differently probabilistic and deterministic NWPs. The second experiment compares the four combinations of NWP explained in section 3.1.1. The aim is to identify the most appropriate combination method and compare it against the most skillful NWP to assess whether the combination of NWP adds value to the system. The setup of these two experiments is similar, apart from the difference in the input data, and is explained in the following paragraphs.

For the majority of the analyses, we used only stations that met the current minimum catchment area of 2000 km². With this subset of stations, we explored the evolution of skill with lead time, probability and persistence. The 20 lead time values —2 forecasts per day and an horizon of 10 days— were grouped in two ways. First, we grouped them daily to analyze the evolution of skill with lead time. Second, to explore the impacts of the probability threshold and persistence, we defined 4 lead time ranges: a) shorter than 2 days, a range at which EFAS formal notifications cannot be issued, b) 2-5.5 days, when all NWP are available, c) 5.5-7 days, when 3 NWP are available as the maximum lead time of COS is exceeded, d) 7-10 days when only 2 NWP are available as the maximum lead time of DWD is exceeded.

Following the exploration, we proceeded to optimize the probability threshold and the persistence criteria. Specifically, we sought the combination of probability and persistence that produces the maximum $f_{0.8}$ at each of the 4 lead time ranges previously specified. The optimization was repeated for every NWP individually and for every combination of the NWP. To ensure a robust selection of criteria, we applied a 10-fold cross validation: 20% of the stations were left aside as a test set, while the remaining 80% were subdivided in 10 folds. We computed the skill for every combination of 9 folds and then averaged over folds. The optimal notification criteria were derived from this average-over-fold skill matrix, as shown in panel (d) of Figure 1). Subsequently, the selected criteria were evaluated on the test set to prevent overfitting.

Lastly, we explored the impact of catchment area on warning skill using the entire set of stations. We calculated the notification skill for increasing

values of the minimum catchment area, ranging from 500 km² to 300,000 km², using the criteria previously optimized for the minimum catchment area of 2000 km². Subsequently, we tested whether the skill of the system, particularly that of small catchments, significantly improves with a more complex notification criteria in which the probability threshold varies with catchment area. We fixed the persistence criterion to that obtained in the initial optimization and only tuned the probability threshold for increasing values of the catchment area threshold. We compared the skill of the fixed probability threshold with the skill of the area-specific probability threshold to evaluate whether the new, more complex criteria pays off in terms of performance.

4. Results

4.1. Analysis of "observed" events

Figure 2 depicts the spatial distribution of the 1239 stations used in the optimization of the notification criteria, i.e., those with a minimum contributing area of 2000 km² and a KGE not lower than 0.50. The colours represent the amount of "observed" flood events, while the histogram at the bottom shows the frequency of events across the stations.

In total, the optimization of the notification criteria will be based on 1239 stations and 874 "observed events". A higher concentration of points with events is observed in Central Europe, the British Isles, and Mediterranean catchments. Significant flood events in the Rhine, Meuse, and Ebro are visually evident on the map. Throughout the study period, 61% of the stations did not exceed the 5 year return period, which means that hits and misses can not exist, and the only term in the contingency table will be false alarms. Consequently, the f-score for these stations can be either null or 0. Additionally, 29% of stations registered only one "observed" event. These nuances bear implications for the overall skill of the system, as we will explore in subsequent discussions.

The imposition of a minimum contributing area of 2000 km² places a constraint on the number of stations available for optimization, consequently affecting the count of observed events. In the final phase of our analysis, we assessed the implications of this criterion by expanding our consideration to stations with a minimum area of 500 km². Figure 3 represents the relationship between an increasing catchment area threshold and the corresponding

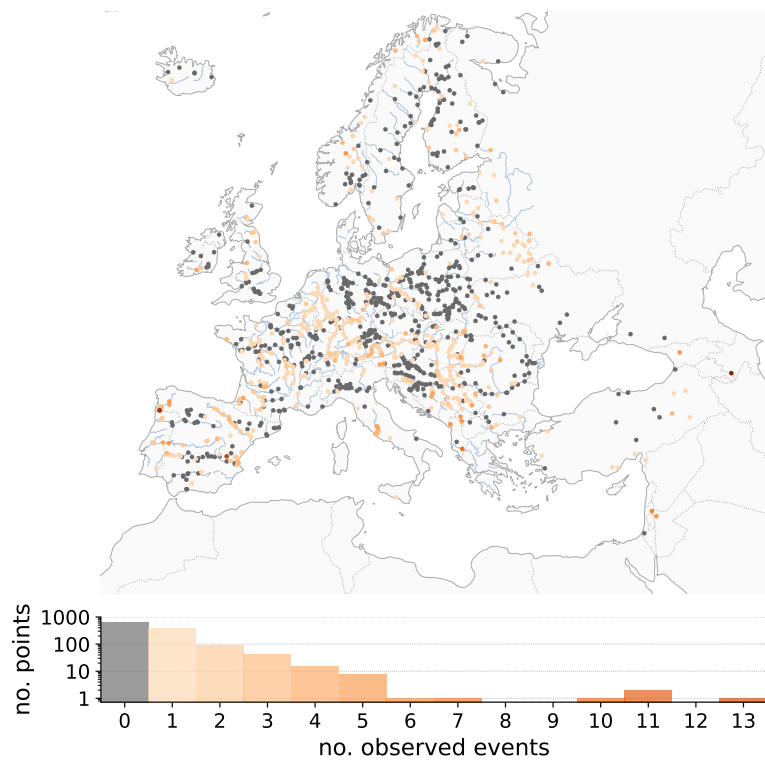


Figure 2: Geographical distribution of the stations used for optimizing the notification criteria, and number of "observed" flood events during the study period.

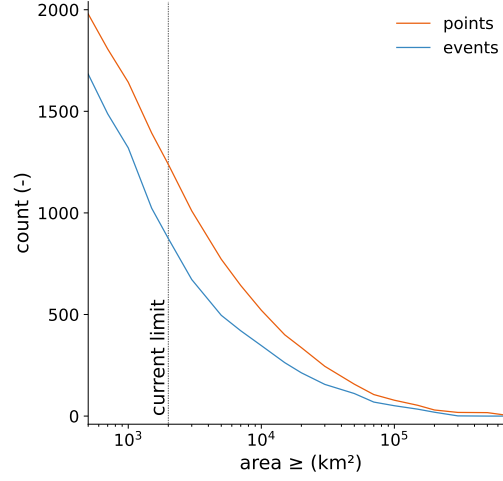


Figure 3: Number of stations (orange) and observed events (blue) by catchment area threshold. The vertical, dotted line represents a catchment area of 2000 km², the current limit in the EFAS notifications.

401 number of stations and "observed" events. Both counts decrease exponen-
 402 tially with catchment area. By excluding the points with contributing area
 403 smaller than 2000 km², we discarded 37% of the stations and 48% of the
 404 events. The objective of this decision was to use the current notification
 405 criteria as benchmark.

406 The imposition of a minimum contributing area of 2000 km² roots in
 407 the idea of using the current notification criteria as benchmark. However,
 408 it places a constraint on the number of stations available for optimization,
 409 consequently affecting the count of observed events. In the final phase of
 410 our analysis, we assessed the implications of this criterion by expanding our
 411 consideration to stations with a minimum area of 500 km². Figure 3 repre-
 412 sents the relationship between an increasing catchment area threshold and
 413 the corresponding number of stations and "observed" events. Both counts
 414 decrease exponentially with catchment area. By excluding the points with
 415 contributing area smaller than 2000 km², we discarded 37% of the stations
 416 and 48% of the events.

417 4.2. Individual NWP

418 Prior to studying how to combine the NWP models, we analysed the
 419 skill of each of the models individually. This analysis serves a dual purpose.

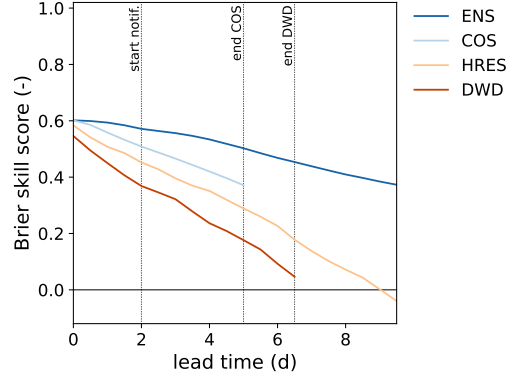


Figure 4: Brier skill score of the four NWP used in EFAS at daily lead times. The reference ($BSS = 0$) is a model that never predicts an event. Blue lines represent probabilistic models, and orange lines deterministic ones.

First, to understand the relative skill of each model, with the intention of incorporating this skill into the computation of the total probability. Second, to compare the skill of individual NWP models against the benchmark—the current notification criteria—and to set a baseline for the combination methods.

4.2.1. Probabilistic skill

In the initial assessment of NWP skill, we calculated the Brier score for each NWP at daily lead times. The Brier score, as an error metric, yields values that can be challenging to interpret, given the dependence of error magnitude on the specific variable—particularly in the context of rare events like floods, where the magnitude is inherently low. Instead, we employ the Brier skill score (BSS) to gauge the relative skill of a model in comparison to a reference. Models outperforming the reference receive a positive BSS, while those underperforming register a negative BSS. For the reference, we opted for a dummy model that never predicts an event ($P_{pred} = 0$) Legg and Mylne (2004).

The plot above demonstrates that probabilistic models exhibit greater skill than deterministic ones. Only within very short lead times (0-1 days) do deterministic models approach the skill observed in probabilistic models. This is particularly significant for EFAS notifications, as the formal notifications are reserved for lead times greater than 2 days (indicated by the leftmost dotted line). As lead time increases, there is a degradation in skill.

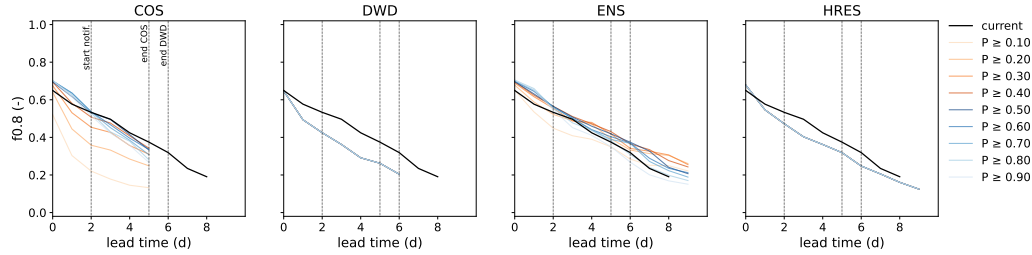


Figure 5: Evolution of the notification skill with daily lead times and probability threshold for each NWP model in an scenario with no persistence. Each plot represents a different NWP. As a benchmark, the black, solid line represents the skill of the current operational criteria (1 deterministic + 1 probabilistic, 30% probability and a persistence of 3 forecasts).

442 This decline impacts ENS to a lesser extent than the other models. Both de-
 443 terministic models display poor skill at their forecast horizon. For instance,
 444 at 10 days lead time, the skill of HRES is worse than a model that never
 445 predicts a flood.

446 Overall, the most skillful model for flood warning forecasting is ENS,
 447 while the least skillful is DWD. In section 4.3, we will convert the Brier score
 448 into weighing factors for the computation of total probability (see Figure 8).

449 4.2.2. Notification skill

450 In this section we analysed how the NWP would have performed if notifi-
 451 cations would be sent based uniquely in one of them. First, we illustrate the
 452 general behaviour of notification skill according to the three dimensions here
 453 involved —lead time, probability threshold and persistence—. Second, we
 454 optimize the probability and persistence criteria for a fixed lead time range.

455 Figure 5 exhibits the evolution of the notification skill with lead time and
 456 probability threshold for a scenario with no persistence. The black, solid line
 457 is the notification skill of the current notification criteria, as a benchmark.
 458 Each colour line represents a different probability threshold; orange lines
 459 represent thresholds below 50% and blue lines over that value. For the two
 460 deterministic models (DWD, HRES) all lines overlap, since the probability
 461 threshold does not affect a deterministic forecast.

462 In line with Figure 4, the probabilistic models show higher skill than the
 463 deterministic models. Under certain conditions, they even outperform the
 464 current notification criteria, indicating potential for enhancing the skill of
 465 the current EFAS notification criteria. Deterministic models demonstrate
 466 skill on par with the current criteria solely for the initial lead time. As ex-

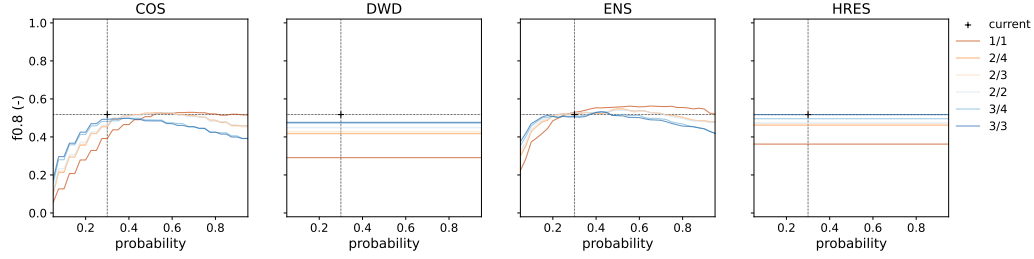


Figure 6: Evolution of the notification skill with probability threshold and persistence for each NWP model at a fixed lead time range (from 2 to 5.5 days). Each plot represents a different NWP model. As a benchmark, the black cross represents the current criteria (1 deterministic + 1 probabilistic, 30% probability and a persistence of 3 forecasts).

pected, notification skill degrades with lead time. This trend is consistent across all cases—deterministic, probabilistic and benchmark—, although the rate of degradation depends on the probability threshold. Lower probability thresholds sharply degrade at short lead times, while high probability thresholds experience a more pronounced loss of skill at longer lead times (such as ENS over 7 days).

There is a range of probability thresholds, approximately from 40% to 90%, exhibiting similarly good skill. Within this range, higher thresholds perform slightly better at short lead times, and lower thresholds perform slightly better at mid-long lead times. As we are seeking to identify a single optimal probability threshold for the notification criteria, the selection of the optimal criteria will prioritize a lead time range from 2 days (the minimum formal notification lead time) to 5.5 days (the maximum lead time in COS). This approach allows us to mitigate the substantial uncertainty associated with longer lead times, and focus on the lead times at which the majority of formal notifications are issued.

Up to this point, we have not yet considered persistence in our analysis. In order to assess the impact of persistence on the notification skill we have produced the plot in Figure 6, illustrating the evolution of skill with the probability threshold and persistence for a fixed lead time range (2-5.5 days). The benchmark (current notification criteria) is now represented by a single point corresponding to a 30% probability and a persistence of 3/3. As the probability threshold does not affect deterministic forecasts, the lines for the two deterministic models (DWD and HRES) are horizontal.

Three out of four NWP models are able to replicate or improve the skill

of the current notification criteria at certain combinations of persistence and probability. Only DWD is less skillful than the benchmark. The skill of the probabilistic models shows a trade-off between probability threshold and persistence. Both criteria play the same role of removing false positives (or uncertain events) by taking stricter values. Consequently, stricter persistence necessitates lower probability thresholds to optimize skill, and vice versa. Nevertheless, the highest skill are consistently obtained in the scenario of no persistence. In this scenario, there is a wide range of probability thresholds (from 40 to 90%) that perform similarly well.

Persistence does have a significant impact in the deterministic models. Their skill improves dramatically as soon as some persistence is added in the criteria. For the most stringent persistence (3/3), the skill of the deterministic HRES is as good as that of the probabilistic ENS, and even better than COS. However, as mentioned earlier, this is a sub-optimal value of persistence for the probabilistic models.

With the knowledge gained in the previous exploration, we were in a better position to understand the outcome of optimizing the notification criteria individually for each NWP, summarized in Table 1. The results are organised by lead time ranges; for each range, the table presents the optimized criteria —probability and persistence— and the skill metrics —recall, precision and $f_{0.8}$ — for the available NWP models. As a benchmark, the first row in each lead time range shows the skill of the current operational criteria.

The current EFAS setup (1D+1P) notifies 52% of the actual events (recall) and 74% of the notifications are correct (precision) at most. These figures reflect a negative bias, i.e., notifications are issued with a high level of certainty, leading to a limited number of false alarms, but many events being missed. This behaviour aligns with the selection of a biased target metric, such as the $f_{0.8}$ score, for the optimization of the notification criteria. The current criteria is not optimal as 1D+1P is consistently outperformed in terms of $f_{0.8}$ at any lead time by single NWP, suggesting that the combination of all NWPs hinders the skill of that single NWP.

At the shortest lead time range, COS emerges as the top-performing NWP, closely followed by ENS. Both ENS and COS optimized a very high probability threshold and removed persistence. On the other hand, the skill of the two deterministic NWP is distinctively lower —particularly DWD—, and both require a persistence of 2/2. The current operational criteria is outperformed by any of the probabilistic models, and the deterministic HRES almost reaches that benchmark.

Table 3: Summary of the optimization of the notification criteria for individual NWP and four lead time ranges. The initial row serves as a benchmark, indicating the skill of the current notification criteria. In each lead time range, bold figures highlight the maximum obtained skill for a specific metric.

lead time	model	probability	persistence	recall	precision	f _{0.8}	rank
<2 d	1D+1P	0.300	3/3	0.522	0.735	0.634	3
	COS	0.875	1/1	0.673	0.718	0.700	1
	DWD	-	2/2	0.585	0.583	0.583	5
	ENS	0.800	1/1	0.681	0.711	0.699	2
	HRES	-	2/2	0.580	0.671	0.632	4
2-5.5 d	1D+1P	0.300	3/3	0.413	0.618	0.518	3
	COS	0.725	1/1	0.387	0.687	0.518	2
	DWD	-	3/3	0.420	0.522	0.477	5
	ENS	0.650	1/1	0.416	0.725	0.562	1
	HRES	-	3/3	0.416	0.612	0.517	4
5.5-7 d	1D+1P	0.300	3/3	0.215	0.612	0.356	2
	DWD	-	2/2	0.291	0.358	0.328	4
	ENS	0.450	1/1	0.264	0.605	0.402	1
	HRES	-	2/2	0.273	0.429	0.351	3
7-10 d	1D+1P	0.300	3/3	0.120	0.625	0.237	3
	ENS	0.175	2/2	0.287	0.396	0.345	1
	HRES	-	2/2	0.244	0.336	0.293	2

530 The scenario remains similar when examining lead times from 2 to 5.5
531 days. The two probabilistic NWP models continue to demonstrate higher skill than
532 the deterministic ones, and outperform the current operational criteria. In
533 this case ENS is the top-performing NWP. Neither of them require persistence
534 and the probability thresholds are lower than in the previous lead time range,
535 although still higher than the 30% value used currently. HRES, despite being
536 deterministic, almost matches the skill of the benchmark and COS. As well
537 as DWD, to maximize its skill requires a persistence of 3/3. Overall, there
538 is a loss in skill of approximately 20% compared with the first 2 days of
539 forecast.

540 At lead times from 5.5 to 7 days, the remaining probabilistic model, ENS,
541 continues to outperform the other models. The optimal criteria follow the
542 trend: no persistence and a decreasing probability threshold —though still
543 higher than the benchmark—. Overall skill has degraded by 30% compared
544 to the previous lead time range (over 40% compared to the first 2 days of
545 forecast).

546 The skill at the longest lead time range is overall poor. Only two models
547 have such a long forecast horizon, with ENS demonstrating significantly bet-
548 ter skill. This long lead time range is the only one for which ENS requires
549 persistence (2/2), a factor that notably decreases the probability threshold,
550 reflecting the trade-off between these two criteria.

551 The Roebber diagram in Figure 7 offers an alternate perspective on the
552 same results. Robber diagrams condense four skill metrics into a single plot
553 Roebber (2009), with an ideal model positioned at the top right corner.
554 Precision and recall are indicated on the X and Y axes, respectively. The
555 slope of the dashed lines represents bias, calculated as the ratio of recall
556 to precision. Points below the 1:1 line indicate negative bias (a smaller
557 number of notifications than observed events), while points above the line
558 indicate positive bias (an excessive number of notifications). The $f_{0.8}$ score
559 is represented by solid, black lines. Figure 7 shows simultaneously the skill
560 of the current notification criteria, the optimization of individual NWP, and
561 the optimization of combination methods (refer to Section 4.3) for the lead
562 time range 2-5.5 days .

563 All NWP models and the current criteria exhibit negative bias, indicating
564 that EFAS underpredicts the occurrence of flood events. In the case of the
565 NWP models, the selection of the $f_{0.8}$ score as the target metric in the optimization
566 forces this bias, as it prioritizes precision over recall. However, the current
567 setup already shows this error. It is remarkable that the improved $f_{0.8}$ of the

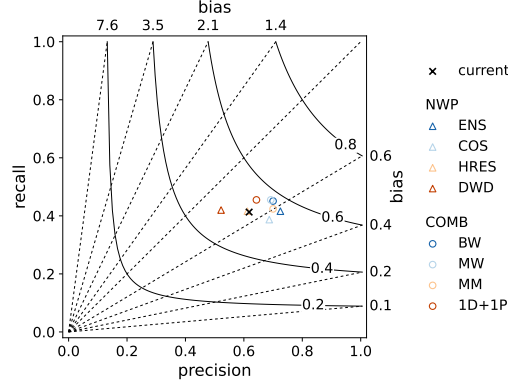


Figure 7: Roebber diagram of the optimized criteria at the lead time range from 2 to 5.5 days. Four skill metrics are represented: precision and recall in the X and Y axis, bias by the dashed lines, and the $f_{0.8}$ score by the solid lines. Triangles illustrate individual NWP and circles the combination of NWP. For reference, the skill of the current notification criteria is shown as a black cross.

568 probabilistic models is a result of higher precision, while recall values remain
569 similar across all NWPs and the current criteria.

570 4.3. Combination of models

571 As explained in the methodology, three of the four combination methods
572 compute total probability, which requires assigning weights to each NWP
573 and lead time. Figure 8 illustrates the distribution of weights among NWP
574 models for these three combination methods, and how the weights vary with
575 lead time.

576 The model mean (MM) approach attributes equal weights to each model.
577 The changes in the weights with lead time occur when the maximum lead
578 time of a model is exceeded (5.5 days for COS and 7 days for DWD). This is
579 the approach in which the deterministic models are given equal importance
580 as the probabilistic models.

581 Instead, in the member weighted (MW) combination, every model run
582 is assigned an equal weight. Therefore, ENS, which has a significant larger
583 number of members, prevails over any other NWP. Even for the first 5 days,
584 when all the models are available, ENS receives 70% of the weight. Con-
585 versely, the sum of the two deterministic models (HRES and DWD) has a
586 maximum weight of 4% from days 5.5 to 7. In general, this approach heavily
587 relies on the skill of the largest ensemble, which is not necessarily the most

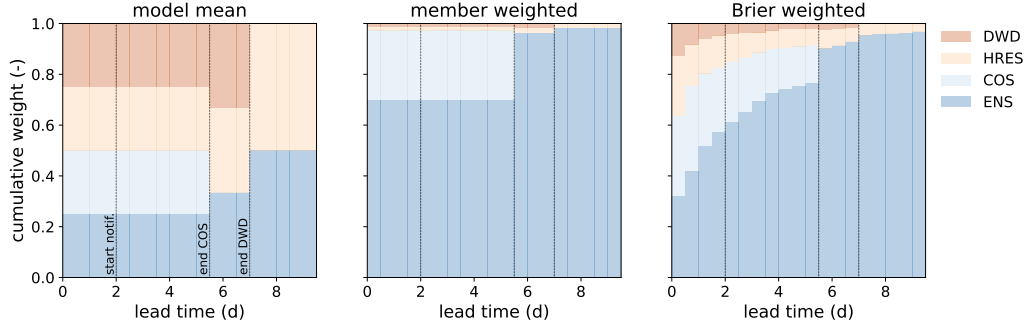


Figure 8: Weights applied to compute the total probability. Every plot represents a different methods, with colours representing NWPs (blue for probabilistic and orange for deterministic models).

skillful, as is in the case of EFAS.

In the Brier weighted (BW) combination, we used the Brier scores from section 4.2.1 to derive weighing factors that prioritize the more skill models. The resulting weights vary with lead time, showing a transition from short to long lead times. At very short lead times, the deterministic models demonstrate skill, accounting for approximately a third of the total weight. However, as the lead time increases, the probabilistic models, particularly ENS, assume the majority of the weight. At lead times from 2 to 5.5 days, when most of the notifications are sent, the superior skill of probabilistic models is represented by a combined weight of approximately 80%.

4.3.1. Notification skill

Figure 9 and Figure 10 replicate the analysis of the notification skill previously done for the individual NWP models, but this time for the combination methods. Figure 9 illustrates the evolution of the notification skill with lead time and probability threshold for a fixed persistence value (no persistence). On the other hand, Figure 10 presents the evolution of skill with probability and persistence for a fixed lead time range (2-5.5 days). In both cases, the benchmark is ENS, the NWP that proved highest skill. Together these figures an overview of the behaviour of skill across four dimensions: combination method, lead time, probability threshold and persistence.

The results indicate that ENS is responsible for the majority of the skill in the grand ensembles, since only marginal gains are possible with specific combinations at certain lead times. Only two combination methods (MW and BW) are able to replicate the skill of the benchmark across all lead

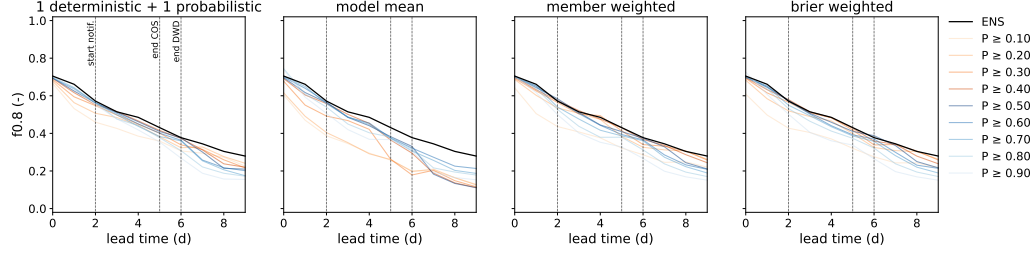


Figure 9: Evolution of the notification skill with daily lead times and probability threshold for each of the combination methods in an scenario with no persistence. Each plot represents a different combination of NWP. As a benchmark, the black, solid line represents the skill of ENS with optimized criteria.

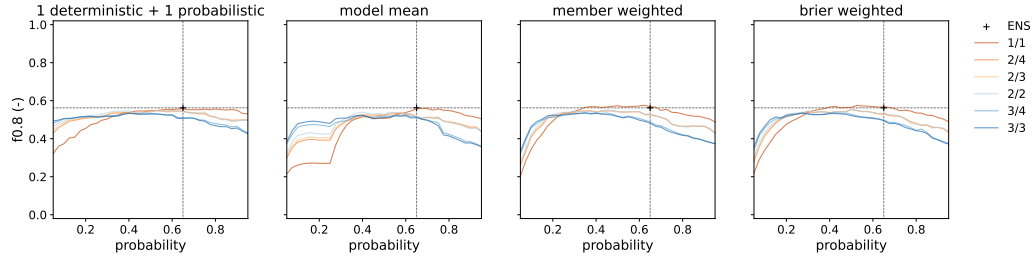


Figure 10: Evolution of the notification skill with probability threshold and persistence for each combination of NWP at a fixed lead time range (from 2 to 5.5 days). Each plot represents a different NWP model. Each plot represents a different combination of NWP. As a benchmark, the black cross represents the skill of ENS with optimized criteria (65% probability and no persistence).

612 times, with minimal improvements at days 2, 4 and 6. Although MM at
 613 lead time 0 achieves the highest marginal gain, this analysis proves that this
 614 combination method is not suitable, as the skill of this grand ensemble is
 615 poorer than the benchmark from day 2 onwards. The current procedure
 616 (1D+1P) is also sub-optimal, even though the degradation with lead time
 617 is not as severe as with MM.

618 Regardless of the NWP or combination of NWP, the notification skill
 619 degrades notably with lead time. Even if at lead time 0 the skill is high (up
 620 to 0.74), the minimum lead time criterion limits the EFAS notification skill
 621 to values slightly lower than 0.6. The degradation continues and, from day 7
 622 onward, the skill drops below 0.4, which may be an indicator for creating a
 623 new limitation on the maximum lead time at which notifications are issued.

624 Figure 10 reinforces the idea that the persistence criterion limits the

625 maximum attainable skill in ensemble systems. Across all four combina-
626 tions, the highest skill is reached when no persistence is applied (1/1). In
627 this scenario, all combinations exhibit similar maximum skill. Only member
628 weighted (MW) and Brier weighted (BW) marginally surpass the baseline
629 (ENS). These two combinations show optimal skill within a range of proba-
630 bility thresholds spanning 40% to 70%. In both instances, the maximum skill
631 is achieved at a probability threshold lower than that optimized for ENS.

632 The absence of sensitivity to probability in the current criteria (indicated
633 by the dark blue line in the left-hand side pane) is noteworthy. Even at
634 the lowest probability threshold, the $f_{0.8}$ score remains at 0.5, unlike other
635 approaches where there is a significant decline in performance when the proba-
636 bility threshold takes very low values.

637 Table 4 summarizes the results of the optimization of the notification
638 criteria for the combination methods in an identical way as Table 3 did for
639 the NWP. The results are organised by lead time ranges; for each range, the
640 table presents the optimized criteria (probability and persistence) and the
641 skill metrics (recall, precision and $f_{0.8}$) for the four methods. As a baseline,
642 the first row in each lead time range shows the skill of ENS. The objective
643 of the optimization is again two-fold: to compare the four combinations of
644 NWP models, and to assess the added value of building a grand ensemble
645 instead of simply using the baseline.

646 In the shortest lead time range, two combinations clearly outperform
647 the baseline (MM, BW). Between the two, MM exhibits the highest skill
648 ($f_{0.8} = 0.741$). This proficiency can be attributed to the importance that
649 MM assigns to deterministic models, which demonstrated notable skill at
650 very short lead times (see Figure 8). As of the optimized criteria, none of
651 the four methods required persistence, and probability thresholds fell within
652 the top quartile.

653 From day 2 to 5.5, BW and MW stand out as the top-performing com-
654 binations, with a comparable skill that surpasses the baseline by 1%. Both
655 approaches operate optimally without the need for persistence, with the proba-
656 bility threshold hovering around 50% (refer to Figure 10 for a sense of the
657 uncertainty in defining the probability threshold). Compared with the pre-
658 ceding lead time range, there is an evident decline in skill by approximately
659 20%.

660 In the third lead time range, from 5.5 to 7 days, none of the combinations
661 outperform the baseline, despite three of them (1D+1P, MW and BW) at-
662 taining very similar skill. None of these three methods necessitated the use

Table 4: Summary of the optimization of the notification criteria for the combination methods and four lead time ranges. The initial row serves as a baseline, indicating the skill of ENS, the top-performing NWP. In each lead time range, bold figures highlight the peak value for a specific metric.

lead time	method	probability	persistence	recall	precision	$f_{0.8}$	rank
<2 d	ENS	0.800	1/1	0.681	0.711	0.699	4
	1D+1P	0.925	1/1	0.662	0.717	0.694	5
	MM	0.775	1/1	0.628	0.838	0.741	1
	MW	0.750	1/1	0.673	0.718	0.700	3
	BW	0.950	1/1	0.620	0.829	0.733	2
2-5.5 d	ENS	0.650	1/1	0.416	0.725	0.562	3
	1D+1P	0.600	1/1	0.455	0.643	0.554	5
	MM	0.700	1/1	0.424	0.700	0.559	4
	MW	0.500	1/1	0.455	0.692	0.574	2
	BW	0.525	1/1	0.451	0.700	0.576	1
5.5-7 d	ENS	0.450	1/1	0.264	0.605	0.402	1
	1D+1P	0.425	1/1	0.262	0.599	0.399	4
	MM	0.500	1/1	0.276	0.412	0.345	5
	MW	0.425	1/1	0.271	0.579	0.401	2
	BW	0.450	1/1	0.268	0.586	0.400	3
7-10 d	ENS	0.175	2/2	0.287	0.396	0.345	1
	1D+1P	0.250	1/1	0.256	0.414	0.334	4
	MM	0.225	2/2	0.252	0.334	0.296	5
	MW	0.175	2/2	0.278	0.402	0.343	3
	BW	0.300	1/1	0.255	0.445	0.345	1

663 of persistence, and the associated probability thresholds were slightly lower
664 than those in the preceding lead time range (around 40%). When compared
665 with the prior lead time range, there is a decrease in skill of around 30%
666 (45% when compared to the the first range).

667 In the longest lead time range, BW emerges as the best-performing com-
668 bination, with a skill on par with the baseline. MW, while slightly less
669 proficient, shows similar skill. However, their optimized criteria differ. MW
670 requires a persistence of 2/2 and a relatively low probability threshold (0.175)
671 — precisely the same criteria optimized for the baseline. This results are not
672 surprising, as at this lead time range MW and ENS are practically the same,
673 since the weight of HRES in the grand ensemble is negligible. In contrast,
674 BW does not require persistence, and its probability threshold (30%) aligns
675 with the decreasing trend observed in previous lead time ranges.

676 The maps in Figure 11 illustrate the skill metrics associated with the
677 optimal notification criteria, i.e., the BW combination with no persistence
678 and a probability threshold of 52.5%. The metrics represent only the lead
679 time range from 2 to 5.5 days, which corresponds to the period when the
680 majority of the notifications are issued.

681 A pronounced contrast is evident in the maps, attributable to the limited
682 number of events in most stations, resulting in skill metrics primarily yielding
683 values of either 1 or 0 . In terms of f-score, there is a clustering of under-
684 performing points in central Europe (notably the Alps) and central France.
685 The breakdown into recall and precision reveals that the predominant cause
686 of the low f-score lies in recall, indicating missed events. Conversely, the
687 precision of notifications remains consistently high, with exceptions observed
688 in the Seine and Arno rivers. It is noteworthy the skill in all metrics for
689 the Ebro, Rhine and Meuse—three rivers that experienced significant flood
690 events during the study period.

691 By applying this set of criteria, EFAS would be able to issue notifications
692 with at least 2 days lead time for 45% of the events, and 70% of the notifica-
693 tions would be correct. For reference, these figures represent an improvement
694 in both metrics over the existing criteria, which achieved 41% recall and 62%
695 precision (see Figure 7). The Roebber diagram indicates that the grand en-
696 sembles —namely MW and BW— still suffer from a negative bias, but it was
697 slightly reduced by improving recall compared with ENS.

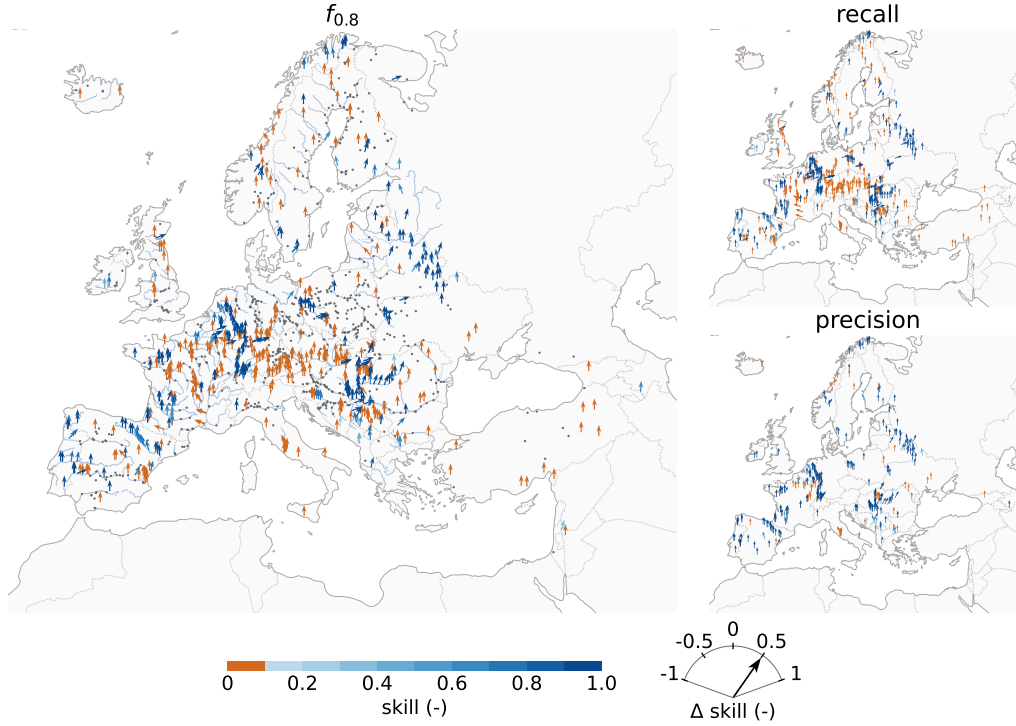


Figure 11: Skill maps for the optimized notification criteria (BW, 52.5% probability and no persistence) at the lead time range from 2 to 5.5 days. The main plot shows the skill in terms of $f_{0.8}$ (the target metric); in this plot, gray dots are stations for which the f-score cannot be computed due to all instances of hits, misses and false alarms being null. The smaller plots show precision and recall, the components of the f-score; for the sake of visibility, it only shows the stations for which the specific metric can be computed. In all the plots the direction of the arrows shows the difference in that metric between the optimized criteria and the current criteria; positive values imply gains and negative values losses in skill.

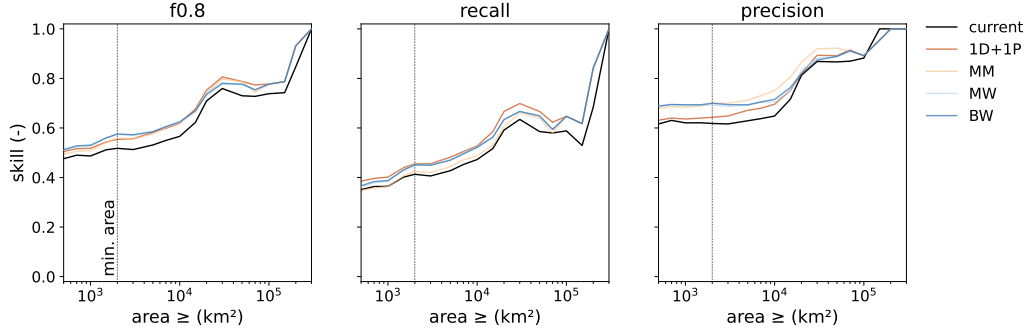


Figure 12: Evolution of skill with catchment area limit. Each plot represents a skill metric, with $f_{0.8}$ as the optimization target, and recall and precision as its components. In each of the plots, the black line represents the skill of the current notification criteria, while the colour lines depict the skill of the optimized criteria for the 4 combination methods. The vertical, dotted line indicates the catchment area limit currently applied in EFAS.

698 4.4. Skill by catchment area

699 The preceding sections presented results for a set of stations with a catchment area of at least 2000 km², the current limit. To investigate the potential relaxation of this criterion, Figure 12 illustrates the evolution of skill depending on the catchment area limit. The criteria used to create this figure are those optimized for the fixed area limit of 2000 km² and a lead time range between 2 and 5.5 days (refer to Table 4). For benchmarking purposes, the plots compare the skill of the four combination methods (coloured lines) with the skill of the current notification criteria (black line).

707 The skill of the system improves with catchment area, as expected. For very large catchments, all three metrics reach their maximum value of 1. However, the skill curves do not increase continuously. Recall experiences a loss in skill for areas ranging from 30,000 to 70,000 km², leading to a decrease in $f_{0.8}$ values. This loss is caused by missed events in the Guadiana, Seine, Loire, Rhone and Danube catchments. As already mentioned in previous sections, there is a notable gap between recall and precision, the components of the f-score, in both the optimized and current notification criteria, with precision consistently surpassing recall.

716 The vertical line at 2000 km² illustrates the gain in skill achieved through optimization, which is sustained across all catchment area values. Reducing the catchment area limit results in minimal loss in $f_{0.8}$, suggesting that this criterion could be reduced without compromising skill. For instance, the BW

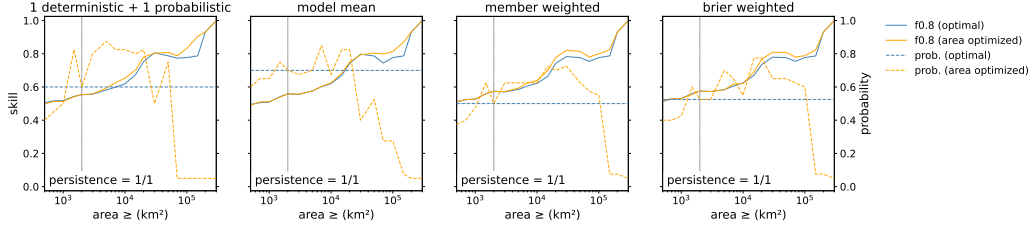


Figure 13: Comparison of the notification skill between a fixed (blue) and a area-specific (orange) probability threshold criterion for the lead time range from 2 to 5.5 days. Each plot depicts a different combination method, with solid lines representing the $f_{0.8}$ and dashed lines representing the probability threshold. The black, dotted, vertical line indicates the catchment area limit (2,000 km²) used for optimizing the fixed probability threshold.

720 approach at 1,000 km² exhibits slightly higher skill ($f_{0.8} = 0.531$) than the
 721 current criteria at 2000 km² ($f_{0.8} = 0.518$). The relaxation of the catchment
 722 area limit impacts the f-score components differently. While precision re-
 723 mains unaffected, there is a loss in recall. To sum up, issuing flood alerts to
 724 smaller catchments would marginally reduce the skill of the system, primarily
 725 due to an increase in missed events, without leading to more false alarms.

726 In the previous analysis, a fixed probability threshold was applied for all
 727 catchments, regardless of their area. We also investigated whether the skill
 728 of the system could be enhanced by adapting the probability threshold to the
 729 catchment area. Our rationale is rooted in the understanding that the level
 730 of uncertainty (model spread) differs between small and large catchments,
 731 suggesting that area-specific probability thresholds may enhance overall sys-
 732 tem skill. The results of this experiment are depicted in Figure 13. Each
 733 plot represents a different combination method, comparing the f-score (solid
 734 lines) and the probability threshold (dashed lines) between the model opti-
 735 mized for a 2,000 km² area limit (blue) and models optimized for increasing
 736 catchment area limits (orange). In order to compare the results of the two
 737 optimization runs, we kept a constant persistence value of 1/1, which was
 738 identified as optimal in Table 4.

739 The skill measured as $f_{0.8}$ is very similar for both optimizations, especially
 740 for areas smaller than 2,000 km². For larger areas, the main improvement
 741 is at the range between 30,000 and 100,000 km², for which the fixed criteria
 742 loses some skill. The evolution of the probability threshold with catchment
 743 area is erratic, likely due to the uncertainty in defining the optimal value

744 (refer to Figure 10). Despite this, a general trend can be discerned, with
745 the threshold taking lower values for catchments smaller than 2,000 km²,
746 peaking at approximately 100,000 km², and dropping to a minimum of 5%
747 for very large catchments.

748 Overall, the experiment indicates that varying the probability threshold
749 does not significantly improve the skill of the notification criteria. Therefore,
750 for the sake of simplicity, a fixed probability threshold is recommended.

751 5. Discussion

752 The definition of the spatial and temporal framework is often a limitation
753 in studies that analyze the skill of ensemble flood forecasting systems Cloke
754 and Pappenberger (2009). Due to the rarity of flood events, the statistical
755 robustness of such analysis relies on a limited and often highly correlated
756 sample of events. To address this limitation, long-term and continental or
757 global studies are advocated, such as the one presented here, which spans
758 over a period of two and a half years and extends over a European domain.
759 Nevertheless, our study would benefit from a larger sample of points and flood
760 events. As shown in Figure 11, there are many stations for which the skill
761 metrics cannot be calculated due to null hits, misses or false alarms. A larger
762 sample of observed events would reduce the susceptibility of the analysis to
763 this issue. Two potential solutions emerge: extending the study period, which
764 is limited by the availability of the HEPS forecasts (or reforecasts), or using
765 an event threshold of higher recurrence. We decided to work with a sample
766 of stations, instead of all the river cells Bartholmes et al. (2009), to limit the
767 spatial correlation of events. Additionally, we tested removing stations with
768 highly correlated discharge time series to further reduce correlation, but the
769 results were similar and the sample of events much smaller, so we discarded
770 that approach.

771 In the optimization of the notification criteria, we set a catchment area
772 limit of 2,000 km², a threshold inherited from previous EFAS setups with
773 lower spatial and temporal resolution. The results of this study (Figure
774 12) demonstrate that the current resolution of both NWP and hydrological
775 models can produce skillful warnings at smaller catchments, which can signif-
776 icantly increase the number of stations and flood events analyzed, as shown
777 in Figure 3. In line with this, the new EFAS version 5 (Joint Research Centre
778 - European Commission (2023)) has increased spatial resolution from 5 km
779 to 1 arc-minute, which is expected to further improve the skill of the system

780 in smaller catchments. The skill of this new EFAS version will be analyzed
 781 as soon as a long enough period or reforecasts are available.

782 The selection of the target metric is a critical aspect in any skill analy-
 783 sis. Bartholmes et al. (2009) reviewed the desired characteristics of a skill
 784 score, and selected odds ratio, HK score and bias as their target metrics.
 785 In contrast, for our analysis, we selected the f_β score, a metric commonly
 786 used in machine learning, but rarely applied in hydrology. The f_β score has
 787 two interesting properties for analyzing a flood warning system. Firstly, it is
 788 based on the contingency table but avoids using true negatives, which could
 789 overestimate skill. Secondly, it allows for tailoring the notification criteria to
 790 the specific use case, as the β parameter can be adjusted to penalize stronger
 791 misses or false alarms. For instance, Bouttier and Marchal Bouttier and
 792 Marchal (2023) used the f_2 score to optimize the probability threshold for
 793 high-intensity precipitation warnings in France. The β value of 2 penalizes
 794 four times more missed events than false alarms, under the assumption that
 795 the cost of being hit by an extreme event unprepared is larger than the cost
 796 of mobilising resources in a false alarm. In our study, we took the opposite
 797 approach and decided to minimize the number of false alarms by using a β
 798 value of 0.8. This decision was based on the fact that EFAS complements
 799 the national or regional systems by issuing medium-range flood warnings to
 800 the responsible administrations, not to the general public. The aim is to
 801 alert authorities only when there is substantial evidence that the event will
 802 occur, in order to avoid excessive notifications that could undermine their
 803 trust in the system. Additionally, the event threshold (5-year return period)
 804 corresponds to a recurrence time shorter than the flood protection levels in
 805 many European regions, so we assume that missing minor events will not be
 806 as costly as Bouttier and Marchal argue. In a preliminary analysis, we tested
 807 β values of 0.8, 1 and 1.25 and found that the changes in the f-score were
 808 minimal (in the order of 3%) and in none of the cases persistence was needed.
 809 However, the selection of β affects the optimal probability threshold and the
 810 resulting bias, i.e., the distribution of errors between misses and false alarms.
 811 Values lower than 1 lead to higher probability thresholds and negative biases,
 812 whereas values larger than 1 yield positive bias, i.e., more notifications than
 813 actual events.

814 The first objective of this study was to evaluate the skill of the differ-
 815 ent NWP within EFAS, with a specific focus on comparing deterministic and
 816 probabilistic models. Figure 4 demonstrates that probabilistic NWPs outper-
 817 form deterministic models in terms of Brier skill score across all lead times,

818 with the exception of short lead times, where deterministic NWP approach
 819 similar levels of skill. The outcome is similar when applying the notification
 820 criteria and measuring warning skill in terms of $f_{0.8}$ (Figure 5 and Figure 6).
 821 At their optimal notification criteria, the probabilistic NWPs, particularly
 822 ENS, outperform deterministic NWPs. The skill of both types of NWP de-
 823 grades with increasing lead time, casting doubt on their ability to issue flood
 824 alerts more than 5-6 days in advance. The effects of the probability thresh-
 825 old and persistence criteria differs depending on the nature of the NWP.
 826 The probability threshold has a substantial effect on the skill of probabilistic
 827 models, while it does not impact deterministic models. Both COS and ENS
 828 perform better at probability thresholds over 50%, with a wide range of sim-
 829 ilarly performing values. On the contrary, persistence proves to be beneficial
 830 in improving the notification skill of deterministic NWPs, but it limits the
 831 skill of probabilistic models. Persistence, a.k.a. poor man’s ensemble, is a
 832 method of creating an ensemble out of a deterministic forecast Cloke and
 833 Pappenberger (2009). For instance, a persistence of 3/3 is an ensemble of 3
 834 members with a probability threshold of 100%. Our results show that while
 835 persistence removes the inherent erratic behaviour of deterministic models
 836 and notably improves their skill, it should not be applied to HEPS.

837 The second objective of this study was to determine the appropriate
 838 method to combine several NWP models into a grand ensemble. Careful
 839 consideration is necessary in selecting this method to avoid diminishing the
 840 skill of the most proficient NWP within the grand ensemble. For instance,
 841 the current EFAS notification criteria limit the skill of the system to that
 842 of the highest-performing deterministic model (HRES), which is poorer than
 843 any of the probabilistic NWP (Figure 6). This limitation is caused by a com-
 844 bination method (1D+1P) that excessively relies on deterministic forecasts,
 845 as well as the use of persistence. The challenge lies in finding a combination
 846 that enhances the skill of the best-performing NWP, which in the case of
 847 EFAS is the ENS.

848 Our findings demonstrate that ENS is a very strong baseline, with only a
 849 few combination methods yielding marginal gains to its skill. The effective-
 850 ness of the grand ensemble is limited to the first 5 days lead time, when the
 851 total number of members is highest (73), particularly for lead times shorter
 852 than 2 days, when the deterministic models provide value. As an example,
 853 a simplistic approach like MM exhibits the highest skill within the shortest
 854 lead time range, potentially because it is the approach that assigns higher
 855 value to the deterministic models. Overall, the most promising approaches

are the member-based (MW) and skill-based (BW) methods, as they outperform the baseline throughout the first 5 days lead time. Both methods have similar optimal notification criteria (no persistence and a probability threshold close to 50%), and their success is based on granting most of the weight to ENS. However, the reason why they allocate this weight to ENS differs. In the case of MW, it is coincidental that the most skillful model also possesses the largest number of members. On the contrary, BW grants greater value to ENS because it proved to be a superior model. If a more skillful model with fewer members would be added to the grand ensemble, BW would be able to extract that value, while MW would not. Therefore, we argue that skill-based combination methods are preferable.

The decision on the most appropriate combination methods can not be based solely on skill metrics, but also consider other factors such as the operational implementation effort, user comprehensibility, or the impact of adding or removing a NWP. Skill-based approaches, such as BW, are theoretically superior as the allocation of weights is based on quality rather than quantity. They are also the most robust when it comes to adding or removing NWP models. However, they are more challenging to implement and to explain to end users. To derive the matrix of weights (Figure 8), a skill-based approach requires having an extensive period of reanalysis and reforecasts upfront, posing a substantial computational burden on system implementation. Additionally, practitioners using the forecasts would require additional training to understand that the ensemble members are not equiprobable, which would be more intuitive, but there are some prevailing members.

There remains a question on the use of deterministic models in a grand ensemble dominated by a probabilistic NWP. When using a member-based combination, such as MW, deterministic models could be removed from the grand ensemble, as the weight allocated to them is so small that their inclusion barely affects the total probability. Skill-based approaches, instead, allocate larger weights to these models in the very first lead times, when they have proven value given their often higher resolution. The inclusion of deterministic models is a topic for future analysis, as the spatial resolution of deterministic and probabilistic NWP are nowadays similar, and centres such as the ECMWF plan to discontinue their deterministic models in favour of the ensembles.

891 6. Conclusions

892 This study describes a procedure to optimize warning thresholds in HEPS.
 893 We investigated the ability of deterministic and probabilistic NWP mod-
 894 els in providing correct flood warnings, and we explored the effects of the
 895 notification criteria, namely probability threshold and persistence. The fi-
 896 nal objective of the study is to devise a method to combine several NWP
 897 into a grand ensemble in order to outperform the most proficient, individual
 898 NWP. Our study case is the European Flood Awareness System (EFASv4),
 899 a medium-range continental flood warning system.

900 The individual analysis of the NWPs demonstrated that probabilistic
 901 models, particularly ENS, provide better flood warnings than deterministic
 902 models, even for short lead times, where the latter show some skill. We
 903 discovered that the persistence criterion is useful to increase the skill of de-
 904 terministic models, as it creates a pseudo-ensemble, but is counterproductive
 905 in the case of ensembles. The criterion that maximizes ensemble skill is the
 906 probability threshold, whose optimum shows a certain degree of uncertainty,
 907 but always exceeds a value of 50%.

908 By default, the combination of several NWP into a grand ensemble does
 909 not improve the overall skill of the flood warning system. As an example, the
 910 current EFAS notification criteria, which uses four NWPs, is outperformed
 911 by only using one NWP (ENS) with the adequate criteria. Two of the ap-
 912 proaches tested in this work yielded marginal gains in skill compared with the
 913 baseline in medium and short lead times. One of these approaches (named
 914 member weighted) assumes equiprobability among all the model runs, and
 915 the other one (named Brier weighted) assigns weights to each NWP at every
 916 lead time based on their probabilistic skill. In our study case, these two
 917 approaches yielded similar results because the most proficient NWP is also
 918 the one with the largest number of members. Despite that, we argue that
 919 the skill-based approach is conceptually more appropriate, gives significance
 920 to the inclusion of deterministic NWP in the grand ensemble, and would
 921 perform better if the set of NWP would change. However, other study cases
 922 may consider other factors such implementation costs or explainability in the
 923 selection of the combination method.

924 Finally, we explored how catchment area affects the notification skill,
 925 with the idea of relaxing the current notification criterion that establishes a
 926 minimum catchment area. The results indicate that skill deteriorates with
 927 decreasing catchment area, as other studies report, but the improvements

in meteorological and hydrological models over the last decade allow for a reduction in the minimum catchment area. We have proven that with the optimized criteria we can halve the area limit, therefore cover a larger area, and achieve a similar performance as in the current system setup. We expect that the skill at smaller catchments will be positively affected by the release of the new EFAS version with a higher spatial resolution.

7. Data availability

The reanalysis and forecast discharge data is available at the Climate Data Store of the Copernicus Climate Change Service. All the scripts, pre-processed data and results of the study can be found in this GitHub repository.

References

- Alfieri, L., Bisselink, B., Dottori, F., Naumann, G., de Roo, A., Salamon, P., Wyser, K., Feyen, L., 2017. Global projections of river flood risk in a warmer world. *Earth's Future* 5, 171–182. doi:10.1002/2016EF000485.
- Bartholmes, J.C., Thielen, J., Ramos, M.H., Gentilini, S., 2009. The european flood alert system efas – part 2: Statistical skill assessment of probabilistic and deterministic operational forecasts. *Hydrol. Earth Syst. Sci* 13, 141–153. URL: www.hydrol-earth-syst-sci.net/13/141/2009/, doi:10.5194/hess-13-141-2009.
- Bauer, P., Thorpe, A., Brunet, G., 2015. The quiet revolution of numerical weather prediction. *Nature* 525, 47–55. doi:10.1038/nature14956.
- Bouttier, F., Marchal, H., 2023. Probabilistic short-range forecasts of high precipitation events : optimal decision thresholds and predictability limits. URL: <https://doi.org/10.5194/egusphere-2023-3111>, doi:10.5194/egusphere-2023-3111.
- Brier, G.W., 1950. Verification of forecasts expressed in terms of probability. *Monthly Weather Review* 78.
- Buizza, R., 2008. The value of probabilistic prediction. *Atmospheric Science Letters* 9, 36–42. doi:10.1002/asl.170.

- 958 Burek, P., van der Knijff, J., de Roo, A., 2013. Lisflood. distributed water
959 balance and flood simulation model. doi:10.2788/24719.
- 960 Cloke, H.L., Pappenberger, F., 2009. Ensemble flood forecasting: A review.
961 Journal of Hydrology 375, 613–626. doi:10.1016/j.jhydro1.2009.06.
962 005.
- 963 Demeritt, D., Nobert, S., Cloke, H.L., Pappenberger, F., 2013. The european
964 flood alert system and the communication, perception, and use of ensemble
965 predictions for operational flood risk management. Hydrological Processes
966 27, 147–157. doi:10.1002/hyp.9419.
- 967 Diomede, T., Davolio, S., Marsigli, C., Miglietta, M.M., Moscatello, A., Pa-
968 petti, P., Paccagnella, T., Buzzi, A., Malguzzi, P., 2008. Discharge pre-
969 diction based on multi-model precipitation forecasts. Meteorology and
970 Atmospheric Physics 101, 245–265. doi:10.1007/s00703-007-0285-0.
- 971 EEA, 2023. Economic losses from weather- and climate-related ex-
972 tremes in Europe. Technical Report. European Environmental Agency.
973 URL: [https://www.eea.europa.eu/en/analysis/indicators/](https://www.eea.europa.eu/en/analysis/indicators/economic-losses-from-climate-related?activeAccordion=ecdb3bcf-bbe9-4978-b5cf-0b136399d9f8)
974 [economic-losses-from-climate-related?activeAccordion=](https://www.eea.europa.eu/en/analysis/indicators/economic-losses-from-climate-related?activeAccordion=ecdb3bcf-bbe9-4978-b5cf-0b136399d9f8)
975 [ecdb3bcf-bbe9-4978-b5cf-0b136399d9f8](https://www.eea.europa.eu/en/analysis/indicators/economic-losses-from-climate-related?activeAccordion=ecdb3bcf-bbe9-4978-b5cf-0b136399d9f8).
- 976 Egerton, P., Stander, J., Paterson, L., Devillier, R., Champagne-Fall, A.,
977 Honore, C., Allis, E., Love, G., Nitu, R., Stuart, L., Kaya, F., Santamaria,
978 L., Teruggi, G., Taalas, P., Rea, A., Lucio, F., Harding, J., Repnik, M.,
979 Luterbacher, J., Alexieva, A., Gonsior, H., Uhlenbrook, S., Cullmann, J.,
980 Lombardi, N., Dunja, D., Pfister, D., Zommers, Z., Escobar Rodriguez,
981 H., Jacob, A., Keo, K., 2023. Early warnings for all. Executive action plan
982 2023-2027. Technical Report. United Nations. URL: [https://www.un.](https://www.un.org/en/climatechange/early-warnings-for-all)
983 [org/en/climatechange/early-warnings-for-all](https://www.un.org/en/climatechange/early-warnings-for-all).
- 984 Gupta, H.V., Kling, H., Yilmaz, K.K., Martinez, G.F., 2009. Decomposition
985 of the mean squared error and nse performance criteria: Implica-
986 tions for improving hydrological modelling. Journal of Hydrology 377,
987 80–91. URL: [https://www.sciencedirect.com/science/article/](https://www.sciencedirect.com/science/article/pii/S0022169409004843)
988 [pii/S0022169409004843](https://www.sciencedirect.com/science/article/pii/S0022169409004843), doi:10.1016/J.JHYDROL.2009.08.003.
- 989 *Objetivo: Hacer un diagnóstico del NSE como función*
990 *objetivo en la calibración de modelos hidrológicos a partir de su descom-*
991 *posición. A partir de ese diagnóstico se propone un nuevo criterio de*

optimización. Metodología: Primeramente se hace
 un desarrollo teórico sobre la descomposición del NSE, sus limitaciones
 y se plantea el KGE como nuevo criterio de optimización. La
 aplicabilidad de estos dos criterios se estudio por medio de la simulación
 mediante HBV de 49 cuencas a mesoescala en Austria. El modelo se cali-
 bra de dos maneras, frente al NSE y el KGE, obteniéndose dos conjuntos
 de parámetros para cada subcuenca. Sobre estas simulaciones se analiza
 el rendimiento global, los componentes del NSE/KGE y los conjuntos
 de parámetros optimizados. Teorías e hipótesis: Se
 descompone el NSE en tres componentes: la correlación, el sesgo nor-
 malizado (a través de la desv. típica) y la variabilidad relativa. De esta
 descomposición se extraen las siguientes limitaciones del NSE: La
 normalización del sesgo limita el peso específico de éste sobre el global
 del NSE, especialmente en cuencas con régimen muy variable. La
 variabilidad aparece dos veces en el NSE y se demuestra que el
 máximo se obtiene cuando la variabilidad es igual a la raíz del coeficiente
 de correlación. NSE nunca será superior, por tanto, al coeficiente de
 correlación. Se tiende a subestimar la pendiente de las regre-
 siones observado-simulado y viceversa, por lo que se subestiman los
 caudales altos y sobreestiman los caudales bajos. Frente al
 NSE, se propone un nuevo criterio de optimización, el Kling-Gupta
 efficiency (KGE). Es la distancia euclídea entre los tres componentes
 (correlación, sesgo relativo y variabilidad relativa) y sus valores óptimos
 (1, 0, 1). Resultados: Fuente correlación entre
 los resultados de NSE y KGE cuando se calibra a éste último. No es
 así en sentido contrario. La correlación es claramente el compo-
 nente con más peso de los tres tanto para NSE como para KGE. Sin
 embargo, en el caso de KGE, no se debe a una menor ponderación
 (los tres componentes tienen el mismo peso), sino a que se consiguen
 valores de los otros dos componentes muy próximos al óptimo. Mientras
 que ambos métodos obtienen calibraciones de la correlación
 similares, KGE es muy superior a NSE en la calibración del sesgo y la
 variabilidad relativos. La pérdida en la validación es menor con KGE,
 aunque aumenta mucho la variabilidad de los dos componentes. NSE
 obtiene una recta de regresión casi ideal para la regresión de simulados
 sobre observados, pero muy mala al contrario. KGE obtiene valores
 similares para ambas regresiones, pero siempre ligeramente inferiores al
 óptimo. Muy fuerte correlación entre los valores de los parámetros

1030 optimizados por ambos métodos (0.8). Sin embargo, pequeños cambios
 1031 en los parámetros conllevan mayores cambios en el rendimiento.¿br/¿-
 1032 Dos valores iguales de NSE (o KGE) no tienen por qué significar un
 1033 mismo rendimiento. Mirando a los tres componentes del criterio, se puede
 1034 discernir qué conjunto es mejor/peor que otro incluyo para un mismo
 1035 NSE (KGE).¿br/¿¿br/¿¿b¿Limitaciones:¿/b¿¿br/¿¿br/¿¿b¿Preguntas sin
 1036 respuesta:¿br/¿¿br/¿Futura investigación:¿br/¿i/b¿.

1037 Hanssen, A., Kuipers, W., 1965. On the Relationship Between the Frequency
 1038 of Rain and Various Meteorological Parameters: (with Reference to the
 1039 Problem Ob Objective Forecasting). Koninkl. Nederlands Meterologisch
 1040 Institut. Mededelingen en Verhandelingen, Staatsdrukkerij- en Uitgeverij-
 1041 bedrijf.

1042 Joint Research Centre - European Commission, 2020. European Flood
 1043 Awareness System v4.0. URL: [https://confluence.ecmwf.int/
 1044 display/CEMS/EFAS+v4.0](https://confluence.ecmwf.int/display/CEMS/EFAS+v4.0).

1045 Joint Research Centre - European Commission, 2023. European Flood
 1046 Awareness System v5.0. URL: [https://confluence.ecmwf.int/
 1047 display/CEMS/Latest+operational+EFAS+release](https://confluence.ecmwf.int/display/CEMS/Latest+operational+EFAS+release).

1048 Kling, H., Fuchs, M., Paulin, M., 2012. Runoff conditions in the upper
 1049 Danube basin under an ensemble of climate change scenarios. Journal of
 1050 Hydrology 424-425, 264–277. doi:10.1016/j.jhydro1.2012.01.011.

1051 Knoben, W.J., Freer, J.E., Woods, R.A., 2019. Technical note: Inherent
 1052 benchmark or not? comparing nash-sutcliffe and kling-gupta efficiency
 1053 scores. Hydrology and Earth System Sciences 23, 4323–4331. doi:10.
 1054 5194/hess-23-4323-2019.

1055 LeClerc, J., Joslyn, S., 2015. The cry wolf effect and weather-related decision
 1056 making. Risk Analysis 35, 385–395. doi:10.1111/risa.12336.

1057 Legg, T.P., Mylne, K.R., 2004. Early Warnings of Severe Weather from
 1058 Ensemble Forecast Information. Weather and Forecasting 19, 891–906.

1059 Martina Angela Caretta, Aditi Mukherji, Md Arfanuzzaman, Richard
 1060 A. Betts, Alexander Gelfan, Yukiko Hirabayashi, Tabea Katharina
 1061 Lissner, Elena Lopez Gunn, Junguo Liu, Ruth Morgan, Sixbert

- 1062 Mwanga, Sereee Supratid, 2023. Water, in: Climate Change
1063 2022 – Impacts, Adaptation and Vulnerability. Cambridge University
1064 Press, pp. 551–712. URL: [https://www.cambridge.org/core/product/](https://www.cambridge.org/core/product/identifier/9781009325844/%23c4/type/book/_part)
1065 [identifier/9781009325844{%}](https://www.cambridge.org/core/product/identifier/9781009325844/%23c4/type/book/_part)23c4/type/book{_}part, doi:10.1017/
1066 9781009325844.006.
- 1067 Molteni, F., Buizza, R., Palmer, T.N., Petroliagis, T., 1996. The ECMWF
1068 Ensemble Prediction System: Methodology and validation. Quarterly
1069 Journal of the Royal Meteorological Society 122, 73–119. doi:<https://doi.org/10.1002/qj.49712252905>.
- 1071 Nevo, S., Morin, E., Gerzi Rosenthal, A., Metzger, A., Barshai, C., Weitzner,
1072 D., Voloshin, D., Kratzert, F., Elidan, G., Dror, G., Begelman, G., Near-
1073 ing, G., Shalev, G., Noga, H., Shavitt, I., Yuklea, L., Royz, M., Giladi,
1074 N., Peled Levi, N., Reich, O., Gilon, O., Maor, R., Timnat, S., Shechter,
1075 T., Anisimov, V., Gigi, Y., Levin, Y., Moshe, Z., Ben-Haim, Z., Hassidim,
1076 A., Matias, Y., 2022. Flood forecasting with machine learning models
1077 in an operational framework. Hydrology and Earth System Sciences 26,
1078 4013–4032. doi:10.5194/hess-26-4013-2022, arXiv:2111.02780.
- 1079 Pappenberger, F., Cloke, H.L., Parker, D.J., Wetterhall, F., Richardson,
1080 D.S., Thielen, J., 2015. The monetary benefit of early flood warnings in
1081 Europe. Environmental Science and Policy 51, 278–291. doi:10.1016/j.
1082 envsci.2015.04.016.
- 1083 Paprotny, D., Sebastian, A., Morales-Nápoles, O., Jonkman, S.N., 2018.
1084 Trends in flood losses in Europe over the past 150 years. Nature Com-
1085 munications 9. doi:10.1038/s41467-018-04253-1.
- 1086 Roebber, P.J., 2009. Visualizing multiple measures of forecast quality.
1087 Weather and Forecasting 24, 601–608. doi:10.1175/2008WAF2222159.1.
- 1088 Thielen, J., Bartholmes, J., Ramos, M.H., Roo, A.D., 2009. The european
1089 flood alert system – part 1: Concept and development. Hydrol. Earth Syst.
1090 Sci 13, 125–140. URL: www.hydrol-earth-syst-sci.net/13/125/2009/,
1091 doi:10.5194/hess-13-125-2009.
- 1092 WMO, 2021. WMO Atlas of mortality and economic losses from weather,
1093 climate and water extremes (1970-2019). Technical Report. World Meteo-
1094 rological Organization. Geneva.

1095 Yang, S.C., Yang, T.H., Chang, Y.C., Chen, C.H., Lin, M.Y., Ho, J.Y., Lee,
1096 K.T., 2020. Development of a hydrological ensemble prediction system
1097 to assist with decision-making for floods during typhoons. Sustainability
1098 (Switzerland) 12. doi:10.3390/su12104258.