



FINAL COACHING – AREA 3

PAES STRUCTURES AND POST-HARVEST MACHINERIES

Engr. John Vincent Nate, M.Sc

QUESTION 1

This gutter is recommended for collecting cattle manure.

- A. gravity drain gutter**
- B. flush gutter**
- C. scrape gutter**
- D. step-dam gutter**

QUESTION 1

This gutter is recommended for collecting cattle manure.

- A. gravity drain gutter**
- B. flush gutter**
- C. scrape gutter**
- D. step-dam gutter**

QUESTION 2

The introduction of substances not found in the natural composition of water that make the water less desirable or unfit for intended use

- a. water pollution**
- b. contamination**
- c. impurification**
- d. deterioration**

QUESTION 2

The introduction of substances not found in the natural composition of water that make the water less desirable or unfit for intended use

- a. water pollution**
- b. contamination**
- c. impurification**
- d. deterioration**

QUESTION 3

Precipitate resulting from coagulation or sedimentation of liquid waste.

- A. Slurry**
- B. Sludge**
- C. Effluent**
- D. suspended solid**

QUESTION 3

Precipitate resulting from coagulation or sedimentation of liquid waste.

- A. Slurry**
- B. Sludge**
- C. Effluent**
- D. suspended solid**

QUESTION 4

In CPES rating, what is the equivalent score of very satisfactory?

- A. 82% to 89%**
- B. 89% to 96%**
- C. 75% to 82%**
- D. < 96%**

QUESTION 4

In CPES rating, what is the equivalent score of very satisfactory?

- A. 82% to 89%**
- B. 89% to 96%**
- C. 75% to 82%**
- D. < 96%**

QUESTION 5

All projects shall be subjected to a minimum of ___ evaluations to be performed by the CPE during construction. Except for those projects with a duration of 90 calendar days and below which may be subjected to at least ___ visit.

- A. 1,2**
- B. 2,1**
- C. 2,3**
- D. 3,2**

QUESTION 5

All projects shall be subjected to a minimum of ___ evaluations to be performed by the CPE during construction. Except for those projects with a duration of 90 calendar days and below which may be subjected to at least ___ visit.

A. 1,2

B. 2,1

C. 2,3

D. 3,2

QUESTION 6

In PAES 204:2015, the minimum purity of the mechanical rice thresher without sifter and with fan is:

- A. 50%**
- B. 65%**
- C. 80%**
- D. 95%**

QUESTION 6

In PAES 204:2015, the minimum purity of the mechanical rice thresher without sifter and with fan is:

- A. 50%**
- B. 65%**
- C. 80%**
- D. 95%**

QUESTION 7

When this type of curing is used, the pavement shall be cured initially with burlap or cotton mats, until after final set of the concrete or, in any case, for 12 hours after placing the concrete.

- A. white polyethylene sheet**
- B. waterproof paper**
- C. impervious membrane method**
- D. straw**

QUESTION 7

When this type of curing is used, the pavement shall be cured initially with burlap or cotton mats, until after final set of the concrete or, in any case, for 12 hours after placing the concrete.

- A. white polyethylene sheet**
- B. waterproof paper**
- C. impervious membrane method**
- D. straw**

QUESTION 8

In PAES 129:2002, this indicates the maximum load that can be successfully carried by the motor if it is to operate continuously and remain within a safe temperature range.

- A. service factor**
- B. breakdown torque**
- C. duty rating**
- D. locked-rotor current**

QUESTION 8

In PAES 129:2002, this indicates the maximum load that can be successfully carried by the motor if it is to operate continuously and remain within a safe temperature range.

- A. service factor**
- B. breakdown torque**
- C. duty rating**
- D. locked-rotor current**

QUESTION 9

In PAES 201:2015, the minimum heating system efficiency for biomass fuel heated air mechanical grain dryer for indirect-fired operation.

- A. 90%**
- B. 75%**
- C. 65%**
- D. 50%**

QUESTION 9


In PAES 201:2015, the minimum heating system efficiency for biomass fuel heated air mechanical grain dryer for indirect-fired operation.

- A. 90%**
- B. 75%**
- C. 65%**
- D. 50%**

QUESTION 10

In PAES 251:2018, the minimum main product recovery of corn mill is:

- A. 84%**
- B. 86%**
- C. 96**
- D. 64%**

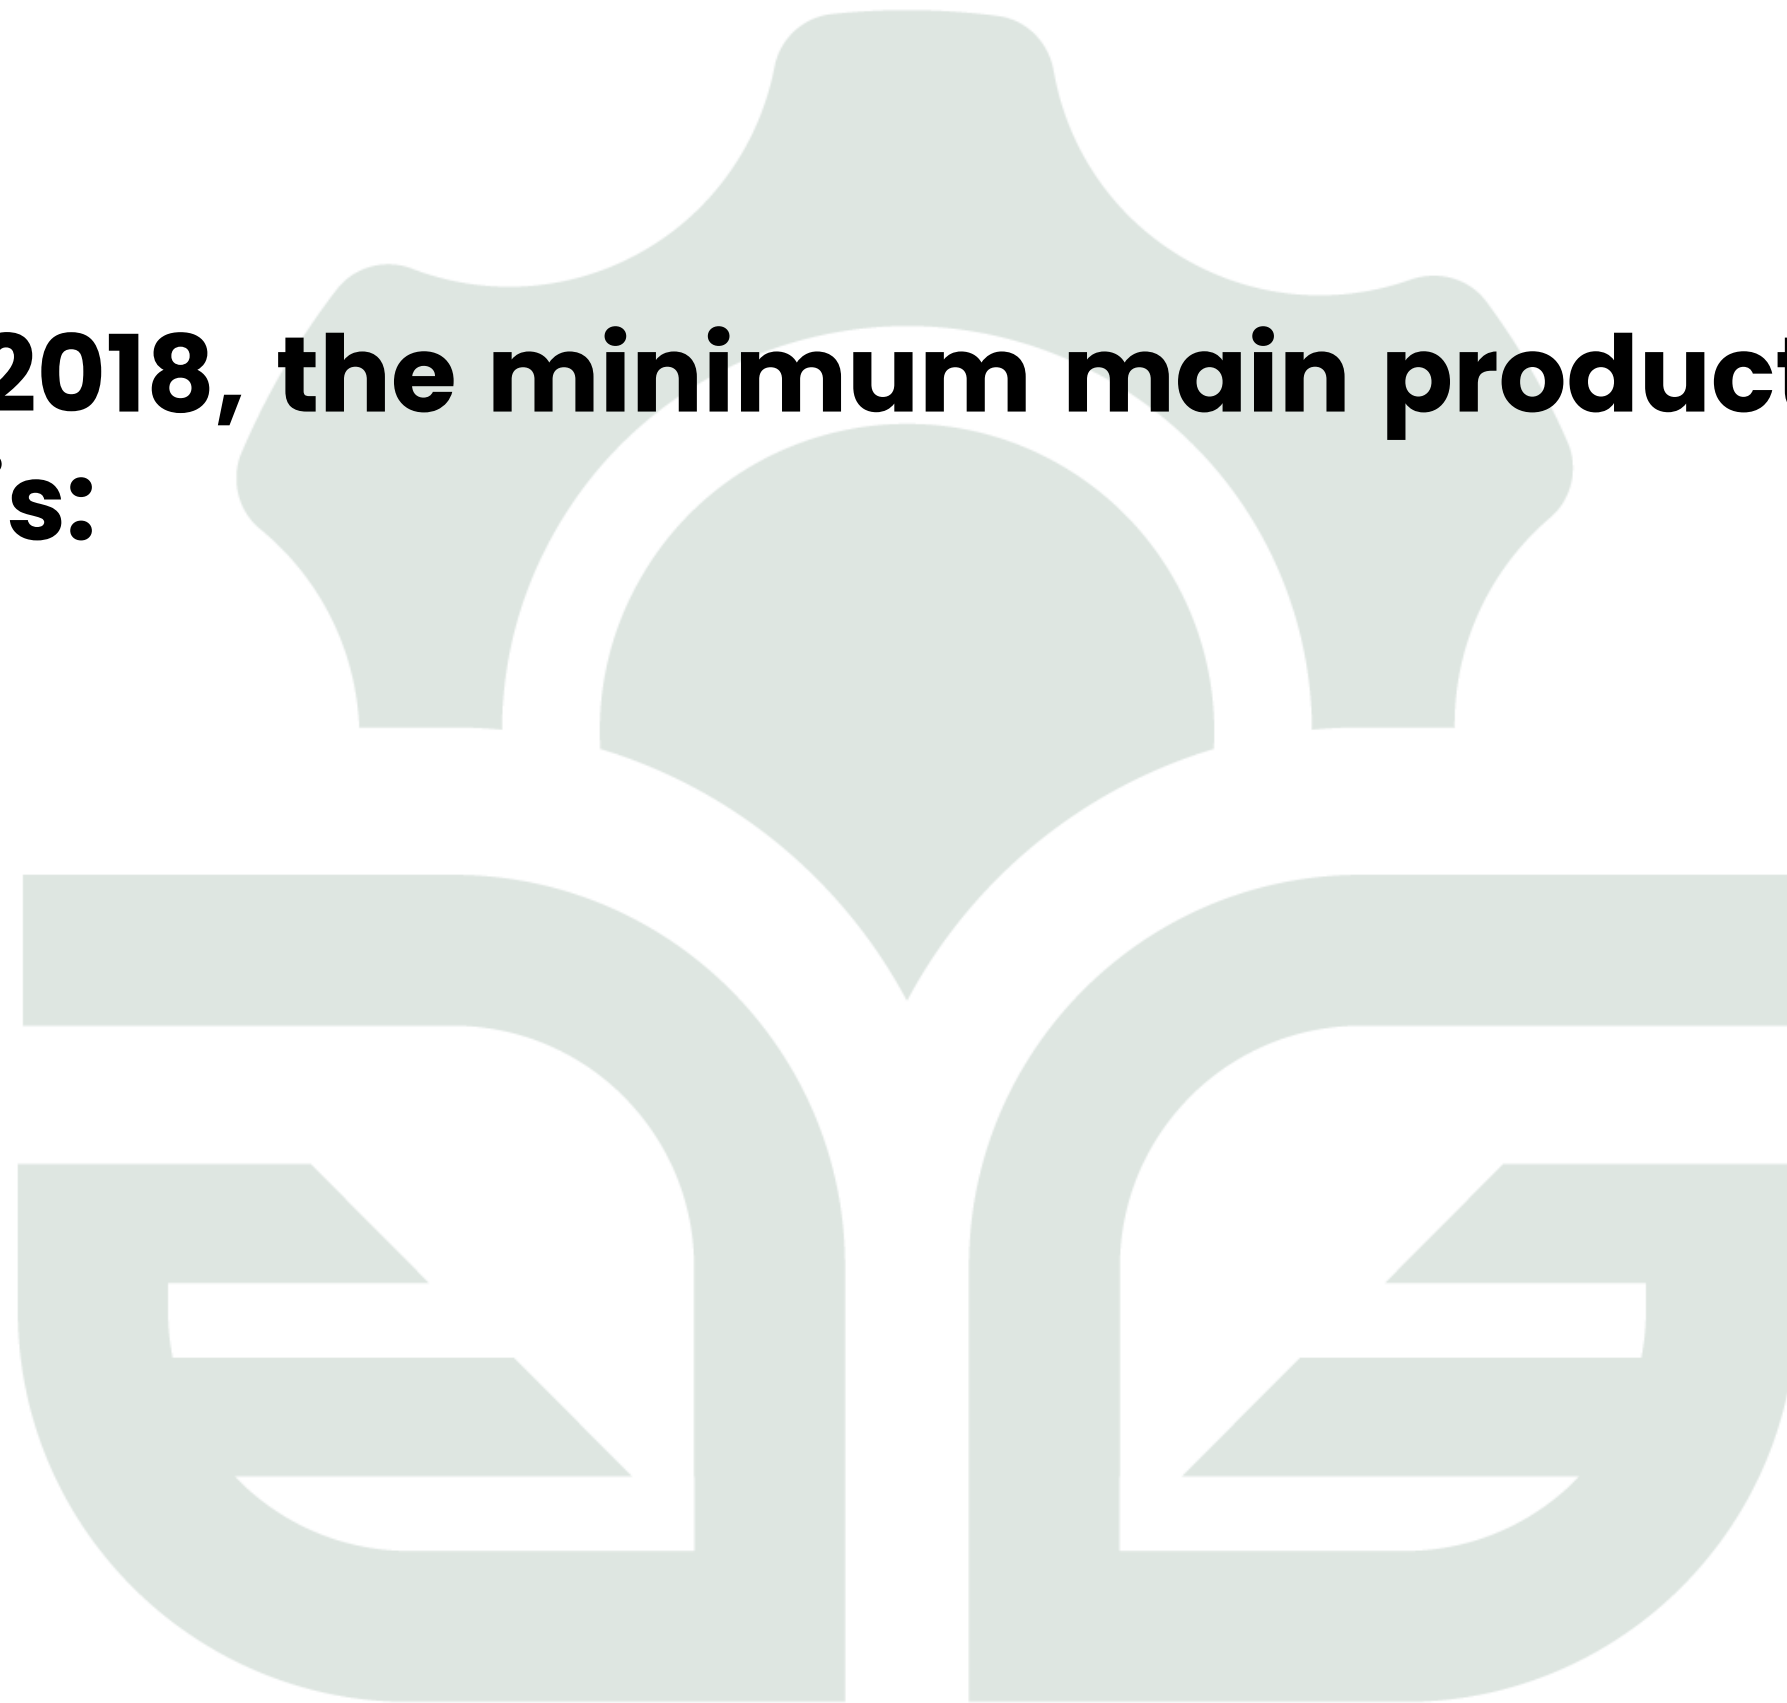

QUESTION 10

In PAES 251:2018, the minimum main product recovery of corn mill is:

- A. 84%**
- B. 86%**
- C. 96**
- D. 64%**

QUESTION 11

Any entity that produces agricultural and fishery machinery from prototyping, testing, commissioning, and selling. Usually, they produce agricultural and fishery machinery depending on the order and arrangement.

- A. Producer**
- B. assembler**
- C. manufacturer**
- D. fabricator**

QUESTION 11

Any entity that produces agricultural and fishery machinery from prototyping, testing, commissioning, and selling. Usually, they produce agricultural and fishery machinery depending on the order and arrangement.

- A. Producer**
- B. assembler**
- C. manufacturer**
- D. fabricator**

QUESTION 12

Dissolved oxygen concentrations will be the lowest within a waterbody on -----.

- A. Afternoon**
- B. Sunrise**
- C. Sunset**
- D. Noon**

QUESTION 12

Dissolved oxygen concentrations will be the lowest within a waterbody on -----.

A. Afternoon

B. Sunrise

C. Sunset

D. Noon

QUESTION 13

In PAES 201:2015, the minimum drying efficiency of mechanical grain dryer is:

- A. 90%**
- B. 85%**
- C. 80%**
- D. 75%**

QUESTION 13

In PAES 201:2015, the minimum drying efficiency of mechanical grain dryer is:

- A. 90%**
- B. 85%**
- C. 80%**
- D. 75%**

QUESTION 14

In PAES 205:2000, it is the required straw length (cm) for mechanical rice thresher testing:

- A. 40–45**
- B. 45–50**
- C. 50–55**
- D. 55–60**

QUESTION 14

In PAES 205:2000, it is the required straw length (cm) for mechanical rice thresher testing:

- A. 40–45**
- B. 45–50**
- C. 50–55**
- D. 55–60**

QUESTION 15

In PAES 220:2004, the maximum mechanically damage kernel for peanut sheller is:

- A. 3.5**
- B. 3.0**
- C. 2.0**
- D. 7.0**

QUESTION 15


In PAES 220:2004, the maximum mechanically damage kernel for peanut sheller is:

- A. 3.5**
- B. 3.0**
- C. 2.0**
- D. 7.0**

QUESTION 16

In PAES 208:2000, the minimum shelling efficiency for corn sheller:


- A. 97.0**
- B. 99.8**
- C. 95.0**
- D. 99.5**

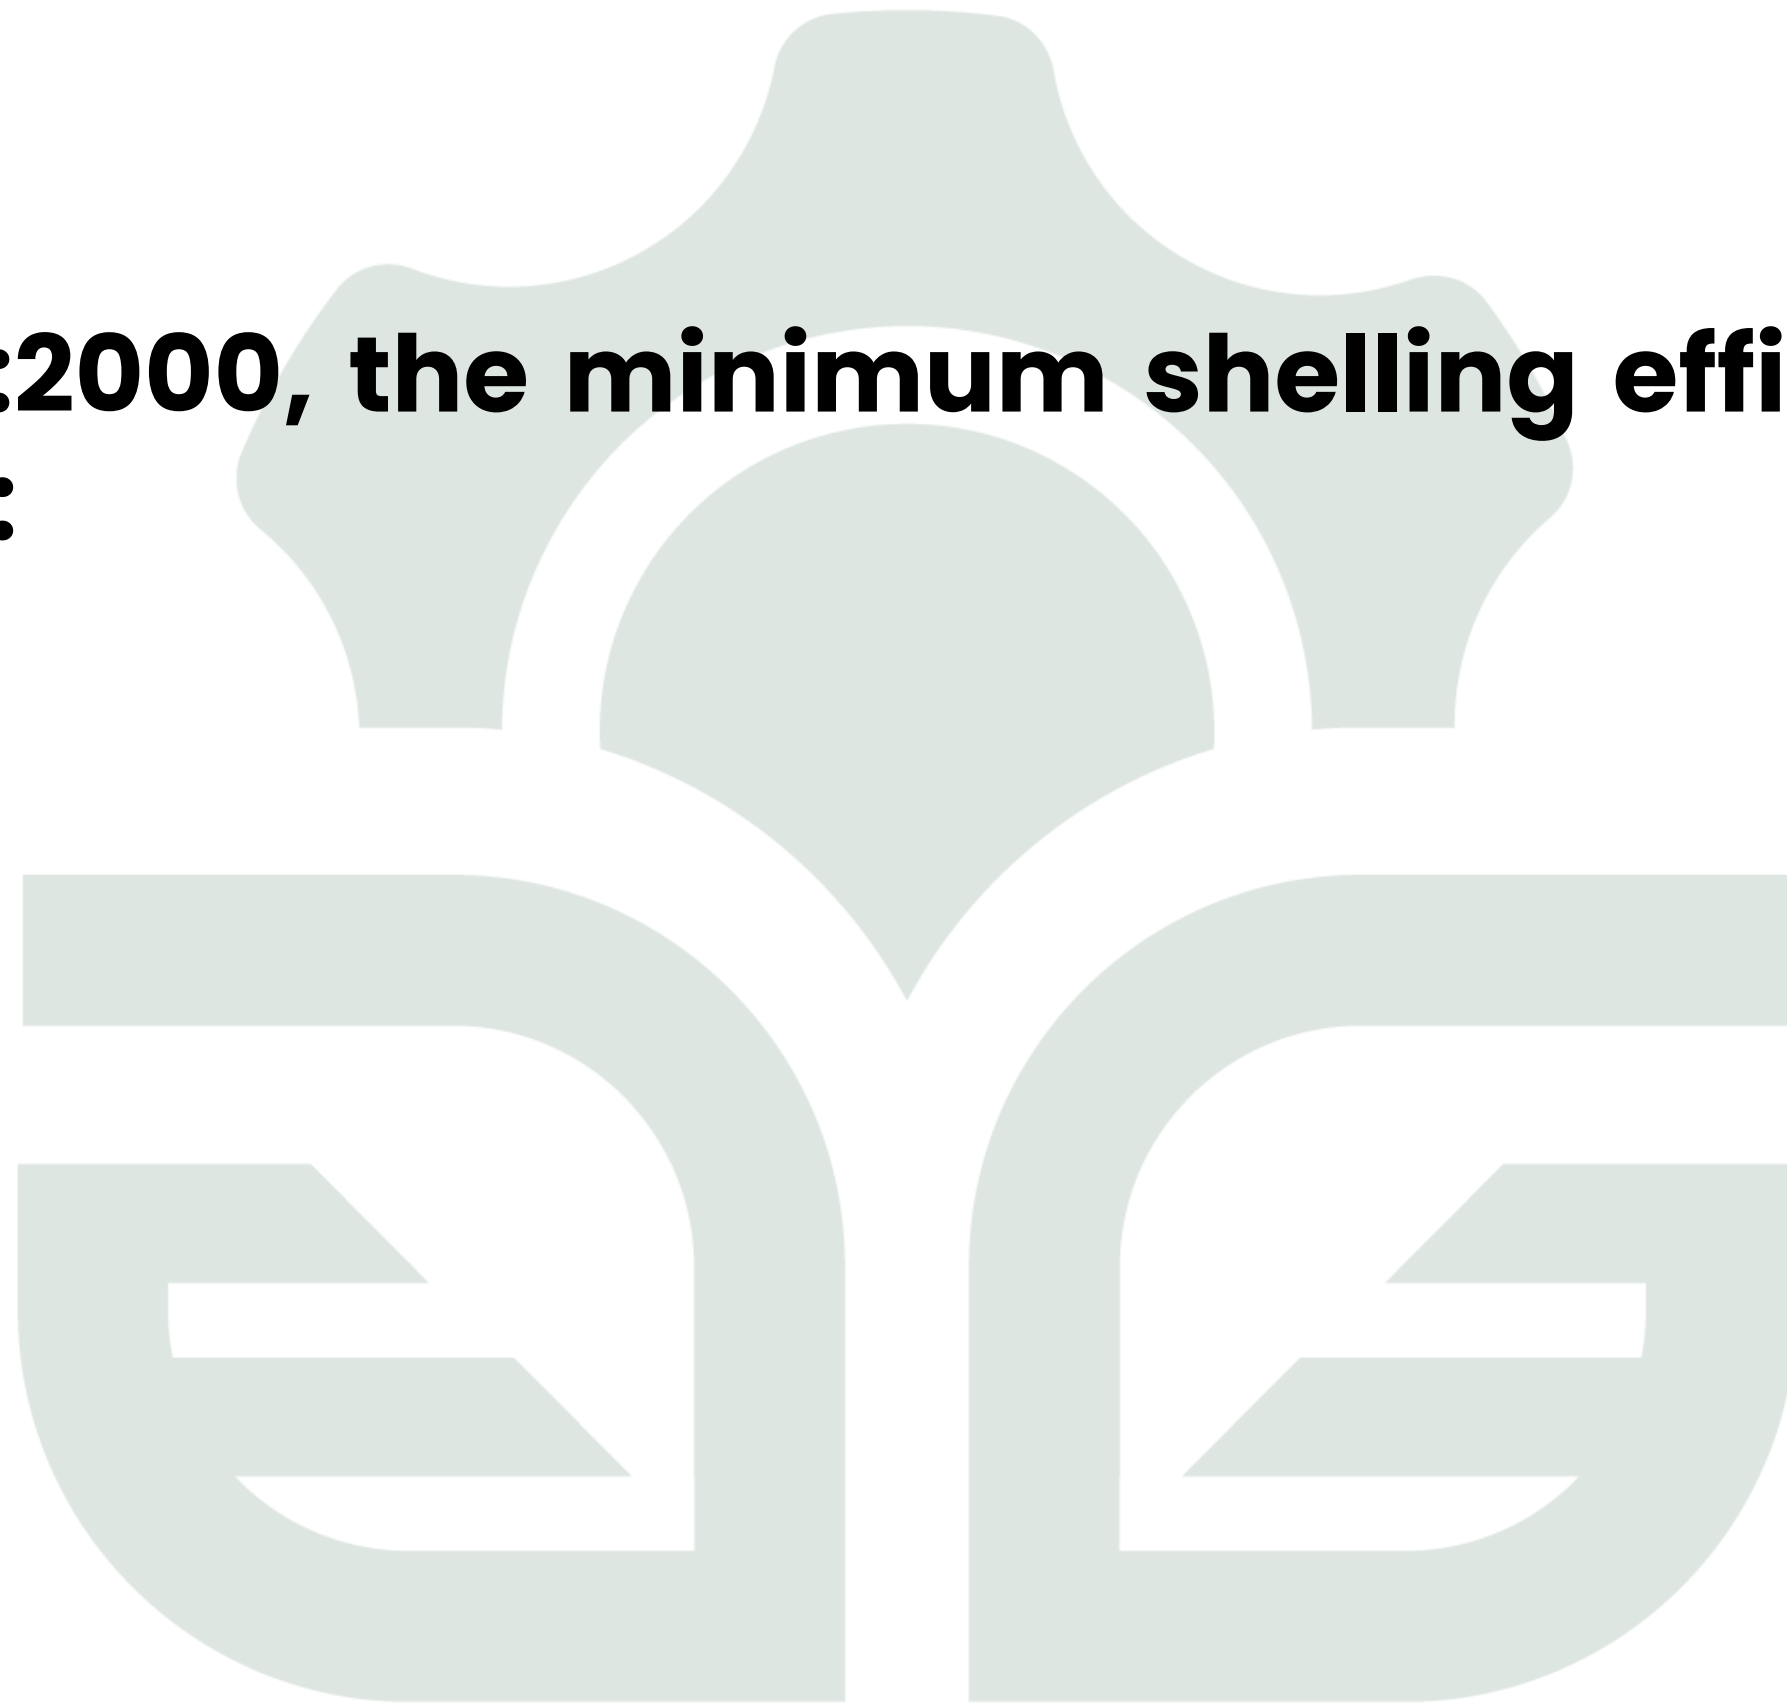

QUESTION 16

In PAES 208:2000, the minimum shelling efficiency for corn sheller:

- A. 97.0**
- B. 99.8**
- C. 95.0**
- D. 99.5**

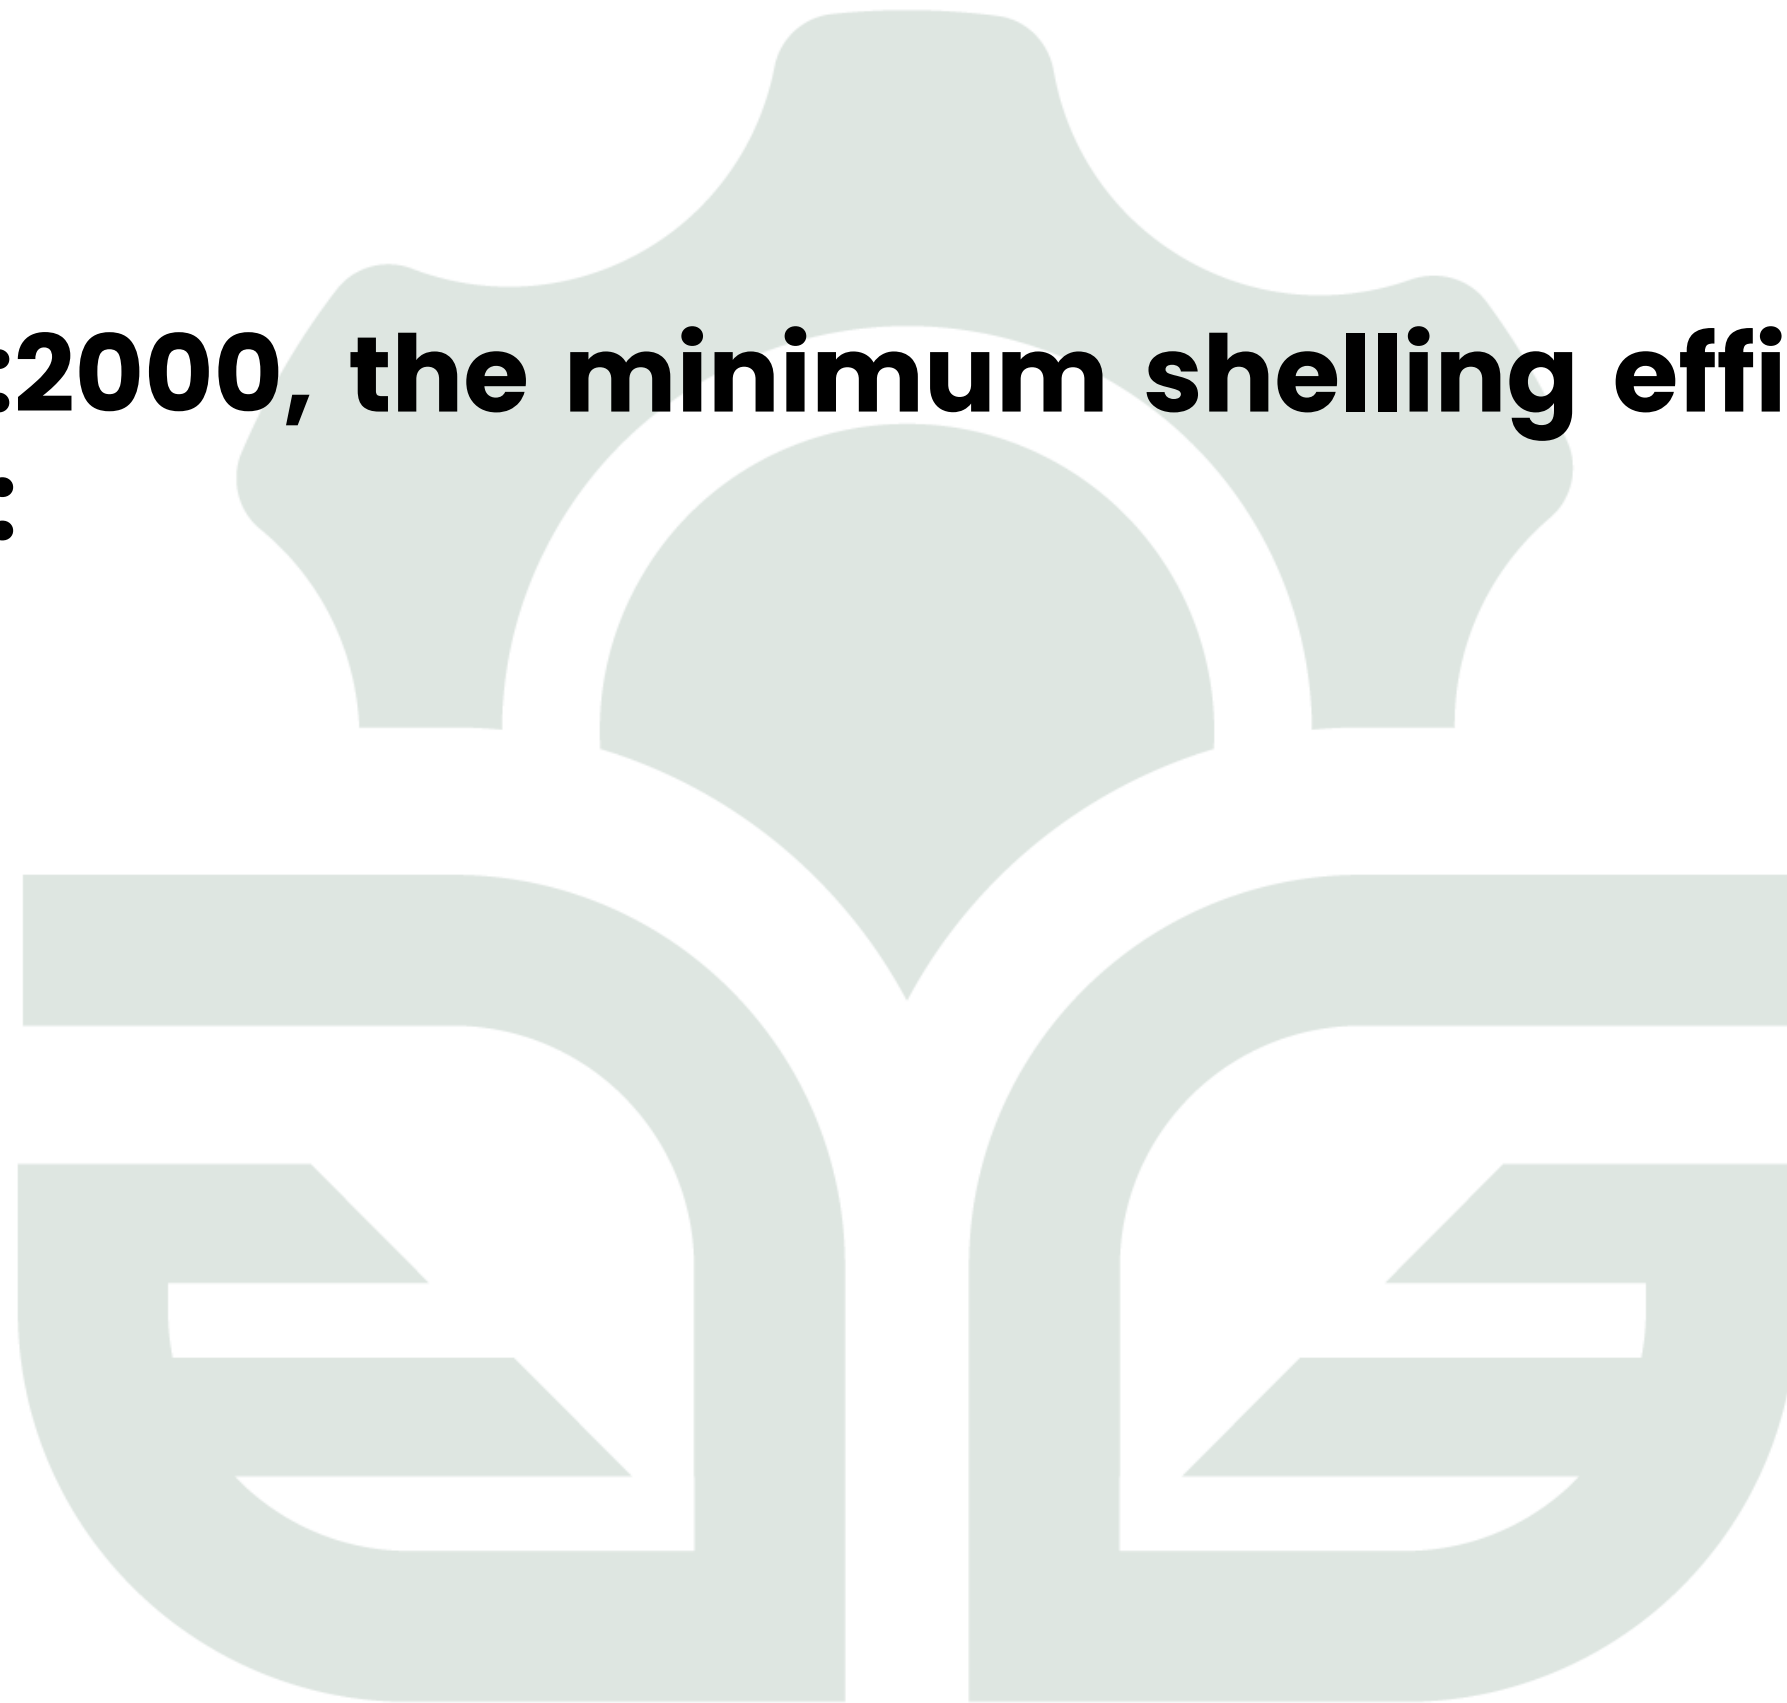

QUESTION 17

Rice grain from which the hull, the germ, the outer bran layer, and the greater part of the inner bran layer have been removed, but part of the lengthwise streaks of the bran layer may still be present on more than 40% of the sample grains

- A. Well-milled rice**
- B. Regular milled rice**
- C. Overmilled rice**
- D. Undermilled rice**

QUESTION 17

Rice grain from which the hull, the germ, the outer bran layer, and the greater part of the inner bran layer have been removed, but part of the lengthwise streaks of the bran layer may still be present on more than 40% of the sample grains

- A. Well-milled rice**
- B. Regular milled rice**
- C. Overmilled rice**
- D. Undermilled rice**

QUESTION 18

In PAES 202:2015, Heated air mechanical grain dryer – Methods of test, the grain to be used shall be homogeneous and the moisture content should be at least _____% for rice and corn.

- A. 18%**
- B. 22%**
- C. 24%**
- D. 26%**

QUESTION 18

In PAES 202:2015, Heated air mechanical grain dryer – Methods of test, the grain to be used shall be homogeneous and the moisture content should be at least _____% for rice and corn.

- A. 18%**
- B. 22%**
- C. 24%**
- D. 26%**

QUESTION 19

In PAES 232:2017, precautionary measures in *Wastewater Re-Use for Irrigation*, which is false?

- A. Direct contact with wastewater shall be avoided**
- B. Use of fine mist for sprinkler irrigation shall be used**
- C. Potable and wastewater lines shall not cross-connect**
- D. Irrigation with wastewater shall be stopped immediately when algal bloom occurs**

QUESTION 19


In PAES 232:2017, precautionary measures in *Wastewater Re-Use for Irrigation*, which is false?

- A. Direct contact with wastewater shall be avoided
- B. Use of fine mist for sprinkler irrigation shall be used**
- C. Potable and wastewater lines shall not cross-connect
- D. Irrigation with wastewater shall be stopped immediately when algal bloom occurs

QUESTION 20

It is the milled corn kernels with particle size between 1.1 mm to 1.19 mm.


- A. Grit #16**
- B. Grit #18**
- C. Grit #10**
- D. Grit #14**

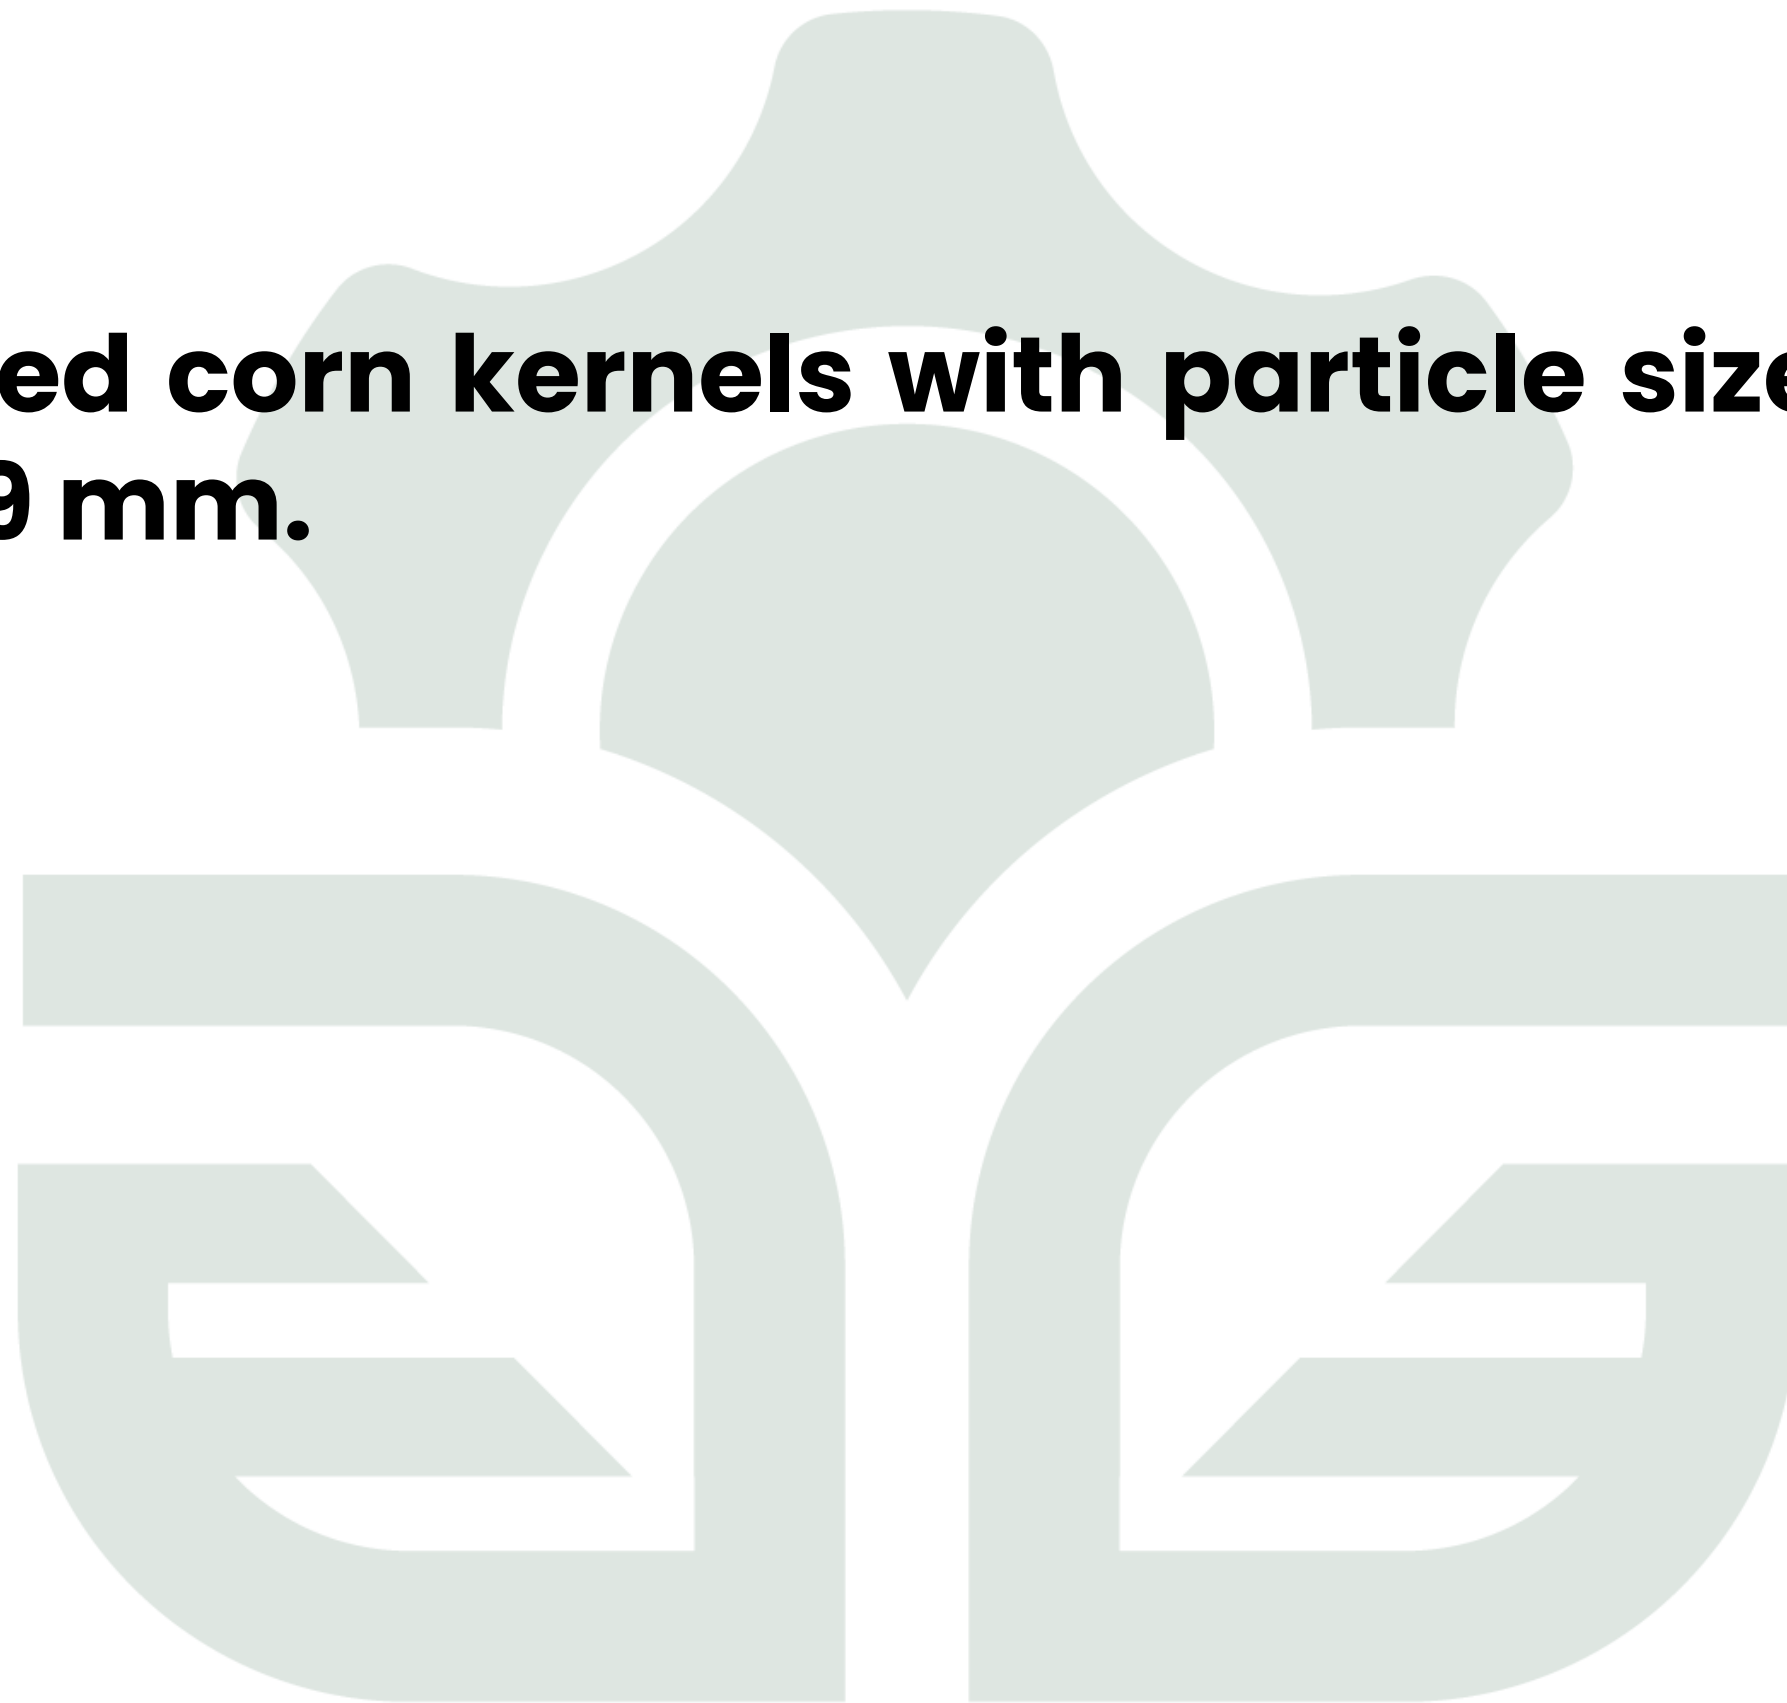

QUESTION 20

It is the milled corn kernels with particle size between 1.1 mm to 1.19 mm.

- A. Grit #16**
- B. Grit #18**
- C. Grit #10**
- D. Grit #14**

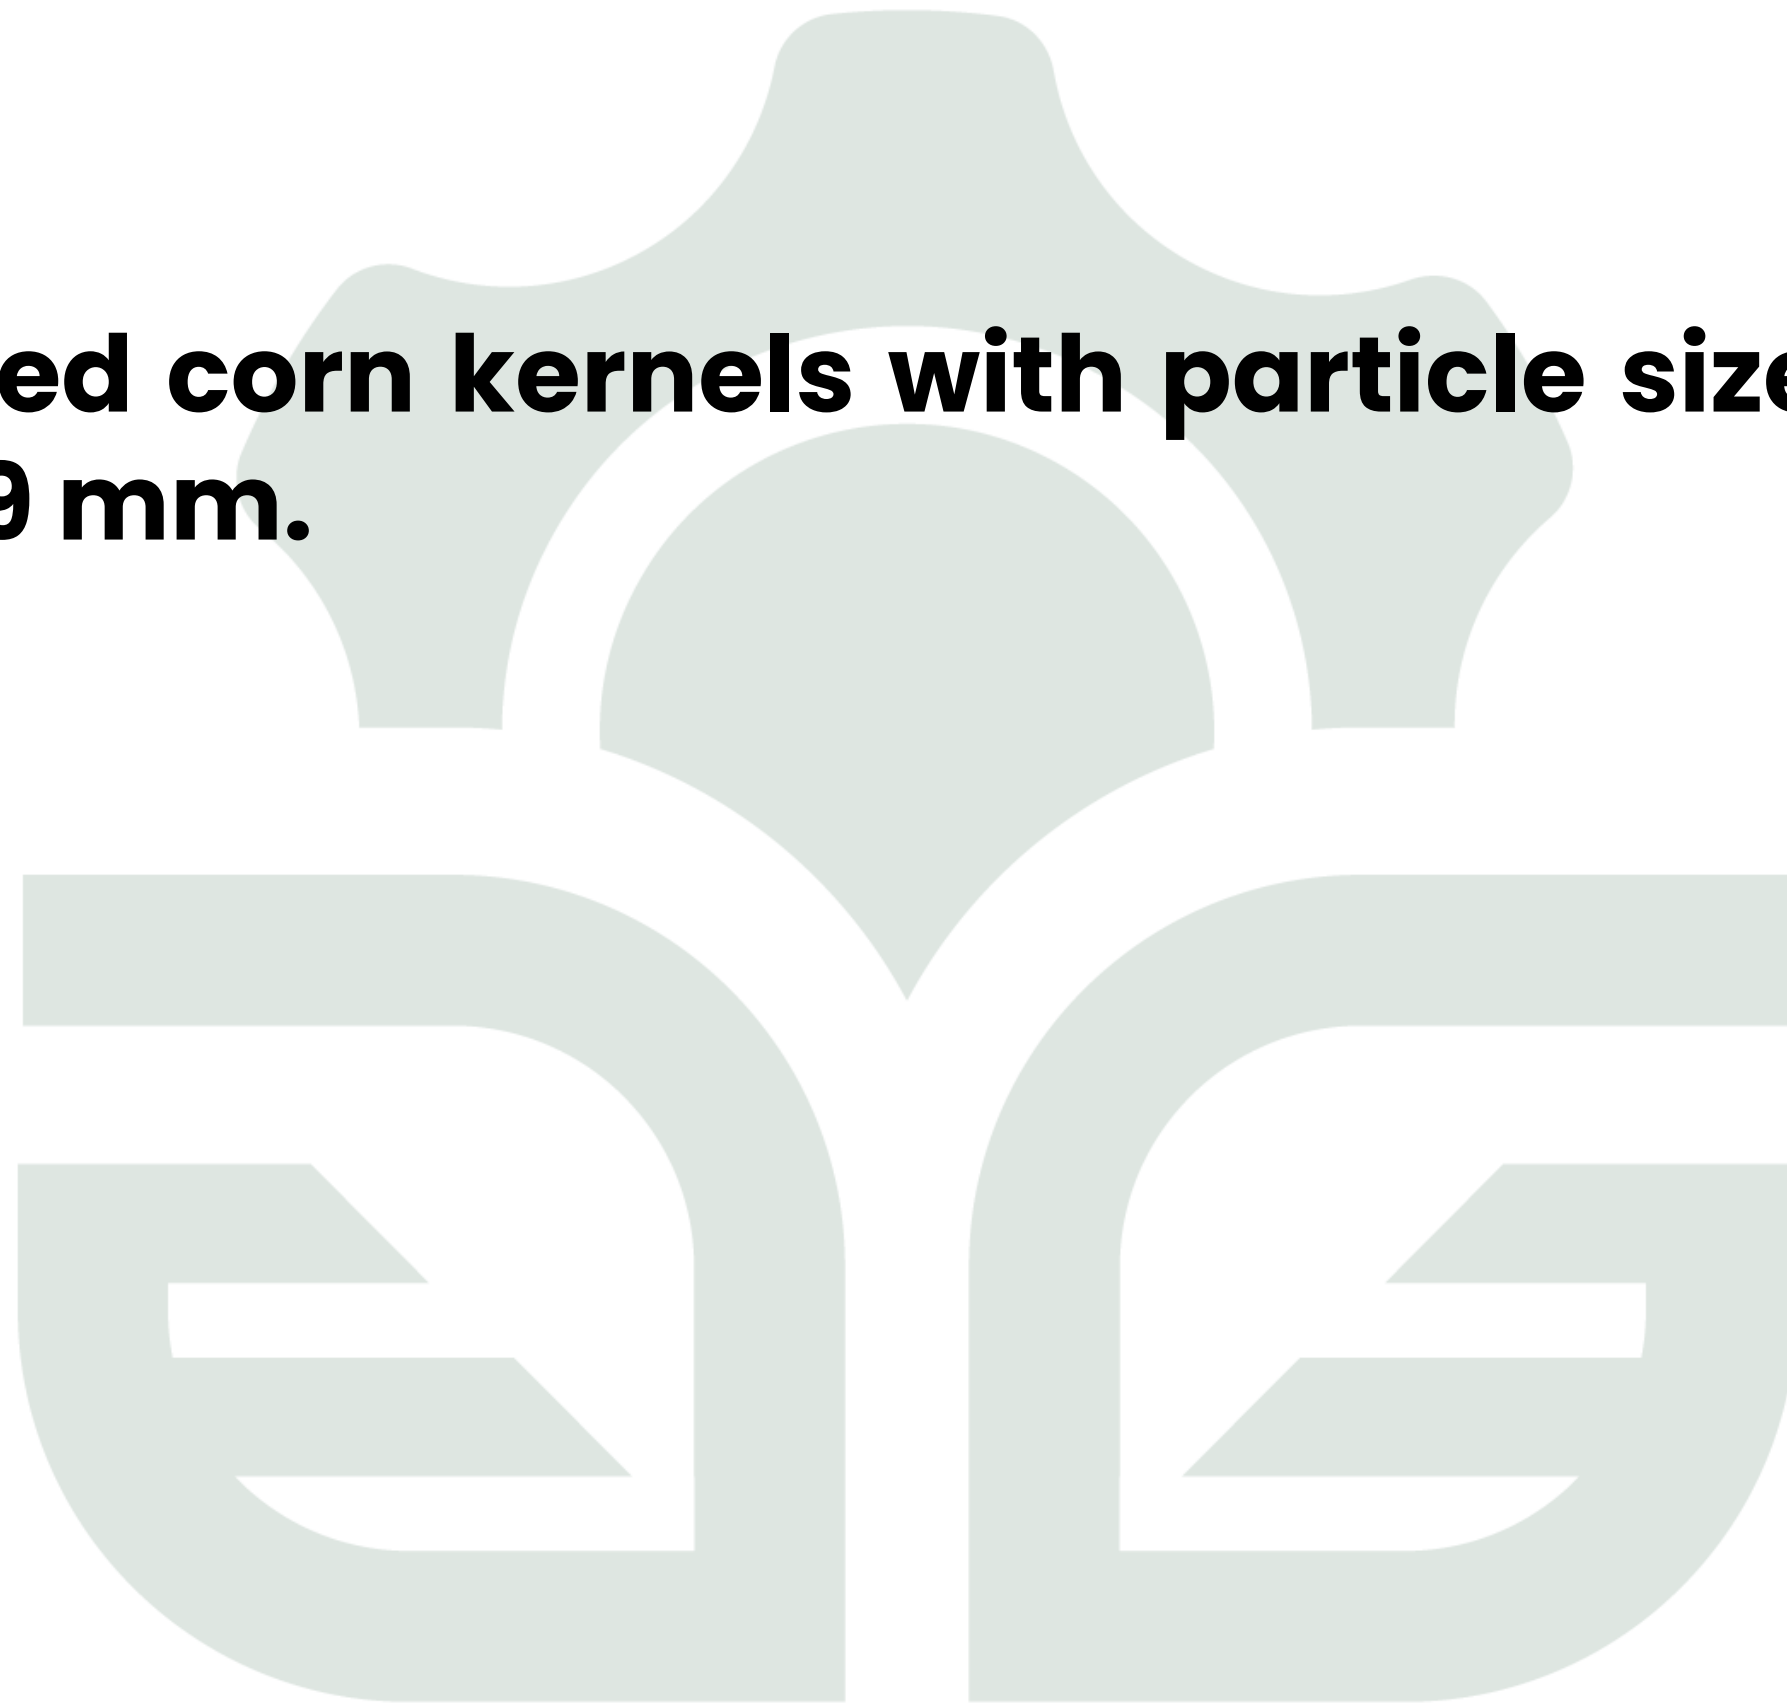

QUESTION 21

In PAES 409:2002, how many milking operators are required for a milking herd having 11-20 animals without a milking machine?

- a. 1**
- b. 2**
- c. 3**
- d. 4**

QUESTION 21

In PAES 409:2002, how many milking operators are required for a milking herd having 11-20 animals without a milking machine?

- a. 1
- b. 2**
- c. 3
- d. 4

QUESTION 22

Doe/Ewe of 50 kg space requirement in slotted flooring.

- A. 0.7 sq. m.**
- B. 0.9 sq. m.**
- C. 1.1 sq. m.**
- D. 2.5 sq. m.**

QUESTION 22

Doe/Ewe of 50 kg space requirement in slotted flooring.

- A. 0.7 sq. m.**
- B. 0.9 sq. m.**
- C. 1.1 sq. m.**
- D. 2.5 sq. m.**

QUESTION 23

Product of the coefficient of hulling and the coefficient of wholeness of grains, expressed in percent.

- A. Coefficient of wholeness**
- B. Coefficient of hulling**
- C. Hulling Efficiency**
- D. Fineness Modulus**

QUESTION 23

Product of the coefficient of hulling and the coefficient of wholeness of grains, expressed in percent.

- A. Coefficient of wholeness**
- B. Coefficient of hulling**
- C. Hulling Efficiency**
- D. Fineness Modulus**

QUESTION 24

What is the minimum methane content of biogas in order to operate biogas-fueled generators?

- A. 50%**
- B. 65%**
- C. 85%**
- D. 90%**

QUESTION 24

What is the minimum methane content of biogas in order to operate biogas-fueled generators?

- A. 50%**
- B. 65%**
- C. 85%**
- D. 90%**

QUESTION 25

Type of biogas plant which have aerobic conditions in the upper layers and anaerobic processes occurring in the bottom layers, especially in the settled solids?

- A. Aerobic Biogas**
- B. Anaerobic Biogas**
- C. Facultative Biogas**
- D. Activated Biogas**

QUESTION 25

Type of biogas plant which have aerobic conditions in the upper layers and anaerobic processes occurring in the bottom layers, especially in the settled solids?

- A. Aerobic Biogas**
- B. Anaerobic Biogas**
- C. Facultative Biogas**
- D. Activated Biogas**

QUESTION 26

It is a wastewater, either treated or untreated, discharged from a reservoir, basin, or treatment plant.

- A. Effluent**
- B. Influent**
- C. Turbid Water**
- D. Hard Water**

QUESTION 26

It is a wastewater, either treated or untreated, discharged from a reservoir, basin, or treatment plant.

- A. Effluent**
- B. Influent**
- C. Turbid Water**
- D. Hard Water**

QUESTION 27

In PAES 421:2009, the tank shall have heating device able to heat a complete charge of bituminous liquid to ___ °C.

- A. 80**
- B. 120**
- C. 180**
- D. 200**

QUESTION 27

In PAES 421:2009, the tank shall have heating device able to heat a complete charge of bituminous liquid to ___ °C.

- A. 80**
- B. 120**
- C. 180**
- D. 200**

QUESTION 28

In PAES 415:2001, under natural ventilating systems of greenhouse, large vent openings provide the most ventilation with total vent area that should be _____ - _____ of floor area.

- A. 15% - 30%**
- B. 30% - 50%**
- C. 25% - 50%**
- D. 15% - 25%**

QUESTION 28

In PAES 415:2001, under natural ventilating systems of greenhouse, large vent openings provide the most ventilation with total vent area that should be _____ - _____ of floor area.

- A. 15% - 30%**
- B. 30% - 50%**
- C. 25% - 50%**
- D. 15% - 25%**

QUESTION 29

In PAES 421:2009, it is constructed to drain water from the subgrade and to collect surface water either from the roadway surface or adjacent.

- A. roadside ditch**
- B. culvert**
- C. channel**
- D. conduit**

QUESTION 29

In PAES 421:2009, it is constructed to drain water from the subgrade and to collect surface water either from the roadway surface or adjacent.

- A. roadside ditch**
- B. culvert**
- C. channel**
- D. conduit**

QUESTION 30

In PAES 408:2001, the minimum space requirement for carabao feedlot feeding shall be _____ m/animal.

- A. 0.5**
- B. 1.0**
- C. 0.75**
- D. 1.25**

QUESTION 30

In PAES 408:2001, the minimum space requirement for carabao feedlot feeding shall be _____ m/animal.

- A. 0.5**
- B. 1.0**
- C. 0.75**
- D. 1.25**

QUESTION 31

The maximum number of outlets for a 15-A circuit.

- A. 8-10 outlets**
- B. 10-12 outlets**
- C. 14-15 outlets**
- D. 6-8 outlets**

QUESTION 31

The maximum number of outlets for a 15-A circuit.

- A. 8-10 outlets**
- B. 10-12 outlets**
- C. 14-15 outlets**
- D. 6-8 outlets**

QUESTION 32

In PAES 401:2000, heaters shall be installed in creep areas to provide newborn pigs its required temperature of ____°C - ____°C until they are 3 days old.

- A. 32-35**
- B. 29-35**
- C. 30-35**
- D. 27-35**

QUESTION 32

In PAES 401:2000, heaters shall be installed in creep areas to provide newborn pigs its required temperature of ____°C - ____°C until they are 3 days old.

- A. 32-35**
- B. 29-35**
- C. 30-35**
- D. 27-35**

QUESTION 33

It is an environmental-friendly refrigerant.

- A. CFC**
- B. HFC**
- C. HCFC**
- D. FC**



QUESTION 33

It is an environmental-friendly refrigerant.

- A. CFC**
- B. HFC**
- C. HCFC**
- D. FC**



QUESTION 34

It is a type of whitening machine consisting of a ribbed cylinder enclosed in a perforated steel housing.

- A. friction type**
- B. abrasive type**
- C. rubber roll type**
- D. cone “cono” type**

QUESTION 34

It is a type of whitening machine consisting of a ribbed cylinder enclosed in a perforated steel housing.

- A. friction type**
- B. abrasive type**
- C. rubber roll type**
- D. cone “cono” type**

QUESTION 35

A throw-in type of thresher wherein cut plants are fed between the rotating cylinder and stationary concave, and the threshed materials/straws are discharged out of the threshing chamber tangentially.

- A. radial type thresher**
- B. hold-on type thresher**
- C. axial-flow thresher**
- D. through flow thresher**

QUESTION 35

A throw-in type of thresher wherein cut plants are fed between the rotating cylinder and stationary concave, and the threshed materials/straws are discharged out of the threshing chamber tangentially.

- A. radial type thresher**
- B. hold-on type thresher**
- C. axial-flow thresher**
- D. through flow thresher**

QUESTION 36

In lateral and sub-lateral canal where the available roadway width is 3 meters, the carriageway width shall be 2 meters and the shoulder width shall be 0.5 meters. If the available roadway width is 4 meters, the shoulder shall expand to 1 meter.

- A. roadway on main irrigation canals**
- B. road bed lateral canals**
- C. roadway on lateral & sub lateral irrigation canals**
- D. turn-out section canals**

QUESTION 36

In lateral and sub-lateral canal where the available roadway width is 3 meters, the carriageway width shall be 2 meters and the shoulder width shall be 0.5 meters. If the available roadway width is 4 meters, the shoulder shall expand to 1 meter.

- A. roadway on main irrigation canals**
- B. road bed lateral canals**
- C. roadway on lateral & sub lateral irrigation canals**
- D. turn-out section canals**

QUESTION 37

It is the layer of aggregate, soil-treated aggregate, treated soil, or soil aggregate that rests upon the subbase or if no subbase, upon the sub-grade. Treatment may include application of chemical-based soil additives such as soil-stabilizers and/or any approved method.

- A. Aggregate Base Course**
- B. Base Course**
- C. Subbase Course**
- D. Aggregate Subbase Course**

QUESTION 37

It is the layer of aggregate, soil-treated aggregate, treated soil, or soil aggregate that rests upon the subbase or if no subbase, upon the sub-grade. Treatment may include application of chemical-based soil additives such as soil-stabilizers and/or any approved method.

- A. Aggregate Base Course**
- B. Base Course**
- C. Subbase Course**
- D. Aggregate Subbase Course**

QUESTION 38

It involves the arrangement of compost mix in long, narrow piles or windrows that are periodically turned to maintain aerobic conditions.

- A. Aerated static pile**
- B. In-vessel system composting**
- C. Windrow composting**
- D. Bin composting**

QUESTION 38

It involves the arrangement of compost mix in long, narrow piles or windrows that are periodically turned to maintain aerobic conditions.

- A. Aerated static pile**
- B. In-vessel system composting**
- C. Windrow composting**
- D. Bin composting**

QUESTION 39

The percent of moisture content of test materials for peanut sheller.

- A. 8%–10%, wet basis**
- B. 12%–14%, wet basis**
- C. 8%–10%, dry basis**
- D. 12%–14%, dry basis**

QUESTION 39

The percent of moisture content of test materials for peanut sheller.

- A. 8%–10%, wet basis**
- B. 12%–14%, wet basis**
- C. 8%–10%, dry basis**
- D. 12%–14%, dry basis**

QUESTION 40

Ratio of the weight of corn kernels that fell out from the machine during shelling operation to the weight of the total corn kernel input of the sheller, expressed in percent.

- A. Scattering loss**
- B. Cylinder loss**
- C. Separation loss**
- D. Blower loss**

QUESTION 40

Ratio of the weight of corn kernels that fell out from the machine during shelling operation to the weight of the total corn kernel input of the sheller, expressed in percent.

- A. Scattering loss**
- B. Cylinder loss**
- C. Separation loss**
- D. Blower loss**

QUESTION 41

In PAES 421:2009, the minimum radius of curvature for flat, rolling and mountainous terrains respectively shall be.

- A. 75, 50 & 5 m**
- B. 500, 150 & 50 m**
- C. 150, 100 & 50 m**
- D. 600, 200 & 100 m**

QUESTION 41

In PAES 421:2009, the minimum radius of curvature for flat, rolling and mountainous terrains respectively shall be.

- A. 75, 50 & 5 m**
- B. 500, 150 & 50 m**
- C. 150, 100 & 50 m**
- D. 600, 200 & 100 m**

QUESTION 42

It refers to the extent or degree by which the bran layer of the brown rice is removed as a result of whitening.

- A. Whitening degree**
- B. Milling degree**
- C. Milling recovery**
- D. Milling index**

QUESTION 42

It refers to the extent or degree by which the bran layer of the brown rice is removed as a result of whitening.

- A. Whitening degree**
- B. Milling degree**
- C. Milling recovery**
- D. Milling index**

QUESTION 43

Standard thickness of concrete of trapezoidal ditch w/ riprap.

- A. 0.25 m**
- B. 0.15 m**
- C. 0.30 m**
- D. 0.20 m**



QUESTION 43

**Standard thickness of concrete of trapezoidal ditch w/
riprap.**

- A. 0.25 m**
- B. 0.15 m**
- C. 0.30 m**
- D. 0.20 m**



QUESTION 44

It is a rice grain from which the hull, the germ, the outer bran layers, and the greater part of the inner bran layer have been removed, but part of the lengthwise streaks of the bran layers may still be present on less than 20% of the sample grains.

- A. Well-milled rice**
- B. Regular milled rice**
- C. Overmilled rice**
- D. Undermilled rice**

QUESTION 44

It is a rice grain from which the hull, the germ, the outer bran layers, and the greater part of the inner bran layer have been removed, but part of the lengthwise streaks of the bran layers may still be present on less than 20% of the sample grains.

- A. Well-milled rice**
- B. Regular milled rice**
- C. Overmilled rice**
- D. Undermilled rice**

QUESTION 45

Moisture gradient of corn and rice in mechanical dryer.

- A. 0.5%**
- B. 1.0%**
- C. 2.5%**
- D. 2.0%**

QUESTION 45

Moisture gradient of corn and rice in mechanical dryer.

- A. 0.5%**
- B. 1.0%**
- C. 2.5%**
- D. 2.0%**

QUESTION 46

It is the chamber maintained under pressure for uniform distribution of the heated air through the grain mass.

- A. dust collection system**
- B. drying chamber**
- C. plenum**
- D. tempering bin**

QUESTION 46

It is the chamber maintained under pressure for uniform distribution of the heated air through the grain mass.

- A. dust collection system**
- B. drying chamber**
- C. plenum**
- D. tempering bin**

QUESTION 47

In PAES 420:2002, the door height shall be provided with a clearance of at least _____ m above the tallest machinery.

- A. 0.3**
- B. 0.4**
- C. 0.6**
- D. 0.7**

QUESTION 47

In PAES 420:2002, the door height shall be provided with a clearance of at least _____ m above the tallest machinery.

- A. 0.3**
- B. 0.4**
- C. 0.6**
- D. 0.7**

QUESTION 48

Heat absorbed by a unit mass of a material at its boiling point to convert the material into a gas without temperature change.

- A. Latent heat of sublimation**
- B. Latent heat of deposition**
- C. Latent heat of fusion**
- D. Latent heat of vaporization**

QUESTION 48

Heat absorbed by a unit mass of a material at its boiling point to convert the material into a gas without temperature change.

- A. Latent heat of sublimation**
- B. Latent heat of deposition**
- C. Latent heat of fusion**
- D. Latent heat of vaporization**

QUESTION 49

The angle measured from the horizontal at which product will start to move downwards over a smooth surface with gravity discharging the product is called a _____.

- A. angle of discharge**
- B. angle of friction**
- C. angle of repose**
- D. hopper angle**

QUESTION 49

The angle measured from the horizontal at which product will start to move downwards over a smooth surface with gravity discharging the product is called a _____.

- A. angle of discharge**
- B. angle of friction**
- C. angle of repose**
- D. hopper angle**

QUESTION 50

In PAES 616:2016, precautionary measures in *Wastewater Re-Use for Irrigation*, which is false?

- A. Direct contact with wastewater shall be avoided**
- B. Use of fine mist for sprinkler irrigation shall be used**
- C. Potable and wastewater lines shall not cross connect**
- D. Irrigation with wastewater shall be stopped immediately when algal bloom occurs**

QUESTION 50


In PAES 616:2016, precautionary measures in *Wastewater Re-Use for Irrigation*, which is false?

- A. Direct contact with wastewater shall be avoided
- B. Use of fine mist for sprinkler irrigation shall be used**
- C. Potable and wastewater lines shall not cross connect
- D. Irrigation with wastewater shall be stopped immediately when algal bloom occurs

QUESTION 51

It is the milled corn kernels with particle size between 1.2 mm to 1.4 mm.


- A. Grit #16**
- B. Grit #18**
- C. Grit #10**
- D. Grit #14**

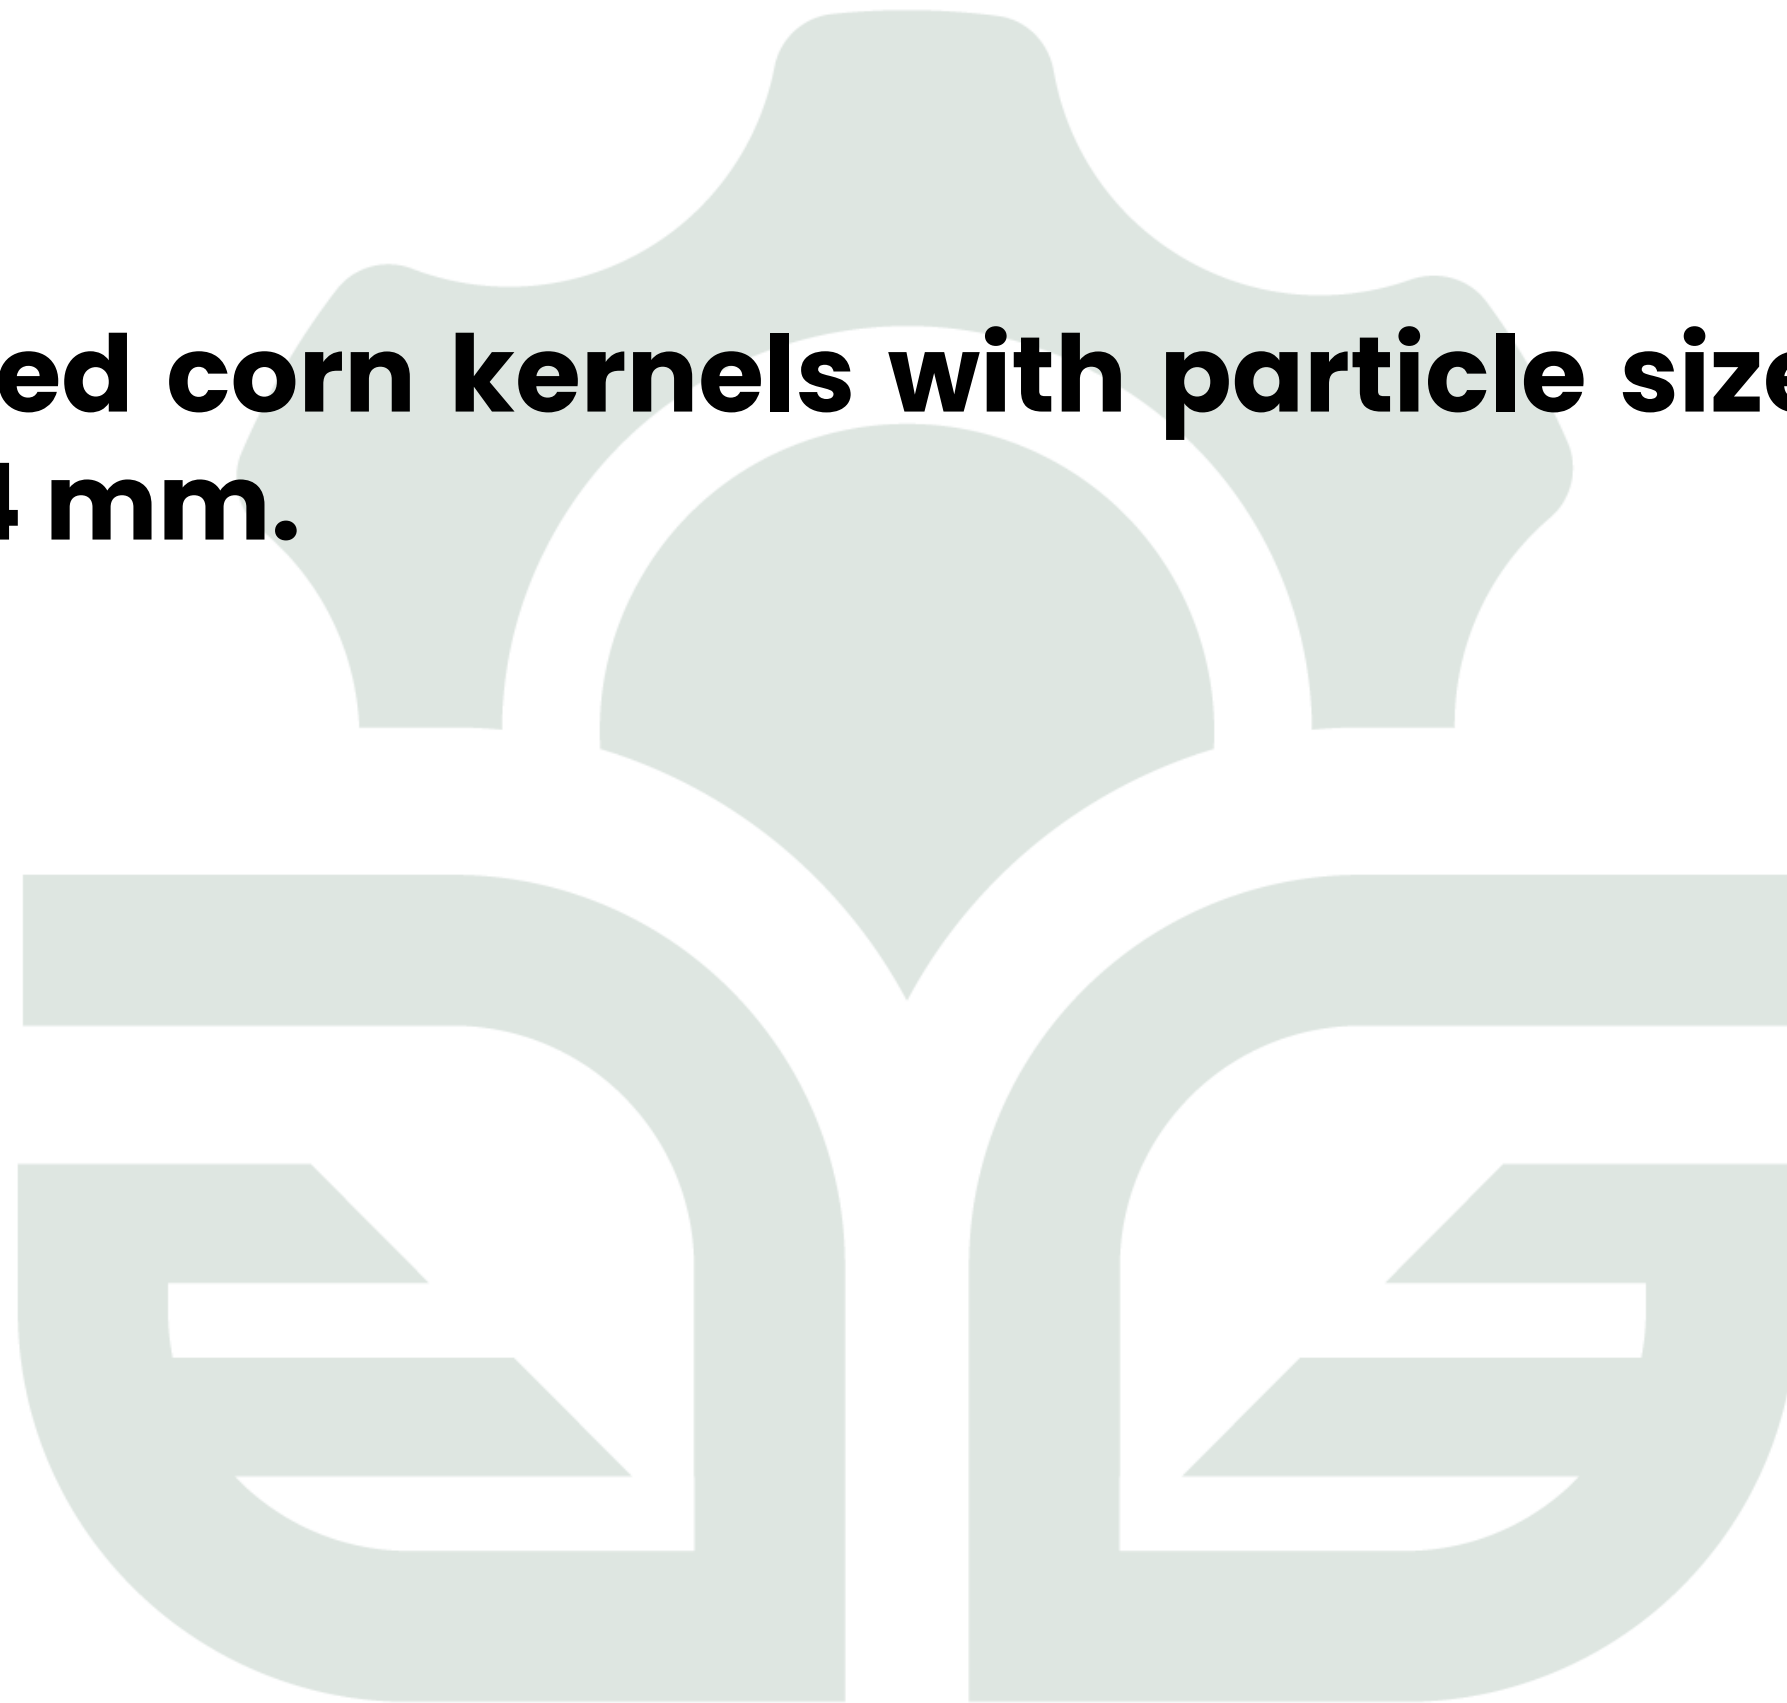

QUESTION 51

It is the milled corn kernels with particle size between 1.2 mm to 1.4 mm.

- A. Grit #16**
- B. Grit #18**
- C. Grit #10**
- D. Grit #14**

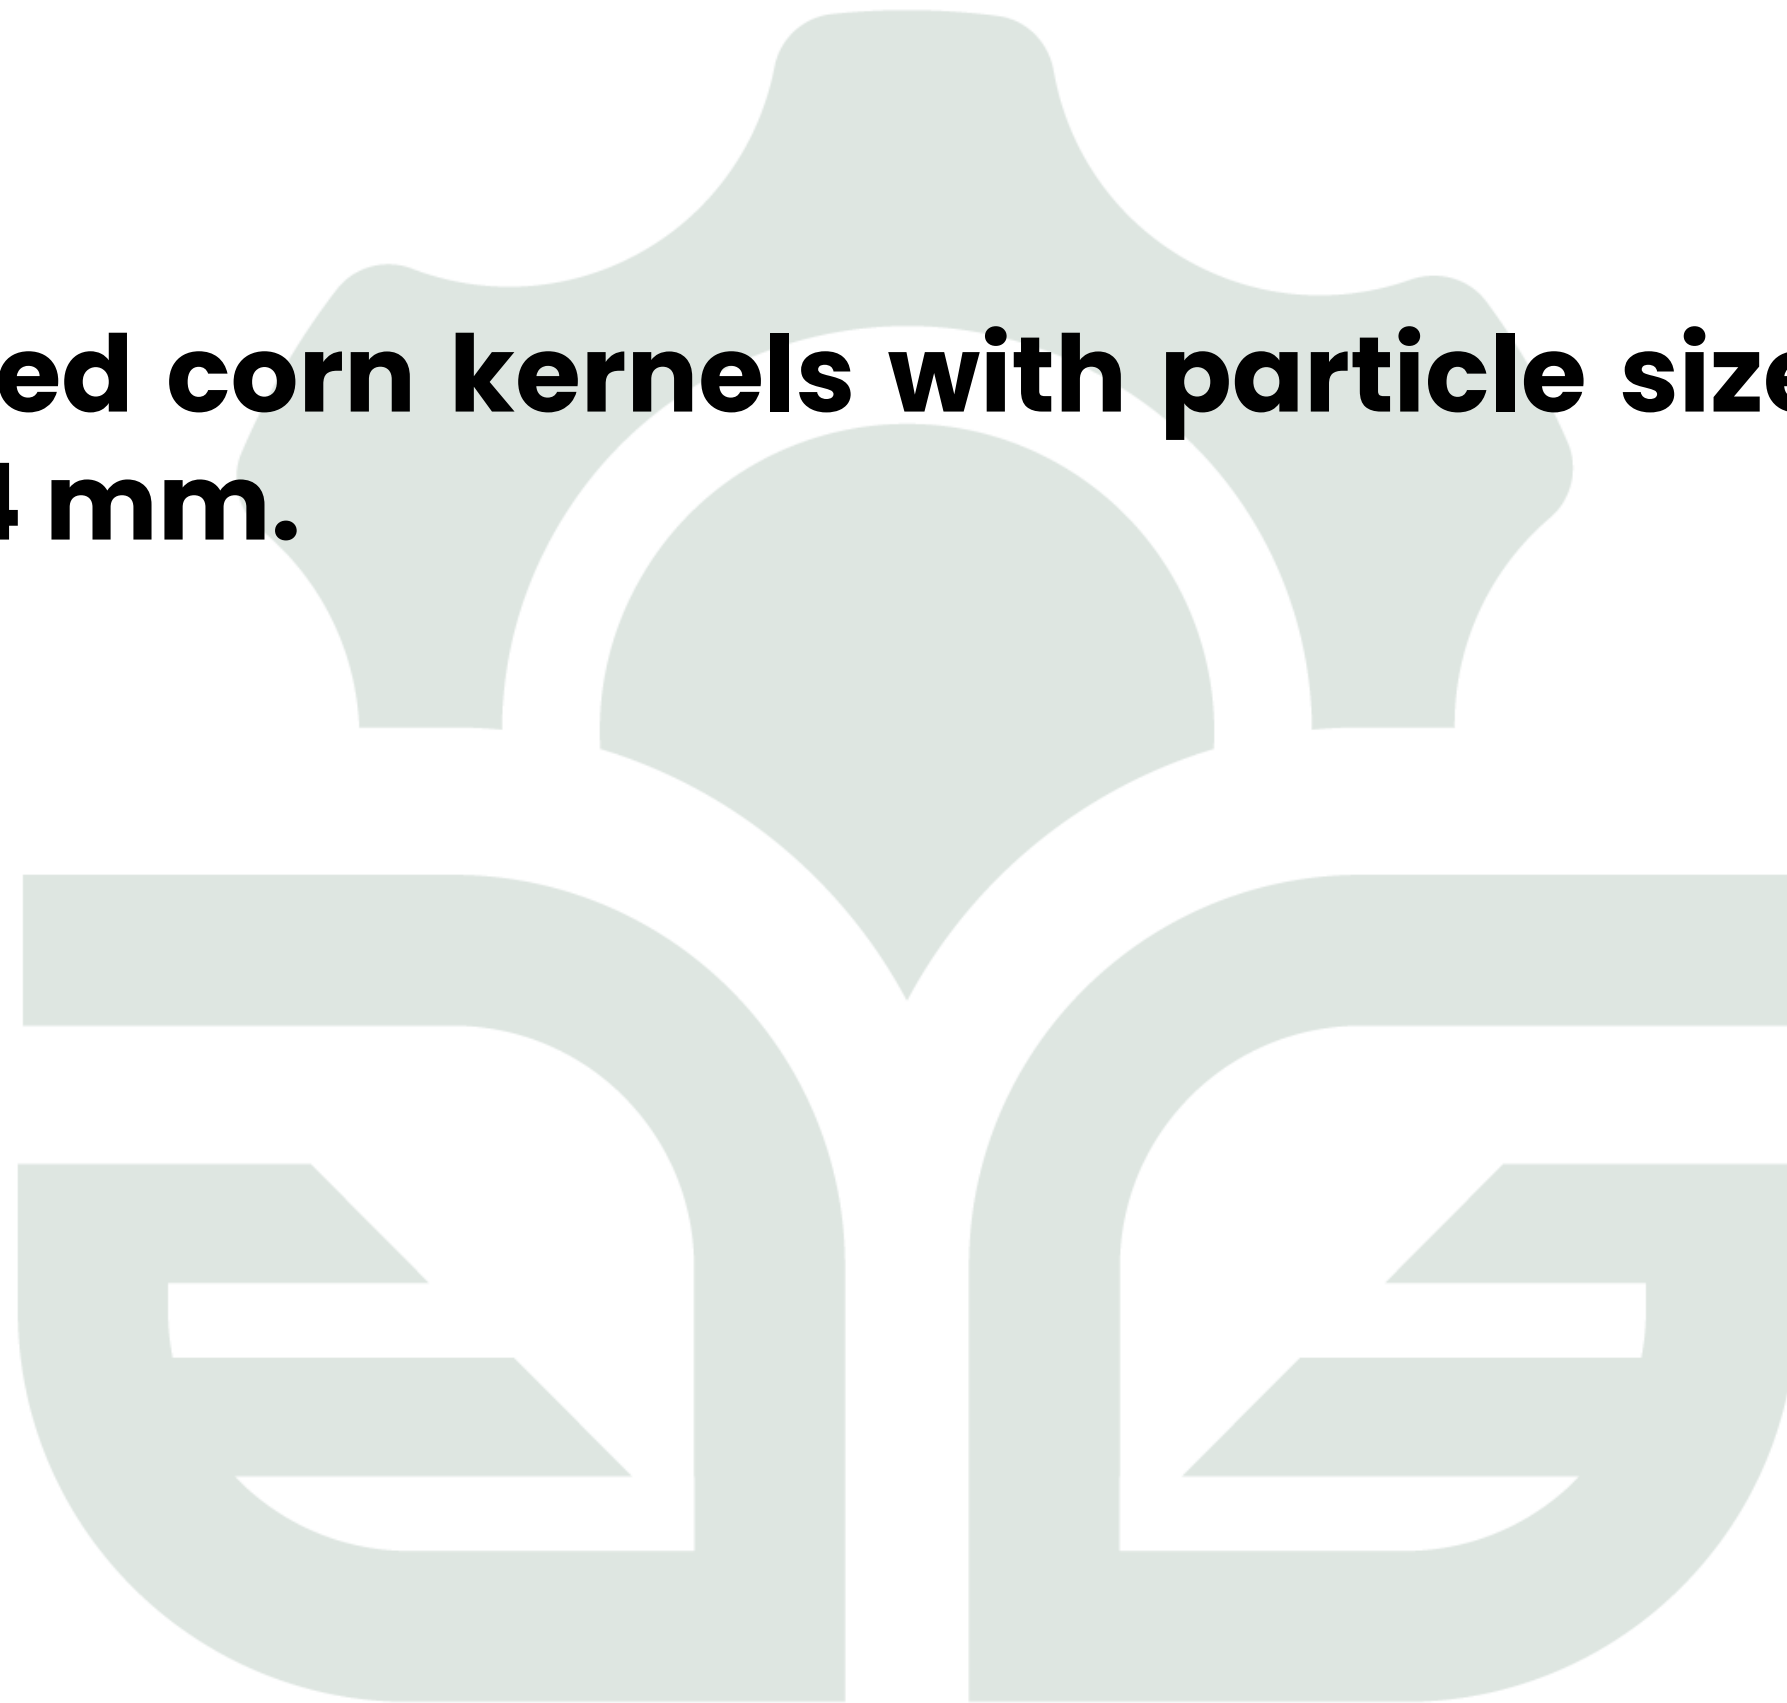

QUESTION 52

The amount of moisture in the grain expressed as a percentage of the total weight of the samples.

- A. Moisture content dry basis**
- B. Moisture content wet basis**
- C. Moisture content**
- D. Equilibrium moisture content**

QUESTION 52

The amount of moisture in the grain expressed as a percentage of the total weight of the samples.

- A. Moisture content dry basis**
- B. Moisture content wet basis**
- C. Moisture content**
- D. Equilibrium moisture content**

QUESTION 53

Recommended stacking density for corn in terms of number of bags per cubic meter.

- A. 10**
- B. 9**
- C. 12**
- D. 15**

QUESTION 53

Recommended stacking density for corn in terms of number of bags per cubic meter.

- A. 10**
- B. 9**
- C. 12**
- D. 15**

QUESTION 54

In PAES 418:2002, area in sqm per ton of commodity in primary processing plant is:

- A. 10 sqm per ton**
- B. 15 sqm per ton**
- C. 20 sqm per ton**
- D. 25 sqm per ton**

QUESTION 54

In PAES 418:2002, area in sqm per ton of commodity in primary processing plant is:

- A. 10 sqm per ton**
- B. 15 sqm per ton**
- C. 20 sqm per ton**
- D. 25 sqm per ton**

QUESTION 55

In PAES 411:2000, the gut room/tripery shall be provided with lighting intensity of _____ lux.

- A. 200**
- B. 220**
- C. 540**
- D. 110**

QUESTION 55

In PAES 411:2000, the gut room/tripery shall be provided with lighting intensity of _____ lux.

- A. 200**
- B. 220**
- C. 540**
- D. 110**

QUESTION 56

In PAES 409:2002, how many milking operators are required for a milking herd having 21-30 animals without a milking machine?

- A. 1**
- B. 2**
- C. 3**
- D. 4**

QUESTION 56

In PAES 409:2002, how many milking operators are required for a milking herd having 21-30 animals without a milking machine?

- A. 1**
- B. 2**
- C. 3**
- D. 4**

QUESTION 57

Burning efficiency of the biomass furnace shall be at least:

- A. 98%**
- B. 95%**
- C. 90%**
- D. 80%**

QUESTION 57

Burning efficiency of the biomass furnace shall be at least:

- A. 98%**
- B. 95%**
- C. 90%**
- D. 80%**

QUESTION 58

Stoichiometric air requirement for pyrolysis.

- A. 10–20%**
- B. 20–30%**
- C. 30–40%**
- D. 40–50%**

QUESTION 58

Stoichiometric air requirement for pyrolysis.

- A. 10–20%**
- B. 20–30%**
- C. 30–40%**
- D. 40–50%**

QUESTION 59

The C/N Ratio of agricultural waste.

- A. 10:20**
- B. 20:30**
- C. 30:40**
- D. 40:50**



QUESTION 59

The C/N Ratio of agricultural waste.

- A. 10:20**
- B. 20:30**
- C. 30:40**
- D. 40:50**

QUESTION 60

Main product of gasification.

- A.* CH_4
- B.* CO
- C.* O_2
- D.* CO_2

QUESTION 60

Main product of gasification.

A. CH_4

***B.* CO**

C. O_2

D. CO_2

QUESTION 61

The heating system efficiency for rice hull direct-fired mechanical grain dryer.

- A. 95%**
- B. 80%**
- C. 90%**
- D. 65%**

QUESTION 61

The heating system efficiency for rice hull direct-fired mechanical grain dryer.

- A. 95%**
- B. 80%**
- C. 90%**
- D. 65%**

QUESTION 62

It is a cantilever beam that holds the gasholder/movable cover in position at the desired biogas pressure

- A. gasholder retainer**
- B. gasholding beam**
- C. gasholder frame**
- D. biogas cover-lever**

QUESTION 62

It is a cantilever beam that holds the gasholder/movable cover in position at the desired biogas pressure

- A. gasholder retainer**
- B. gasholding beam**
- C. gasholder frame**
- D. biogas cover-lever**

QUESTION 63

The height of hover type brooder shall be adjustable. Hovers shall be maintained at a minimum clearance of _____ above the back of the birds.

- A. 120 mm**
- B. 150 mm**
- C. 170 mm**
- D. 200 mm**

QUESTION 63

The height of hover type brooder shall be adjustable. Hovers shall be maintained at a minimum clearance of _____ above the back of the birds.

- A. 120 mm**
- B. 150 mm**
- C. 170 mm**
- D. 200 mm**

QUESTION 64

Doe/Ewe of 70 kg space requirement in Slotted Flooring.

- A. 0.7 sq. m.**
- B. 0.9 sq. m.**
- C. 1.1 sq. m.**
- D. 2.5 sq. m.**

QUESTION 64


Doe/Ewe of 70 kg space requirement in Slotted Flooring.

- A. 0.7 sq. m.**
- B. 0.9 sq. m.**
- C. 1.1 sq. m.**
- D. 2.5 sq. m.**

QUESTION 65

In housing for broiler, the width of pen shall be about ___ m.

- A. 10-12**
- B. 12-14**
- C. 14-16**
- D. 16-18**

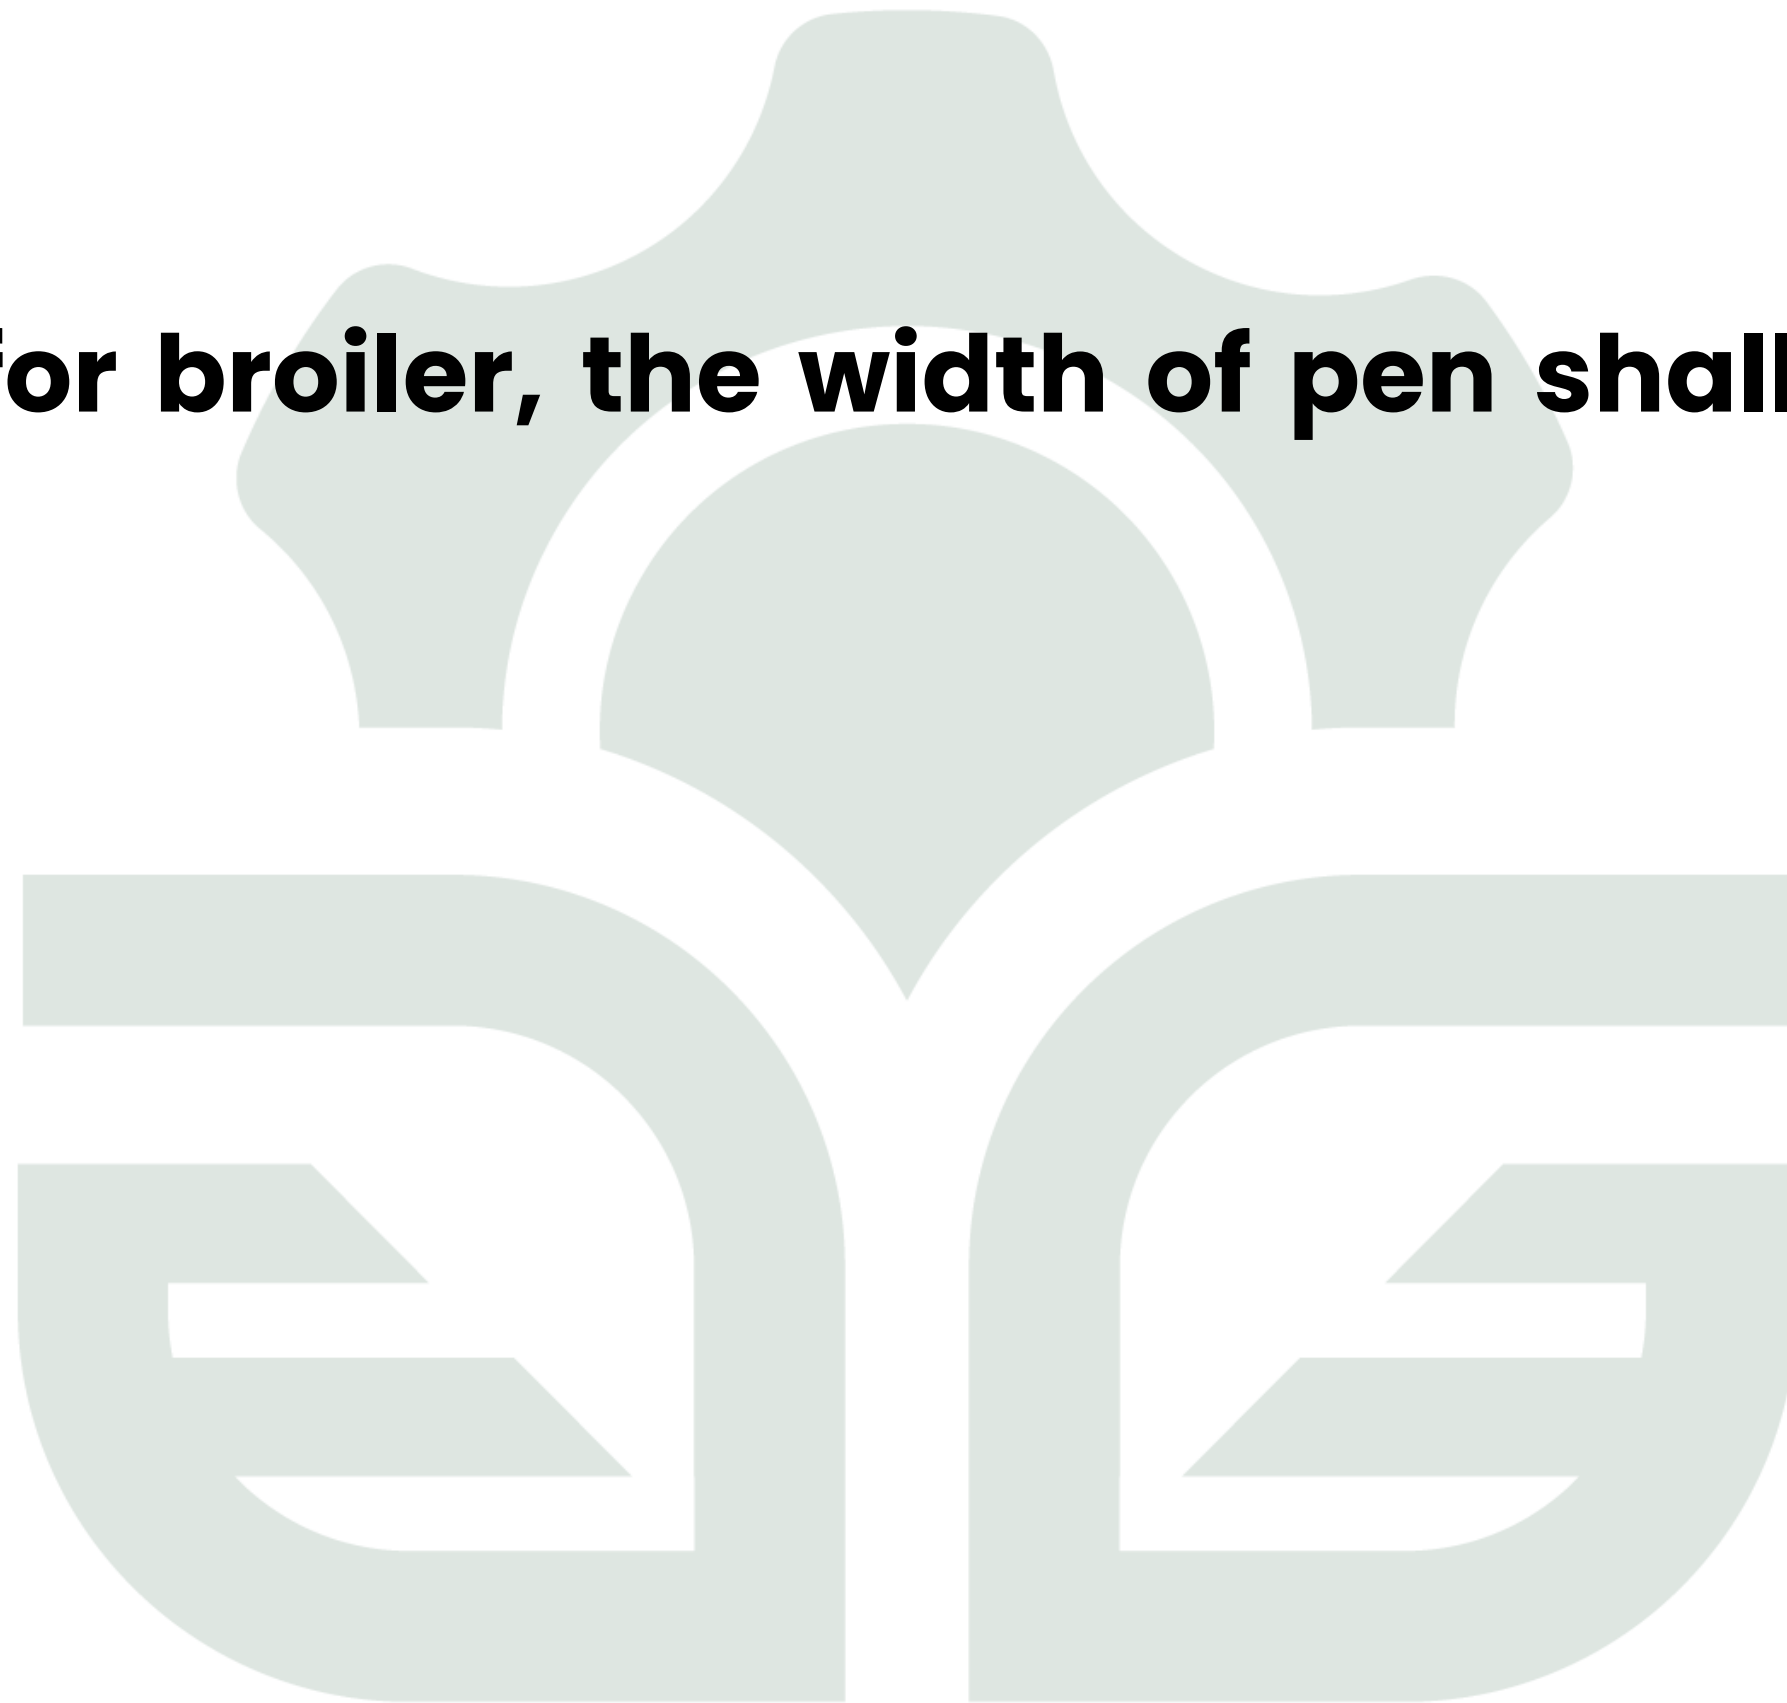

QUESTION 65

In housing for broiler, the width of pen shall be about ___ m.

- A. 10-12**
- B. 12-14**
- C. 14-16**
- D. 16-18**

QUESTION 66

The fence height for Brahman and other exotic breeds in a cattle ranch shall be _____.]

- A. 1.7 – 1.8 m**
- B. 1.8 – 2.0 m**
- C. 1.5 – 1.7 m**
- D. 2.0 – 2.2 m**

QUESTION 66

The fence height for Brahman and other exotic breeds in a cattle ranch shall be _____.]

- A. 1.7 – 1.8 m**
- B. 1.8 – 2.0 m**
- C. 1.5 – 1.7 m**
- D. 2.0 – 2.2 m**

QUESTION 67

The lairage for small and large animals shall be located at least ____ away from the slaughterhouse.

- A. 20 m**
- B. 50 m**
- C. 10 m**
- D. 30 m**

QUESTION 67

The lairage for small and large animals shall be located at least ____ away from the slaughterhouse.

- A. 20 m**
- B. 50 m**
- C. 10 m**
- D. 30 m**

QUESTION 68

Maximum allowable noise limits of a slaughterhouse during night located in a noise sensitive place is ____.

- A. 55 dB**
- B. 50 dB**
- C. 40 dB**
- D. 45 dB**

QUESTION 68

Maximum allowable noise limits of a slaughterhouse during night located in a noise sensitive place is ____.

- A. 55 dB**
- B. 50 dB**
- C. 40 dB**
- D. 45 dB**

QUESTION 69

Waste management structures shall be constructed on soils with at least ____ content.

- A. 15% silt**
- B. 10% clay**
- C. 15% clay**
- D. 15% silt-clay**

QUESTION 69

Waste management structures shall be constructed on soils with at least ____ content.

- A. 15% silt**
- B. 10% clay**
- C. 15% clay**
- D. 15% silt-clay**

QUESTION 70

The moisture content of the composting agricultural solid wastes should be maintained at ___ to nourish composting bacteria.

- A. 50 – 60%**
- B. 55 – 65%**
- C. 40 – 50%**
- D. 60 – 70%**

QUESTION 70

The moisture content of the composting agricultural solid wastes should be maintained at ___ to nourish composting bacteria.

- A. 50 – 60%**
- B. 55 – 65%**
- C. 40 – 50%**
- D. 60 – 70%**

QUESTION 71

Low portable platform made of wood or plastic or metal or combination to facilitate handling, storage, or transport of materials as a unit load using a forklift.

- A. pallet bin storage**
- B. bulk storage**
- C. bin**
- D. pallet**

QUESTION 71

Low portable platform made of wood or plastic or metal or combination to facilitate handling, storage, or transport of materials as a unit load using a forklift.

- A. pallet bin storage**
- B. bulk storage**
- C. bin**
- D. pallet**

QUESTION 72

The recommended dimension for warehouse with 10,000-cavan capacity.

- A. 10m x 25m**
- B. 10m x 30m**
- C. 15m x 25m**
- D. 15m x 30m**

QUESTION 72

The recommended dimension for warehouse with 10,000-cavan capacity.

- A. 10m x 25m**
- B. 10m x 30m**
- C. 15m x 25m**
- D. 15m x 30m**

QUESTION 73

For a welding area, a welding hood with a fan that will move air about _____ shall be provided.

- A. 28–57 cu. m/min**
- B. 38–67 cu. m/min**
- C. 18–37 cu. m/min**
- D. 28–67 cu. m/min**

QUESTION 73

For a welding area, a welding hood with a fan that will move air about _____ shall be provided.

- A. 28–57 cu. m/min**
- B. 38–67 cu. m/min**
- C. 18–37 cu. m/min**
- D. 28–67 cu. m/min**

QUESTION 74

In accordance to RA 9367, (a) at least ____ % bioethanol in the annual total volume of gasoline fuel actually sold and distributed by each and every oil company in the country; (b) at least _____ % blend of biodiesel by volume, is required.

- A. 5;2**
- B. 10;2**
- C. 5;5**
- D. 10;5**

QUESTION 74

In accordance to RA 9367, (a) at least ___ % bioethanol in the annual total volume of gasoline fuel actually sold and distributed by each and every oil company in the country; (b) at least _____ % blend of biodiesel by volume, is required.

- A. 5;2**
- B. 10;2**
- C. 5;5**
- D. 10;5**

QUESTION 75

In order to become an accredited CPES evaluator, an applicant must have at least _____ years of experience in the actual implementation of project.

- A. 3**
- B. 2**
- C. 5**
- D. 7**

QUESTION 75

In order to become an accredited CPES evaluator, an applicant must have at least _____ years of experience in the actual implementation of project.

- A. 3**
- B. 2**
- C. 5**
- D. 7**

QUESTION 76

Defects Liability Period shall be _____ year/s from project completion up to final acceptance by the Government.

- A. 1 year**
- B. 2 years**
- C. 3 years**
- D. 5 years**

QUESTION 76

Defects Liability Period shall be _____ year/s from project completion up to final acceptance by the Government.

- A. 1 year**
- B. 2 years**
- C. 3 years**
- D. 5 years**

QUESTION 77

Solar Powered Irrigation System Photovoltaic array should be facing _____ based on efficiency and performance

- A. North**
- B. South**
- C. East**
- D. West**

QUESTION 77

Solar Powered Irrigation System Photovoltaic array should be facing ----- based on efficiency and performance

- A. North**
- B. South**
- C. East**
- D. West**

QUESTION 78

In PAES 421:2009, what is the minimum carriage way of one-lane and two-lane FMR, excluding shoulders?

- A. 2 and 4 m**
- B. 4 and 6 m**
- C. 2.5 and 5 m**
- D. 3 and 6 m**

QUESTION 78

In PAES 421:2009, what is the minimum carriage way of one-lane and two-lane FMR, excluding shoulders?

- A. 2 and 4 m**
- B. 4 and 6 m**
- C. 2.5 and 5 m**
- D. 3 and 6 m**

QUESTION 79

In PAES 402:2000, the recommended brooding temperature for 14–21 days chicks.

- A. provide heat when necessary**
- B. 29–32 °C**
- C. 32–35 °C**
- D. 27–29 °C**

QUESTION 79


In PAES 402:2000, the recommended brooding temperature for 14–21 days chicks.

- A. provide heat when necessary**
- B. 29–32 °C**
- C. 32–35 °C**
- D. 27–29 °C**

QUESTION 80

What is the defect of wood that causes abnormal growth which occurs at the starting point of a limb or branch of a tree?

- A. shake**
- B. knot**
- C. check**
- D. wane**

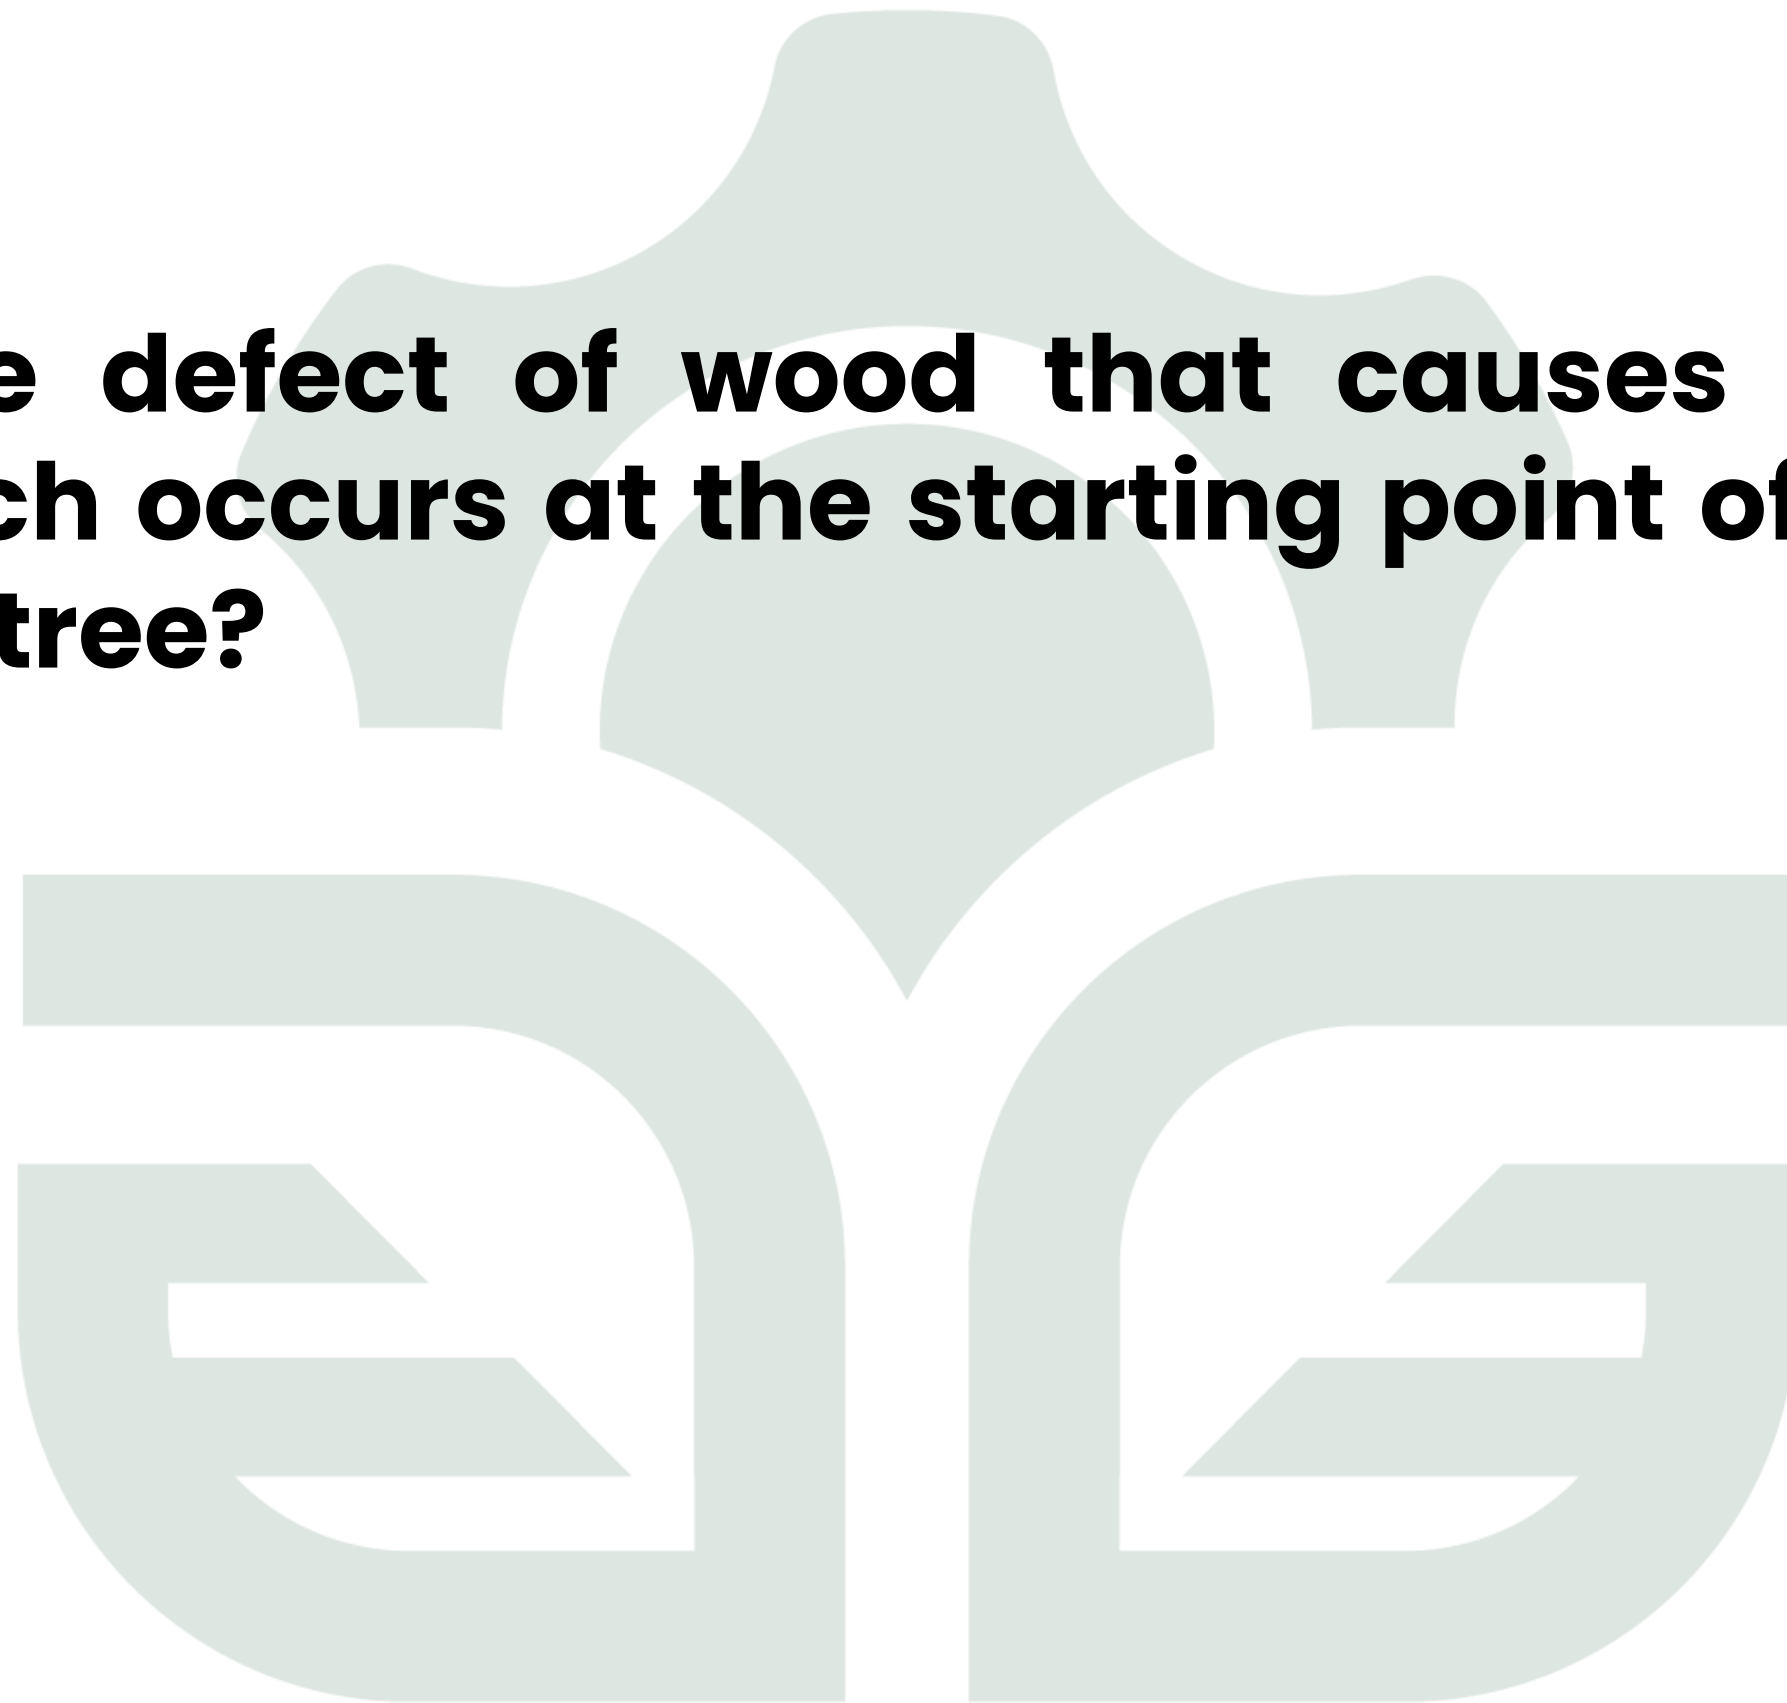

QUESTION 80

What is the defect of wood that causes abnormal growth which occurs at the starting point of a limb or branch of a tree?

- A. shake**
- B. knot**
- C. check**
- D. wane**

QUESTION 81

In PAES 410:2000, the lairage shall be provided with lighting intensity of _____ lux.

- A. 200**
- B. 100**
- C. 500**
- D. 110**

QUESTION 81

In PAES 410:2000, the lairage shall be provided with lighting intensity of _____ lux.

- A. 200**
- B. 100**
- C. 500**
- D. 110**

QUESTION 82

In PAES 403:2001, under the individual nest subsection, there shall be one nest for each ____ to ____ layer.

- A. 5 – 6**
- B. 8 – 10**
- C. 7 – 8**
- D. 4 – 6**

QUESTION 82

In PAES 403:2001, under the individual nest subsection, there shall be one nest for each ____ to ____ layer.

- A. 5 – 6**
- B. 8 – 10**
- C. 7 – 8**
- D. 4 – 6**

QUESTION 83

What cement class is used for the construction of FMR?

- A. AA**
- B. A**
- C. B**
- D. C**

QUESTION 83


What cement class is used for the construction of FMR?

A. AA

B. A

C. B

D. C

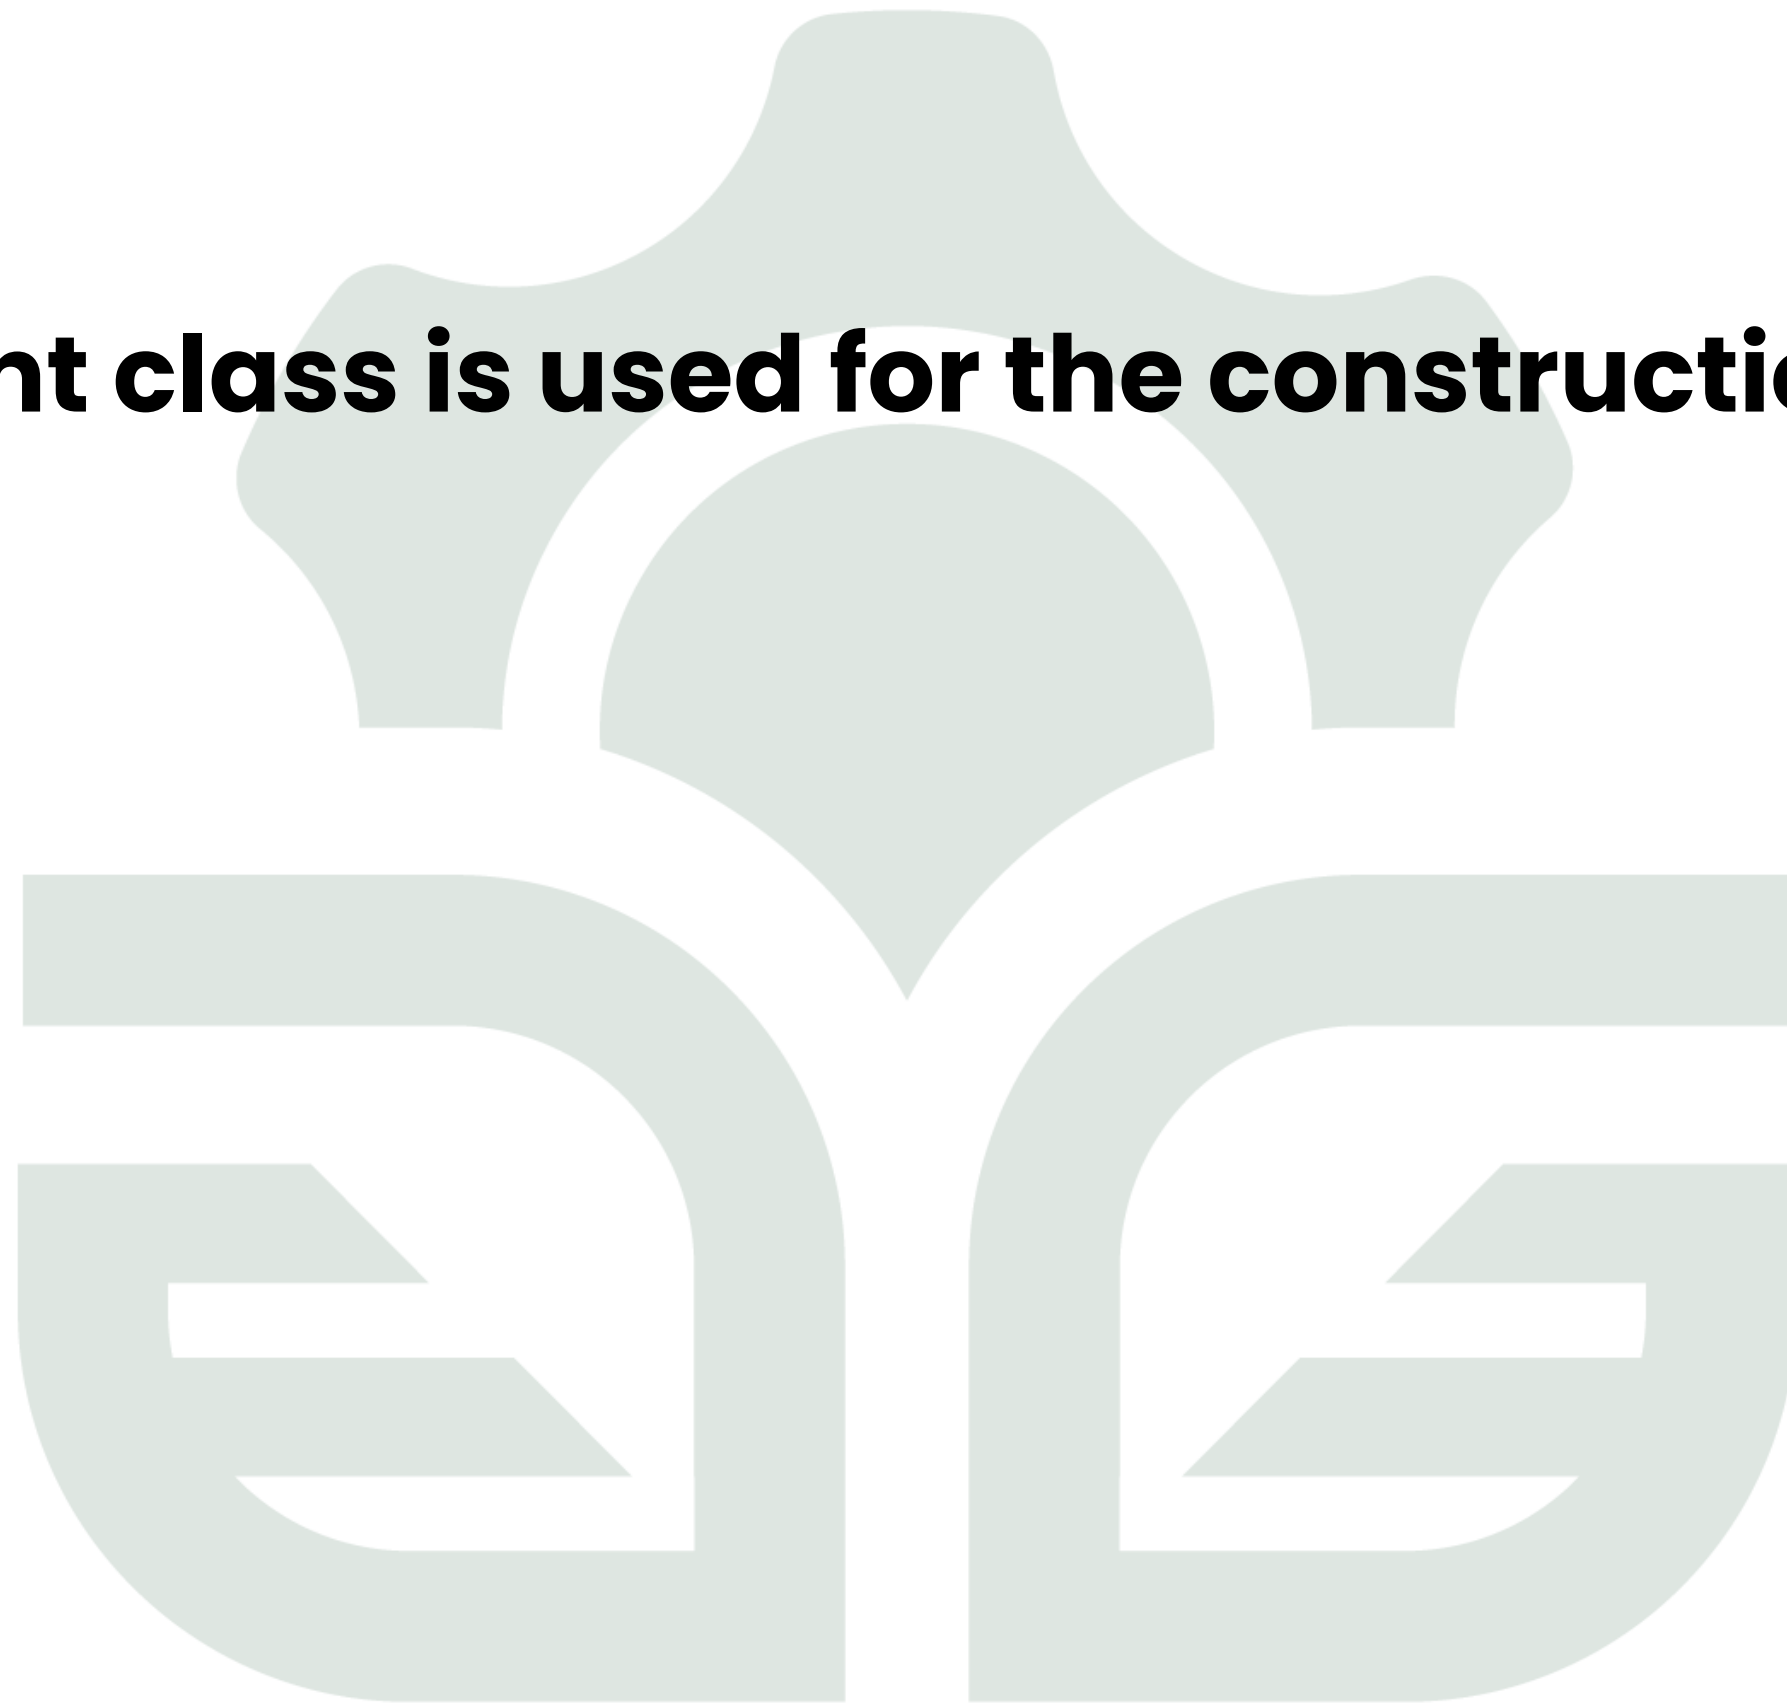

QUESTION 84

It refers to local activity or series of activities to maintain or raise the quality or change the form or characteristics of agricultural, fishery, forestry and biological products/materials and includes, but is not limited to, cleaning, sorting, grading, treating, drying, dehydrating, grinding, mixing, milling, canning, dressing, slaughtering, freezing, pasteurizing, conditioning, packaging, repacking, transporting of agricultural, fishery, forestry and other biological products/materials.

- A. Agricultural Process Engineering**
- B. Agricultural and Bio-Processing**
- C. Agricultural and Bioprocess Engineering**
- D. Crop Process Engineering**

QUESTION 84

It refers to local activity or series of activities to maintain or raise the quality or change the form or characteristics of agricultural, fishery, forestry and biological products/materials and includes, but is not limited to, cleaning, sorting, grading, treating, drying, dehydrating, grinding, mixing, milling, canning, dressing, slaughtering, freezing, pasteurizing, conditioning, packaging, repacking, transporting of agricultural, fishery, forestry and other biological products/materials.

- A. Agricultural Process Engineering**
- B. Agricultural and Bio-Processing**
- C. Agricultural and Bioprocess Engineering**
- D. Crop Process Engineering**

QUESTION 85

According to the National Building Code, the agricultural buildings are classified under Group ____.

- A. B**
- B. D**
- C. J**
- D. G**

QUESTION 85

According to the National Building Code, the agricultural buildings are classified under Group ____.

- A. B**
- B. D**
- C. J**
- D. G**

QUESTION 86

In minimum, all culverts and storm drains used in relation with FMR should be designed using a storm of ___ and 24 hours.

- A. 1-year**
- B. 2-year**
- C. 3-year**
- D. 4-year**

QUESTION 86

In minimum, all culverts and storm drains used in relation with FMR should be designed using a storm of ___ and 24 hours.

- A. 1-year**
- B. 2-year**
- C. 3-year**
- D. 4-year**

QUESTION 87

A grain or a piece of a grain with its length equal to or greater than three-fourths ($3/4$) of the average length of the whole kernels

- A. paddy**
- B. head rice**
- C. well-milled rice**
- D. cargo rice**

QUESTION 87

A grain or a piece of a grain with its length equal to or greater than three-fourths ($3/4$) of the average length of the whole kernels

- A. paddy**
- B. head rice**
- C. well-milled rice**
- D. cargo rice**

QUESTION 88

A type of a huller with rotating blades and utilizes pressure such as Coriolis' force, frictional force from the blades, or impact force at collision with the blades and the peripheral surface.

- A. centrifugal type**
- B. friction type**
- C. abrasive type**
- D. cono type**

QUESTION 88


A type of a huller with rotating blades and utilizes pressure such as Coriolis' force, frictional force from the blades, or impact force at collision with the blades and the peripheral surface.

- A. centrifugal type**
- B. friction type**
- C. abrasive type**
- D. cono type**

QUESTION 89

In PAES 206:2015, minimum percent head rice index for rice mill is:


- A. 0.97**
- B. 0.98**
- C. 0.80**
- D. 0.90**

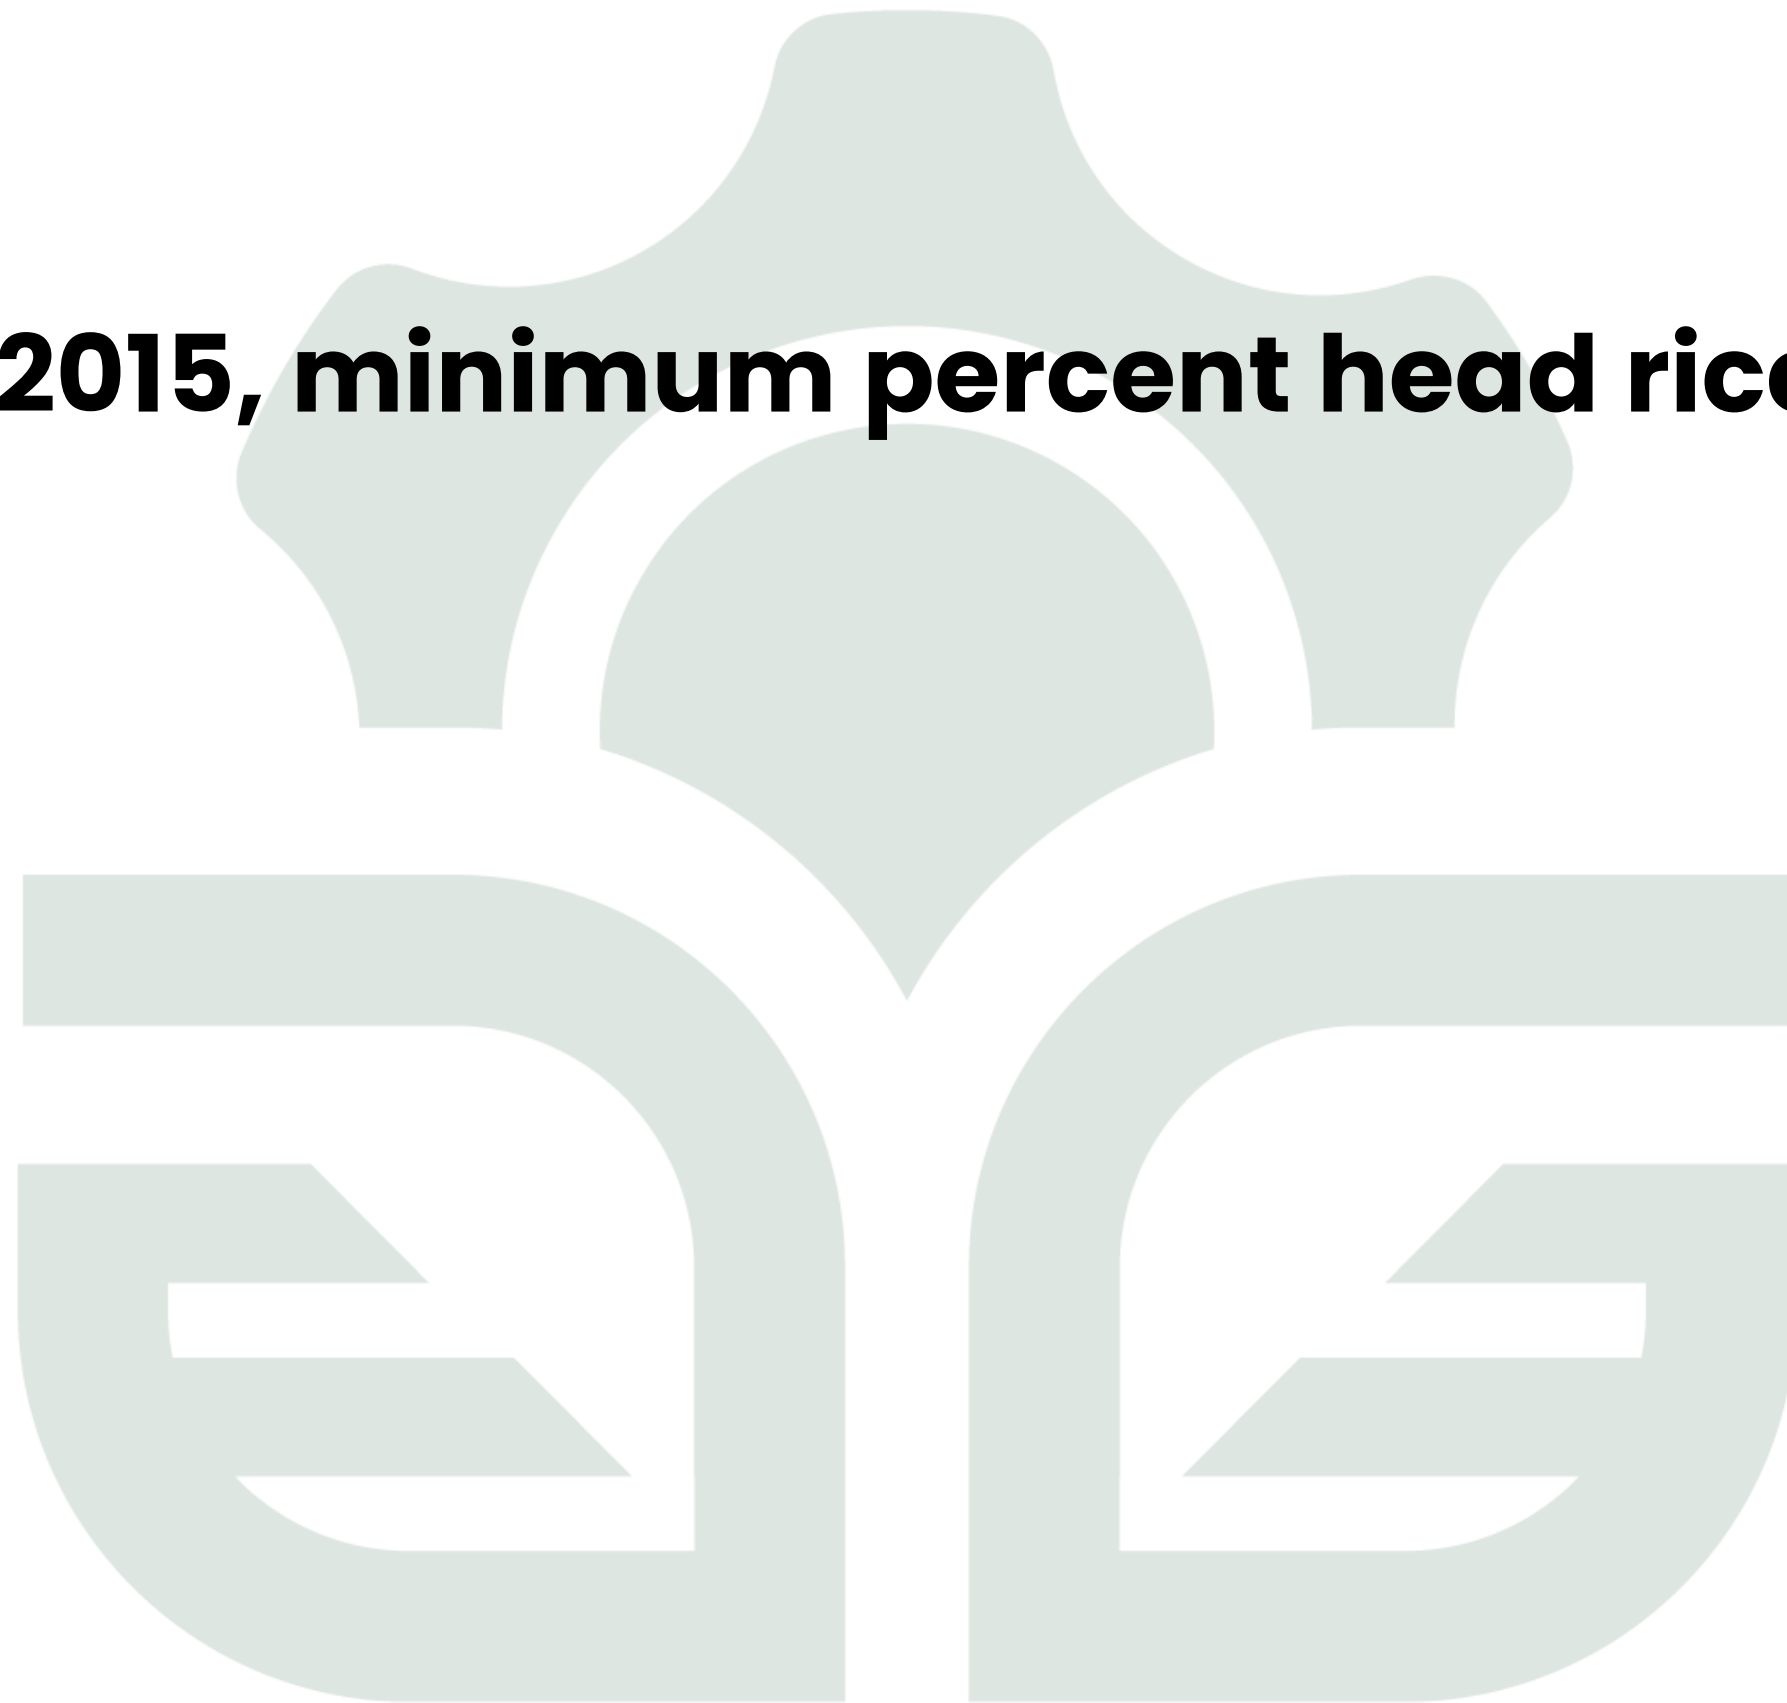

QUESTION 89

In PAES 206:2015, minimum percent head rice index for rice mill is:

- A. 0.97**
- B. 0.98**
- C. 0.80**
- D. 0.90**

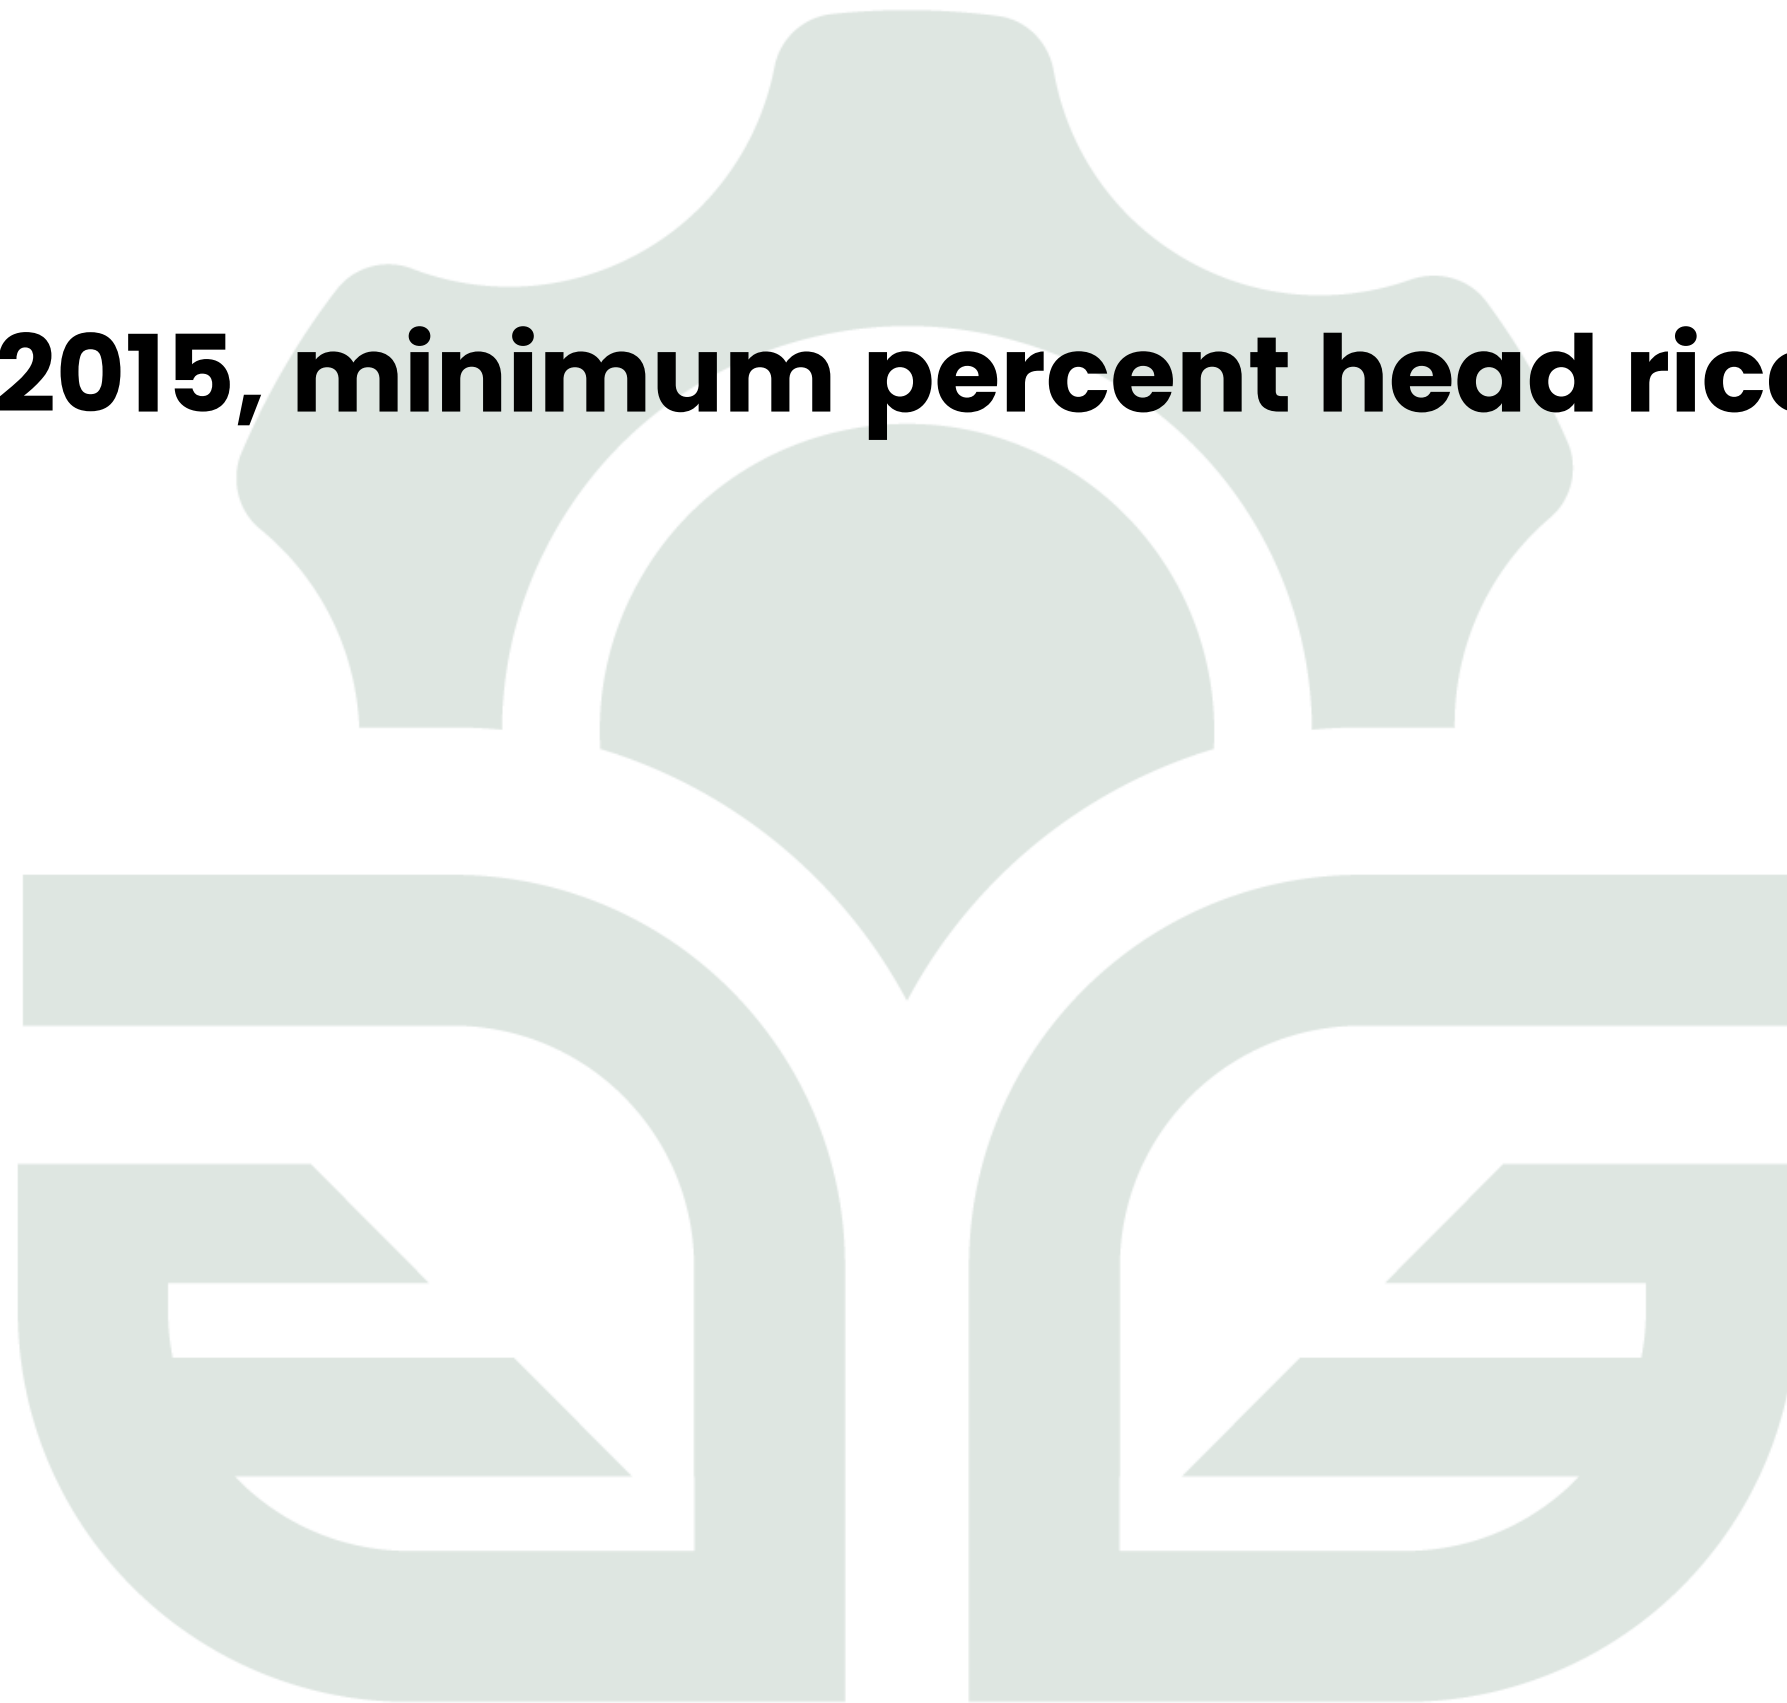

QUESTION 90

What is the value of the work done for a closed, reversible, isometric system?

- A. positive**
- B. negative**
- C. zero**
- D. cannot be determined**

QUESTION 90


What is the value of the work done for a closed, reversible, isometric system?

- A. positive**
- B. negative**
- C. zero**
- D. cannot be determined**

QUESTION 91

Max. Moisture gradient for Mechanical Grain Dryer


- A. 2%**
- B. 6%**
- C. 4%**
- D. 8%**

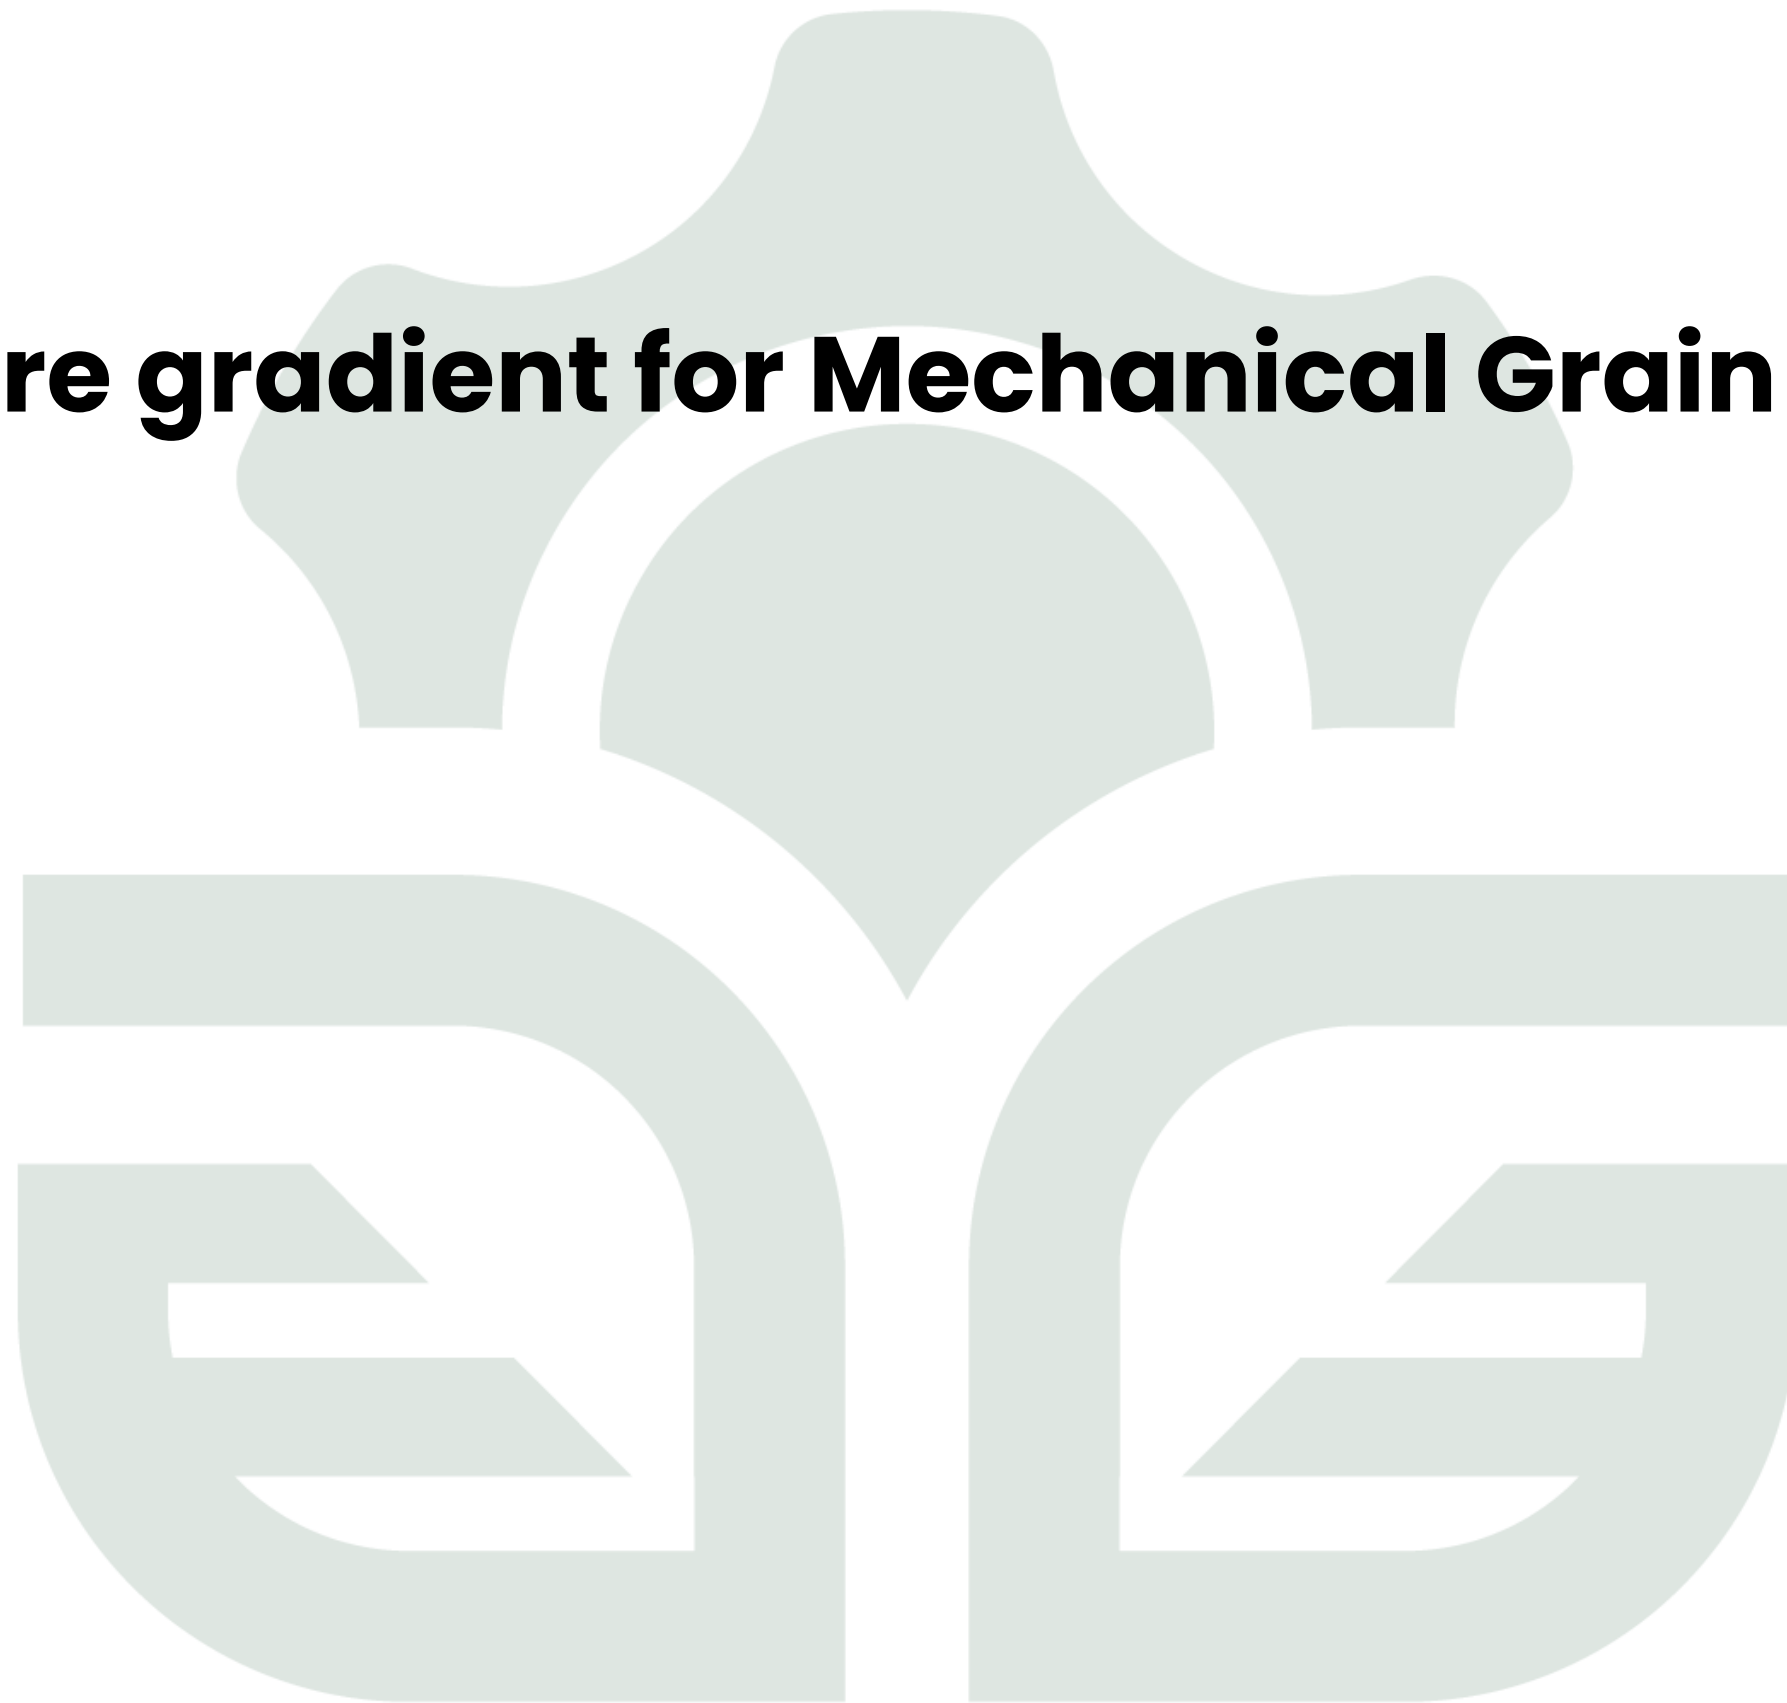

QUESTION 91

Max. Moisture gradient for Mechanical Grain Dryer

- A. 2%**
- B. 6%**
- C. 4%**
- D. 8%**

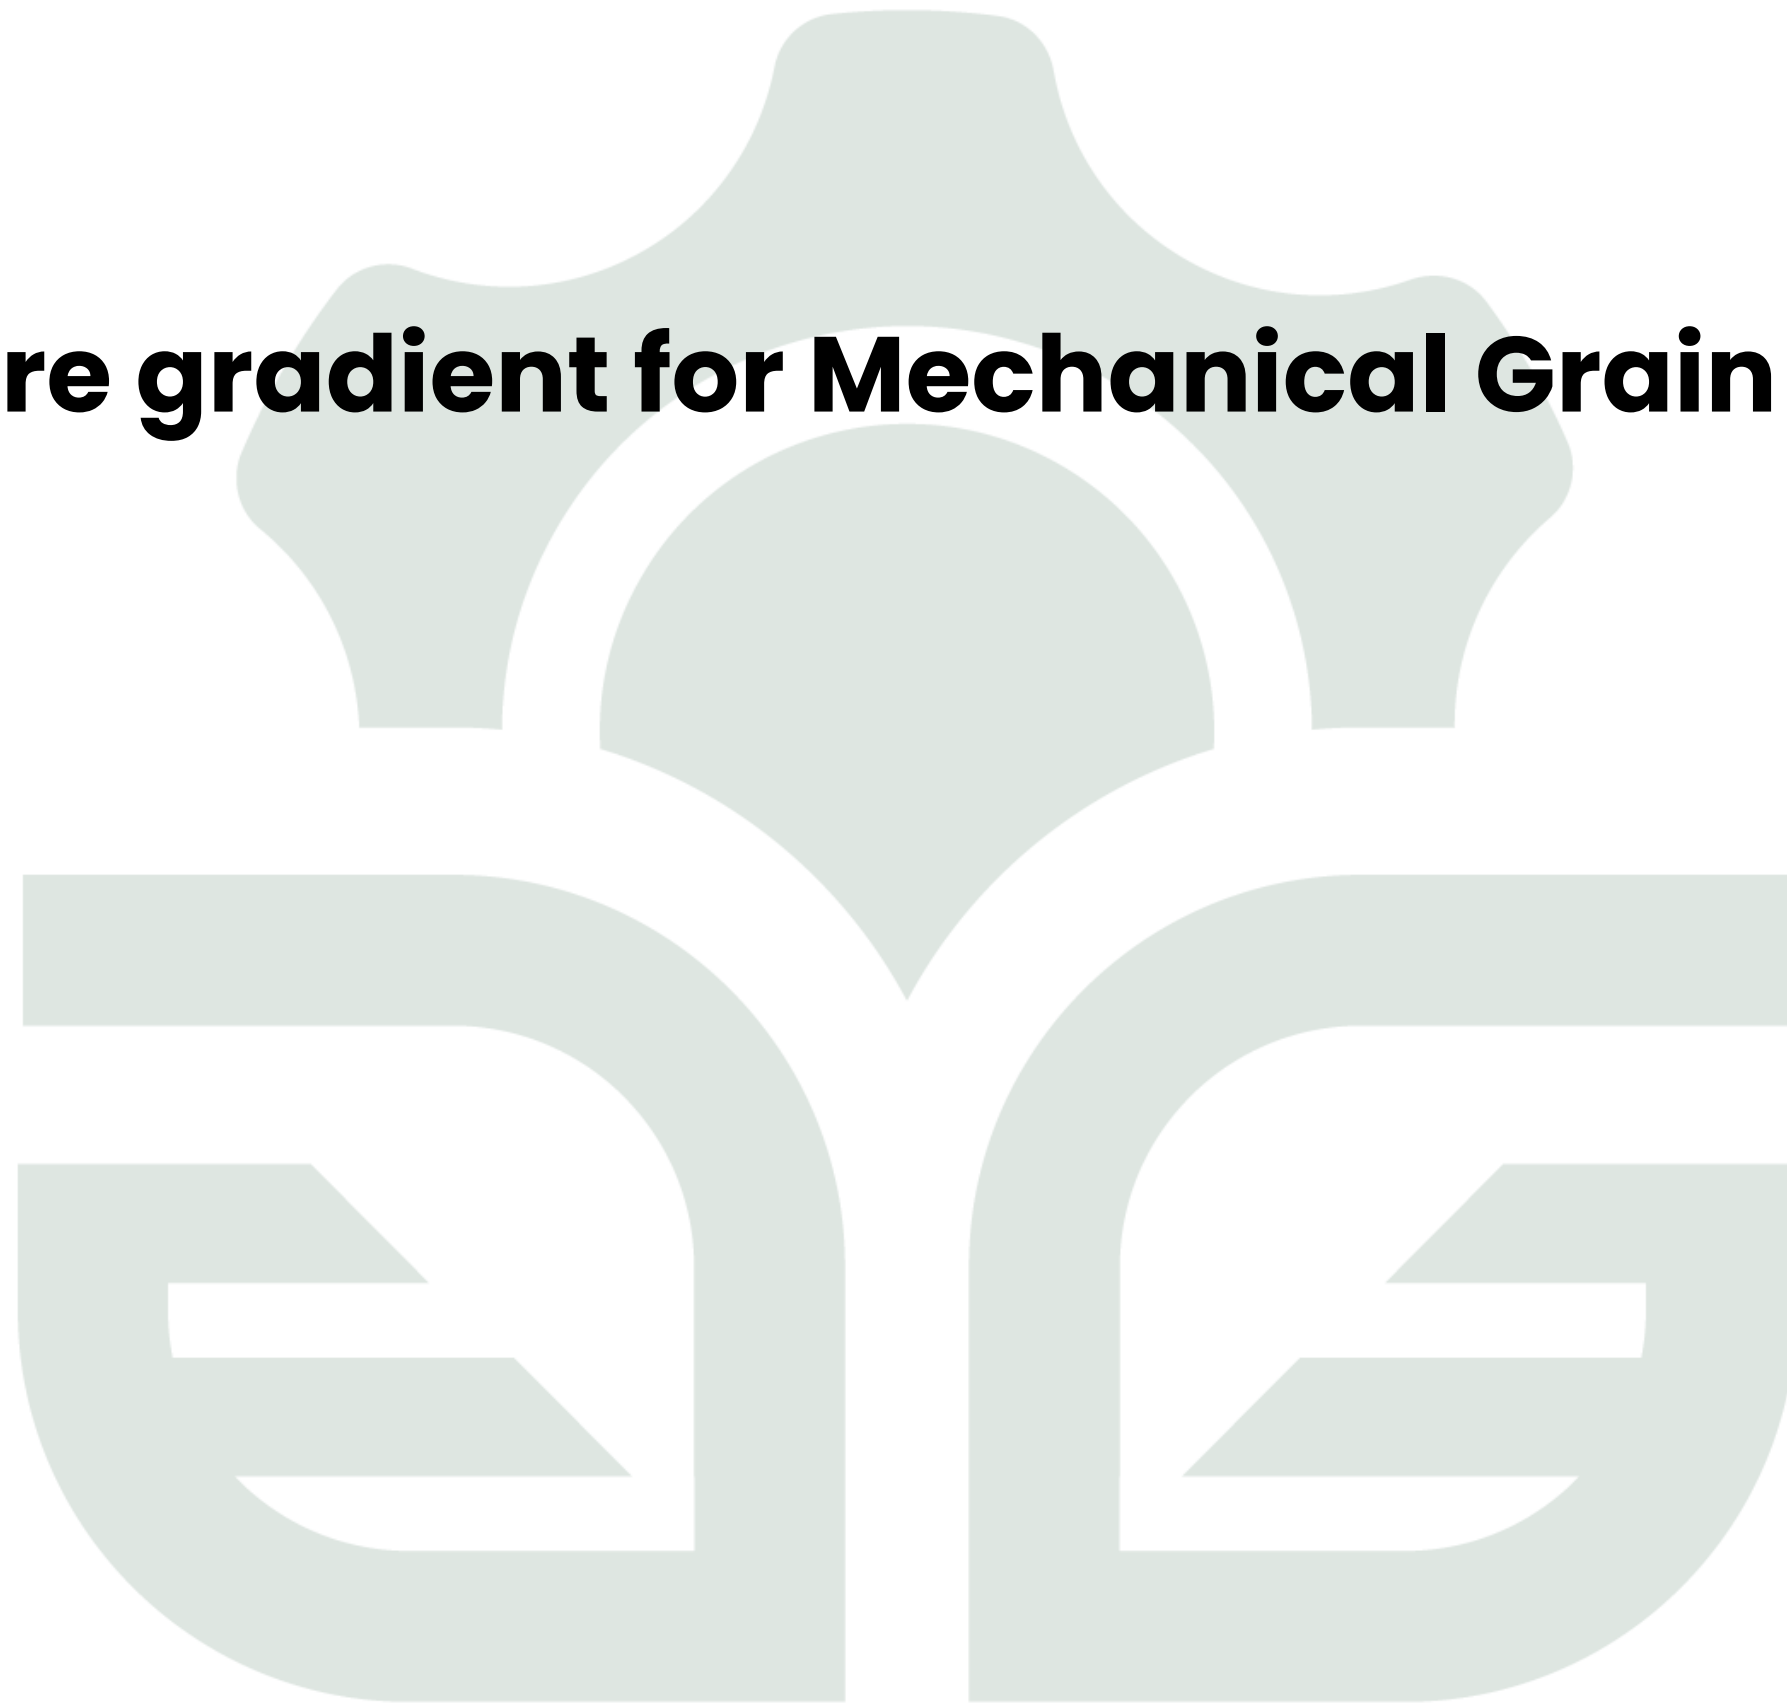

QUESTION 92

Min. shelling recovery for Peanut Sheller

- A. 75%**
- B. 60%**
- C. 93%**
- D. 96%**



QUESTION 92

Min. shelling recovery for Peanut Sheller

- A. 75%**
- B. 60%**
- C. 93%**
- D. 96%**



QUESTION 93

Max. Noise level for Mechanical Rice Thresher, Rice Combine and Fiber Decorticator.

- A. 80 dB**
- B. 75 dB**
- C. 85 dB**
- D. 95 dB**



QUESTION 93

Max. Noise level for Mechanical Rice Thresher, Rice Combine and Fiber Decorticator.

- A. 80 dB**
- B. 75 dB**
- C. 85 dB**
- D. 95 dB**



QUESTION 94

Min. Milling Recovery of Rubber Roll & Centrifugal Type Rice Mill

- A. 90%**
- B. 96%**
- C. 93%**
- D. 98%**



QUESTION 94

Min. Milling Recovery of Rubber Roll & Centrifugal Type Rice Mill

- A. 90%**
- B. 96%**
- C. 93%**
- D. 98%**



QUESTION 95

**For corn mill testing, the min. purity of sample is
-----.**

- A. 65%**
- B. 75%**
- C. 85%**
- D. 95%**

QUESTION 95

**For corn mill testing, the min. purity of sample is
-----.**

- A. 65%**
- B. 75%**
- C. 85%**
- D. 95%**

QUESTION 96

Max. Noise Level of Corn Sheller.

- A. 120dB**
- B. 95dB**
- C. 100dB**
- D. 80dB**



QUESTION 96

Max. Noise Level of Corn Sheller.

- A. 120dB**
- B. 95dB**
- C. 100dB**
- D. 80dB**



QUESTION 97

A minimum of _____engine shall be used for a rotary cutting knife cutting mechanism with _____cutting width.

- A. 8 hp and 2.4 m**
- B. 5 hp and 1.2 m**
- C. 3 hp and 1.4 m**
- D. 1.5 hp and 2 m**

QUESTION 97

A minimum of _____engine shall be used for a rotary cutting knife cutting mechanism with _____cutting width.

- A. 8 hp and 2.4 m**
- B. 5 hp and 1.2 m**
- C. 3 hp and 1.4 m**
- D. 1.5 hp and 2 m**

QUESTION 98

The reaper shall be operated at the speed of _____.

- A. 6 kph to 8 kph**
- B. 3 kph to 5 kph**
- C. 2 kph to 6 kph**
- D. 4 kph to 9 kph**

QUESTION 98

The reaper shall be operated at the speed of _____.

- A. 6 kph to 8 kph**
- B. 3 kph to 5 kph**
- C. 2 kph to 6 kph**
- D. 4 kph to 9 kph**

QUESTION 99

The rubber hardness shall be _____for press-cured rubber mixes.

- A. 85 shore**
- B. 95 shore**
- C. 75 shore**
- D. 65 shore**

QUESTION 99

The rubber hardness shall be _____for press-cured rubber mixes.

- A. 85 shore**
- B. 95 shore**
- C. 75 shore**
- D. 65 shore**

QUESTION 100

**The modulus of elasticity of the rubber shall be
_____to_____.**

- A. 482 kPa to 689 kPa**
- B. 462 kPa to 689 kPa**
- C. 472 kPa to 689 kPa**
- D. 492 kPa to 689 kPa**

QUESTION 100

The modulus of elasticity of the rubber shall be _____to_____.

- A. 482 kPa to 689 kPa**
- B. 462 kPa to 689 kPa**
- C. 472 kPa to 689 kPa**
- D. 492 kPa to 689 kPa**

QUESTION 101

Grains that fall with the cut stalks during delivery and release at the side of the reaper during operation.

- A. header loss**
- B. conveying loss**
- C. shattering loss**
- D. delivery loss**

QUESTION 101

Grains that fall with the cut stalks during delivery and release at the side of the reaper during operation.

- A. header loss**
- B. conveying loss**
- C. shattering loss**
- D. delivery loss**

QUESTION 102

Type of shelling unit with cylinder having shelling elements of knife bar or Pegtooth.

- A. open-frame cylinder**
- B. closed-frame cylinder**
- C. disc-type**
- D. cylinder-type**

QUESTION 102

Type of shelling unit with cylinder having shelling elements of knife bar or Pegtooth.

- A. open-frame cylinder**
- B. closed-frame cylinder**
- C. disc-type**
- D. cylinder-type**

QUESTION 103

Type of shelling unit consisting of a vertical disc with spiked surface.

- A. open-frame cylinder**
- B. closed-frame cylinder**
- C. disc-type**
- D. cylinder-type**

QUESTION 103

Type of shelling unit consisting of a vertical disc with spiked surface.

- A. open-frame cylinder**
- B. closed-frame cylinder**
- C. disc-type**
- D. cylinder-type**

QUESTION 104

Type of shelling cylinder where the shelling elements are attached to the equally spaced longitudinal bars arranged cylindrically. open-frame cylinder

- A. open-frame cylinder**
- B. closed-frame cylinder**
- C. disc-type**
- D. cylinder-type**

QUESTION 104

Type of shelling cylinder where the shelling elements are attached to the equally spaced longitudinal bars arranged cylindrically. open-frame cylinder

- A. open-frame cylinder**
- B. closed-frame cylinder**
- C. disc-type**
- D. cylinder-type**

QUESTION 105

Max. Mechanically Damage kernel for Corn Sheller.

- A. 3%**
- B. 6%**
- C. 4%**
- D. 8%**



QUESTION 105

Max. Mechanically Damage kernel for Corn Sheller.

A. 3%

B. 6%

C. 4%

D. 8%



QUESTION 106

For Mechanical Grain Dryer testing, the grain to be used shall be single variety and the moisture content shall be _____ and above for rice and corn with the highest available moisture content to be used in the test.

- A. 20%**
- B. 25%**
- C. 30%**
- D. 15%**

QUESTION 106

For Mechanical Grain Dryer testing, the grain to be used shall be single variety and the moisture content shall be _____ and above for rice and corn with the highest available moisture content to be used in the test.

- A. 20%**
- B. 25%**
- C. 30%**
- D. 15%**

QUESTION 107

Max. Total losses for Peanut Sheller.

- A. 5%**
- B. 6%**
- C. 7%**
- D. 8%**

QUESTION 107

Max. Total losses for Peanut Sheller.

- A. 5%**
- B. 6%**
- C. 7%**
- D. 8%**

QUESTION 108

Type of a huller with rotating blades and utilizes pressure such as Coriolis' force.

- A. Rubber Roll type**
- B. centrifugal type**
- C. Under Runner Type**
- D. Cone type**

QUESTION 108

Type of a huller with rotating blades and utilizes pressure such as Coriolis' force.

- A. Rubber Roll type**
- B. centrifugal type**
- C. Under Runner Type**
- D. Cone type**

QUESTION 109

For rice mill, hammer mill, and rubber roll testing, the min. purity of sample is ____.

- A. 96%**
- B. 98%**
- C. 93%**
- D. 95%**

QUESTION 109

For rice mill, hammer mill, and rubber roll testing, the min. purity of sample is ____.

- A. 96%**
- B. 98%**
- C. 93%**
- D. 95%**

QUESTION 110

For Corn Sheller testing, the Kernel-Ear Corn Ratio of samples is _____.

- A. 0.67 – 0.71**
- B. 0.77 – 0.81**
- C. 0.57 – 0.61**
- D. 0.87 – 0.91**

QUESTION 110

For Corn Sheller testing, the Kernel-Ear Corn Ratio of samples is _____.

A. 0.67 – 0.71

B. 0.77 – 0.81

C. 0.57 – 0.61

D. 0.87 – 0.91

QUESTION 111

Max. Grain Moisture Content for Mechanical Rice Thresher testing.

- A. 24% MCwb**
- B. 20% MCwb**
- C. 14% MCwb**
- D. 17% MCwb**

QUESTION 111

Max. Grain Moisture Content for Mechanical Rice Thresher testing.

- A. 24% MCwb**
- B. 20% MCwb**
- C. 14% MCwb**
- D. 17% MCwb**

QUESTION 112

Cutting mechanism consisting of planetary type circular saw-toothed blade which rotates at the same time with the pick-up triangular frame.

- A. Reciprocating cutter knife**
- B. Rotary knife**
- C. Circular saw**
- D. Rotary blade**

QUESTION 112

Cutting mechanism consisting of planetary type circular saw-toothed blade which rotates at the same time with the pick-up triangular frame.

- A. Reciprocating cutter knife**
- B. Rotary knife**
- C. Circular saw**
- D. Rotary blade**

QUESTION 113

Cutting mechanism consisting of fixed lower knife and reciprocating upper knife wherein its movement is controlled by the crank connected to the gear box or belt drive.

- A. Rotary knife**
- B. Reciprocating cutter knife**
- C. Rotary blade**
- D. Circular saw**

QUESTION 112

Cutting mechanism consisting of planetary type circular saw-toothed blade which rotates at the same time with the pick-up triangular frame.

- A. Reciprocating cutter knife**
- B. Rotary knife**
- C. Circular saw**
- D. Rotary blade**

QUESTION 114

**For Corn Mill Testing, the sample's variety to be used is
-----.**

- A. Composite**
- B. Inbred**
- C. Open pollinated**
- D. Hybrid**

QUESTION 114

**For Corn Mill Testing, the sample's variety to be used is
-----.**

- A. Composite**
- B. Inbred**
- C. Open pollinated**
- D. Hybrid**

QUESTION 115

Max. Total Losses of Corn Mill.

- A. 10%**
- B. 3%**
- C. 2%**
- D. 5%**



QUESTION 115

Max. Total Losses of Corn Mill.

- A. 10%**
- B. 3%**
- C. 2%**
- D. 5%**



QUESTION 116

Min. Main Product recovery of Corn Mill.

- A. 12%**
- B. 5%**
- C. 10%**
- D. 2%**



QUESTION 116

Min. Main Product recovery of Corn Mill.

A. 12%

B. 5%

C. 10%

D. 2%



QUESTION 117

It is the distance between two outermost divider tips.

- A. Cutting width**
- B. Cutting Area**
- C. Cutting Length**
- D. Cutting Height**

QUESTION 117

It is the distance between two outermost divider tips.

- A. Cutting width**
- B. Cutting Area**
- C. Cutting Length**
- D. Cutting Height**

QUESTION 118

The rubber roll when tested in accordance with PAES 215 shall have hulling efficiency of at least_____.

- A. 90%**
- B. 80%**
- C. 75%**
- D. 60%**

QUESTION 118

The rubber roll when tested in accordance with PAES 215 shall have hulling efficiency of at least_____.

- A. 90%**
- B. 80%**
- C. 75%**
- D. 60%**

QUESTION 119

**The tensile stress of the rubber roll shall be
-----to-----.**

- A. 6 000 kPa to 8 268 kPa**
- B. 9 300 kPa to 8 268 kPa**
- C. 6 200 kPa to 8 268 kPa**
- D. 8 000 kPa to 8 268 kPa**

QUESTION 119

**The tensile stress of the rubber roll shall be
-----to-----.**

- A. 6 000 kPa to 8 268 kPa**
- B. 9 300 kPa to 8 268 kPa**
- C. 6 200 kPa to 8 268 kPa**
- D. 8 000 kPa to 8 268 kPa**

QUESTION 120

**The specific gravity of the rubber shall be
_____to_____.**

- A. 1.2 to 1.3**
- B. 1.5 to 1.9**
- C. 1.3 to 1.6**
- D. 1.4 to 1.8**

QUESTION 120

**The specific gravity of the rubber shall be
_____to_____.**

- A. 1.2 to 1.3**
- B. 1.5 to 1.9**
- C. 1.3 to 1.6**
- D. 1.4 to 1.8**

QUESTION 121

This type of forage chopper usually produces the longest mean particle lengths, and the least uniformly cut particles.

- A. random-cut forage chopper**
- B. semi-precision-cut forage chopper**
- C. precision-cut forage chopper**
- D. random precision cut chopper**

QUESTION 121

This type of forage chopper usually produces the longest mean particle lengths, and the least uniformly cut particles.

- A. random-cut forage chopper**
- B. semi-precision-cut forage chopper**
- C. precision-cut forage chopper**
- D. random precision cut chopper**

QUESTION 122

This type of forage chopper is capable of producing the shortest and most uniformly cut particles.

- A. random-cut forage chopper**
- B. random precision cut chopper**
- C. precision-cut forage chopper**
- D. semi-precision-cut forage chopper**

QUESTION 122

This type of forage chopper is capable of producing the shortest and most uniformly cut particles.

- A. random-cut forage chopper**
- B. random precision cut chopper**
- C. precision-cut forage chopper**
- D. semi-precision-cut forage chopper**

QUESTION 123

The noise emitted by the large ruminant's slaughterhouse equipment, particularly the stunning box (knocking pen) shall not be more than ____.

- A. 90 dB**
- B. 96 dB**
- C. 92 dB**
- D. 98 dB**

QUESTION 123

The noise emitted by the large ruminant's slaughterhouse equipment, particularly the stunning box (knocking pen) shall not be more than ____.

- A. 90 dB**
- B. 96 dB**
- C. 92 dB**
- D. 98 dB**

QUESTION 124

The noise emitted by the hammer mill, forage chopper, and coconut decorticator shall not be more than_____.

- A. 90 dB**
- B. 96 dB**
- C. 92 dB**
- D. 98 dB**

QUESTION 124

The noise emitted by the hammer mill, forage chopper, and coconut decorticator shall not be more than_____.

- A. 90 dB**
- B. 96 dB**
- C. 92 dB**
- D. 98 dB**

QUESTION 125

It is the sum of the weight fractions retained above each sieve divided by 100.

- A. Bulk Density**
- B. Specific Gravity**
- C. Uniformity Coefficient**
- D. Fineness Modulus**

QUESTION 125

It is the sum of the weight fractions retained above each sieve divided by 100.

- A. Bulk Density**
- B. Specific Gravity**
- C. Uniformity Coefficient**
- D. Fineness Modulus**

QUESTION 126

The hammer mill should be used for the desired product having a reduction ratio of at least _____.

- A. 20:1**
- B. 30:1**
- C. 60:1**
- D. 50:1**

QUESTION 126

The hammer mill should be used for the desired product having a reduction ratio of at least _____.

- A. 20:1**
- B. 30:1**
- C. 60:1**
- D. 50:1**

QUESTION 127

It is a cylindrical roll generally with protrusions or flutes, used to gather, compress and advance the crop into the cutterhead.

- A. Feed auger**
- B. Conveyor chain**
- C. Feedroll**
- D. Gathering reel**

QUESTION 127

It is a cylindrical roll generally with protrusions or flutes, used to gather, compress and advance the crop into the cutterhead.

- A. Feed auger**
- B. Conveyor chain**
- C. Feedroll**
- D. Gathering reel**

QUESTION 128

It is the maximum height of the stacks for warehouse when using woven polypropylene bags.

- A. 3 meters**
- B. 6 meters**
- C. 12 meters**
- D. 9 meters**

QUESTION 128

It is the maximum height of the stacks for warehouse when using woven polypropylene bags.

- A. 3 meters**
- B. 6 meters**
- C. 12 meters**
- D. 9 meters**

QUESTION 129

It is the dimension for maximum piling of stacks to conform with the fumigating sheets in situations where warehouses cannot be made airtight.

- A. 7.4 m x 20.9 m x 4.5 m**
- B. 7.3 m x 20.9 m x 4.5 m**
- C. 7.3 m x 21.9 m x 4.5 m**
- D. 7.4 m x 21.9 m x 4.5 m**

QUESTION 129

It is the dimension for maximum piling of stacks to conform with the fumigating sheets in situations where warehouses cannot be made airtight.

- A. 7.4 m x 20.9 m x 4.5 m**
- B. 7.3 m x 20.9 m x 4.5 m**
- C. 7.3 m x 21.9 m x 4.5 m**
- D. 7.4 m x 21.9 m x 4.5 m**

QUESTION 130

Recommended stack height for warehouse should not exceed the height of the walls and a space of at least between the tops of the stacks and the roof frame.

- A. 3 meter**
- B. 5 meters**
- C. 7 meters**
- D. 1 meters**

QUESTION 130

Recommended stack height for warehouse should not exceed the height of the walls and a space of at least between the tops of the stacks and the roof frame.

- A. 3 meter**
- B. 5 meters**
- C. 7 meters**
- D. 1 meters**

QUESTION 131

It refers to any building or place which is used for killing of animals where the flesh is intended for human consumption.

- A. Slaughter House**
- B. stunning pen**
- C. Butcher house**
- D. Meat Processing Plant**

QUESTION 131

It refers to any building or place which is used for killing of animals where the flesh is intended for human consumption.

- A. Slaughter House**
- B. stunning pen**
- C. Butcher house**
- D. Meat Processing Plant**

QUESTION 132

It is a slaughter house with required facilities and operational procedures to serve any market.

- A. "A" Slaughter House**
- B. "AA" Slaughter House**
- C. "AAA" Slaughter House**
- D. None of the Above**

QUESTION 132

It is a slaughter house with required facilities and operational procedures to serve any market.

- A. "A" Slaughter House**
- B. "AA" Slaughter House**
- C. "AAA" Slaughter House**
- D. None of the Above**

QUESTION 133

It is the amount of water requirement of a slaughter house for large animals.

- A. 107 liters per day per animal**
- B. 227 liters per day per animal**
- C. 207 liters per day per animal**
- D. 127 liters per day per animal**

QUESTION 133

It is the amount of water requirement of a slaughter house for large animals.

- A. 107 liters per day per animal**
- B. 227 liters per day per animal**
- C. 207 liters per day per animal**
- D. 127 liters per day per animal**

QUESTION 134

It is the amount of water requirement of a slaughter house for small animals.

- A. 102 liters per day per animal**
- B. 114 liters per day per animal**
- C. 104 liters per day per animal**
- D. 112 liters per day per animal**

QUESTION 134

It is the amount of water requirement of a slaughter house for small animals.

- A. 102 liters per day per animal**
- B. 114 liters per day per animal**
- C. 104 liters per day per animal**
- D. 112 liters per day per animal**

QUESTION 135

It is the amount of water requirement of a slaughter house for swine.

- A. 50 liters per day per animal**
- B. 54 liters per day per animal**
- C. 60 liters per day per animal**
- D. 57 liters per day per animal**

QUESTION 135

It is the amount of water requirement of a slaughter house for swine.

- A. 50 liters per day per animal**
- B. 54 liters per day per animal**
- C. 60 liters per day per animal**
- D. 57 liters per day per animal**

QUESTION 136

It is the minimum distance required of slaughter house when it is to be located near the river, streams, or lakes.

- A. 5 m from the bank**
- B. 15 m from the bank**
- C. 10 m from the bank**
- D. 20 m from the bank**

QUESTION 136

It is the minimum distance required of slaughter house when it is to be located near the river, streams, or lakes.

- A. 5 m from the bank**
- B. 15 m from the bank**
- C. 10 m from the bank**
- D. 20 m from the bank**

QUESTION 137

It is the minimum pipeline pressure for water supply system in slaughter houses.

- A. 5 psi**
- B. 10 psi**
- C. 15 psi**
- D. 20 psi**

QUESTION 137

It is the minimum pipeline pressure for water supply system in slaughter houses.

- A. 5 psi**
- B. 10 psi**
- C. 15 psi**
- D. 20 psi**

QUESTION 138

It is the recommended height of the windows for slaughter houses.

- A. 1.0 meters above the floor**
- B. 2.0 meters above the floor**
- C. 1.5 meters above the floor**
- D. 2.5 meters above the floor**

QUESTION 138

It is the recommended height of the windows for slaughter houses.

- A. 1.0 meters above the floor**
- B. 2.0 meters above the floor**
- C. 1.5 meters above the floor**
- D. 2.5 meters above the floor**

QUESTION 139

It is the minimum width of doorways for slaughter houses.

- A. 10 meters wide**
- B. 20 meters wide**
- C. 25 meters wide**
- D. 15 meters wide**

QUESTION 139

It is the minimum width of doorways for slaughter houses.

- A. 10 meters wide**
- B. 20 meters wide**
- C. 25 meters wide**
- D. 15 meters wide**

QUESTION 140

It is the process or suspending the carcass for particular operation.

- A. Sticking**
- B. Pitching**
- C. Gambrelling**
- D. Stunning**

QUESTION 140

It is the process or suspending the carcass for particular operation.

- A. Sticking**
- B. Pitching**
- C. Gambrelling**
- D. Stunning**

QUESTION 141

It is the insertion of a rod or coiled wire through the hole in the skull of a cattle made by captive blot to destroy the brain and the spinal cord to prevent reflex muscular action and possible injury to operatives.

- A. Sticking**
- B. Pitching**
- C. Gambrelling**
- D. Stunning**

QUESTION 141

It is the insertion of a rod or coiled wire through the hole in the skull of a cattle made by captive blot to destroy the brain and the spinal cord to prevent reflex muscular action and possible injury to operatives.

- A. Sticking**
- B. Pitching**
- C. Gambrelling**
- D. Stunning**

QUESTION 142

It renders the animal insensible before it is killed.

- A. Sticking**
- B. Pitching**
- C. Gambrelling**
- D. Stunning**

QUESTION 142

It renders the animal insensible before it is killed.

- A. Sticking**
- B. Pitching**
- C. Gambrelling**
- D. Stunning**

QUESTION 143

It is the removal of hide of the carcass.

- A. Flaying**
- B. Scalding**
- C. Sticking**
- D. blanching**

QUESTION 143

It is the removal of hide of the carcass.

- A. Flaying**
- B. Scalding**
- C. Sticking**
- D. blanching**

QUESTION 144

It refers to the lowering of animal into a steam to prepare the skin for dehairing.

- A. Flaying**
- B. Scalding**
- C. Sticking**
- D. blanching**

QUESTION 144

It refers to the lowering of animal into a steam to prepare the skin for dehairing.

- A. Flaying**
- B. Scalding**
- C. Sticking**
- D. blanching**

QUESTION 145

It is the allowable space between the tops for the stocks and the roof truss of the warehouse.

- A. 1.0 meter**
- B. 1.5 meter**
- C. 2.0 meter**
- D. 2.5 meter**

QUESTION 145

It is the allowable space between the tops for the stocks and the roof truss of the warehouse.

- A. 1.0 meter**
- B. 1.5 meter**
- C. 2.0 meter**
- D. 2.5 meter**

QUESTION 146

It is the optimum recommended stock height for the paddy stored in the warehouse.

- A. 12 layers**
- B. 14 layers**
- C. 16 layers**
- D. 18 layers**



QUESTION 146

It is the optimum recommended stock height for the paddy stored in the warehouse.

- A. 12 layers**
- B. 14 layers**
- C. 16 layers**
- D. 18 layers**



QUESTION 147

It is the optimum recommended stock height for maize stored in the warehouse.

- A. 12 layers**
- B. 14 layers**
- C. 16 layers**
- D. 18 layers**



QUESTION 147

It is the optimum recommended stock height for maize stored in the warehouse.

- A. 12 layers**
- B. 14 layers**
- C. 16 layers**
- D. 18 layers**



QUESTION 148

It is the minimum side space requirement between the edge of the pile and the wall of the warehouse.

- A. 0.5 m**
- B. 0.2 m**
- C. 1.0 m**
- D. 0.3 m**



QUESTION 148

It is the minimum side space requirement between the edge of the pile and the wall of the warehouse.

- A. 0.5 m**
- B. 0.2 m**
- C. 1.0 m**
- D. 0.3 m**

QUESTION 149

It is the minimum recommended height of the interior between the beam and the floor of warehouse.

- A. 40 feet**
- B. 10 feet**
- C. 20 feet**
- D. 30 feet**



QUESTION 149

It is the minimum recommended height of the interior between the beam and the floor of warehouse.

- A. 40 feet**
- B. 10 feet**
- C. 20 feet**
- D. 30 feet**

QUESTION 150

It is the recommended size of reinforcement bar for warehouse.

- A. 8 mm diameter**
- B. 12 mm diameter**
- C. 16 mm diameter**
- D. 24 mm diameter**

QUESTION 150

It is the recommended size of reinforcement bar for warehouse.

- A. 8 mm diameter**
- B. 12 mm diameter**
- C. 16 mm diameter**
- D. 24 mm diameter**

QUESTION 151

It is the minimum requirement for illumination of warehouse.

- A. 4 watts per square meter**
- B. 6 watts per square meter**
- C. 3 watts per square meter**
- D. 8 watts per square meter**

QUESTION 151

It is the minimum requirement for illumination of warehouse.

- A. 4 watts per square meter**
- B. 6 watts per square meter**
- C. 3 watts per square meter**
- D. 8 watts per square meter**

QUESTION 152

It is the minimum distance required of slaughter house from buildings used for human habitation, factory, public road and places.

- A. 25 m**
- B. 50 m**
- C. 75 m**
- D. 100 m**

QUESTION 152

It is the minimum distance required of slaughter house from buildings used for human habitation, factory, public road and places.

- A. 25 m**
- B. 50 m**
- C. 75 m**
- D. 100 m**

QUESTION 153

It refers to the meat requiring further examination as declared by a veterinary inspector after veterinary examination.

- A. Detained Meat**
- B. Rejected Meat**
- C. Condemned Meat**
- D. Contaminated Meat**

QUESTION 153

It refers to the meat requiring further examination as declared by a veterinary inspector after veterinary examination.

- A. Detained Meat**
- B. Rejected Meat**
- C. Condemned Meat**
- D. Contaminated Meat**

QUESTION 154

It refers to the meat which is unfit for human consumption as declared by a veterinary inspector after veterinary examination.

- A. Detained Meat**
- B. Rejected Meat**
- C. Condemned Meat**
- D. Contaminated Meat**

QUESTION 154

It refers to the meat which is unfit for human consumption as declared by a veterinary inspector after veterinary examination.

- A. Detained Meat**
- B. Rejected Meat**
- C. Condemned Meat**
- D. Contaminated Meat**

QUESTION 155

In flocculation process, it is necessary that the water being treated must be

- A. Stagnant**
- B. Agitated**
- C. Filtered**
- D. Settled**



QUESTION 155

In flocculation process, it is necessary that the water being treated must be

- A. Stagnant**
- B. Agitated**
- C. Filtered**
- D. Settled**

QUESTION 156

It is a water treatment process aimed to destroy microorganisms that cause infectious disease.

- A. Disinfection**
- B. Coagulation**
- C. Filtration**
- D. Sedimentation**

QUESTION 156

It is a water treatment process aimed to destroy microorganisms that cause infectious disease.

- A. Disinfection**
- B. Coagulation**
- C. Filtration**
- D. Sedimentation**

QUESTION 157

Lesser amount of chlorine is needed for water being treated if the turbidity of water is

- A. High**
- B. medium**
- C. Low**
- D. None of the Above**

QUESTION 157

Lesser amount of chlorine is needed for water being treated if the turbidity of water is

- A. High**
- B. medium**
- C. Low**
- D. None of the Above**

QUESTION 158

It is the commonly practiced method of disinfecting water by households.

- A. Boiling**
- B. Chlorination**
- C. Filtration**
- D. Sedimentation**

QUESTION 158

It is the commonly practiced method of disinfecting water by households.

- A. Boiling**
- B. Chlorination**
- C. Filtration**
- D. Sedimentation**

QUESTION 159

It is a partially lined or unlined underground pit into which raw animal or household waste water is discharged.

- A. Septic Tank**
- B. Cesspool**
- C. Soak Pit**
- D. Drain Field**

QUESTION 159

It is a partially lined or unlined underground pit into which raw animal or household waste water is discharged.

- A. Septic Tank**
- B. Cesspool**
- C. Soak Pit**
- D. Drain Field**

QUESTION 160

It is the breakdown of organic matter in a water solution or suspension into simpler or more biologically-stable compounds.

- A. Fermentation**
- B. Digestion**
- C. Decomposition**
- D. Stabilization**

QUESTION 160

It is the breakdown of organic matter in a water solution or suspension into simpler or more biologically-stable compounds.

- A. Fermentation**
- B. Digestion**
- C. Decomposition**
- D. Stabilization**

QUESTION 161

It is the recommended spacing of reinforcement bar for warehouse wall.

- A. 200 mm vertical and horizontal**
- B. 400 mm vertical and horizontal**
- C. 600 mm vertical and horizontal**
- D. 800 mm vertical and horizontal**

QUESTION 161

It is the recommended spacing of reinforcement bar for warehouse wall.

- A. 200 mm vertical and horizontal**
- B. 400 mm vertical and horizontal**
- C. 600 mm vertical and horizontal**
- D. 800 mm vertical and horizontal**

QUESTION 162

It is the recommended height of floor for warehouse to permit easy loading and unloading by trucks at the sides of the warehouse.

- A. 1.0 meter above the ground**
- B. 1.5 meter above the ground**
- C. 2.0 meter above the ground**
- D. 2.5 meter above the ground**

QUESTION 162

It is the recommended height of floor for warehouse to permit easy loading and unloading by trucks at the sides of the warehouse.

- A. 1.0 meter above the ground**
- B. 1.5 meter above the ground**
- C. 2.0 meter above the ground**
- D. 2.5 meter above the ground**

QUESTION 163

In sedimentation, processed water is allowed to pass through a settling chamber at

- A. Low velocity**
- B. High velocity**
- C. Equilibrium velocity**
- D. All of the Above**

QUESTION 163

In sedimentation, processed water is allowed to pass through a settling chamber at

- A. Low velocity**
- B. High velocity**
- C. Equilibrium velocity**
- D. All of the Above**

QUESTION 164

It is the recommended height of the floor if trucks are permitted to load and unload inside the warehouse.

- A. 0.10 m above the ground**
- B. 0.20 m above the ground**
- C. 0.30 m above the ground**
- D. 0.40 m above the ground**

QUESTION 164

It is the recommended height of the floor if trucks are permitted to load and unload inside the warehouse.

- A. 0.10 m above the ground**
- B. 0.20 m above the ground**
- C. 0.30 m above the ground**
- D. 0.40 m above the ground**

QUESTION 165

They are factors that contribute to the increasing amount of waste.

- A. Over population**
- B. Utilization of chemicals in Agriculture**
- C. Natural catastrophes and droughts**
- D. All of the Above**

QUESTION 165

They are factors that contribute to the increasing amount of waste.

- A. Over population**
- B. Utilization of chemicals in Agriculture**
- C. Natural catastrophes and droughts**
- D. All of the Above**

QUESTION 166

It refers to the location of vents in a warehouse.

- A. Near the floor level**
- B. Top of the wall near grid line**
- C. Top of the roof and the ridge**
- D. All of the Above**

QUESTION 166

It refers to the location of vents in a warehouse.

- A. Near the floor level**
- B. Top of the wall near grid line**
- C. Top of the roof and the ridge**
- D. All of the Above**

QUESTION 167

It is the maximum recommended length for greenhouse.

- A. 20 meters**
- B. 50 meters**
- C. 100 meters**
- D. 150 meters**

QUESTION 167

It is the maximum recommended length for greenhouse.

- A. 20 meters**
- B. 50 meters**
- C. 100 meters**
- D. 150 meters**

QUESTION 168

It is the maximum recommended width for gutter connected greenhouse.

- A. 20 meters**
- B. 50 meters**
- C. 100 meters**
- D. 150 meters**

QUESTION 168

It is the maximum recommended width for gutter connected greenhouse.

- A. 20 meters**
- B. 50 meters**
- C. 100 meters**
- D. 150 meters**

QUESTION 169

It is an algebraic sum of all the external forces acting parallel to cross-section of one side of the section tending to cause failure by sliding movement.

- A. Shear Force**
- B. Ultimate Strength**
- C. Shearing Stress**
- D. Shear Stress**

QUESTION 169

It is an algebraic sum of all the external forces acting parallel to cross-section of one side of the section tending to cause failure by sliding movement.

- A. Shear Force**
- B. Ultimate Strength**
- C. Shearing Stress**
- D. Shear Stress**

QUESTION 170

It is the amount of stress that produces failure by increasing the unit stress until breakage or rupture occurs.

- A. Shear Force**
- B. Ultimate Strength**
- C. Shearing Stress**
- D. Shear Stress**

QUESTION 170

It is the amount of stress that produces failure by increasing the unit stress until breakage or rupture occurs.

- A. Shear Force**
- B. Ultimate Strength**
- C. Shearing Stress**
- D. Shear Stress**

QUESTION 171

It is a stress that tends to cause two contiguous parts of a body to slide, relative to each other in a direction parallel to the plane of contact.

- A. Shear Force**
- B. Ultimate Strength**
- C. Shearing Stress**
- D. Unit Stress**

QUESTION 171

It is a stress that tends to cause two contiguous parts of a body to slide, relative to each other in a direction parallel to the plane of contact.

- A. Shear Force**
- B. Ultimate Strength**
- C. Shearing Stress**
- D. Unit Stress**

QUESTION 172

It is the adjustment clearance for rubber brakes in vertical abrasive whitening cone.

- A. 2 to 6 mm from cone coating**
- B. 2 to 5 mm from cone coating**
- C. 2 to 4 mm from cone coating**
- D. 2 to 3 mm from cone coating**

QUESTION 172

It is the adjustment clearance for rubber brakes in vertical abrasive whitening cone.

- A. 2 to 6 mm from cone coating**
- B. 2 to 5 mm from cone coating**
- C. 2 to 4 mm from cone coating**
- D. 2 to 3 mm from cone coating**

QUESTION 173

It refers to the maximum speed requirement of the vertical abrasive whitening cone machine.

- A. 8 m/s**
- B. 13 m/s**
- C. 18 m/s**
- D. 15 m/s**

QUESTION 173


It refers to the maximum speed requirement of the vertical abrasive whitening cone machine.

- A. 8 m/s**
- B. 13 m/s**
- C. 18 m/s**
- D. 15 m/s**

QUESTION 174

It is the normal setting speed of the horizontal abrasive whitener.

- A. 500 rpm**
- B. 800 rpm**
- C. 1000 rpm**
- D. 1200 rpm**

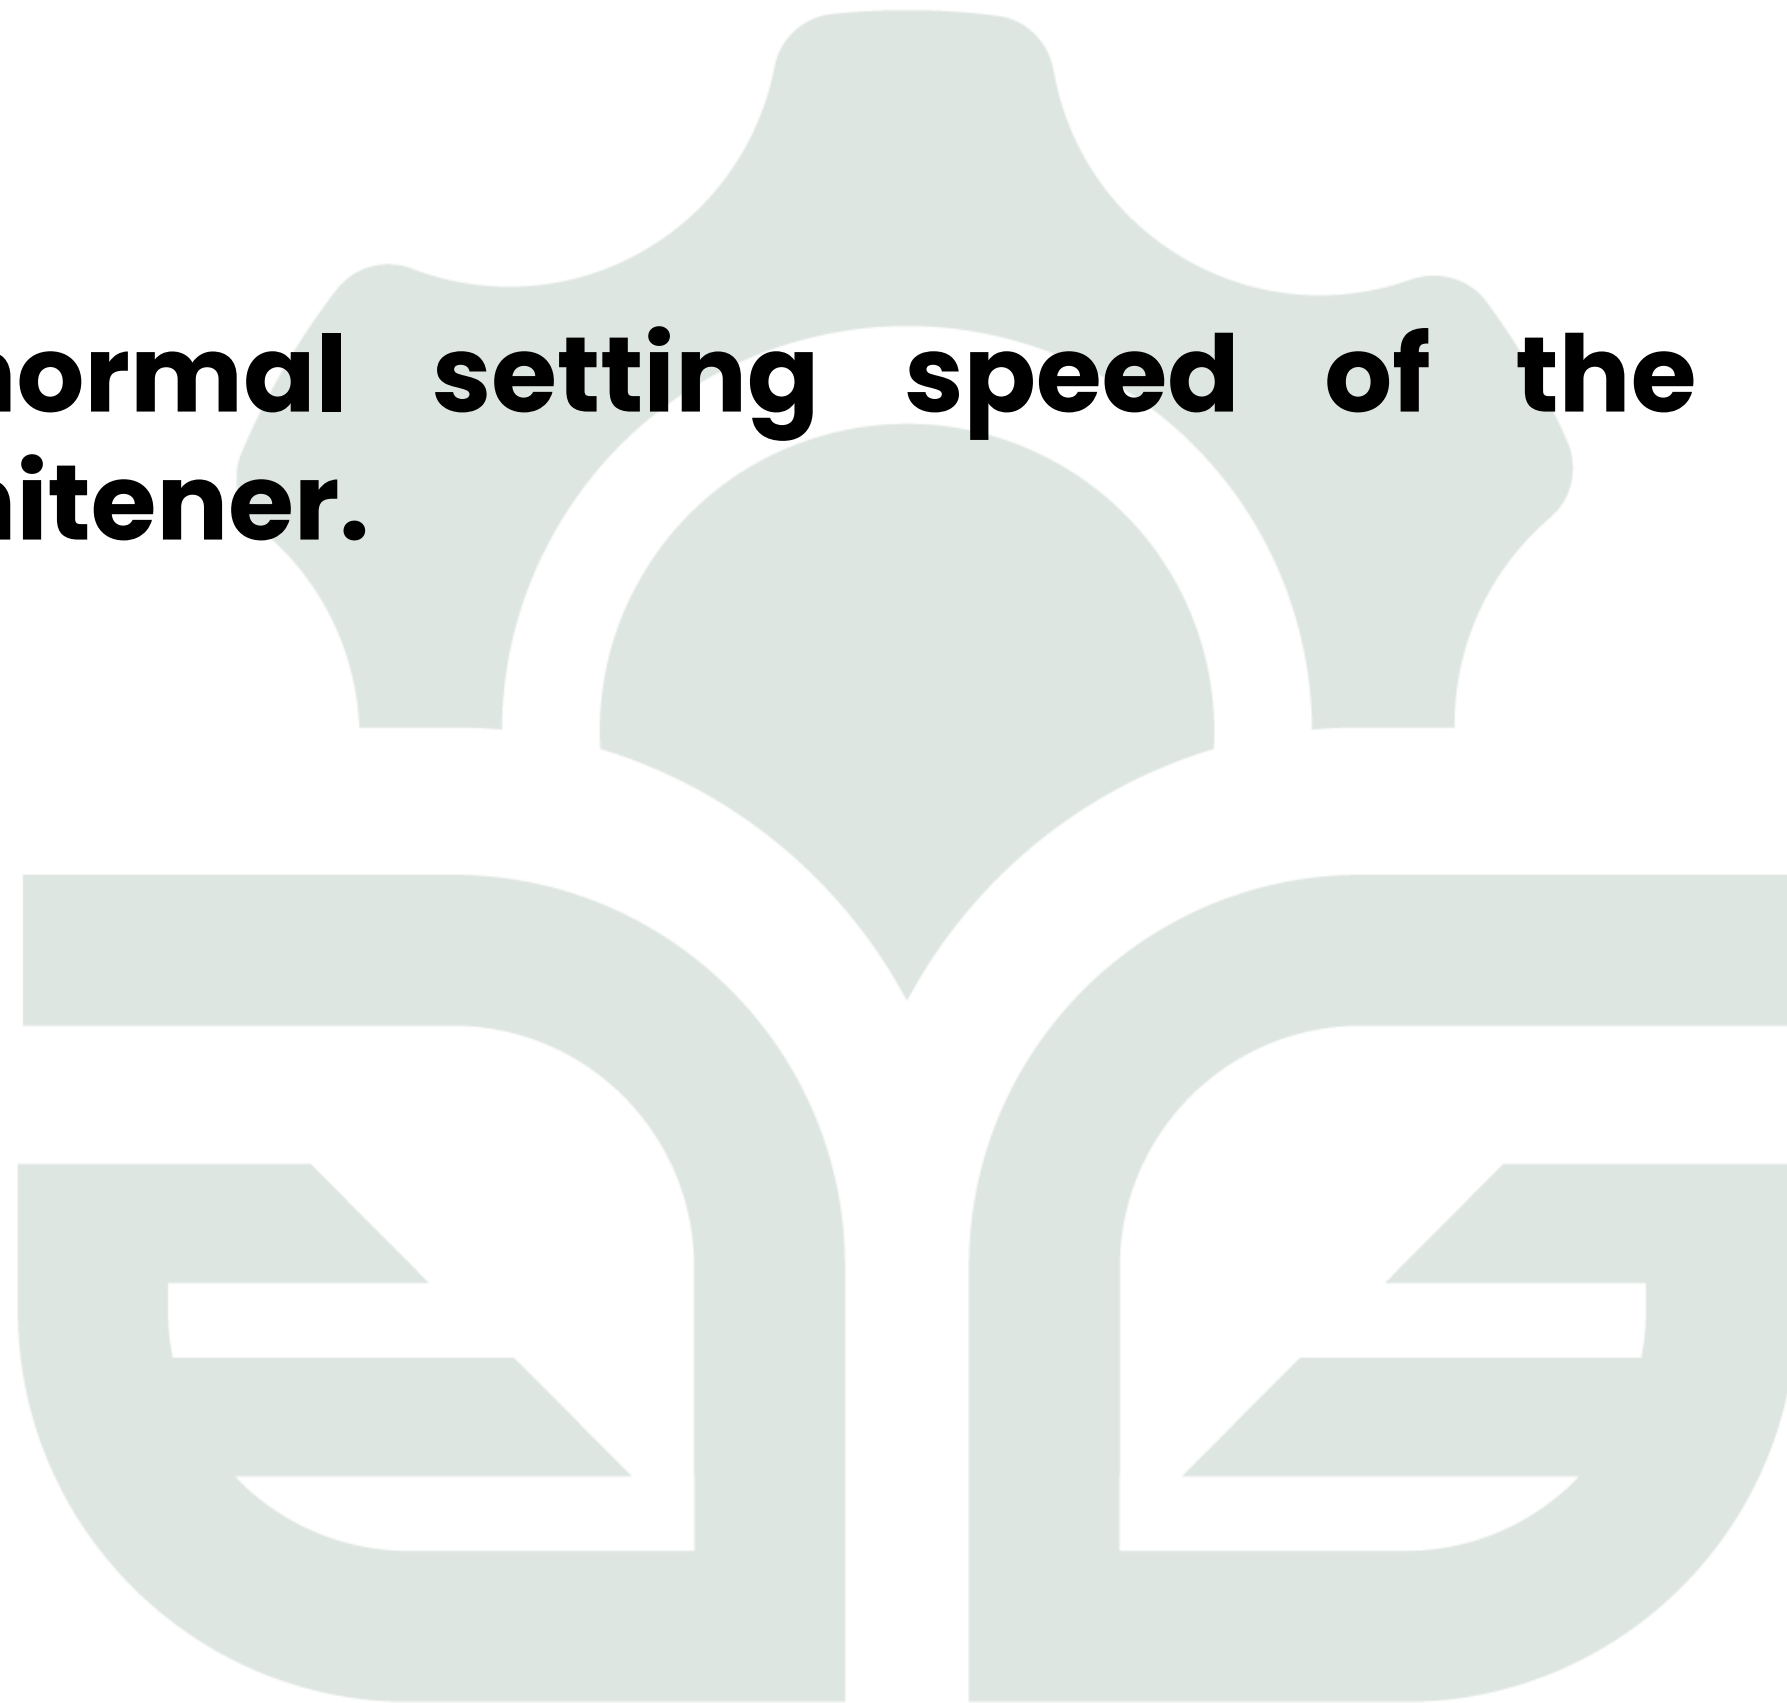

QUESTION 174

It is the normal setting speed of the horizontal abrasive whitener.

- A. 500 rpm**
- B. 800 rpm**
- C. 1000 rpm**
- D. 1200 rpm**

QUESTION 175

It is the average velocity of the hammer tip of a hammer mill.

- A. 50 m/s**
- B. 20 m/s**
- C. 100 m/s**
- D. 200 m/s**



QUESTION 175

It is the average velocity of the hammer tip of a hammer mill.


- A. 50 m/s**
- B. 20 m/s**
- C. 100 m/s**
- D. 200 m/s**



QUESTION 176

It is the approximate speed of a horizontal type feed mixer.


- A. 5 rpm**
- B. 10 rpm**
- C. 15 rpm**
- D. 25 rpm**

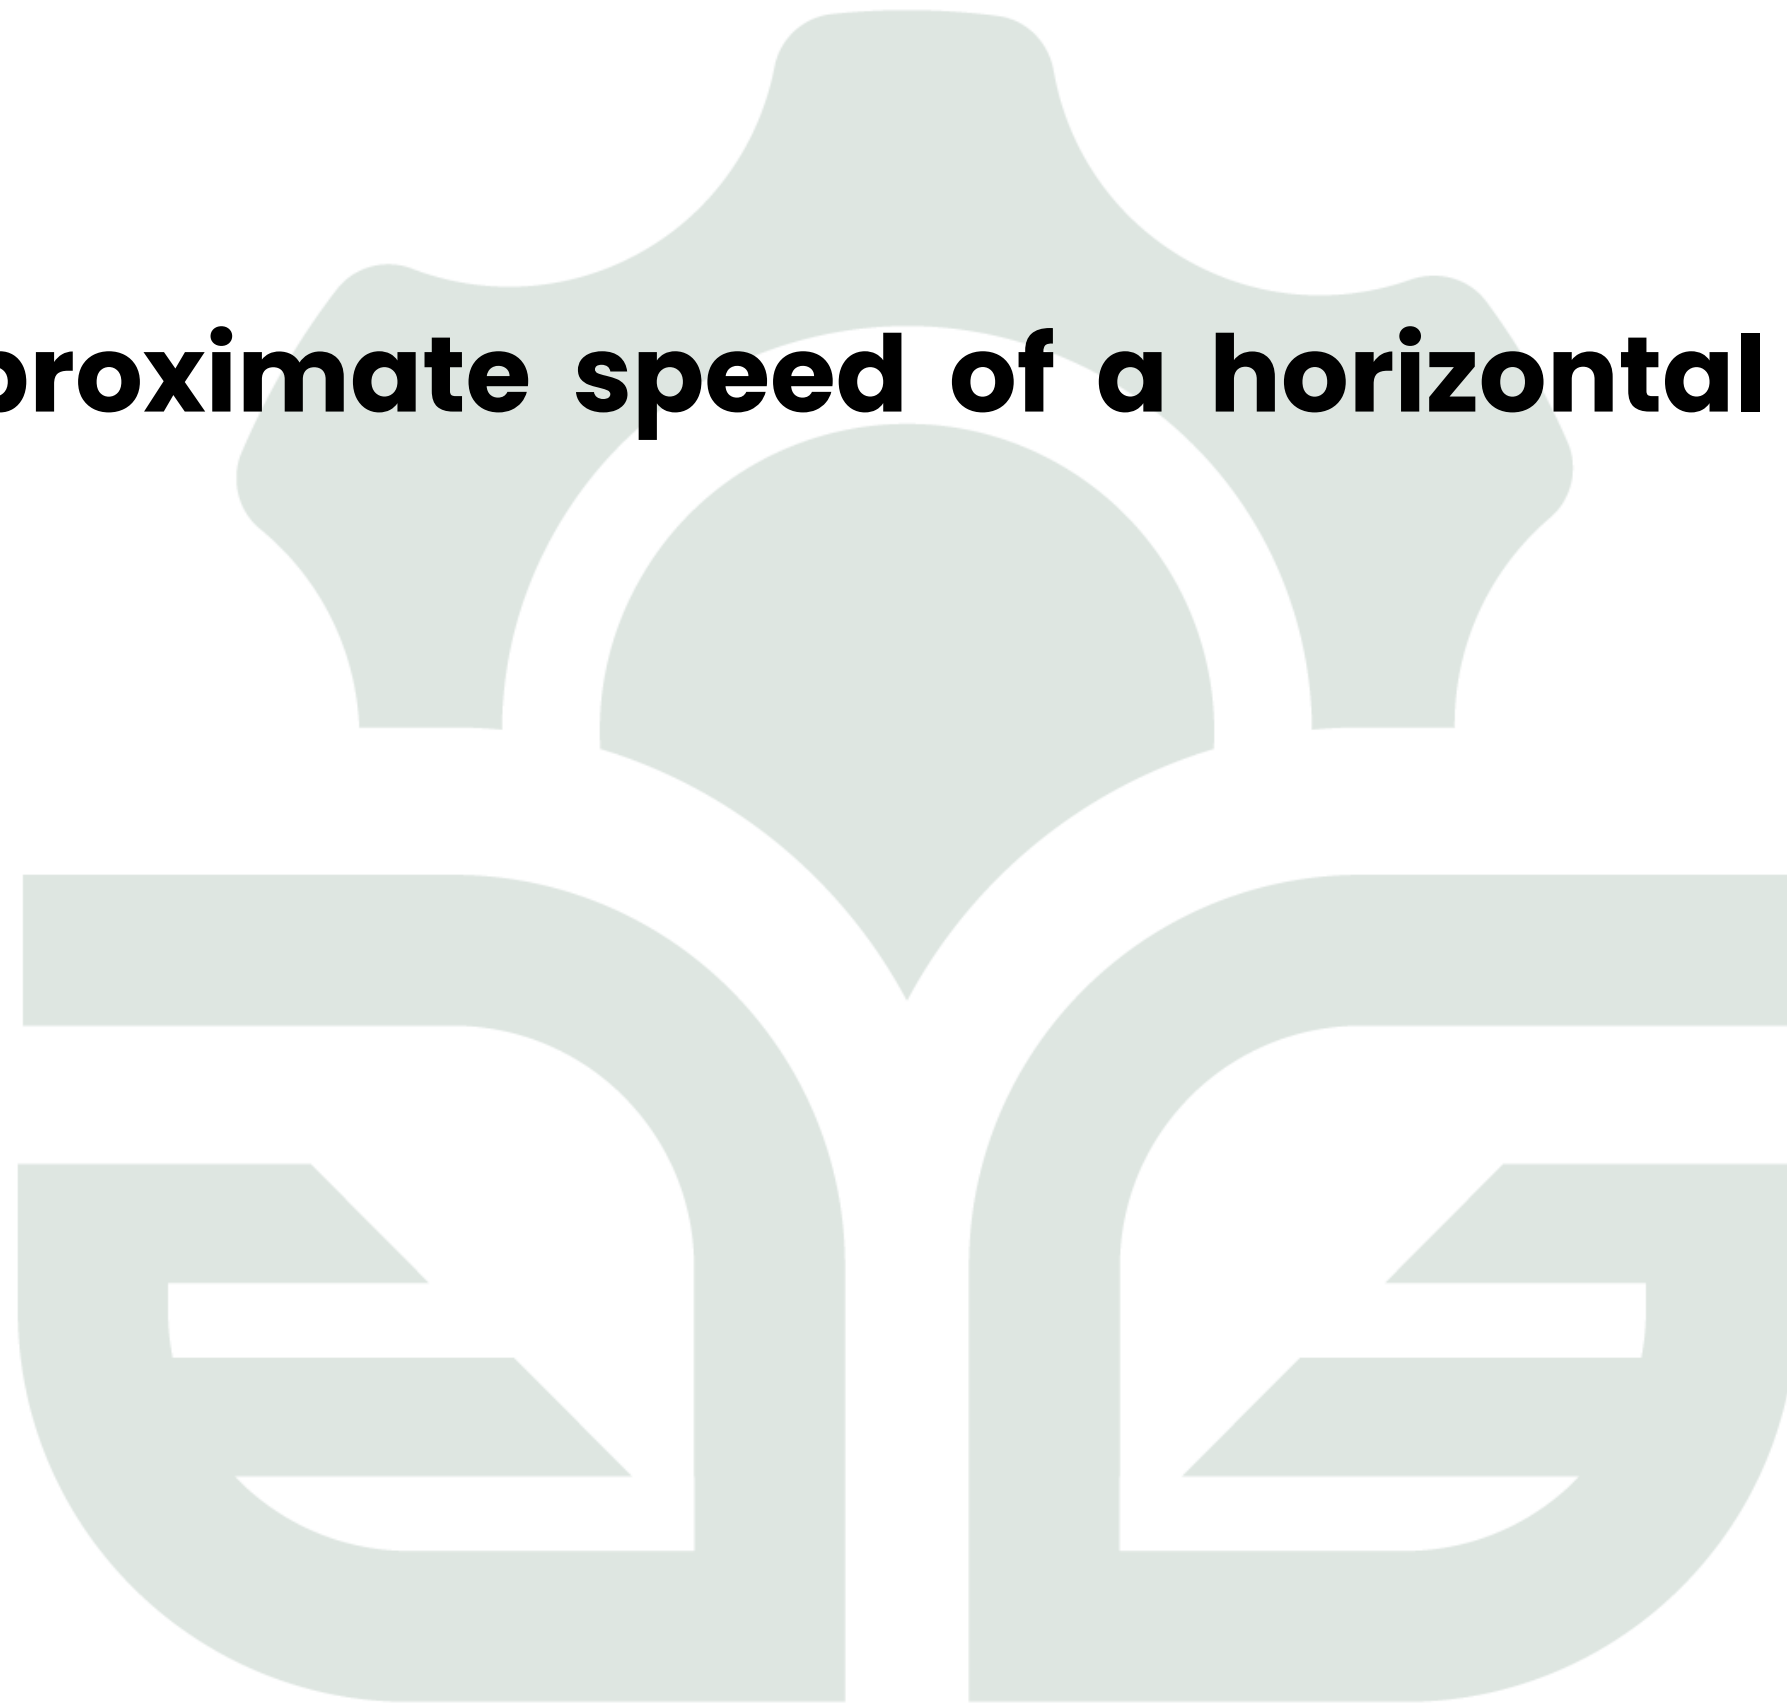

QUESTION 176

It is the approximate speed of a horizontal type feed mixer.

- A. 5 rpm**
- B. 10 rpm**
- C. 15 rpm**
- D. 25 rpm**

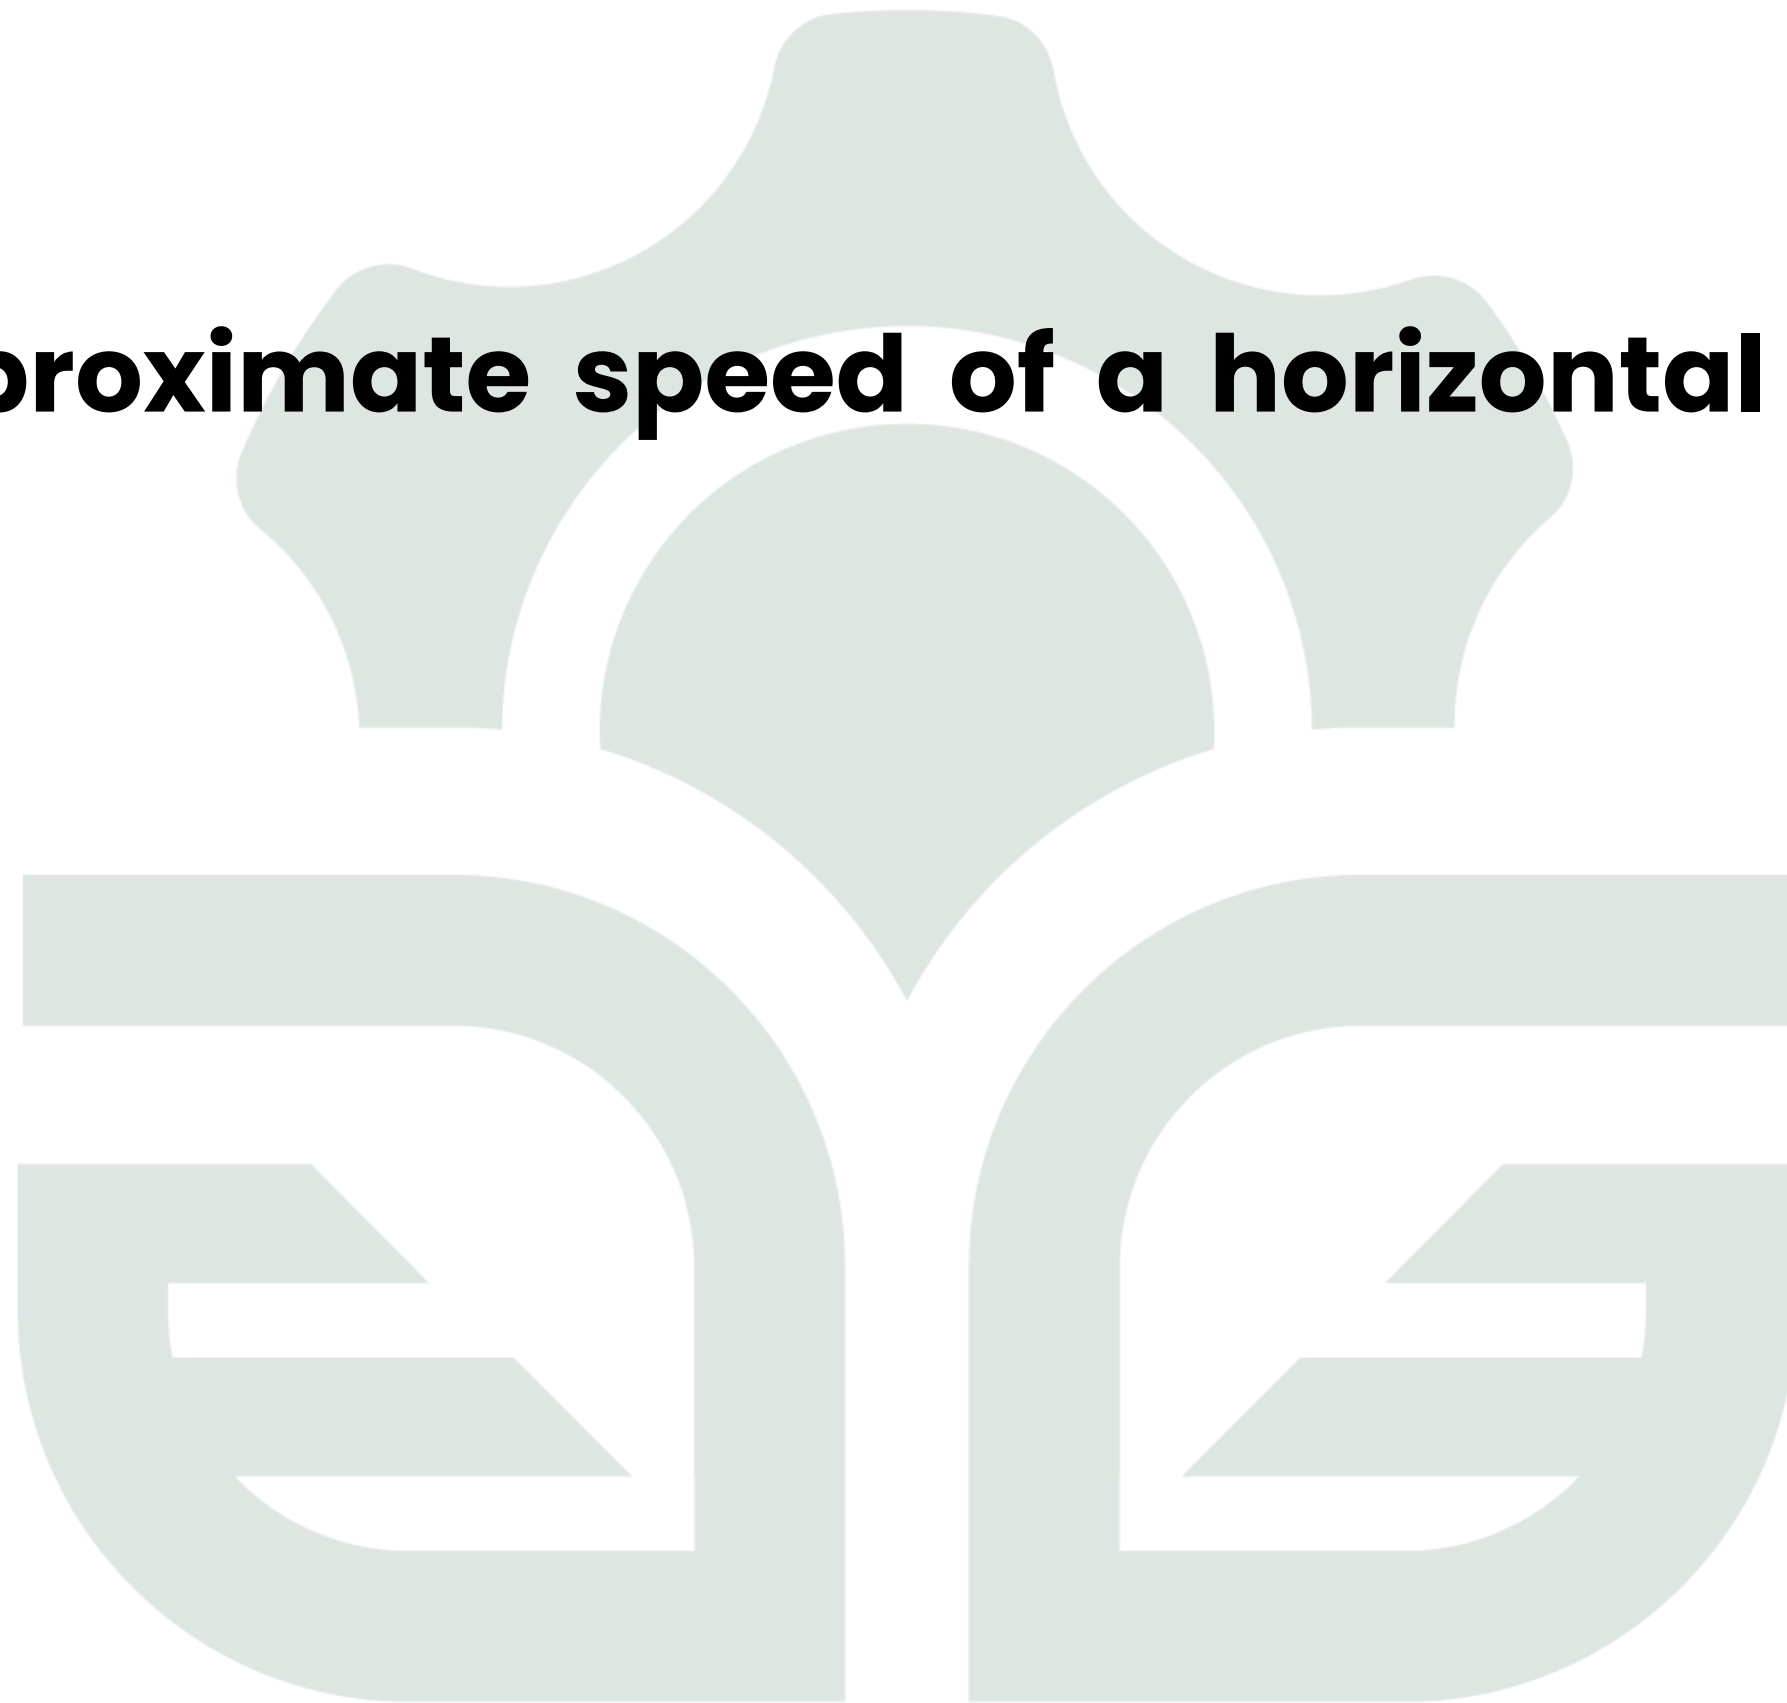

QUESTION 177

It is the optimum mixing time of a vertical-type feed mixer.

- A. 25 minutes**
- B. 15 minutes**
- C. 30 minutes**
- D. 45 minutes**

QUESTION 177

It is the optimum mixing time of a vertical-type feed mixer.

- A. 25 minutes**
- B. 15 minutes**
- C. 30 minutes**
- D. 45 minutes**

QUESTION 178

It is used to control the flow of materials in a feed milling plant to ensure that it will enter the full width of the mill chamber and at the same time, optimum capacity is obtained while the motor is overloaded.

- A. Conveyor**
- B. Feeder**
- C. Hopper**
- D. Chute**

QUESTION 178

It is used to control the flow of materials in a feed milling plant to ensure that it will enter the full width of the mill chamber and at the same time, optimum capacity is obtained while the motor is overloaded.

- A. Conveyor**
- B. Feeder**
- C. Hopper**
- D. Chute**

QUESTION 179

They are feed mixers that are characterized by high capacity, short mixing time, and high power requirement.

Horizontal mixer

Vertical mixers

Drum Mixer

Pan Mixe

QUESTION 179

They are feed mixers that are characterized by high capacity, short mixing time, and high power requirement.

Horizontal mixer

Vertical mixers

Drum Mixer

Pan Mixe

QUESTION 180

It is a feed mixer which has an auger that elevates the feed on top of the mixing bin and is spread evenly in the bin by gravity for another mixing cycle.

Horizontal mixer

Vertical mixers

Drum Mixer

Pan Mixe

QUESTION 180

It is a feed mixer which has an auger that elevates the feed on top of the mixing bin and is spread evenly in the bin by gravity for another mixing cycle.

Horizontal mixer

Vertical mixers

Drum Mixer

Pan Mixe

QUESTION 181

It is a mixer which consists of a U shaped bin that contains a central mixing blade or ribbon mounted on a rotating shaft.

Horizontal mixer

Vertical mixers

Drum Mixer

Pan Mixe

QUESTION 181

It is a mixer which consists of a U shaped bin that contains a central mixing blade or ribbon mounted on a rotating shaft.

Horizontal mixer

Vertical mixers

Drum Mixer

Pan Mixe

QUESTION 182

It is a feed mixer that is characterized by low capacity, longer mixing time, and low power requirement.

Horizontal mixer

Vertical mixers

Drum Mixer

Pan Mixe

QUESTION 182

It is a feed mixer that is characterized by low capacity, longer mixing time, and low power requirement.

Horizontal mixer

Vertical mixers

Drum Mixer

Pan Mixe

QUESTION 183

It is the process of preserving food materials in a hermetically-sealed container which has been sterilized with the use of heat.

Pasteurization

Canning

Heat sterilization

Filtration

QUESTION 183

It is the process of preserving food materials in a hermetically-sealed container which has been sterilized with the use of heat.

Pasteurization

Canning

Heat sterilization

Filtration

QUESTION 184

It is the process of removing the solid particles from the liquid such as wine, fruit juices, vinegar, and vegetable oil.

**Filtration
Distilling
Canning
Heat sterilization**

QUESTION 184

It is the process of removing the solid particles from the liquid such as wine, fruit juices, vinegar, and vegetable oil.

Filtration

Distilling

Canning

Heat sterilization

QUESTION 185

It is the process of subjecting the food product to a temperature of about 65°C for 30 mins. This causes the death of many but, not all of the organisms present.

Pasteurization

Canning

Heat sterilization

Filtration

QUESTION 185

It is the process of subjecting the food product to a temperature of about 65°C for 30 mins. This causes the death of many but, not all of the organisms present.

Pasteurization

Canning

Heat sterilization

Filtration

QUESTION 186

It is the termination of the entire organism in the product using heat at a temperature of about 50 to 100°C.

**Pasteurization
Canning
Heat sterilization
Filtration**

QUESTION 186

It is the termination of the entire organism in the product using heat at a temperature of about 50 to 100°C.

Pasteurization

Canning

Heat sterilization

Filtration

QUESTION 187

It is the minimum by-product recovery required in the performance criteria for corn mill.

- A. 31%**
- B. 36%**
- C. 22%**
- D. 24%**

QUESTION 187

It is the minimum by-product recovery required in the performance criteria for corn mill.

- A. 31%**
- B. 36%**
- C. 22%**
- D. 24%**

QUESTION 188

It is the minimum main product recovery required in the performance criteria for corn mill.

- A. 68%**
- B. 75%**
- C. 64%**
- D. 80%**

QUESTION 188

It is the minimum main product recovery required in the performance criteria for corn mill.

- A. 68%**
- B. 75%**
- C. 64%**
- D. 80%**

QUESTION 189

It is the ratio of the weight of corn kernel input to the total operating time.

- A. Grinding Efficiency**
- B. Milling Capacity**
- C. Milling Recovery**
- D. Output Rate**

QUESTION 189

It is the ratio of the weight of corn kernel input to the total operating time.

- A. Grinding Efficiency**
- B. Milling Capacity**
- C. Milling Recovery**
- D. Output Rate**

QUESTION 190

It is the major component of a corn mill that reduce a corn kernel into grits.

- A. Hammer Mill**
- B. Steel Roller Mill**
- C. Grinding Plate**
- D. Disc Mill**

QUESTION 190

It is the major component of a corn mill that reduce a corn kernel into grits.

- A. Hammer Mill**
- B. Steel Roller Mill**
- C. Grinding Plate**
- D. Disc Mill**

QUESTION 191

It is the ratio of the weight of corn grits to the total weight of corn kernel input expressed in percent.
% main product recovery

- A. Grinding Efficiency**
- B. Milling Capacity**
- C. % main product recovery**
- D. Output Rate**

QUESTION 191

It is the ratio of the weight of corn grits to the total weight of corn kernel input expressed in percent.
% main product recovery

- A. Grinding Efficiency**
- B. Milling Capacity**
- C. % main product recovery**
- D. Output Rate**

QUESTION 192

It is the recommended clearance setting between stones of a disk huller.

- A. $\frac{1}{3}$ of the length of the paddy**
- B. $\frac{1}{4}$ of the length of the paddy**
- C. $\frac{1}{2}$ of the length of the paddy**
- D. 1 of the length of the paddy**

QUESTION 192

It is the recommended clearance setting between stones of a disk huller.

- A. $\frac{1}{3}$ of the length of the paddy**
- B. $\frac{1}{4}$ of the length of the paddy**
- C. $\frac{1}{2}$ of the length of the paddy**
- D. 1 of the length of the paddy**

QUESTION 193

It is the assembling and measuring out of the required qualities of solid raw feed materials into a batch of the desired composition.

- A. Blending**
- B. Mixing**
- C. Formulation**
- D. Weighing**

QUESTION 193

It is the assembling and measuring out of the required qualities of solid raw feed materials into a batch of the desired composition.

- A. Blending**
- B. Mixing**
- C. Formulation**
- D. Weighing**

QUESTION 194

It is the rapid oxidation of solids in a specifically-designed combustion chamber.

- A. Combustion**
- B. Pyrolysis**
- C. Gasification**
- D. Incineration**

QUESTION 194

It is the rapid oxidation of solids in a specifically-designed combustion chamber.

- A. Combustion**
- B. Pyrolysis**
- C. Gasification**
- D. Incineration**

QUESTION 195

It is a type of biogas plant where the digester is separated from the gas chamber.

- A. Fixed-Dome Type**
- B. Floating-Drum Type**
- C. Balloon-Type Plant**
- D. Split-type Plant**

QUESTION 195


It is a type of biogas plant where the digester is separated from the gas chamber.

- A. Fixed-Dome Type**
- B. Floating-Drum Type**
- C. Balloon-Type Plant**
- D. Split-type Plant**

QUESTION 196

It is waste water flowing into a reservoir or treatment plant.


- A. Influent**
- B. Effluent**
- C. Leachate**
- D. Sludge**

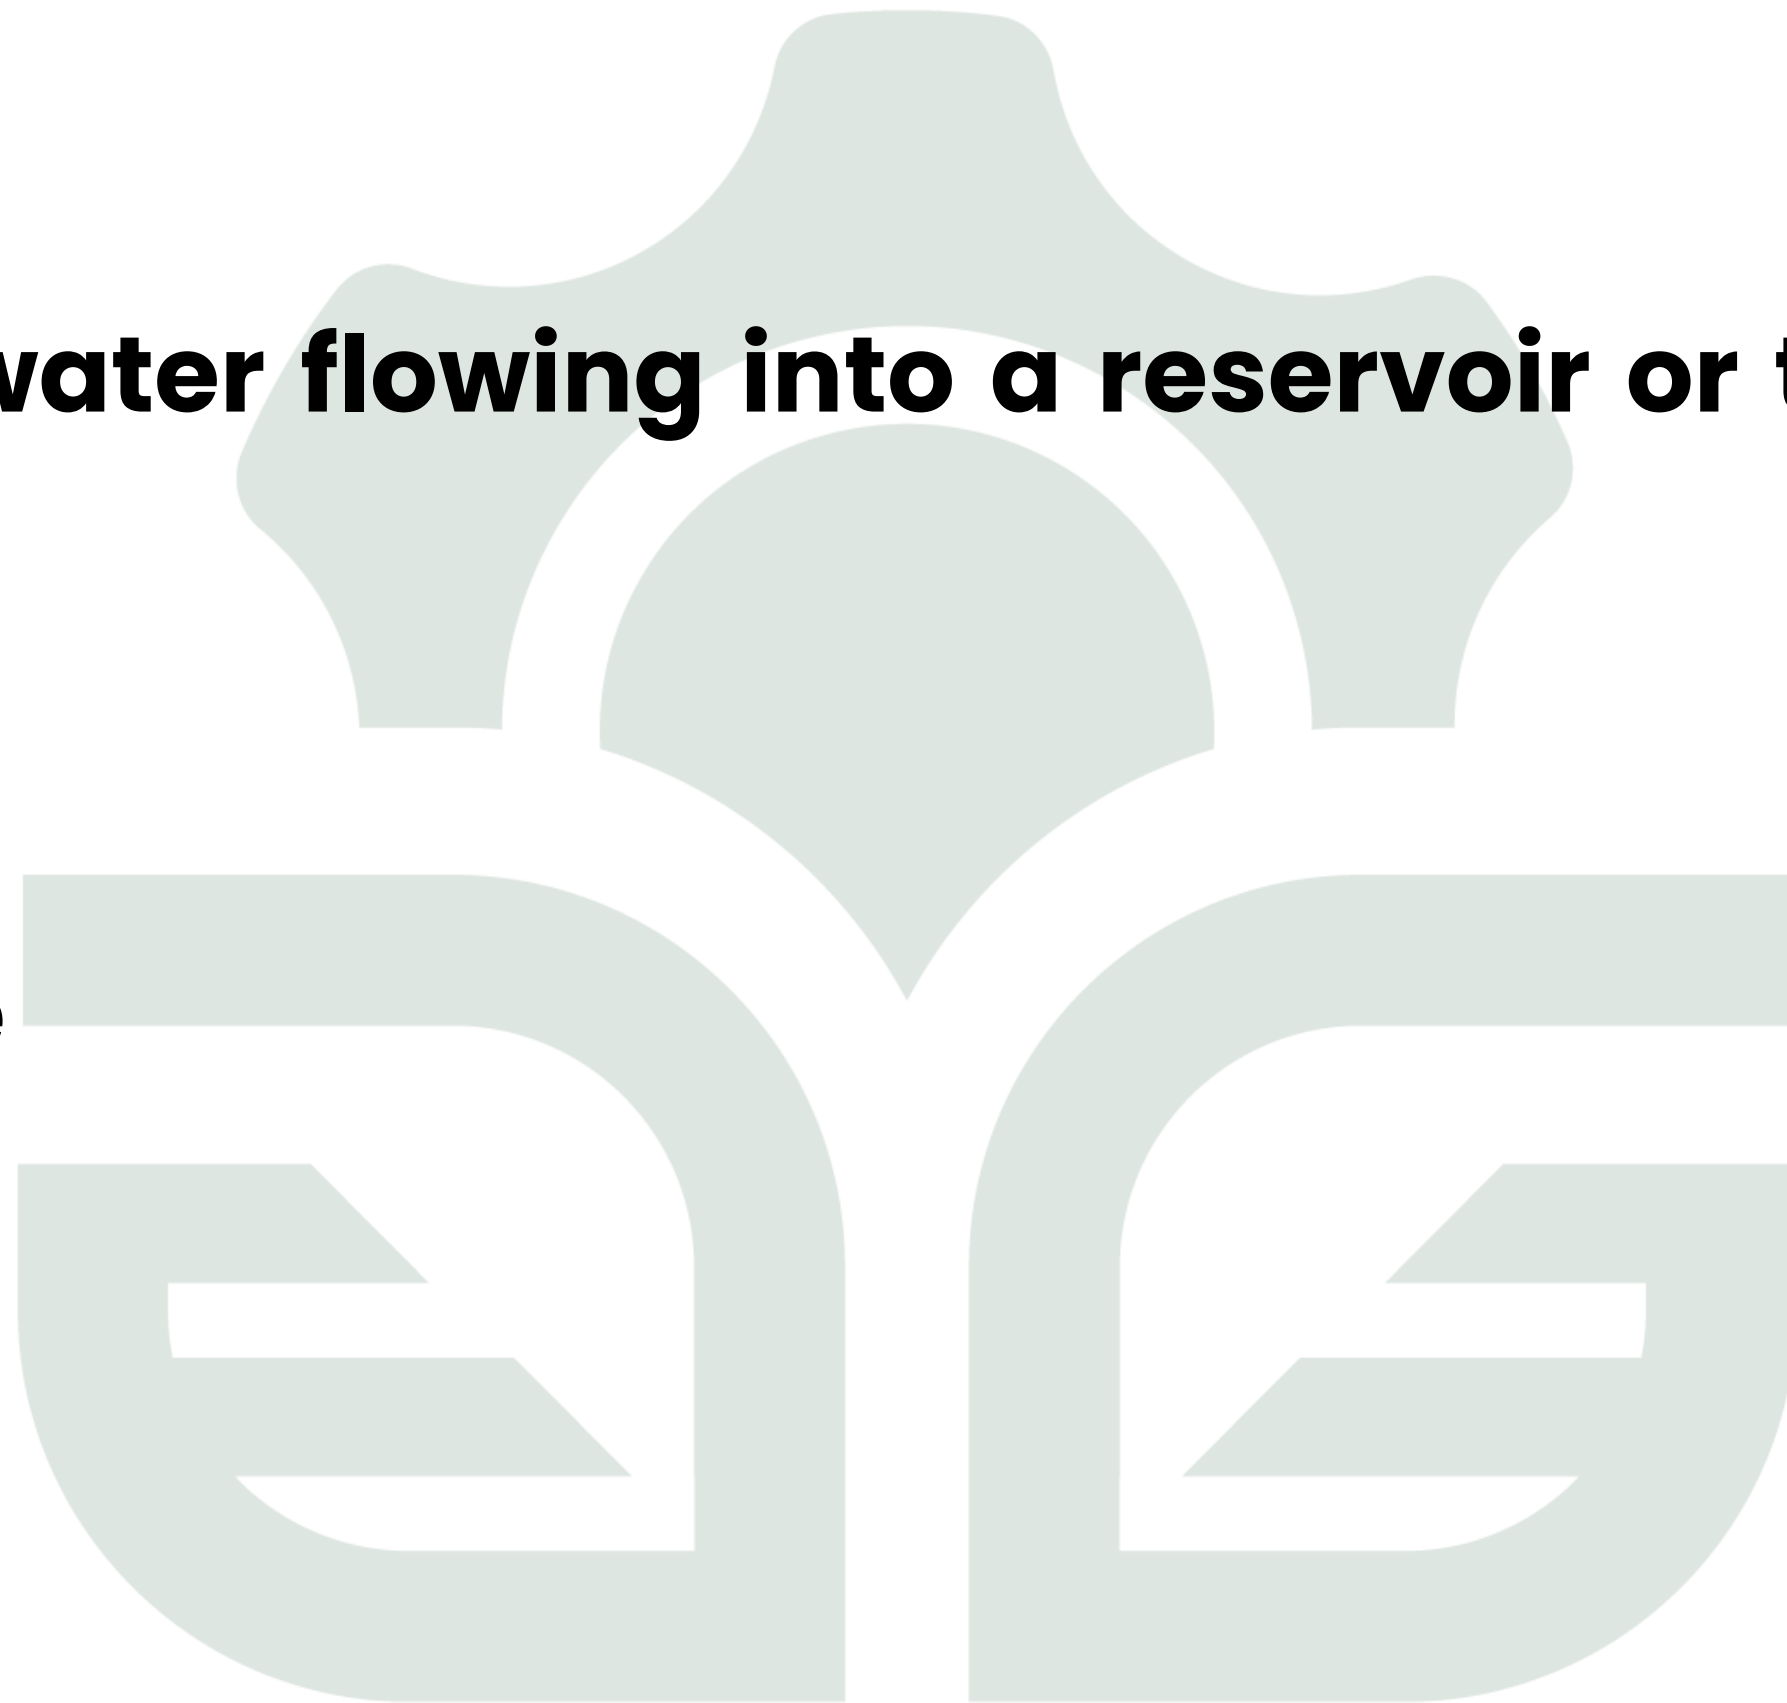

QUESTION 196

It is waste water flowing into a reservoir or treatment plant.

- A. Influent**
- B. Effluent**
- C. Leachate**
- D. Sludge**

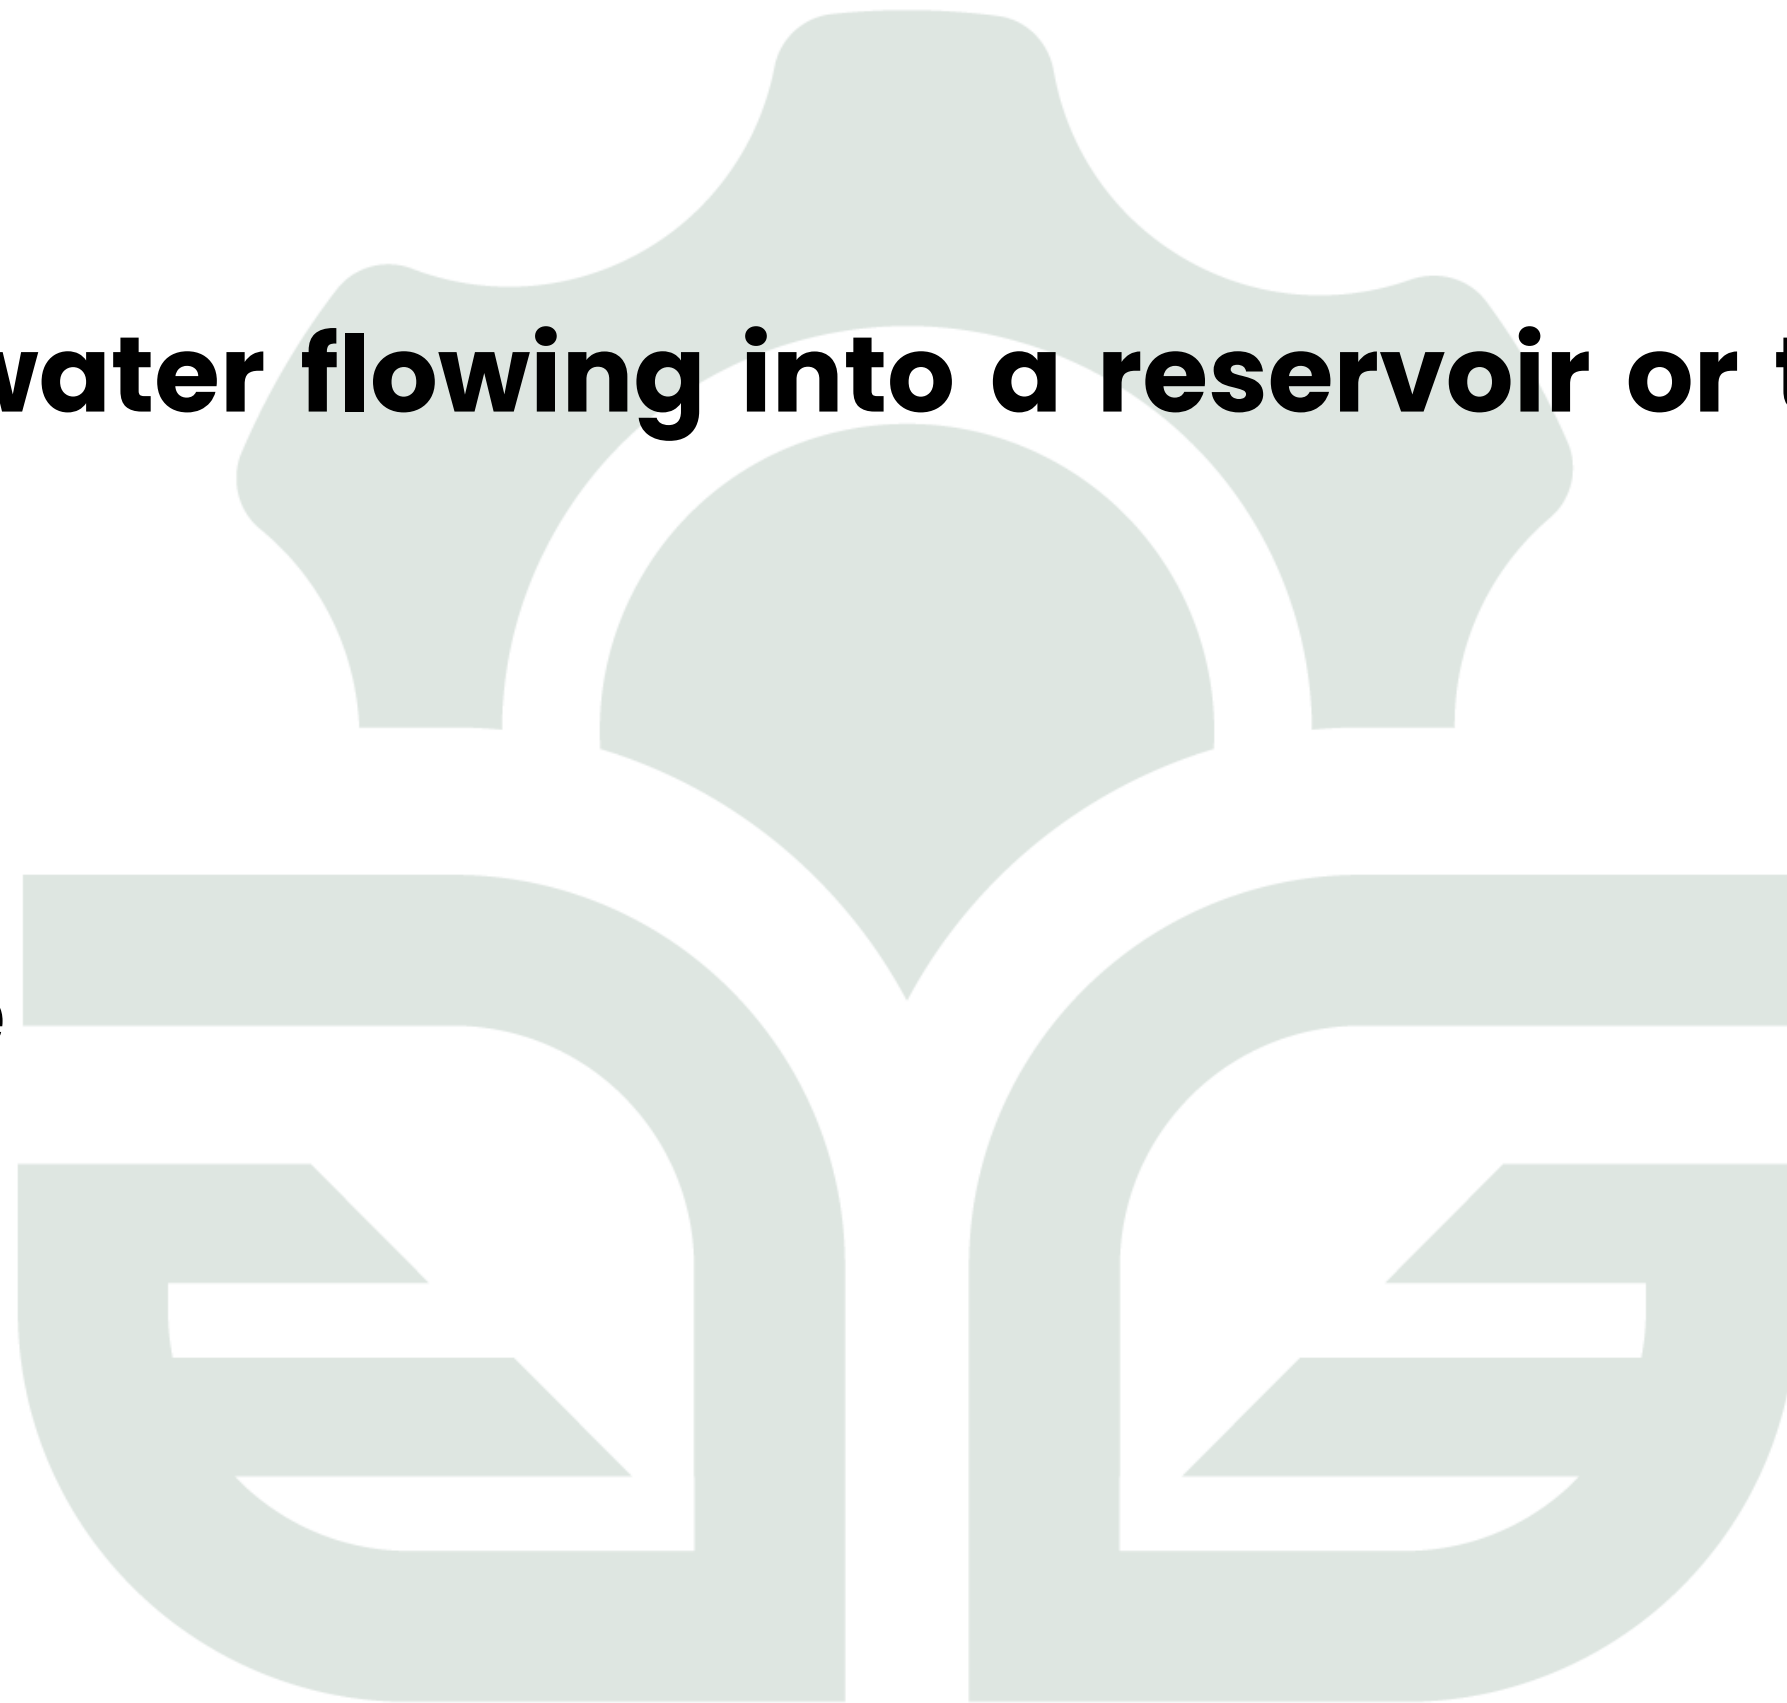

QUESTION 197

It is the ordinary killing of all living microorganisms with the use of heat and pressure or with the use of some chemicals.

- A. Disinfection**
- B. Pasteurization**
- C. Sterilization**
- D. Sanitization**

QUESTION 197

It is the ordinary killing of all living microorganisms with the use of heat and pressure or with the use of some chemicals.

- A. Disinfection**
- B. Pasteurization**
- C. Sterilization**
- D. Sanitization**

QUESTION 198

It is the maximum stock height for grains stored in jute bags.

- A. $\frac{1}{2}$ the wall height**
- B. $\frac{1}{4}$ the wall height**
- C. Wall Height**
- D. None of the Above**

QUESTION 198

It is the maximum stock height for grains stored in jute bags.

- A. $\frac{1}{2}$ the wall height**
- B. $\frac{1}{4}$ the wall height**
- C. Wall Height**
- D. None of the Above**

QUESTION 199

It is the minimum stock height for grains stored in woven polypropylene bags.

- A. $\frac{1}{2}$ the wall height**
- B. $\frac{1}{4}$ the wall height**
- C. Wall Height**
- D. None of the Above**

QUESTION 199

It is the minimum stock height for grains stored in woven polypropylene bags.

- A. $\frac{1}{2}$ the wall height**
- B. $\frac{1}{4}$ the wall height**
- C. Wall Height**
- D. None of the Above**

QUESTION 200

It is the preferred lighting fixtures for warehouse building.

- A. Fluorescent Lamp**
- B. Incandescent Lamp**
- C. LED Lamp**
- D. Mercury Vapor Lamp**

QUESTION 200

It is the preferred lighting fixtures for warehouse building.

- A. Fluorescent Lamp**
- B. Incandescent Lamp**
- C. LED Lamp**
- D. Mercury Vapor Lamp**