


GRATING

Parallel Grating - Radial - 6"-18"

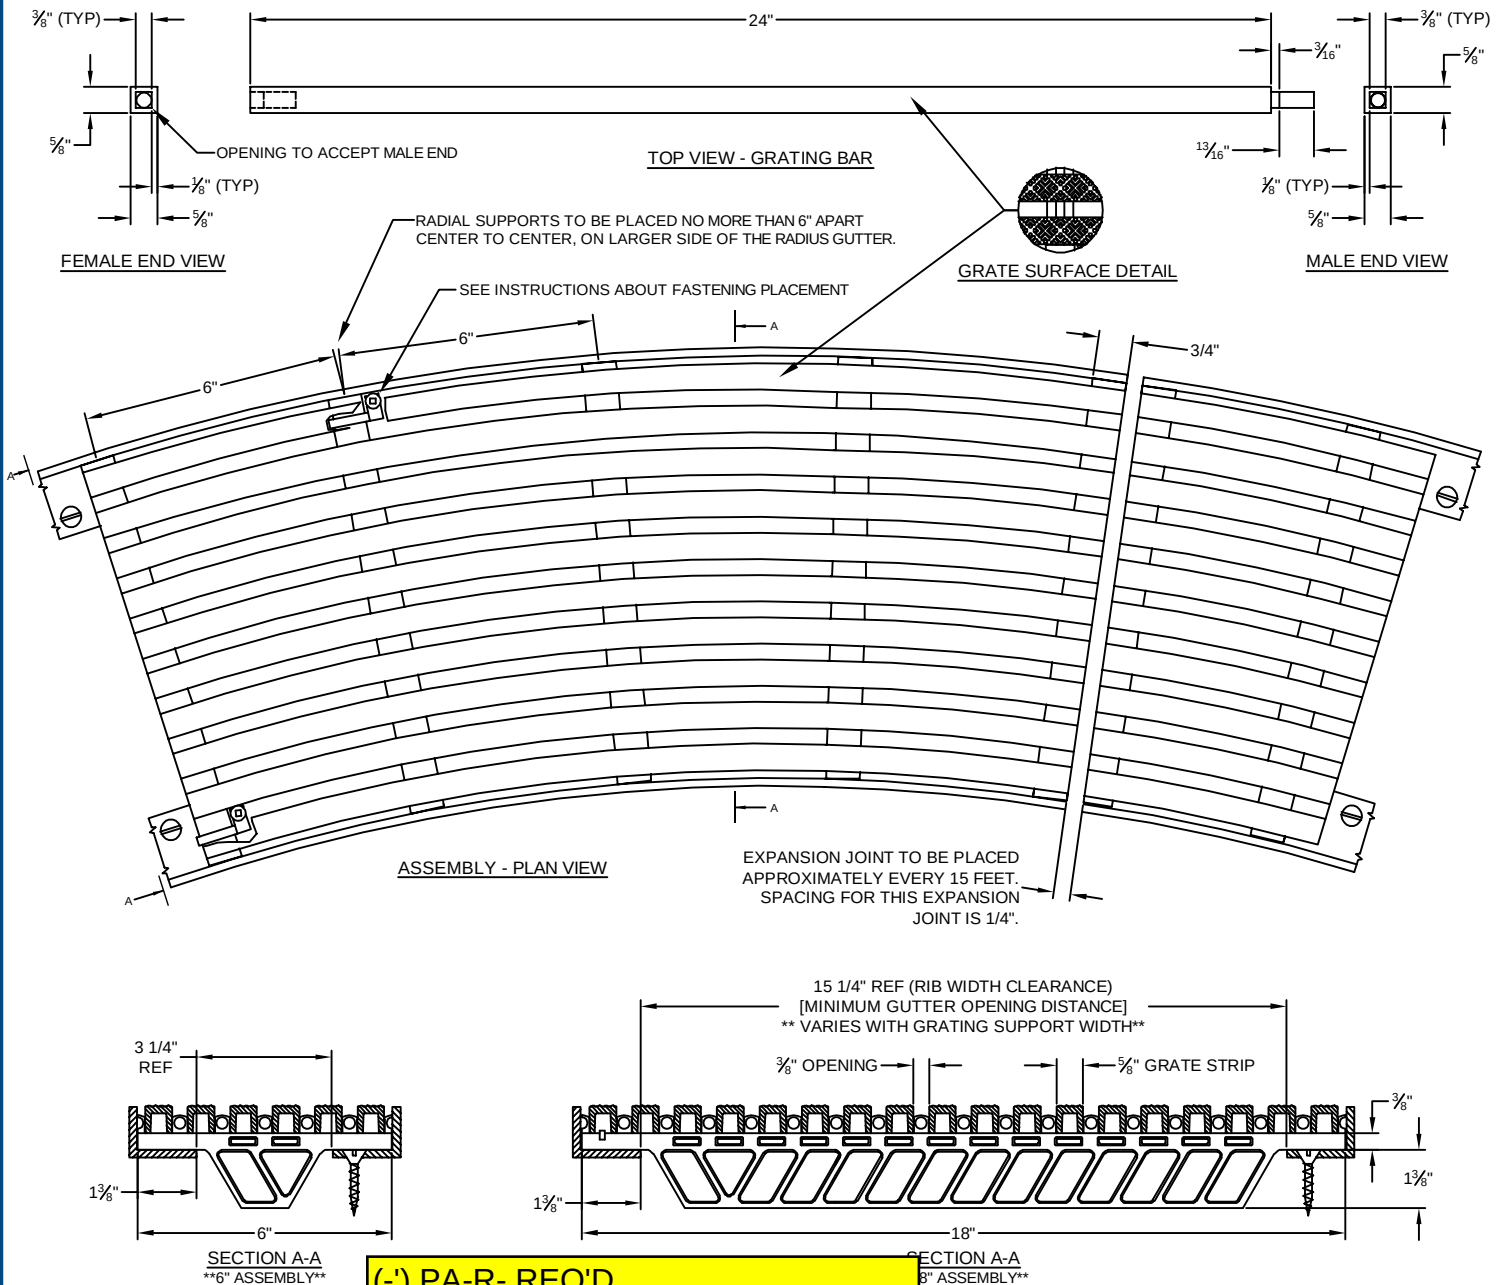

Grating Fasteners

- Stainless steel clips and fasteners sold separately
- See installation instructions for more details

Colors

- Grate available in White (WT), Bone (BO) & Gray (GY)

Notes

- PVC Parallel Radial Grate, 6" to 18" widths in 1" increments
- Radial Grate can be field bent down to a 60" radius. If less than 60" radius, consult factory
- Non-Skid Surface, 37.5% flow space
- ASTM G-154, 750 Hours UV, ANSI/APSP-16
- ASTM C-1028 Static coefficient of friction, wet and dry

ALL DRAWING DIMENSIONS SUPPLIED BY NEPTUNE-BENSON, LLC ARE FOR REFERENCE ONLY. ALL DRAWING FILES WERE CREATED USING AUTOCAD FILE FORMAT (*.DWG) AND ARE PRESENTED AS A SERVICE TO OUR CUSTOMERS. ERRORS SOMETIMES OCCUR DURING THIS PROCESS AND WITH SOFTWARE INCOMPATIBILITY UPON OPENING A FILE. NEPTUNE-BENSON, LLC AND/OR ANY AUTHORIZED DISTRIBUTOR OF OUR PRODUCTS WILL NOT BE HELD RESPONSIBLE FOR PROBLEMS ARISING FROM FILES WHICH HAVE BEEN CONVERTED AND DOES NOT WARRANTY THE DOCUMENTS AGAINST DEFICIENCIES OR TYPOGRAPHICAL ERRORS OF ANY KIND. WE RECOMMEND THAT ALL MEASUREMENTS ARE VERIFIED WITH ACTUAL PHYSICAL PRODUCT BEFORE ANY CUSTOM FABRICATION IN THE FIELD OCCURS.

(-) PA-R- REQ'D
 (-) CA-NT REQ'D
 (-) FASTENING SET(S) REQ'D

GRATING SIZES	
Part Number (White)	Description
PA-R06-WT	Grate Radial 6"
PA-R08-WT	Grate Radial 8"
PA-R10-WT	Grate Radial 10"
PA-R12-WT	Grate Radial 12"
PA-R14-WT	Grate Radial 14"
PA-R16-WT	Grate Radial 16"
PA-R18-WT	Grate Radial 18"
PA-FASTSET-R	Radial Fastening Set


-	-	-	-
NO.	DATE	BY	DESCRIPTION
REVISIONS			

CUSTOMER	-			
PRODUCT	PARALLEL GRATING - RADIAL - 6"-18"			
⚠ DO NOT SCALE PRINT				
DRAWN	-	DRAWING NO.	REV.	MATERIAL
DATE	12/05/16			
CHECKED	-	PAR-0618	-	PVC
DATE	-			


QuietFlow® Grates

Designed to capture and disperse water surge in a matter of inches and speed flow rate.

To meet the requirements of indoor and outdoor commercial pools, competition pools and the most distinctive pool designs in the aquatics industry, Neptune-Benson has designed a high tech, high performance system of parallel grating, either straight or radius, that follows the contours of any rim-flow pool design. Our Quiet-Flow parallel grating is designed to capture water surge in a matter of inches, and speed flow and disperse rate. The result is a significantly quieter, faster pool without the excessive cost of building sloped or wider gutters.

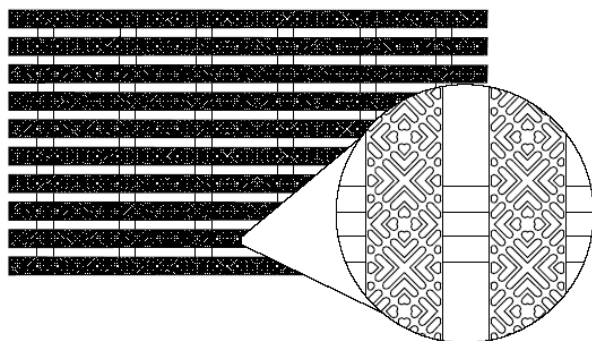

SuperGrip™ Grates

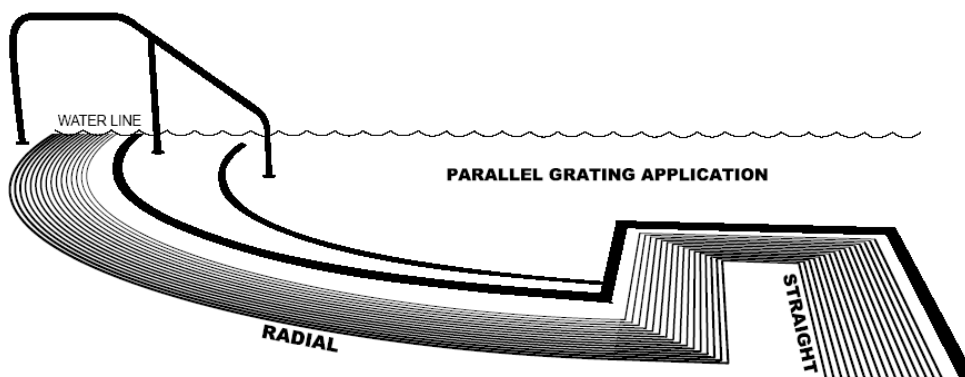

STRAIGHT

Sections of UV stabilized PVC grating in on foot lengths x widths of 6" to 18" in one inch increments. Individual pieces snap together to accommodate the length of the straight sections. The top surface of both types of parallel grating shall have a raised diamond ridge design to create good friction, wet or dry, ensuring that decks are safer with rigid, non-slip comfort underfoot.

Leading commercial/competition pool designers, aquatics consultants and contractors require that equal consideration be given to each and every element used to create and deliver spectacular, highly functional pool facility.

RADIUS


Sections of UV stabilized PVC grating in 24" long pieces connected end to end to accommodate the length of the radius sections. The width is in multiples of one inch, from 6" to 18" wide. For sizes 6-10" there shall be cross supports spaced at 6" (max) intervals around the perimeter to span the gutter opening, and to accept the parallel bars. Place supports at 4" OC for sizes 11-18". The cross supports are designed to maintain the space between the pieces not to exceed 0.375". The parallel radius bars are designed to attach directly into the straight sections for a clean transition. Field bend radii 12 feet and greater. Radii between 12'-5' must be factory bent and field installed. Not recommended for radii smaller than 5'.

FEATURES

- Unique ergonomically-designed diamond ridge pattern to deflect standing water two ways, ensuring that decks are safer.
- Wet or Dry – with rigid, non-slip comfort under foot.
- QuietFlow grate complies with federal ADA regulations.
- Available in 3 standard colors – White, Gray, and Bone.
- Ten year warranty.

SPECIFICATIONS

Size	6" to 18" widths in 1" increments
Material	PVC
Surface	Non-Skid surface
Grate	White, Gray, and Bone
Open Area	37.5%
Rating	ASTM G-154 750 Hours UV ASTM C-1028 static coefficient of friction, wet and dry ASTM E-661092 load to failure and deflection @200#

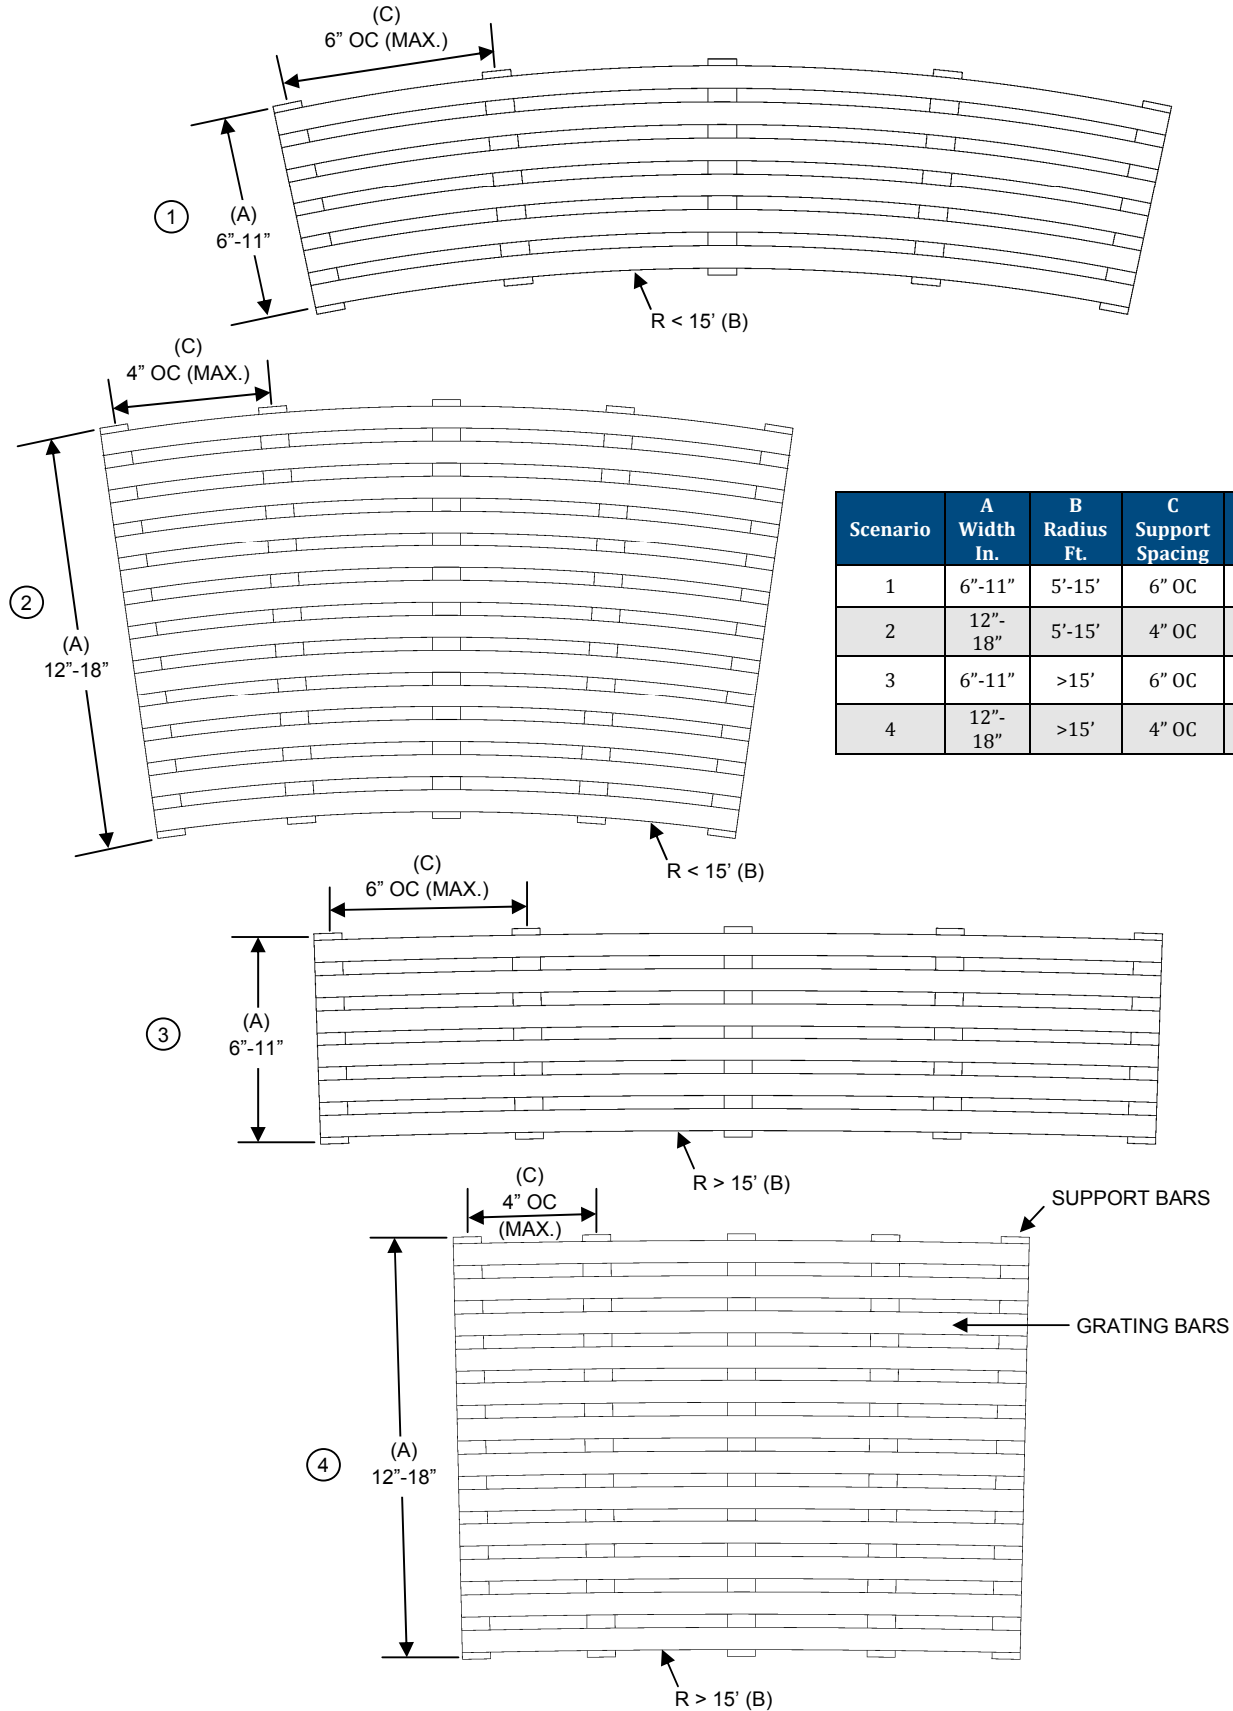

Scenario	A Width In.	B Radius Ft.	C Support Spacing	Factory Bend	Field Bend
1	6"-11"	5'-15'	6" OC	YES	NO
2	12"-18"	5'-15'	4" OC	YES	NO
3	6"-11"	>15'	6" OC	ON REQUEST	YES
4	12"-18"	>15'	4" OC	ON REQUEST	YES