

FILTER REGULATOR

ONE REQ'D PER FILTER


Model	AW40
Port sizes	1/2"
Fluid	Air
Proof pressure	1.5 MPa
Maximum operating pressure	1.0 MPa
Set pressure range	0.05 to 0.85 MPa
Pressure gauge port size	NPT
Relief pressure	Set pressure + 0.05 MPa (at relief flow rate of 0.1 /min (ANR))
Ambient and fluid temperature	-5 to 60°C (With no freezing)
Nominal filtration rating	5 µm
Drain capacity (cm3)	45
Bowl material	Polycarbonate
Bowl guard	Standard
Construction	Relieving type
Weight (kg)	0.72

Options Included


Float type auto-drain (N.O.)

Applicable tubing O.D for auto drain connection should be $\varnothing 3/8"$ in case NPT thread port is chosen.

Name plate, caution plate for bowl, and pressure gauge in imperial units (PSI, °F)

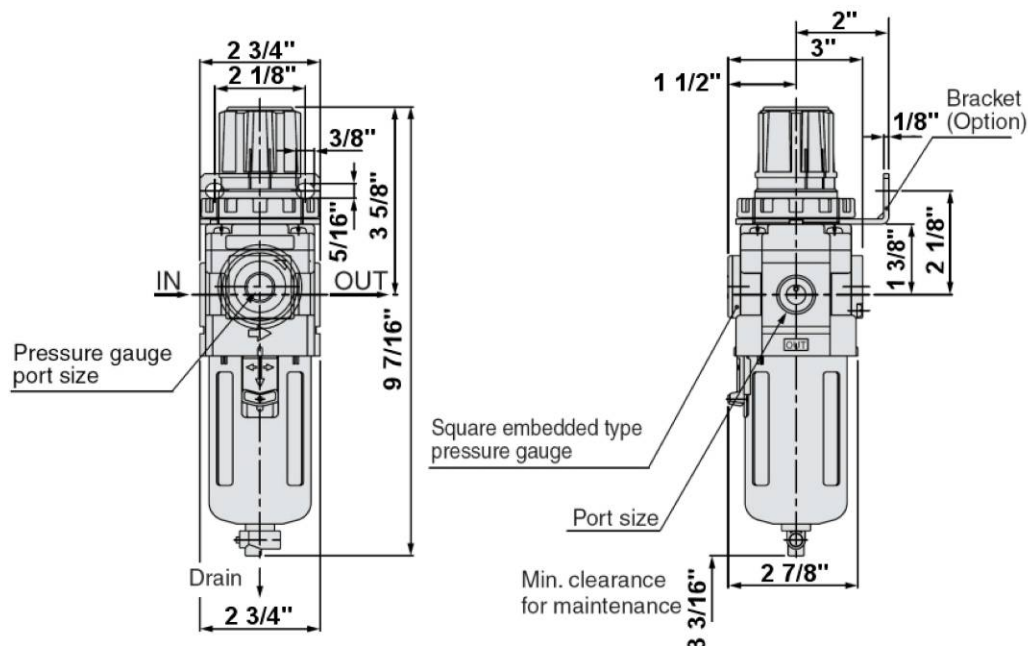

Panel fitting dimension



R 2/12/15