


EFFLUENT & PRECOAT VALVE PNEUMATIC ACTUATED VALVE

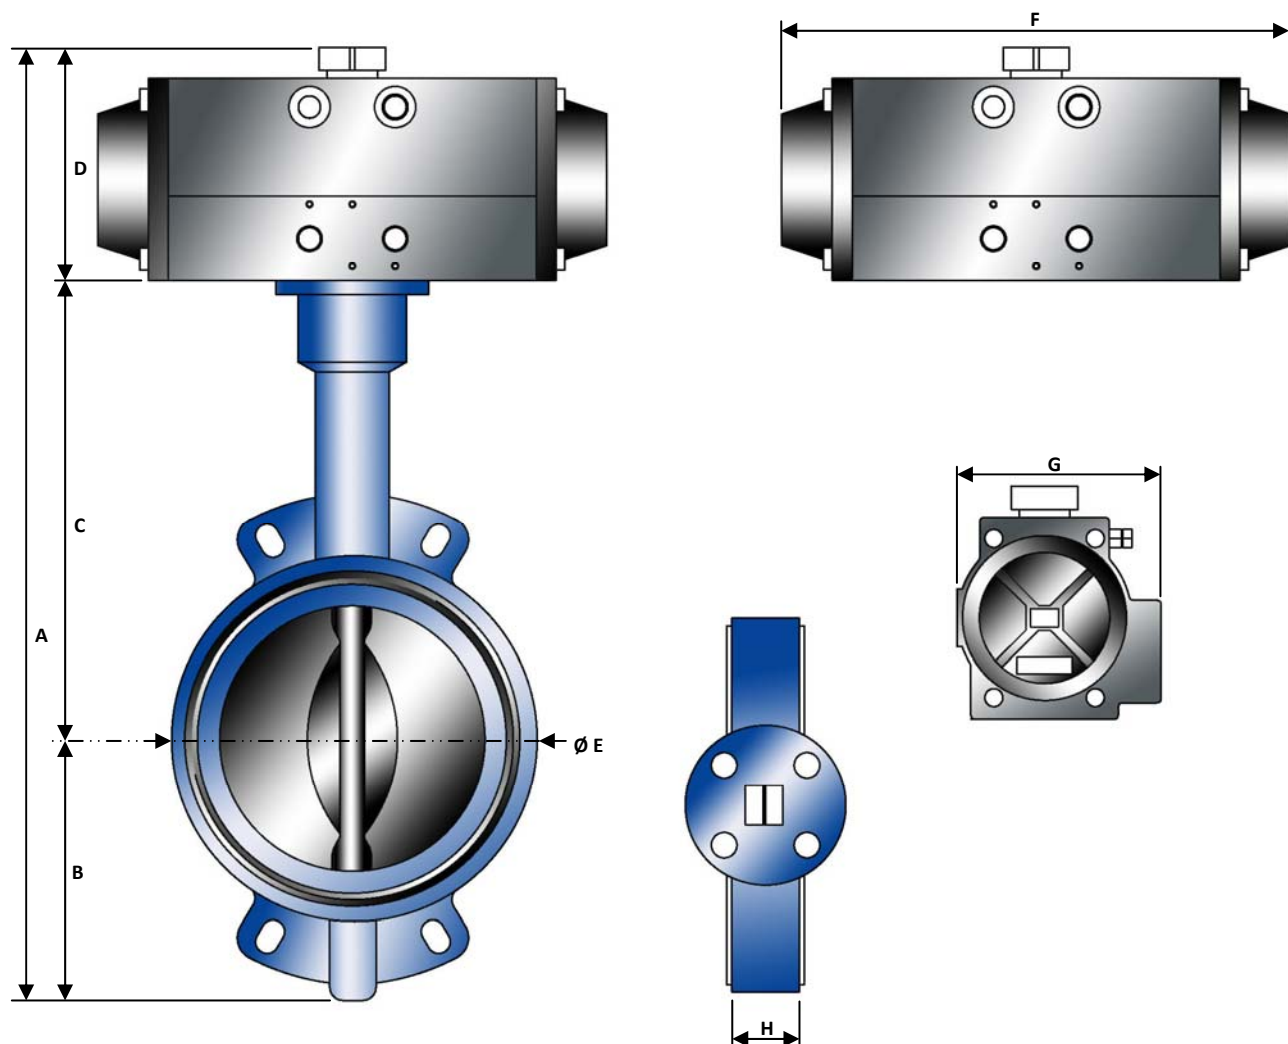

(-) " EFFLUENT REQ'D
 (-) " PRECOAT REQ'D

All dimensions are in inches										
Size in	A	B	C	D	Ø E	F	G	H	Model	Valve with pneumatic actuator
2	12 3/8	2 1/4	5 1/2	4 5/8	4	8 3/16	3 3/4	1 7/8	PN-75-DA	Part # 14059
3	13 3/4	2 7/8	6 1/4	4 5/8	5 3/16	8 3/16	3 3/4	1 7/8	PN-75-DA	Part # 13555
4	15	3 3/8	7	4 5/8	6	8 3/16	3 3/4	2 1/16	PN-75-DA	Part # 13556
6	17 5/8	4 9/16	8	5 1/16	8 1/4	9 3/8	4 3/16	2 1/4	PN-85-DA	Part # 13557
8	21	5 7/8	9 9/16	5 9/16	10 3/8	10 3/4	4 7/8	2 3/8	PN-100-DA	Part # 13558
10	25 7/8	7 7/8	10 3/4	7 1/4	13	14 7/16	5 7/8	2 11/16	PN-125-DA	Part # 13559
12	28 1/2	8 7/8	12 3/8	7 1/4	15	14 7/16	5 7/8	3 1/16	PN-125-DA	Part # 13560

R 10/22/15

PNEUMATIC ACTUATOR

General Features:

- Compact, reliable design.
- Open-Closed adjustment stops.
- High visibility indicator.
- The top mounting pad is drilled and tapped to international NAMUR and ISO standards, providing for quick and economical accessory mounting in conjunction with the NAMUR pinion shaft.
- Standard execution for temperatures from -4°F/-20°C to +180°F/+80°C with standard NBR70 seals

Materials Used:

Body: The Aluminum body extrusion is hard anodized to 45-50 microns to protect against wear and corrosion while reducing piston friction to the absolute minimum.

End Caps: Epoxy coated die cast aluminum end caps provide maximum resistance against potentially corrosive elements.

Pistons: The precisely balanced die cast aluminum pistons are fitted with high-quality rings and guides, resulting in high ratios of output torque vs. input air pressure. The twin rack and piston design creates a constant torque output on all models.


Piston Guides: Large contact areas and self-lubricating, highly durable materials provide high thrust stability with minimum friction.

Pinion: The hardened steel pinion is precision ground and then nickel plated in order to reduce friction, provide maximum wear resistance, and protect against corrosion under severe conditions.

Pinion Seals: NBR-70 rubber pinion seals provide trouble free operation at standard temperature ranges.

Heavy Duty Springs: True-rated spring sets create absolute confidence in all of the fail safe spring return models. The high tensile steel springs are coated with zinc phosphate for corrosion resistance. Springs can be safely and quickly modified into sets ranging from 40 pounds to 80 pounds. Full length end cap bolts allow for easy and safe disassembly.

PNEUMATIC ACTUATOR

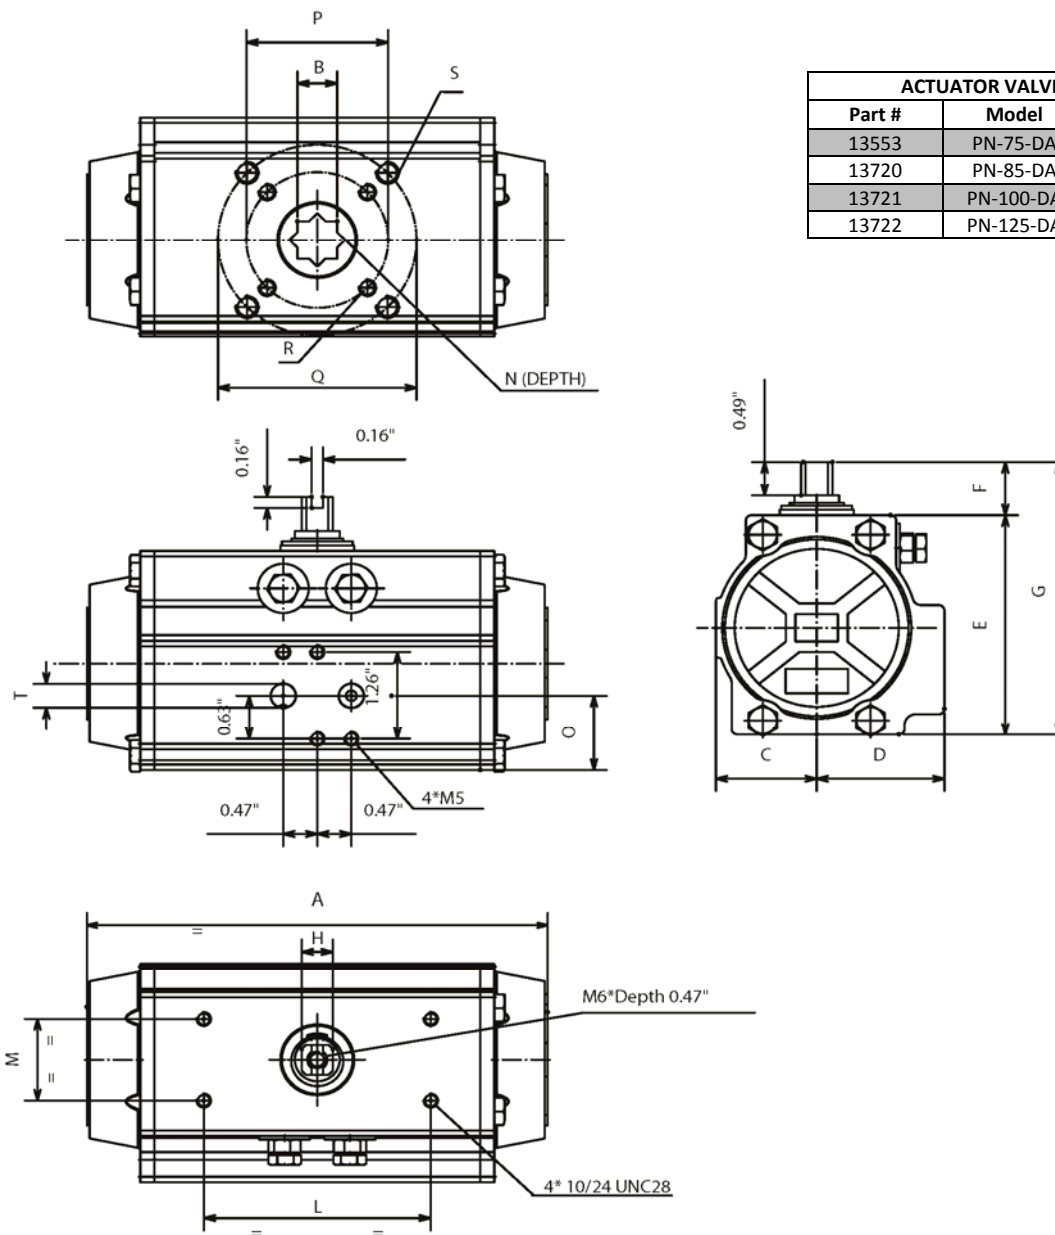


ACTUATOR VALVE MATRIX		
Part #	Model	Valve Size
13553	PN-75-DA	2" – 4"
13720	PN-85-DA	6"
13721	PN-100-DA	8"
13722	PN-125-DA	10" – 12"

DIMENSIONAL DATA

	ISO 5211	A	B	C	D	E	F	G	H	K	L	M	N	O	P	Q	R (UNC)	S (UNC)	T (NPT)
PN-52	F03/F05	5.49	0.433	1.18	1.61	2.74	0.787	3.52	0.43	0.47	3.15	1.18	0.47	1.04	1.42	1.97	10-24 X 0.29	1/4-20 X 0.35	1/8"
PN-63	F05/F07	6.38	0.551	1.40	1.77	3.17	0.787	3.96	0.43	0.59	3.15	1.18	0.63	1.08	1.97	2.76	1/4-20 X 0.31	5/16-18 X 0.47	1/8"
PN-75	F05/F07	8.15	0.669	1.65	2.07	3.82	0.787	4.61	0.67	0.75	3.15	1.18	0.75	1.38	1.97	2.76	1/4-20 X 0.31	5/16-18 X 0.47	1/8"
PN-85	F05/F07	9.35	0.669	1.87	2.30	4.27	0.787	5.06	0.67	0.87	3.15	1.18	0.75	1.65	1.97	2.76	1/4-20 X 0.31	5/16-18 X 0.47	1/8"
PN-100	F07/F10	10.69	0.669	2.17	2.68	4.78	0.787	5.57	0.67	0.87	3.15	1.18	0.81	1.97	2.76	4.02	5/16-18 x 0.47	3/8-16 x 0.55	1/4"
PN-115	F07/F10	12.91	0.869	2.52	2.87	5.57	1.180	6.75	1.06	1.26	5.12	1.18	0.94	1.97	2.76	4.02	5/16-18 x 0.47	3/8-16 x 0.59	1/4"
PN-125	F07/F10	14.41	0.869	2.68	3.15	6.04	1.180	7.22	1.06	1.26	5.12	1.18	0.94	2.40	2.76	4.02	5/16-18 x 0.47	3/8-16 x 0.59	1/4"
PN-140	F10/F12	16.85	1.060	3.01	3.44	6.93	1.180	8.11	1.06	1.38	5.12	1.18	1.14	2.80	4.02	4.92	3/8-16 x 0.59	1/2-13 x 0.71	1/4"

IN-LINE SIGHTGLASS

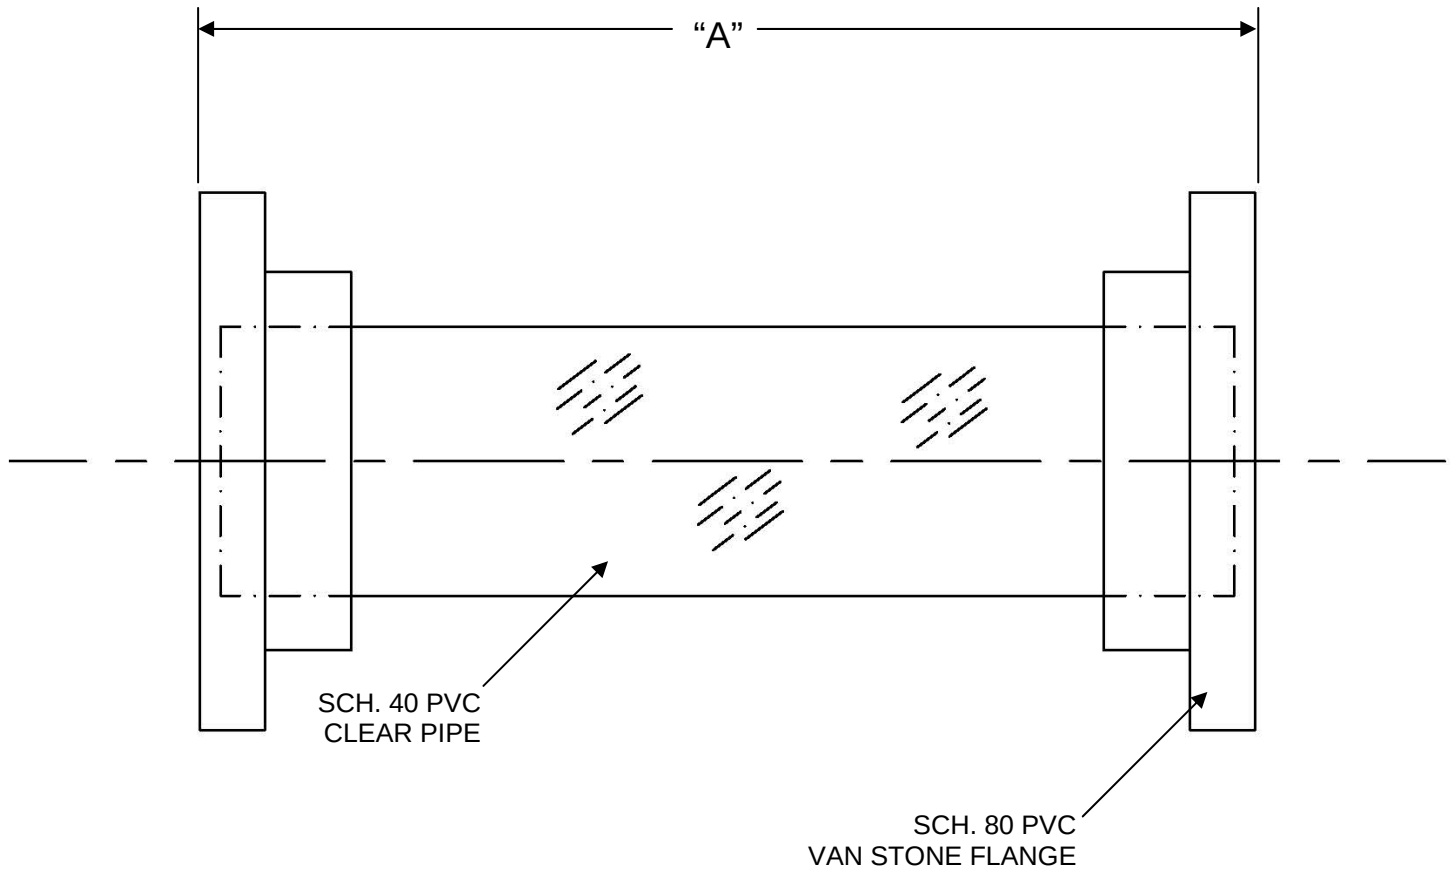

(-) " REQ'D

SIZE	PART NUMBER	DIM "A"
in		in
2	150NBSG002R1	17 9/16
3	150NBSG003R1	17 9/16
4	150NBSG004R1	17 11/16
6	150NBSG006R1	18
8	150NBSG008R1	18

R 10/22/15