


INFLUENT CHECK VALVE

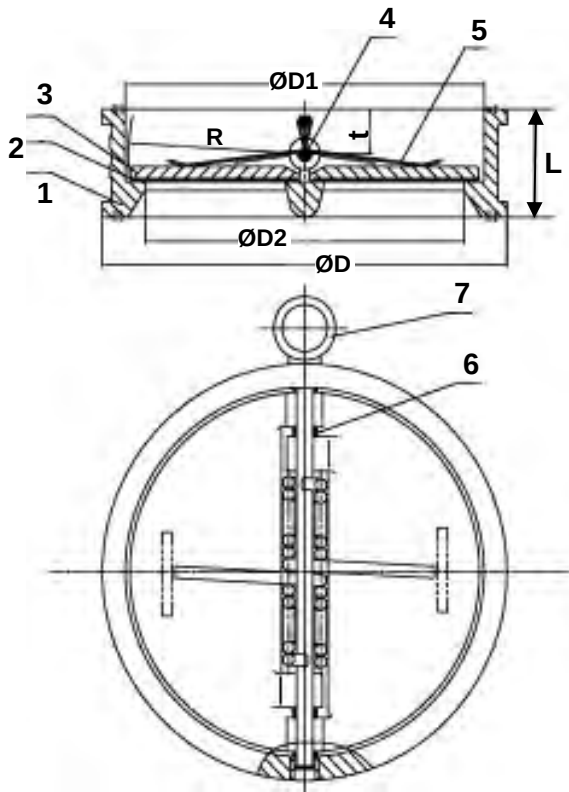


Inspection & Test Standard	EN 12266-1:2003 API598
Flange Standard	EN 1092:1997 PN10 PN16 BS4504
Face to Face	ISO5752

Nominal Diameter	DN50~DN600	DN50~DN600	mm
Nominal Pressure	1	1.6	Mpa
Testing Pressure	Shell 1.5	2.4	
	Sealing 1.1	1.76	

No.	Parts Name	Material
1	Body	CI / DI / WCB / S.S304
2	Seat	NBR / EPDM
3	Disc	DI/C954/C958/ SS316/SS304
4	Stem	SS416 / SS316
5	Spring	SS316 / SS304
6	Bushing	PTFE
7	Eye Bolt	Carbon Steel

Part No.	Size		D		D1		D2		L		R		t		Weight		Nominal Pressure (Mpa)		Nominal Pressure (PSI)	
	mm	in	DIN PN16	ANSI 125	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lbs				
13600	DN50	2	107	102	65	2.6	40	1.6	43	1.7	29	1.1	19	.74	1.53	3.4	1	1.6	145	232
13601	DN65	2.5	127	121	80	3.1	60	2.4	46	1.8	36	1.4	20	.78	2.44	5.4	1	1.6	145	232
13603	DN80	3	142	134	94	3.7	70	2.8	64	2.5	43	1.7	28	1.1	3.60	7.9	1	1.6	145	232
13604	DN100	4	162	171	117	4.6	88	3.5	64	2.5	53	2.1	27	1.1	5.72	12.6	1	1.6	145	232
13605	DN125	5	192	193	145	5.7	115	4.5	70	2.8	66	2.6	30	1.2	7.34	16.2	1	1.6	145	232
13606	DN150	6	218	219	170	6.7	134	5.3	76	3.0	79	3.1	31	1.2	9.00	19.8	1	1.6	145	232
13607	DN200	8	273	276	224	8.8	162	6.4	89	3.5	104	4.1	33	1.3	17.2	37.9	1	1.6	145	232
13608	DN250	10	328	336	265	10.4	220	8.7	114	4.5	127	5.0	50	2.0	26.3	58.0	1	1.6	145	232
13609	DN300	12	378	406	310	12.2	260	10.2	114	4.5	148	5.8	43	1.7	42.1	92.8	1	1.6	145	232
13610	DN350	14	438	448	360	14.2	298	11.7	127	5.0	172	6.8	45	1.8	55.2	121.7	1	1.6	145	232
13611	DN400	16	489	511	410	16.1	350	13.8	140	5.5	197	7.8	52	2.0	75.3	166	1	1.6	145	232

EFFLUENT & PRECOAT VALVE PNEUMATIC ACTUATED VALVE

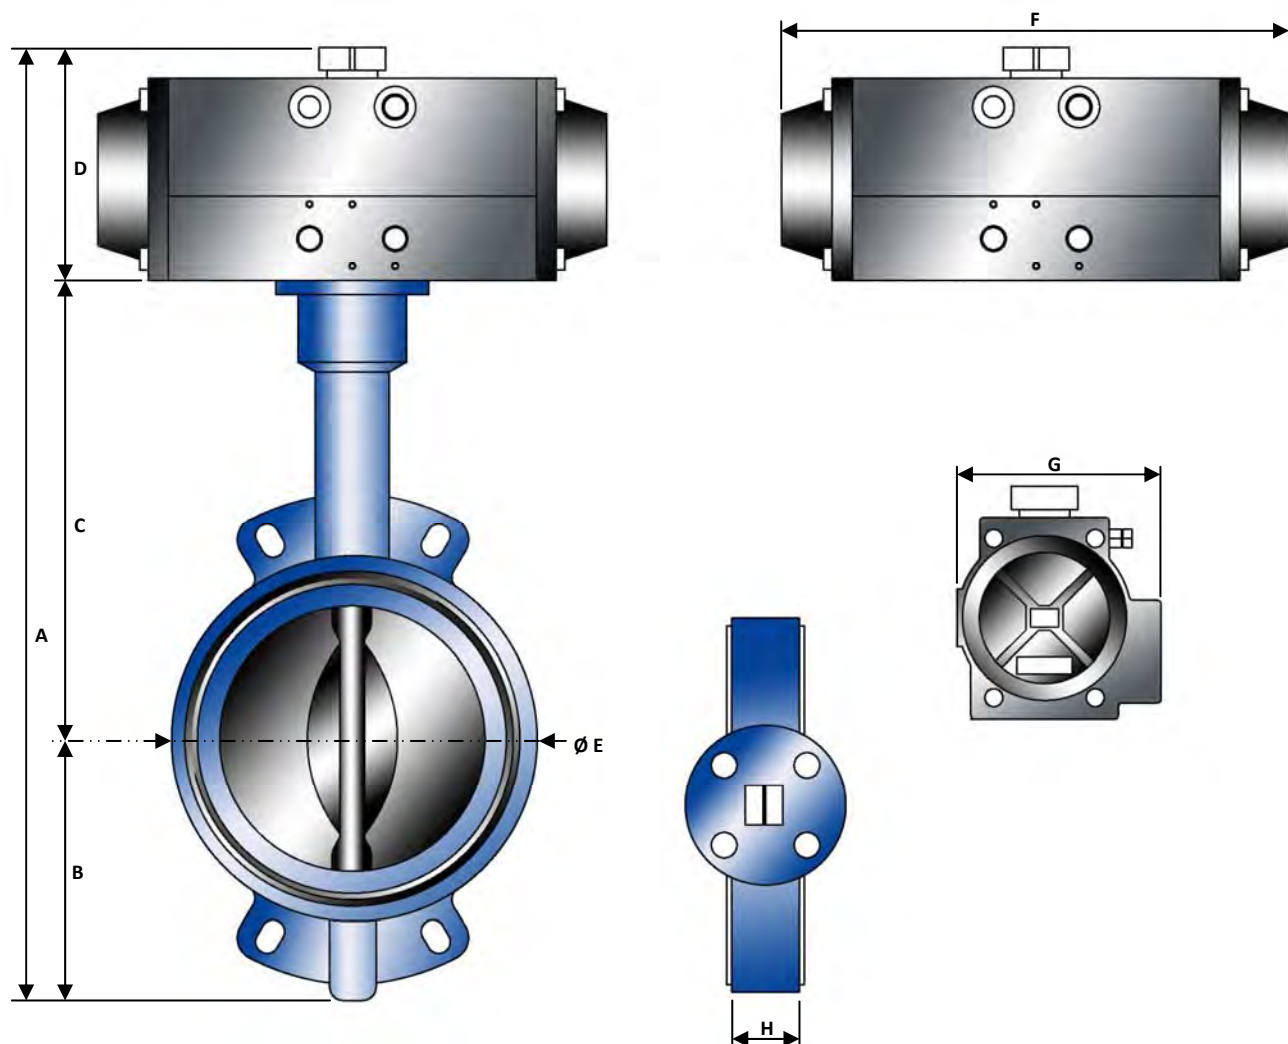

All dimensions are in inches

Size in	A	B	C	D	Ø E	F	G	H	Model	Valve with pneumatic actuator
2	12 3/8	2 1/4	5 1/2	4 5/8	4	8 3/16	3 3/4	1 7/8	PN-75-DA	Part # 14059
3	13 3/4	2 7/8	6 1/4	4 5/8	5 3/16	8 3/16	3 3/4	1 7/8	PN-75-DA	Part # 13555
4	15	3 3/8	7	4 5/8	6	8 3/16	3 3/4	2 1/16	PN-75-DA	Part # 13556
6	17 5/8	4 9/16	8	5 1/16	8 1/4	9 3/8	4 3/16	2 1/4	PN-85-DA	Part # 13557
8	21	5 7/8	9 9/16	5 9/16	10 3/8	10 3/4	4 7/8	2 3/8	PN-100-DA	Part # 13558
10	25 7/8	7 7/8	10 3/4	7 1/4	13	14 7/16	5 7/8	2 11/16	PN-125-DA	Part # 13559
12	28 1/2	8 7/8	12 3/8	7 1/4	15	14 7/16	5 7/8	3 1/16	PN-125-DA	Part # 13560

R 10/22/15

PNEUMATIC ACTUATOR

General Features:

- Compact, reliable design.
- Open-Closed adjustment stops.
- High visibility indicator.
- The top mounting pad is drilled and tapped to international NAMUR and ISO standards, providing for quick and economical accessory mounting in conjunction with the NAMUR pinion shaft.
- Standard execution for temperatures from -4°F/-20°C to +180°F/+80°C with standard NBR70 seals

Materials Used:

Body: The Aluminum body extrusion is hard anodized to 45-50 microns to protect against wear and corrosion while reducing piston friction to the absolute minimum.

End Caps: Epoxy coated die cast aluminum end caps provide maximum resistance against potentially corrosive elements.

Pistons: The precisely balanced die cast aluminum pistons are fitted with high-quality rings and guides, resulting in high ratios of output torque vs. input air pressure. The twin rack and piston design creates a constant torque output on all models.


Piston Guides: Large contact areas and self-lubricating, highly durable materials provide high thrust stability with minimum friction.

Pinion: The hardened steel pinion is precision ground and then nickel plated in order to reduce friction, provide maximum wear resistance, and protect against corrosion under severe conditions.

Pinion Seals: NBR-70 rubber pinion seals provide trouble free operation at standard temperature ranges.

Heavy Duty Springs: True-rated spring sets create absolute confidence in all of the fail safe spring return models. The high tensile steel springs are coated with zinc phosphate for corrosion resistance. Springs can be safely and quickly modified into sets ranging from 40 pounds to 80 pounds. Full length end cap bolts allow for easy and safe disassembly.

PNEUMATIC ACTUATOR


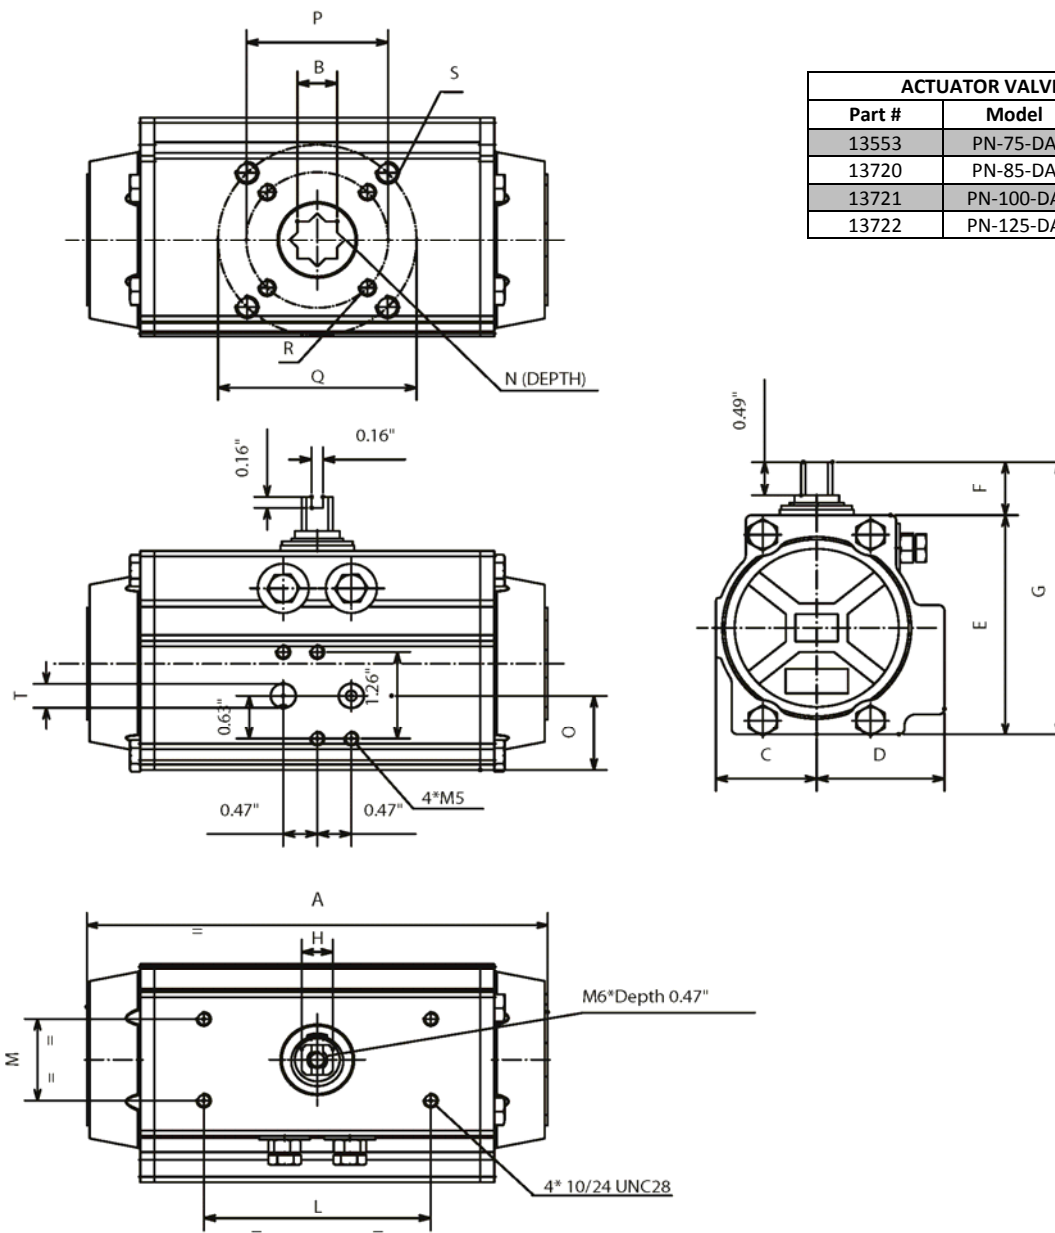


ACTUATOR VALVE MATRIX		
Part #	Model	Valve Size
13553	PN-75-DA	2" – 4"
13720	PN-85-DA	6"
13721	PN-100-DA	8"
13722	PN-125-DA	10" – 12"

DIMENSIONAL DATA

	ISO 5211	A	B	C	D	E	F	G	H	K	L	M	N	O	P	Q	R (UNC)	S (UNC)	T (NPT)
PN-52	F03/F05	5.49	0.433	1.18	1.61	2.74	0.787	3.52	0.43	0.47	3.15	1.18	0.47	1.04	1.42	1.97	10-24 X 0.29	1/4-20 X 0.35	1/8"
PN-63	F05/F07	6.38	0.551	1.40	1.77	3.17	0.787	3.96	0.43	0.59	3.15	1.18	0.63	1.08	1.97	2.76	1/4-20 X 0.31	5/16-18 X 0.47	1/8"
PN-75	F05/F07	8.15	0.669	1.65	2.07	3.82	0.787	4.61	0.67	0.75	3.15	1.18	0.75	1.38	1.97	2.76	1/4-20 X 0.31	5/16-18 X 0.47	1/8"
PN-85	F05/F07	9.35	0.669	1.87	2.30	4.27	0.787	5.06	0.67	0.87	3.15	1.18	0.75	1.65	1.97	2.76	1/4-20 X 0.31	5/16-18 X 0.47	1/8"
PN-100	F07/F10	10.69	0.669	2.17	2.68	4.78	0.787	5.57	0.67	0.87	3.15	1.18	0.81	1.97	2.76	4.02	5/16-18 x 0.47	3/8-16 x 0.55	1/4"
PN-115	F07/F10	12.91	0.869	2.52	2.87	5.57	1.180	6.75	1.06	1.26	5.12	1.18	0.94	1.97	2.76	4.02	5/16-18 x 0.47	3/8-16 x 0.59	1/4"
PN-125	F07/F10	14.41	0.869	2.68	3.15	6.04	1.180	7.22	1.06	1.26	5.12	1.18	0.94	2.40	2.76	4.02	5/16-18 x 0.47	3/8-16 x 0.59	1/4"
PN-140	F10/F12	16.85	1.060	3.01	3.44	6.93	1.180	8.11	1.06	1.38	5.12	1.18	1.14	2.80	4.02	4.92	3/8-16 x 0.59	1/2-13 x 0.71	1/4"

SYSTEM FILL VALVE

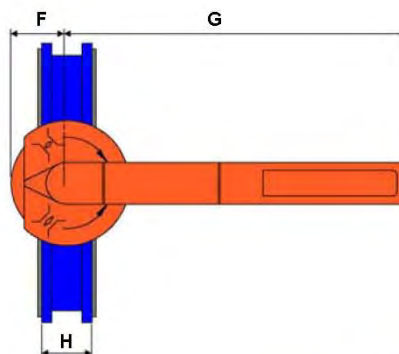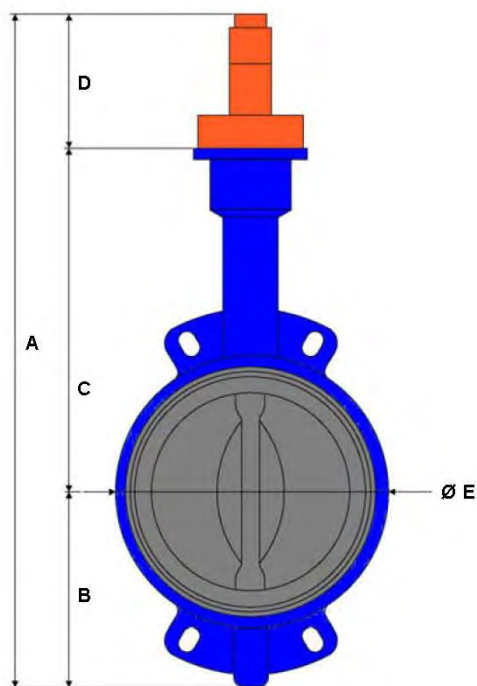

LEVER OPERATED

Part Numbers		
Size (in)	Stainless Steel Disc	Nylon Coated Disc
2	518020RO37	516020R037
2 1/2	518025RO37	516025R037
3	518030RO37	516030R037
4	518040RO37	516040R037
5	N/A	516050R037
6	518060RO37	516060R037
8	518080RO37	516080R037

Size		Dimensions with hand lever – All dimensions are in inches							
in	mm	A	B	C	D	Ø E	F	G	H
2	50	11 5/8	2 1/4	5 1/2	3 7/8	4	1 3/4	8 11/16	1 3/4
2 1/2	65	12 1/2	2 5/8	6	3 7/8	4 13/16	1 3/4	8 11/16	1 7/8
3	80	13	2 7/8	6 1/4	3 7/8	5 1/2	1 3/4	8 11/16	1 7/8
4	100	14 1/4	3 3/8	7	3 7/8	6 1/4	1 3/4	12 5/8	2 1/16
5	125	15 5/8	4 1/4	7 1/2	3 7/8	7 7/16	1 3/4	12 5/8	2 1/4
6	150	16 7/16	4 9/16	8	3 7/8	8 7/16	1 3/4	12 5/8	2 1/4
8	200	19 5/16	5 7/8	9 9/16	3 7/8	10 5/8	1 3/4	16 9/16	2 3/8

R 10/22/15