Native stereo depth versus supplied single-scan LiDAR projection

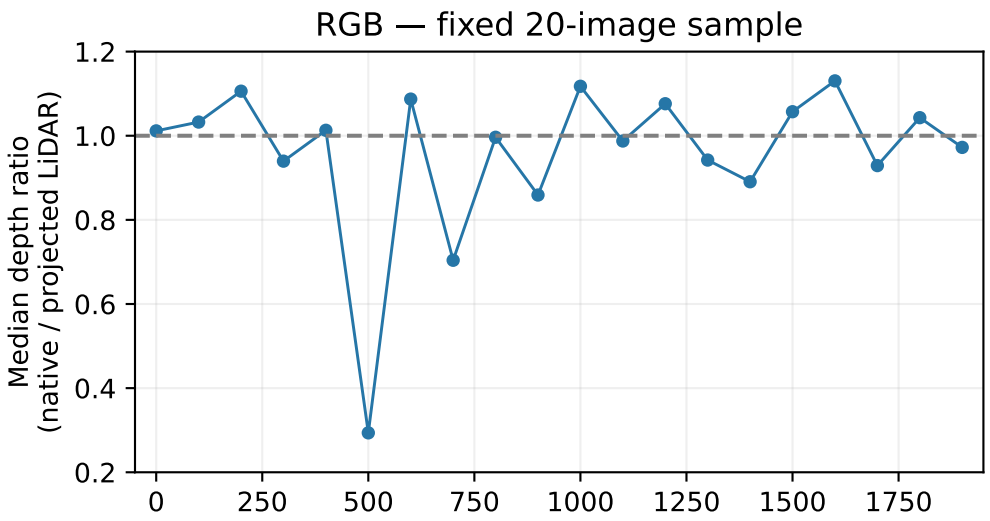

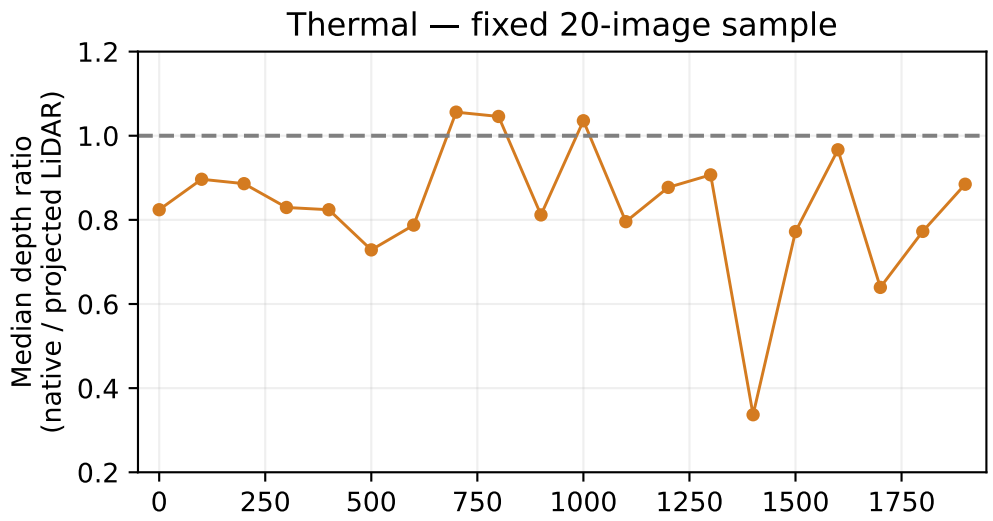

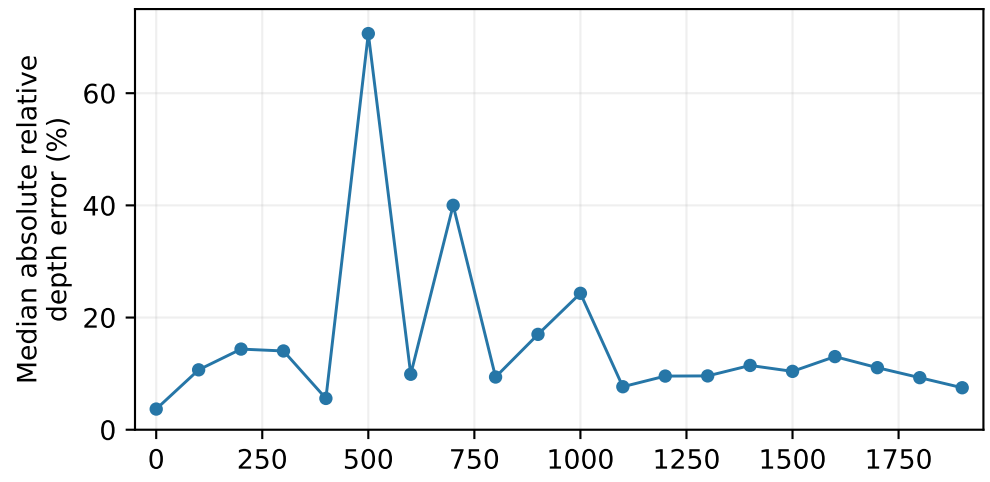

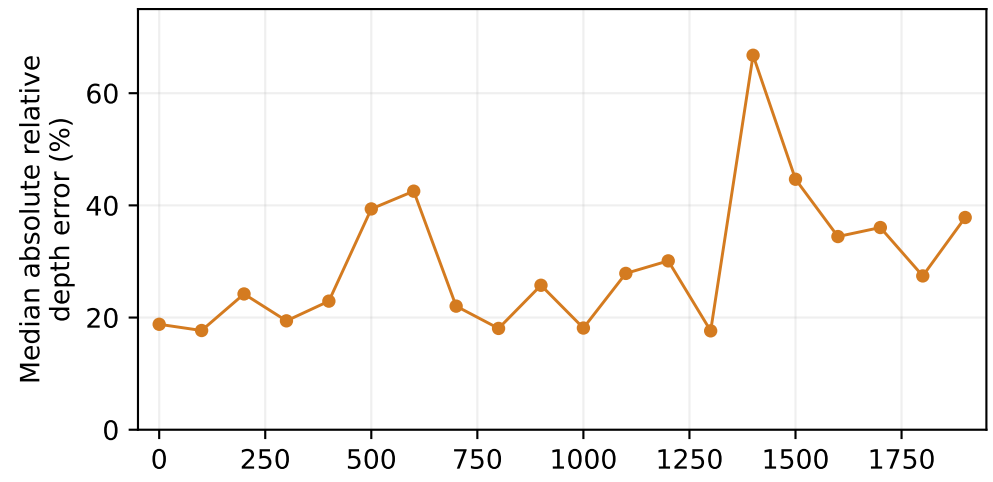

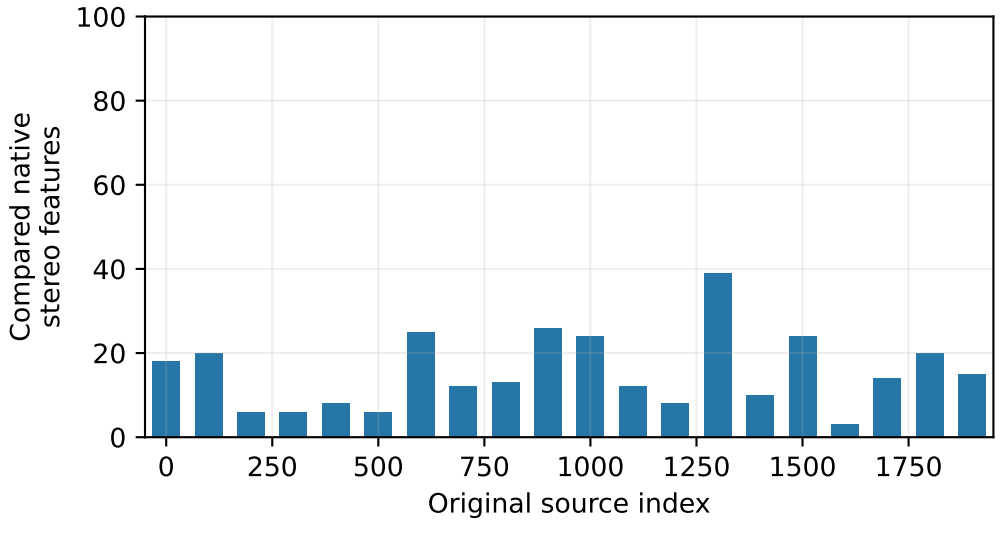

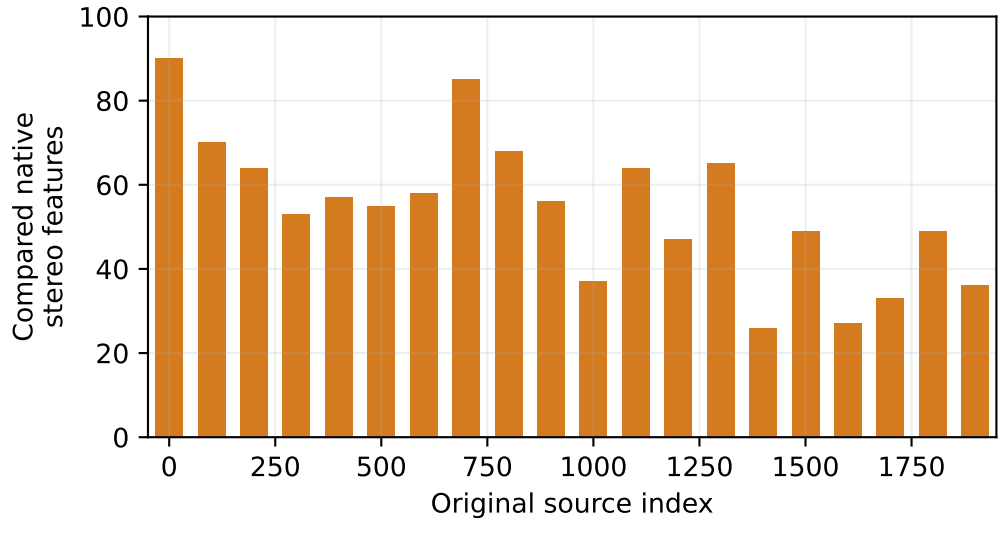

Conditional sparse-keypoint comparison: nearest projected-depth pixel, no interpolation or fitted correction.
All 40 cases retained; RGB 309 / thermal 1,089 compared features. Camera populations differ.
Projection, visibility and physical timestamp association remain unqualified; these are reference proxies.