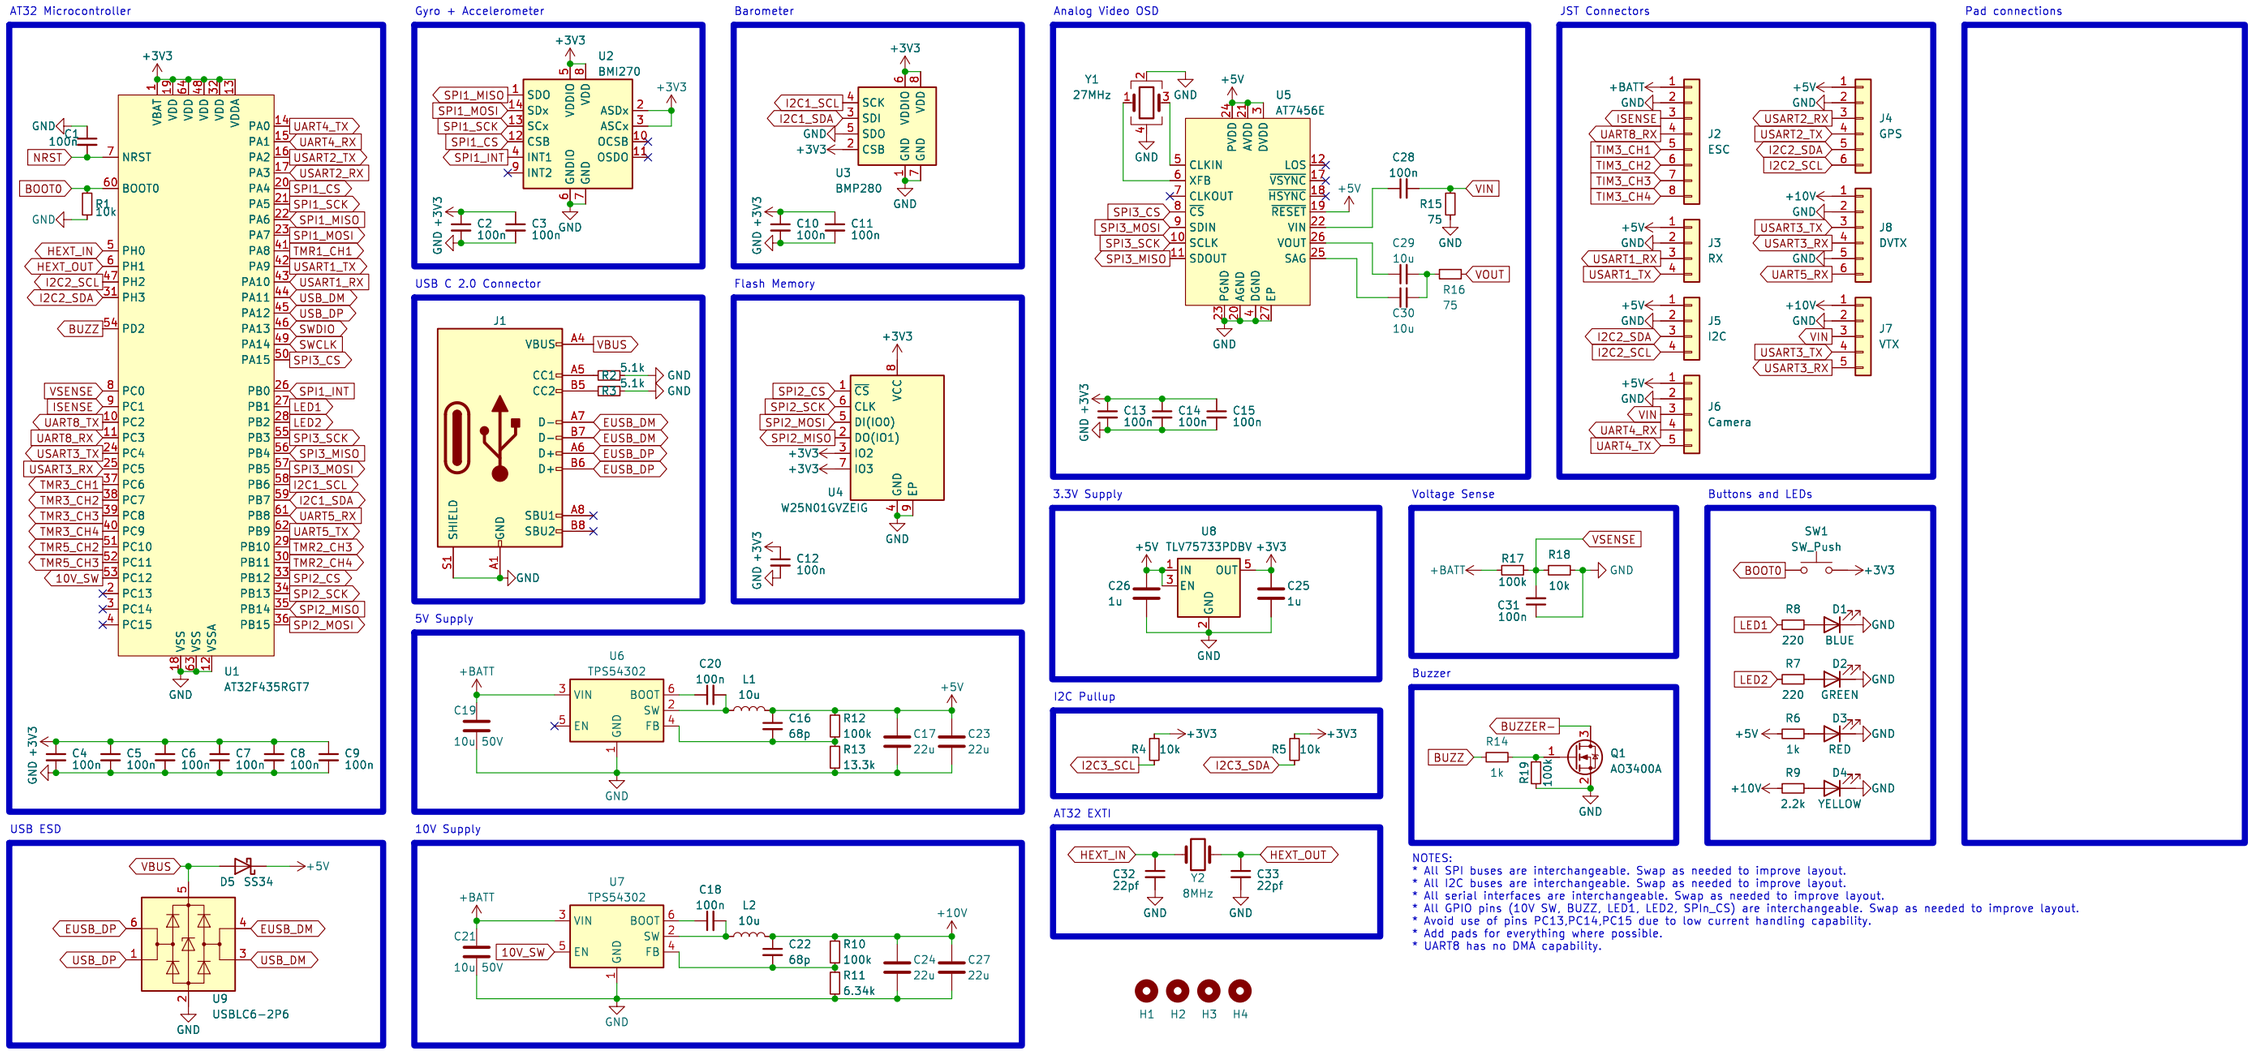

NOTES:
* All SPI buses are interchangeable. Swap as needed to improve layout.
* All I2C buses are interchangeable. Swap as needed to improve layout.
* All serial interfaces are interchangeable. Swap as needed to improve layout.
* All GPIO pins (10V SW, BUZZ, LED1, LED2, SPIn_CS) are interchangeable. Swap as needed to improve layout.
* Avoid use of pins PC13,PC14,PC15 due to low current handling capability.
* Add pads for everything where possible.
* UART8 has no DMA capability.

Sheet: /
File: flight-controller.kicad_sch

Title:

Size: A3	Date:	Rev:
KiCad E.D.A. kicad 7.0.5-7.0.5~ubuntu22.04.1		Id: 1/1